



RADIO TEST REPORT

Test Report No.: 31HE0250-SH-01-A

Applicant : PIONEER CORPORATION
Type of Equipment : CD RDS RECEIVER
Model No. : DEH-6400BT
FCC ID : AJDK042
Test regulation : FCC Part15 Subpart C: 2010
Test result : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this test report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by any agency of the Federal Government.
6. The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan has been accredited.

Date of test: May 1 to 11, 2011

**Representative
test engineer:**

S. Takano

Shinichi Takano
Engineer of WiSE Japan, UL
Verification Service

Approved by :

G. Ishiwata

Go Ishiwata
Manager of WiSE Japan, UL
Verification Service

The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan.
 There is no testing item of "Non-accreditation".



UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

13-EM-F0429

Contents

	<u>Page</u>
SECTION 1: Customer information	3
SECTION 2: Equipment under test (E.U.T.)	3
SECTION 3: Test specification, procedures & results	5
SECTION 4: Operation of E.U.T. during testing.....	8
SECTION 5: Carrier frequency separation.....	11
SECTION 6: 20dB bandwidth & Occupied bandwidth (99%)	11
SECTION 7: Number of hopping frequency	11
SECTION 8: Dwell time	11
SECTION 9: Maximum peak output power.....	11
SECTION 10: Out of band emissions (Antenna port conducted).....	11
SECTION 11: Radiated emission.....	12
Contents of appendixes	14
APPENDIX 1: Photographs of test setup.....	15
APPENDIX 2: Test data.....	16
APPENDIX 3: Test instruments.....	56

SECTION 1: Customer information

Company Name : PIONEER CORPORATION
Address : 25-1 Nishi-machi, Yamada-aza, Kawagoe-shi, Saitama, 350-8555, JAPAN
Telephone Number : +81 49 228 6415
Facsimile Number : +81 49 228 6493
Contact Person : Makoto Kaieda

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment : CD RDS RECEIVER
Model Number : DEH-6400BT
Serial Number : Refer to 4.2.
Rating : DC 14.4V
Country of Mass-production : Thailand
Condition of EUT : Production prototype
(Not for Sale: This sample is equivalent to mass-produced items.)
Receipt Date of Sample : April 26, 2011
Modification of EUT : No modification by the test lab.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

2.2 Product description

Model: DEH-6400BT (referred to as the EUT in this report) is a CD RDS RECEIVER.

The EUT has some derived models:

Pioneer Number	DEH-6400BT	DEH-5400BT	DEH-64BT
The destination(port)	UC	UC	UC (mass market model)
Sensormatic seal	None	OK	OK
FM Frequency Range & Step	87.9 to 107.9MHz & 200kHz step	87.9 to 107.9MHz & 200kHz step	87.9 to 107.9MHz & 200kHz step
AM Frequency Range & Step	530 to 1710kHz (10kHz) & 10kHz step	530 to 1710kHz (10kHz) & 10kHz step	530 to 1710kHz (10kHz) & 10kHz step
DISP OFF Mode	None	None	None
ILLUMINATION	RGB	BLUE	RGB

Clock frequency(ies) in the system : SYSTEM MICRO:16.93MHz, 12MHz
 GRILL MICRO:4.97MHz
 CD mecha:16.93MHz
 Tuner:36.48MHz(VCO: 2.5 - 3.3GHz)
 Bluetooth Module:26MHz
 DC-DC CONVERTER:367.347/439.024kHz

<Radio part>

Equipment type : Transceiver
 Frequency of operation : 2402-2480MHz
 Bandwidth / Channel spacing : 79MHz & 1MHz
 Type of modulation : FHSS
 Antenna type : pattern antenna in BT module
 Antenna connector type : -
 Antenna gain : -2.2dBi max
 ITU code : F1D, G1D
 Operation temperature range : -10 to +60 deg.C.

FCC Part15.31 (e)

The equipment provides the Bluetooth transmitter with stable power supply (+3.2V to 3.6V), therefore, the equipment complies power supply regulation.

FCC Part15.203 Antenna requirement

The antenna is not removable from the EUT. Therefore, the equipment complies with the antenna requirement.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

SECTION 3: Test specification, procedures & results

3.1 Test specification

Test specification : FCC Part 15 Subpart C: 2010, final revised on December 6, 2010 and effective January 5, 2011

Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
 Section 15.207 Conducted limits
 Section 15.209 Radiated emission limits, general requirements
 Section 15.247 Operation within the bands 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz

3.2 Procedures & Results

Item	Test Procedure	Specification	Remarks	Deviation	Worst Margin	Results
Conducted emission	ANSI C63.4:2003 7. AC powerline conducted emission measurements	FCC Section 15.207	-	N/A *1)	N/A	N/A
Carrier frequency separation	FCC Public Notice DA 00-705 & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC Section15.247 (a)(1)	Conducted	N/A		Complied
20dB bandwidth	FCC Public Notice DA 00-705 & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC Section15.247 (a)(1)	Conducted	N/A		-
Number of hopping frequency	FCC Public Notice DA 00-705 & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC Section15.247 (a)(1)(iii)	Conducted	N/A	*See data.	Complied
Dwell time	FCC Public Notice DA 00-705 & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC Section15.247 (a)(1)(iii)	Conducted	N/A		Complied
Maximum peak output power	FCC Public Notice DA 00-705 & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC Section15.247 (b)(1)	Conducted	N/A		Complied
Band edge compliance & Spurious emission	FCC Public Notice DA 00-705 & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC Section15.247 (d) Section15.209	Conducted/ Radiated	N/A	0.6dB Freq.: 287.986MHz Detector: Quasi-Peak Polarization: Horizontal Mode: Tx 2441MHz, DH5	Complied

Note: UL Japan's EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422..

*1) The test is not applied since the EUT has no AC mains.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

3.3 Addition to standard

Item	Test Procedure	Specification	Remarks	Worst Margin	Results
Occupied Bandwidth (99%)	ANSI C63.4:2003 13. Measurement of intentional radiators, RSS-Gen 4.6.1 RSS-Gen 4.6.1	RSS-Gen 4.6.1	Conducted	-	-

Note: UL Japan's EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422.

* Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

Item	Frequency range	No.1 SAC ^{*1} /SR ^{*2} (±)	No.2 SAC/SR (±)	No.3 SAC/SR (±)
Radiated emission (Measurement distance: 3m)	9kHz-30MHz	3.3 dB	2.7 dB	3.4 dB
	30MHz-300MHz	4.7 dB	4.5 dB	4.7 dB
	300MHz-1GHz	4.5 dB	4.6 dB	4.6 dB
	1GHz-13GHz	3.9 dB	3.9 dB	4.0 dB
Radiated emission (Measurement distance: 1m)	13GHz-18GHz	4.8 dB	4.8 dB	4.8 dB
	18GHz-25GHz	4.4 dB	4.2 dB	4.2 dB

*1: SAC=Semi-Anechoic Chamber

*2: SR= Shielded Room is applied besides radiated emission

Radiated emission test

The data listed in this report meets the limits unless the uncertainty is taken into consideration.

Antenna port conducted test

Power Measurement uncertainty above 1GHz for this test was: (±) 1.3dB

Conducted emissions Measurement (below 1GHz) uncertainty for this test was: (±) 1.9dB

Conducted emissions Measurement (1G-3GHz) uncertainty for this test was: (±) 2.5dB

Conducted emissions Measurement (3G-18GHz) uncertainty for this test was: (±) 3.8dB

Conducted emissions Measurement (18G-26.5GHz) uncertainty for this test was: (±) 4.1dB

Bandwidth Measurement uncertainty for this test was: (±) 5.4%

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

3.5 Test location

UL Japan, Inc. Shonan EMC Lab.
1-22-3, Megumigaoka, Hiratsuka-shi, Kanagawa-ken 259-1220 JAPAN
Telephone number : +81 463 50 6400
Facsimile number : +81 463 50 6401
JAB Accreditation No. : RTL02610

	FCC Registration No.	IC Registration No.	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Maximum measurement distance
<input type="checkbox"/> No.1 Semi-anechoic chamber	697847	2973D-1	20.6 x 11.3 x 7.65	20.6 x 11.3	10m
<input type="checkbox"/> No.2 Semi-anechoic chamber	697847	2973D-2	20.6 x 11.3 x 7.65	20.6 x 11.3	10m
<input checked="" type="checkbox"/> No.3 Semi-anechoic chamber	697847	2973D-3	12.7 x 7.7 x 5.35	12.7 x 7.7	5m
<input type="checkbox"/> No.4 Full-anechoic chamber	-	-	8.1 x 5.1 x 3.55	8.1 x 5.1	-
<input type="checkbox"/> No.1 shielded room	-	-	6.8 x 4.1 x 2.7	6.8 x 4.1	-
<input type="checkbox"/> No.2 shielded room	-	-	6.8 x 4.1 x 2.7	6.8 x 4.1	-
<input checked="" type="checkbox"/> No.3 shielded room	-	-	6.3 x 4.7 x 2.7	6.3 x 4.7	-
<input type="checkbox"/> No.4 shielded room	-	-	4.4 x 4.7 x 2.7	4.4 x 4.7	-
<input type="checkbox"/> No.5 shielded room	-	-	7.8 x 6.4 x 2.7	7.8 x 6.4	-
<input checked="" type="checkbox"/> No.6 shielded room	-	-	7.8 x 6.4 x 2.7	7.8 x 6.4	-

3.6 Test setup, Data of test & Test instruments

Refer to Appendix 1 to 3.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN
Telephone : +81 463 50 6400
Facsimile : +81 463 50 6401

SECTION 4: Operation of E.U.T. during testing

4.1 Operating mode

The EUT exercise program used during testing was designed to exercise the various system components in a manner similar to typical use.

Operation: TEST MODE

Test item	Operating mode	Tested frequency
Carrier frequency separation	Transmitting Hopping ON (DH5/3DH5)/Inquiry, Payload: PRBS9	-
20dB bandwidth	Transmitting Hopping OFF (DH5/3DH5)/Inquiry, Payload: PRBS9	2402MHz, 2441MHz, 2480MHz
Number of hopping frequency	Transmitting Hopping ON (DH5/3DH5)/Inquiry, Payload: PRBS9	-
Dwell time	Transmitting (Hopping ON) -DH1, -DH3, -DH5 -3DH1, -3DH3, -3DH5 -Inquiry	-
Maximum peak output power	Transmitting Hopping OFF, Payload: PRBS9 -DH5, -2DH5, -3DH5	2402MHz, 2441MHz, 2480MHz
Spurious emission & Band edge compliance (Conducted) (Radiated)	Transmitting (DH5/3DH5), Payload: PRBS9 -Hopping ON -Hopping OFF	Spurious emission: 2402MHz, 2441MHz, 2480MHz
	Transmitting (DH5/3DH5), Payload: PRBS9	Band edge compliance: 2402MHz, 2480MHz
99% occupied bandwidth	Transmitting, -Hopping ON (DH5/3DH5) -Hopping OFF(DH5/3DH5) -Inquiry Payload: PRBS9	2402MHz, 2441MHz, 2480MHz

*As a result of preliminary test, the formal test was performed with the above modes, which had the maximum payload (except Dwell time test).

*Remarks: Test was not performed at AFH mode, because the decrease of number of channel (min: 20ch) at AFH mode does not influence on the output power and bandwidth of the EUT.

However, the limit level 125mW of AFH mode was used for the test.

*EUT has the power settings by the software as follows;

Software : QWW3110

Power Settings : 4

Justification: The system was configured in typical fashion (as customer would normally use it) for testing.

UL Japan, Inc.


Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

4.2 Configuration of tested system

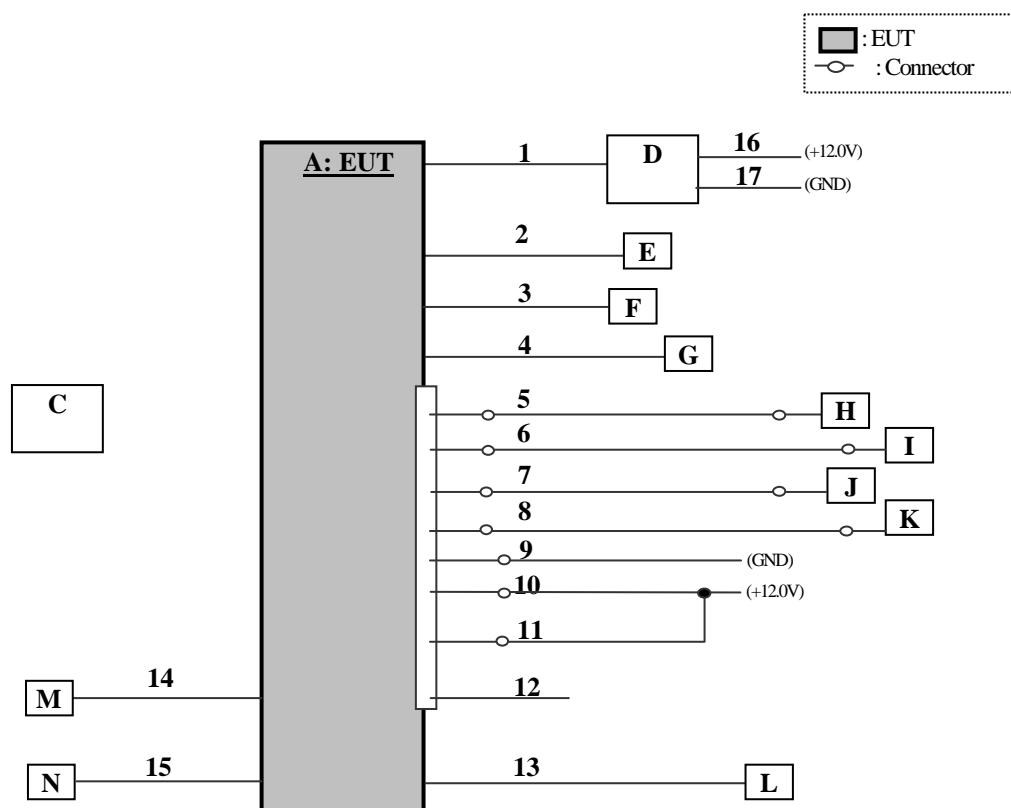

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Description of EUT and support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	CD RDS RECEIVER	DEH-6400BT	KCTM000014UC	PIONEER	EUT
C	Remote controller	OXE1044	-	PIONEER	-
D	Car amplifier	GM-3200T	FGPG004298EW	PIONEER	-
E	Termination	-	-	-	1k ohm
F	Microphone	-	-	PIONEER	-
G	Controller	RM-X2S	-	Sony	-
H	Dummy speaker load	RHA100N	-	CHIBA SD	-
I	Dummy speaker load	RHA100N	-	CHIBA SD	-
J	Speaker	TS-X350	00047	PIONEER	-
K	Speaker	TS-X350	00048	PIONEER	-
L	Termination	-	-	-	75 ohm
M	Termination	-	-	-	300 ohm
N	USB Memory	Clip Drive	-	BUFFALO	-

*1) DC power supply was used for DC 12.0V input.

*2) "PIONEER" means PIONEER CORPORATION or PIONEER MANUFACTURING (THAILAND) Co., LTD.

List of cables used *3)

No.	Name	Length (m)	Shield		Remark
			Cable	Connector	
1	Audio (F)	6.0	Unshielded	Unshielded	-
2	Audio (P/SW)	1.5	Unshielded	Unshielded	-
3	MIC	3.9	Unshielded	Unshielded	-
4	W/R	1.9	Unshielded	Unshielded	-
5	Speaker	0.15+4.4+0.25	Unshielded	Unshielded	Terminated 4ohm
6	Speaker	0.15+4.4+0.25	Unshielded	Unshielded	Terminated 4ohm
7	Speaker	0.15+6.0+0.45	Unshielded	Unshielded	-
8	Speaker	0.15+6.0+0.45	Unshielded	Unshielded	-
9	GND	0.15+2.2	Unshielded	Unshielded	-
10	DC line	0.15+2.2	Unshielded	Unshielded	-
11	DC line	0.15+2.2	Unshielded	Unshielded	-
12	Signal (SYSTEM REMOTE CONTROL)	0.15	Unshielded	Unshielded	-
13	Audio (FM Antenna)	3.6	Unshielded	Unshielded	-
14	Audio (AUX IN)	2.0	Unshielded	Unshielded	-
15	USB	2.0	Shielded	Shielded	-
16	DC line	4.3	Unshielded	Unshielded	-
17	GND	1.0	Unshielded	Unshielded	-

*3) All cables used for the measurement are exclusive use or marketed.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

SECTION 5: Carrier frequency separation

Test procedure

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna port.

Summary of the test results: Pass

Refer to APPENDIX 2

SECTION 6: 20dB bandwidth & Occupied bandwidth (99%)

Test procedure

The bandwidth was measured with a spectrum analyzer connected to the antenna port.

Summary of the test results: Pass

Refer to APPENDIX 2

SECTION 7: Number of hopping frequency

Test procedure

The Number of Hopping Frequency was measured with a spectrum analyzer connected to the antenna port.

Summary of the test results: Pass

Refer to APPENDIX 2

SECTION 8: Dwell time

Test procedure

The Dwell time was measured with a spectrum analyzer connected to the antenna port.

Summary of the test results: Pass

Refer to APPENDIX 2

SECTION 9: Maximum peak output power

Test procedure

The Maximum Peak Output Power was measured with a power meter connected to the antenna port.

Summary of the test results: Pass

Refer to APPENDIX 2

SECTION 10: Out of band emissions (Antenna port conducted)

Test procedure

The Out of Band Emissions was measured with a spectrum analyzer connected to the antenna port.

In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

In the frequency range below 30MHz, RBW was narrowed to separate the noise contents.

Then, wide-band noise near the limit was checked separately, however the noise was not detected as shown in the chart.
(9kHz-150kHz:RBW=200Hz, 150kHz-30MHz:RBW=10kHz)

Summary of the test results: Pass

Refer to APPENDIX 2

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

SECTION 11: Radiated emission

11.1 Operating environment

The test was carried out in No.3 Semi-Anechoic Chamber.

Temperature : See test data (APPENDIX 2)
Humidity : See test data (APPENDIX 2)

11.2 Test configuration

EUT was placed on a platform of nominal size, 1m by 2.0m, raised 80cm above the conducting ground plane. The table is made of Styrofoam and covered with polyvinyl chloride. That has very low permittivity. The rear of EUT, including its peripherals was aligned and flushed with rear of tabletop. I/O cables that were connected to the peripherals were bundled in center. They were folded back and for the forming a bundle 30cm to 40cm long and were hanged at a 40cm height to the ground plane. Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength. Photographs of the set up are shown in Appendix 1.

11.3 Test conditions

Frequency range : 30MHz to 25GHz
Test distance : 3m (below 13GHz) / 1m (above 13GHz)
EUT position : Table top
EUT operation mode : Refer to 4.1.

11.4 Test procedure

The Radiated Electric Field Strength intensity has been measured on a semi-anechoic chamber with a ground plane and at a distance of 3m (below 13GHz) / 1m (above 13GHz). Measurements were performed with quasi-peak, peak and average detector. The measuring antenna height was varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity. The measurements were performed for both vertical and horizontal antenna polarization.

The radiated emission measurements were made with the following detection of the test receiver and Spectrum Analyzer.

Frequency	:	30-1000MHz	1000-25000MHz	
Detection Type	:	Quasi-Peak	Peak	* Average
IF Bandwidth	:	120kHz	RBW:1MHz/VBW:3MHz	RBW:1MHz/VBW:See data

* When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

* The VBW was based on the inverse of the duty cycle (Refer to Appendix 2).

The EUT was tested in the direction normally used.


UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

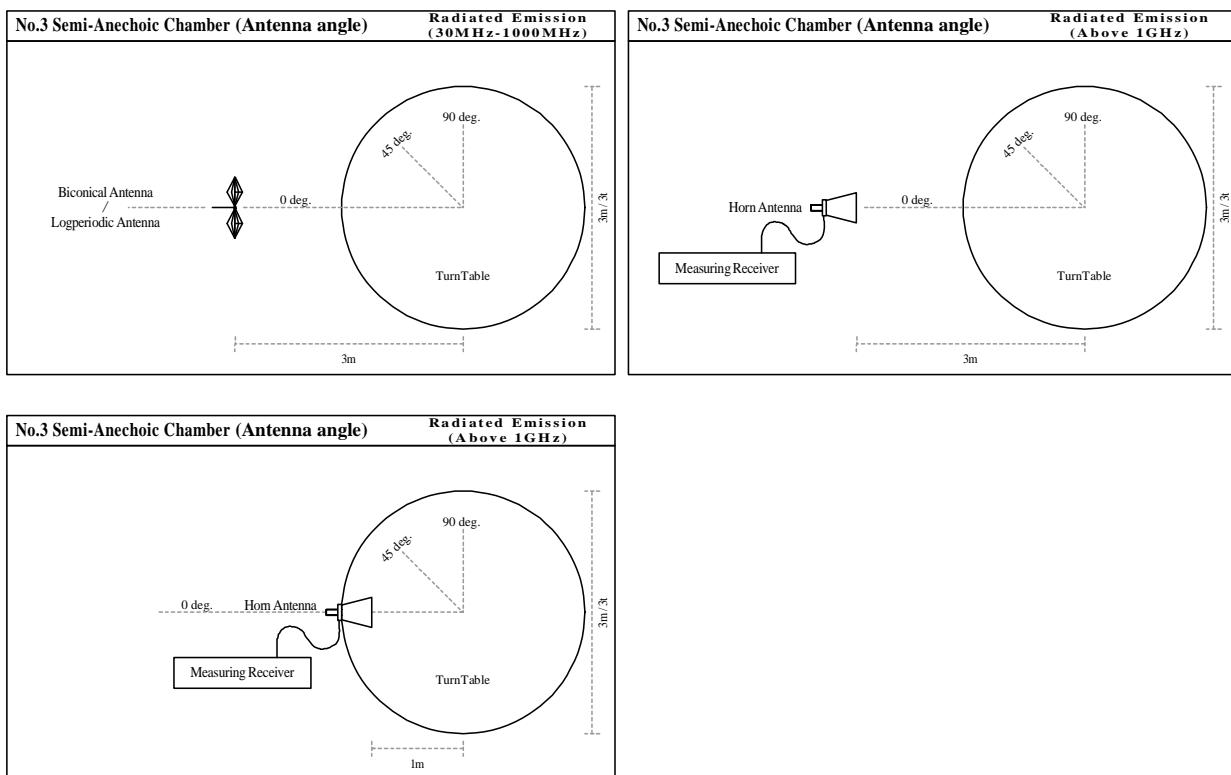Figure 1. Antenna angle**No.3 Semi-Anechoic Chamber****11.5 Band edge**

Band edge level at 2390MHz, 2400MHz and 2483.5MHz is below the limits of FCC 15.209. Refer to the data.

11.6 Results

Summary of the test results : Pass *No noise was detected above the 5th order harmonics.
Refer to APPENDIX 2

UL Japan, Inc.**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Contents of appendixes

APPENDIX 1: Photographs of test setup

Radiated emission

APPENDIX 2: Test data

20dB bandwidth and Carrier frequency separation

Number of hopping frequency

Dwell time

Maximum peak output power

Spurious emission (Antenna port conducted)

Radiated emission

99% Occupied bandwidth

APPENDIX 3: Test instruments

Test instruments

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401