

FCC CERTIFICATION TEST REPORT

FOR

Applicant	:	Pioneer Corporation
Address	:	28-8, Honkomagome 2-chome, Bunkyo-ku, Tokyo 113-0021, Japan
Equipment under Test	:	RDS AV RECEIVER
Model No.	:	DMH-W3050NEX, DMH-W3000NEX
Trade Mark	:	<i>Pioneer</i>
FCC ID	:	AJDK124
Manufacturer	:	Pioneer Corporation
Address	:	28-8, Honkomagome 2-chome, Bunkyo-ku, Tokyo 113-0021, Japan

Issued By: Guangdong Dongdian Testing Service Co., Ltd.

Add.: Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park,
Dongguan, Guangdong, China, 523808

Tel.: +86-0769-38826678, **E-mail:** ddt@dgddt.com, <http://www.dgddt.com>

REPORT

Table of Contents

Test report declares.....	4
1. Summary of Test Results.....	6
2. General Test Information	7
2.1. Description of EUT	7
2.2. Accessories of EUT.....	7
2.3. Assistant equipment used for test.....	8
2.4. Block diagram of EUT configuration for test	8
2.5. Deviations of test standard.....	8
2.6. Test environment conditions	8
2.7. Test laboratory	9
2.8. Measurement uncertainty.....	9
3. Equipment Used During Test.....	10
4. 26dB Bandwidth	11
4.1. Block diagram of test setup.....	11
4.2. Limits	11
4.3. Test procedure	11
4.4. Test result.....	11
4.5. Test graphs	12
5. 6dB Bandwidth	14
5.1. Block diagram of test setup.....	14
5.2. Limits	14
5.3. Test procedure	14
5.4. Test result.....	14
5.5. Test graphs	15
6. Duty Cycle	17
6.1. Block diagram of test setup.....	17
6.2. Limit.....	17
6.3. Test procedure	17
6.4. Test result.....	17
6.5. Test graphs	18
7. Maximum Output Power.....	20
7.1. Block diagram of test setup.....	20
7.2. Limits	20
7.3. Test procedure	20
7.4. Test result channel power	20
8. Power Spectral Density	21
8.1. Block diagram of test setup.....	21

8.2.	Limits	21
8.3.	Test procedure	21
8.4.	Test result.....	22
8.5.	Test graphs	23
9.	Frequency Stability Measurement	25
9.1.	Limit of Frequency Stability	25
9.2.	Measuring Instruments.....	25
9.3.	Test procedures	25
9.4.	Test setup.....	25
9.5.	Test result.....	26
10.	Dynamic Frequency Selection	28
10.1.	Applicability of DFS requirements.....	28
10.2.	Limit.....	29
10.3.	Parameters of radar test waveforms.....	29
10.4.	Calibration of radar waveform	30
10.5.	Channel closing transmission time, channel move time and non-occupancy period..	31
10.6.	Test setup.....	32
10.7.	Test result.....	32
11.	Emissions in Restricted Frequency Bands	33
11.1.	Block diagram of test setup.....	33
11.2.	Limit.....	34
11.3.	Test Procedure.....	35
11.4.	Test result.....	37
12.	Band Edge Compliance	48
12.1.	Block diagram of test setup.....	48
12.2.	Limit.....	48
12.3.	Test Procedure.....	48
12.4.	Test result.....	49
13.	Power Line Conducted Emission	62
13.1.	Block diagram of test setup.....	62
13.2.	Power Line Conducted Emission Limits	62
13.3.	Test Procedure.....	62
13.4.	Test Result	63
14.	Antenna Requirements	64
14.1.	Limit.....	64
14.2.	Result	64
15.	Test Setup Photograph	65
16.	Photos of the EUT	67

Test Report Declare

Applicant	:	Pioneer Corporation
Address	:	28-8, Honkomagome 2-chome, Bunkyo-ku, Tokyo 113-0021, Japan
Equipment under Test	:	RDS AV RECEIVER
Model No.	:	DMH-W3050NEX, DMH-W3000NEX
Trade Mark	:	Pioneer
Manufacturer	:	Pioneer Corporation
Address	:	28-8, Honkomagome 2-chome, Bunkyo-ku, Tokyo 113-0021, Japan

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart E

Test procedure used: ANSI C63.10:2013, 789033 D02 General U-NII Test Procedures New Rules v02r01**We Declare:**

The equipment described above is tested by Guangdong Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangdong Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC standards.

Report No.:	DDT-RE23060602-2E07		
Date of Receipt:	Aug. 02, 2023	Date of Test:	Aug. 02, 2023 ~ Nov. 22, 2023

Prepared By:*Bobo Chen***Bobo Chen/Engineer****Approved By:***Damon Hu***Damon Hu/EMC Manager**

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Guangdong Dongdian Testing Service Co., Ltd.

Revision History

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	Nov. 22, 2023	

1. Summary of Test Results

The EUT have been tested according to the applicable standards as referenced below.		
Description of Test Item	Standard	Results
6/26dB Bandwidth	FCC 15.407 (e)	PASS
Maximum Conducted Output Power	FCC 15.407 (a)	PASS
Power Spectral Density	FCC 15.407 (a)	PASS
Frequency Stability Measurement	FCC 15.407 (g)	PASS
Emissions in restricted frequency bands	FCC 15.407 (b) FCC 15.209 FCC 15.205	PASS
Band Edge Compliance	FCC 15.407 (b) FCC 15.209 FCC 15.205	PASS
Power Line Conducted Emission	FCC 15.207	N/A
Antenna requirement	FCC 15.203	PASS
Dynamic Frequency Selection	FCC 15.407 (h)	N/A
Note: N/A is an abbreviation for Not Applicable and means this test item is not applicable for this device according to the technology characteristic of device.		

2. General Test Information

2.1. Description of EUT

EUT Name	: RDS AV RECEIVER
Model Number	: DMH-W3050NEX, DMH-W3000NEX
Difference of models	: Compared with DMH-W3050NEX, DMH-W3000NEX has no HD Radio/iDataLink, other schematic and structure are the same, including the RF part, therefore the test performed on the model DMH-W3050NEX. All models are tested for radiated emission (below 1 GHz).
EUT function description	: Please reference user manual of this device
Power Supply	: DC 10.8 ~ 15.1V / 10A (max)
Radio Technology	: IEEE 802.11a/n/ac
Frequency Range	: IEEE 802.11a/n HT20/11ac VHT20: 5735-5755 MHz IEEE 802.11n HT40/11ac VHT40: 5735-5775 MHz IEEE 802.11ac VHT80: 5735-5815 MHz
Modulation	: IEEE 802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20, HT40: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK)
Transmitter rate	: IEEE 802.11a: up to 54 Mbps IEEE 802.11n HT20: up to 72.2 Mbps IEEE 802.11n HT40: up to 150 Mbps IEEE 802.11ac VHT20: up to 86.7 Mbps IEEE 802.11ac VHT40: up to 200 Mbps IEEE 802.11ac VHT80: up to 433.3 Mbps
Antenna Type	: FPC antenna, Maximum PK gain: 3.2 dBi
Sample Number	: S23060602-08 for conductive, S23060602-09 for radiation

Note 1: EUT is the abbreviation of equipment under test.

Note 2: "☒" means to be chosen or applicable; "☐" means don't to be chosen or not applicable;
This note applies to entire report.

Channel information					
UNII-3					
IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40)		IEEE 802.11ac (VHT80)	
149	5745	151	5755	155	5775


2.2. Accessories of EUT

Description of Accessories	Manufacturer	Model number	Description	Remark
MIC	N/A	N/A	N/A	N/A
USB Cable	N/A	N/A	N/A	N/A
GPS antennae	N/A	N/A	N/A	N/A
DC Cable	N/A	N/A	N/A	N/A
Audio Cable	N/A	N/A	N/A	N/A

2.3. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	EMC Compliance	SN
N/A	N/A	N/A	N/A	N/A

2.4. Block diagram of EUT configuration for test



Test software: Test software: MobaXterm_Personal_21.4.exe

The test software was used to control EUT work in Continuous Tx mode, and select test channel, wireless mode as below table.

The pathloss of external cable: 2 dB (According to the manufacturer's claims)

Tested mode, channel, and data rate information				
Mode	Setting Tx Power	data rate (Mbps) (see Note)	Channel	Frequency (MHz)
IEEE 802.11a	33	6	CH149	5745
IEEE 802.11n HT20	33	MCS 0	CH149	5745
IEEE 802.11n HT40	31	MCS 0	CH151	5755
IEEE 802.11ac VHT20	33	MCS 0	CH149	5745
IEEE 802.11ac VHT40	31	MCS 0	CH151	5755
IEEE 802.11ac VHT80	29	MCS 0	CH155	5775
Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.				

2.5. Deviations of test standard

No Deviation.

2.6. Test environment conditions

Temperature range:	+15℃ to +35 ℃
Humidity range:	20% to 75%
Pressure range:	86 kPa to106 kPa

2.7. Test laboratory

Guangdong Dongdian Testing Service Co., Ltd.

Add.: Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, R-20155, G-20118

2.8. Measurement uncertainty


Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB (10 MHz ≤ f < 3.6 GHz);
	1.38 dB (3.6 GHz ≤ f < 8 GHz)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB (10 MHz ≤ f < 3.6 GHz);
	1.38 dB (3.6 GHz ≤ f < 8 GHz)
Frequencies Stability	6.7 × 10 ⁻⁸ (Antenna couple method)
	5.5 × 10 ⁻⁸ (Conducted method)
Conducted spurious emissions	0.86 dB (10 MHz ≤ f < 3.6 GHz);
	1.40 dB (3.6 GHz ≤ f < 8 GHz)
	1.66 dB (8 GHz ≤ f < 26.5 GHz)
Uncertainty for radio frequency (RBW < 20 kHz)	3×10 ⁻⁸
Temperature	0.4 °C
Humidity	2 %
Uncertainty for Radiation Emission test (9 kHz – 30 MHz)	3.44 dB
Uncertainty for Radiation Emission test (30 MHz - 1 GHz)	4.70 dB (Antenna Polarize: V)
	4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz - 40 GHz)	4.10 dB (1 - 6 GHz)
	4.40 dB (6 GHz - 18 GHz)
	3.54 dB (18 GHz - 26 GHz)
	4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power line conduction emission test	3.34dB (150KHz-30MHz)
	3.72dB (9KHz-150KHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3. Equipment Used During Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
☑RF Connected Test (Tonscend RF Measurement System 3#)					
Signal & Spectrum analyzer	R&S	FSV40	101407	Jun. 12, 2023	1 Year
Wideband Radio Communication tester	R&S	CMW500	117491	Apr. 27, 2023	1 Year
EXG Analog Signal Generator	KEYSIGHT	N5173B	MY62153058	Jul. 12, 2023	1 Year
Vector Signal Generator	Agilent	N5182A	MY48180912	Apr. 23, 2023	1 Year
RF Control Unit	Tonscend	JS0806-2	20C8060230	Apr. 27, 2023	1 Year
Temp&Humi Programmable	ZHIXIANG	ZXGDJS-150L	ZX170110-A	May 15, 2023	1 Year
Test Software	JS Tonscend	JS1120-3	Ver.3.2.22	N/A	N/A
☑Radiation 3#chamber					
EMI Test Receiver	R&S	ESU26	100472	Apr. 23, 2023	1 Year
Spectrum analyzer	Agilent	E4447A	MY50180031	Apr. 23, 2023	1 Year
Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	Sep. 29, 2022	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	01429	Jul. 12, 2023	2 Year
Double Ridged Horn Antenna	Schwarzbeck	BBHA9120 D	02468	Sep. 29, 2022	1 Year
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	Apr. 26, 2023	1 Year
Pre-amplifier	COM-POWER	PAM-118A	18040084	Jul. 15, 2023	1 Year
Pre-amplifier	COM-POWER	PAM-840A	461369	Apr. 27, 2023	1 Year
RE Cable	N/A	W23.02 CP1-X2 + W23.09 AP1-X8+ JCT26S-NJ-NJ-1.5M	4.5M+8M+1.5M	Apr. 21, 2023	1 Year
RF Cable	Yuhu Technology	JCTB810-NJ-NJ-9M+ ZT26S-SMAJ-SMAJ-1M	21123964	Apr. 23, 2023	1 Year
Micro-Tronics filters	REBES	BRM50702	G555	N/A	N/A
Micro-Tronics filters	REBES	BRM50716	G392	N/A	N/A
High Pass filter	XB	XBLBQ-GTA67	210820-2-3	N/A	N/A
Test software	Tonscend	JS32-RE	V 5.0.0.1	N/A	N/A

4. 26dB Bandwidth

4.1. Block diagram of test setup

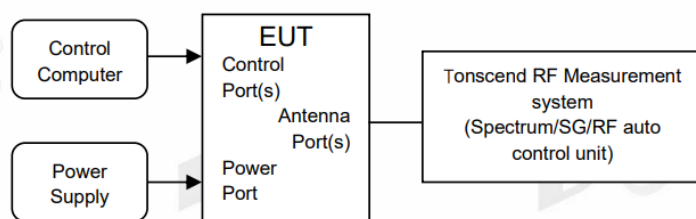

4.2. Limits

FCC Part15, Subpart E		
Test Item	Limit	Frequency Range (MHz)
26 dB Bandwidth	---	5150 - 5250
	---	5250 - 5350
	---	5470 - 5725

4.3. Test procedure

Connect EUT's antenna output to spectrum analyzer by RF cable.


Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	approximately 1% of the emission bandwidth.
VBW	> RBW
Trace	Max hold
Sweep	Auto couple


Allow the trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.

4.4. Test result

Test Mode	Antenna	Frequency [MHz]	26db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5745	22.92	5734.24	5757.16	---	---
11N20SISO	Ant1	5745	20.72	5734.72	5755.44	---	---
11N40SISO	Ant1	5755	41.28	5734.76	5776.04	---	---
11AC20SISO	Ant1	5745	21.28	5734.44	5755.72	---	---
11AC40SISO	Ant1	5755	42.00	5734.04	5776.04	---	---
11AC80SISO	Ant1	5775	81.60	5734.36	5815.96	---	---


4.5. Test graphs

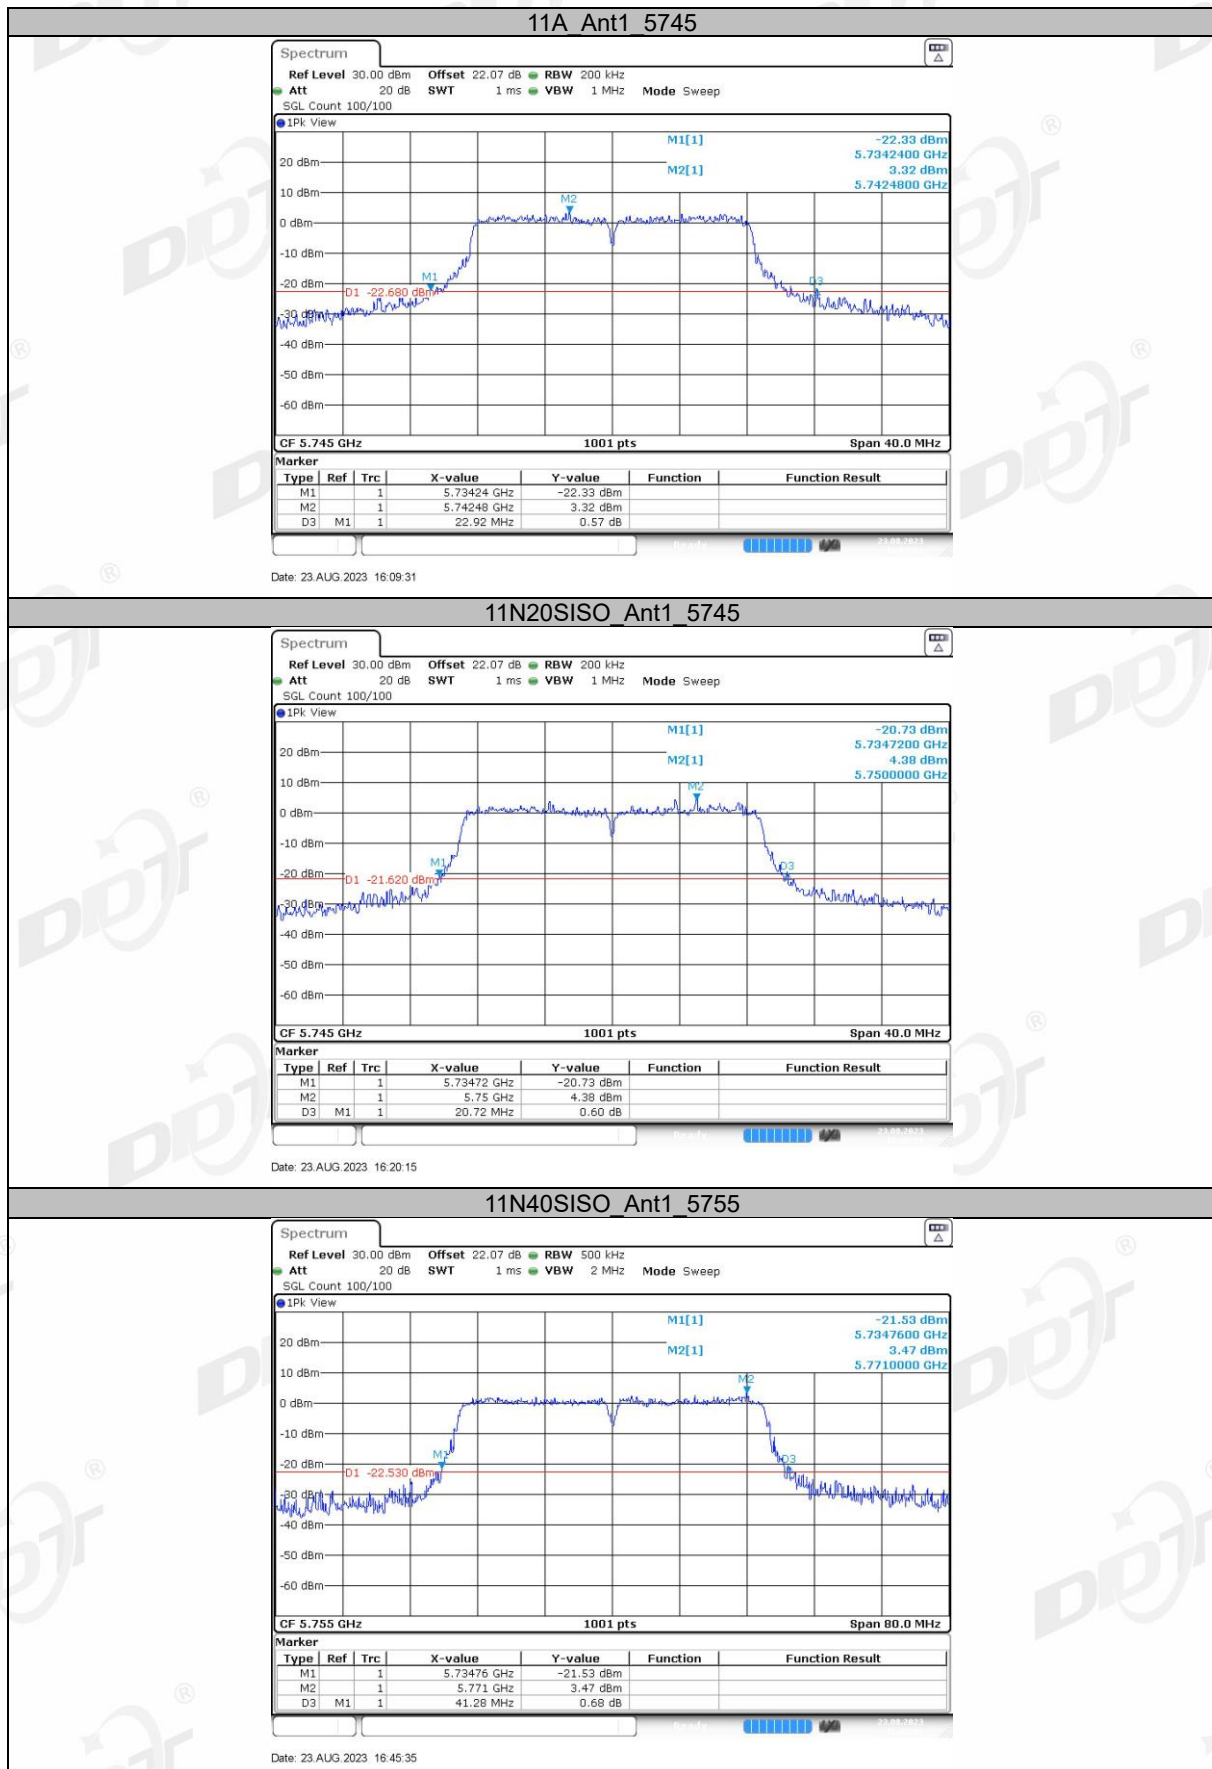

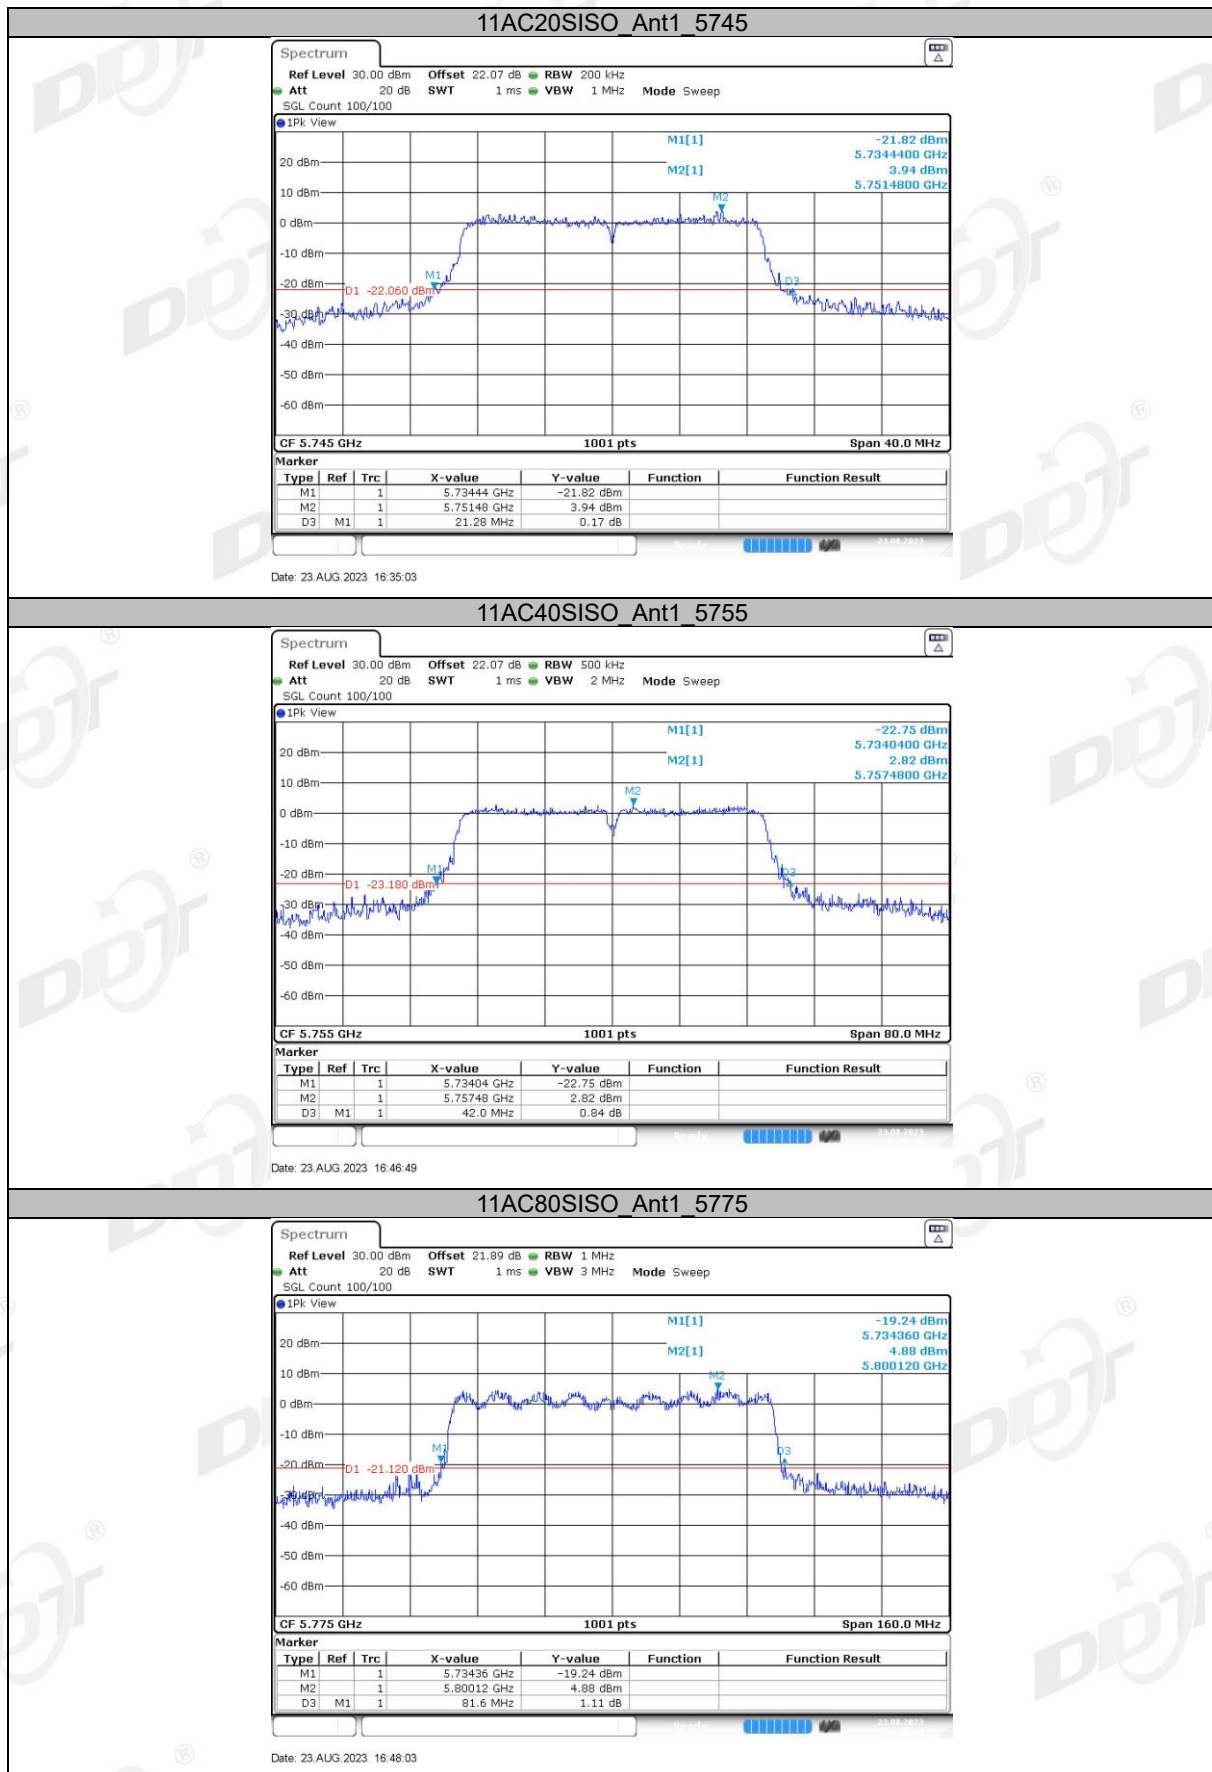

5. 6dB Bandwidth

5.1. Block diagram of test setup

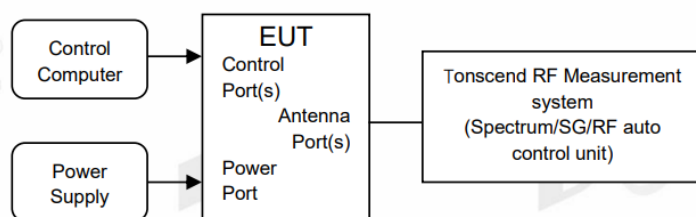

5.2. Limits

FCC Part15, Subpart E		
Test Item	Limit	Frequency Range (MHz)
6 dB Bandwidth	Minimum 500 kHz	5725 - 5850

5.3. Test procedure

Connect EUT's antenna output to spectrum analyzer by RF cable.


Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	For 6 dB Bandwidth: RBW=100 kHz For 26 dB Bandwidth: approximately 1% of the emission bandwidth.
VBW	For 6 dB Bandwidth: VBW=300 kHz For 26 dB Bandwidth: >3 RBW
Trace	Max hold
Sweep	Auto couple


Allow the trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.4. Test result

Test Mode	Antenna	Frequency [MHz]	6dB EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5745	16.32	5736.80	5753.12	0.5	PASS
11N20SISO	Ant1	5745	16.56	5736.80	5753.36	0.5	PASS
11N40SISO	Ant1	5755	35.60	5737.16	5772.76	0.5	PASS
11AC20SISO	Ant1	5745	17.64	5736.16	5753.80	0.5	PASS
11AC40SISO	Ant1	5755	33.76	5738.12	5771.88	0.5	PASS
11AC80SISO	Ant1	5775	75.20	5737.40	5812.60	0.5	PASS


5.5. Test graphs

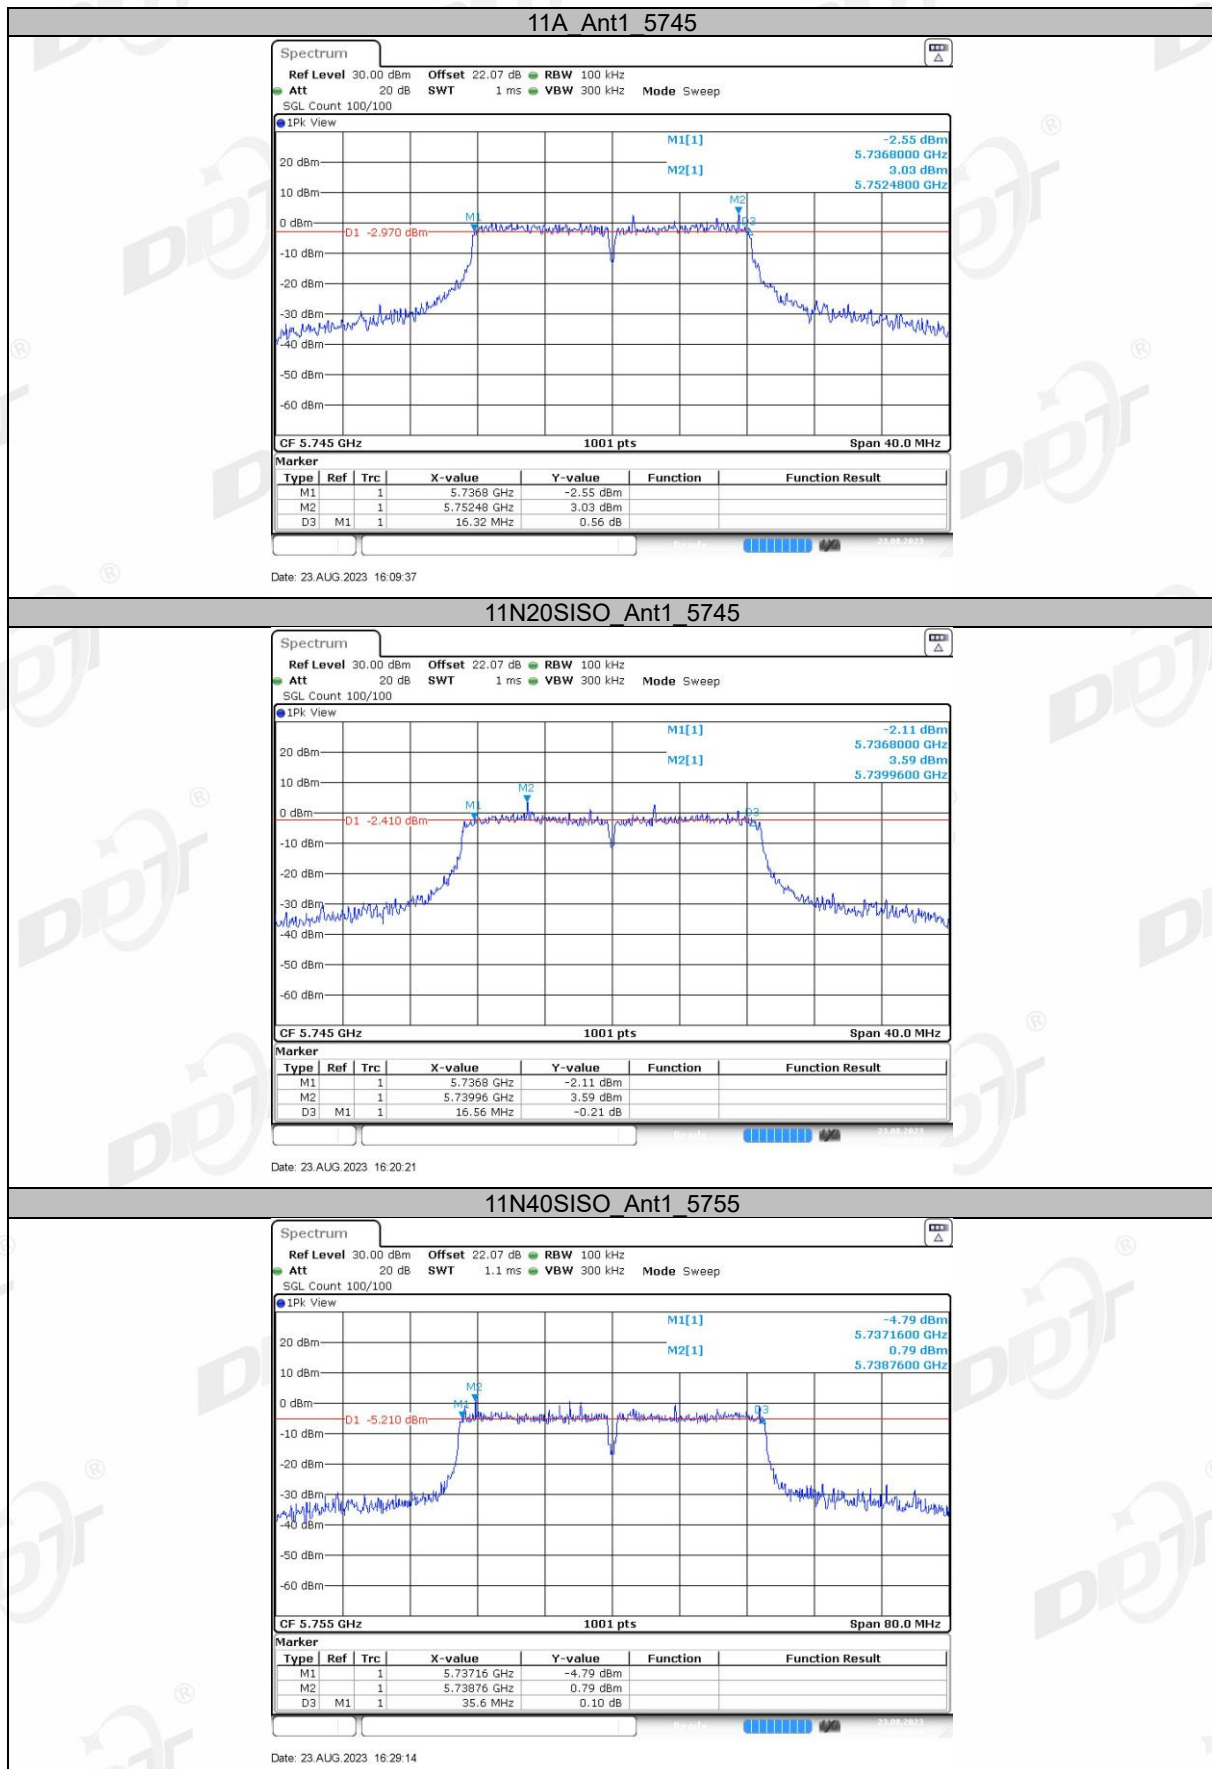

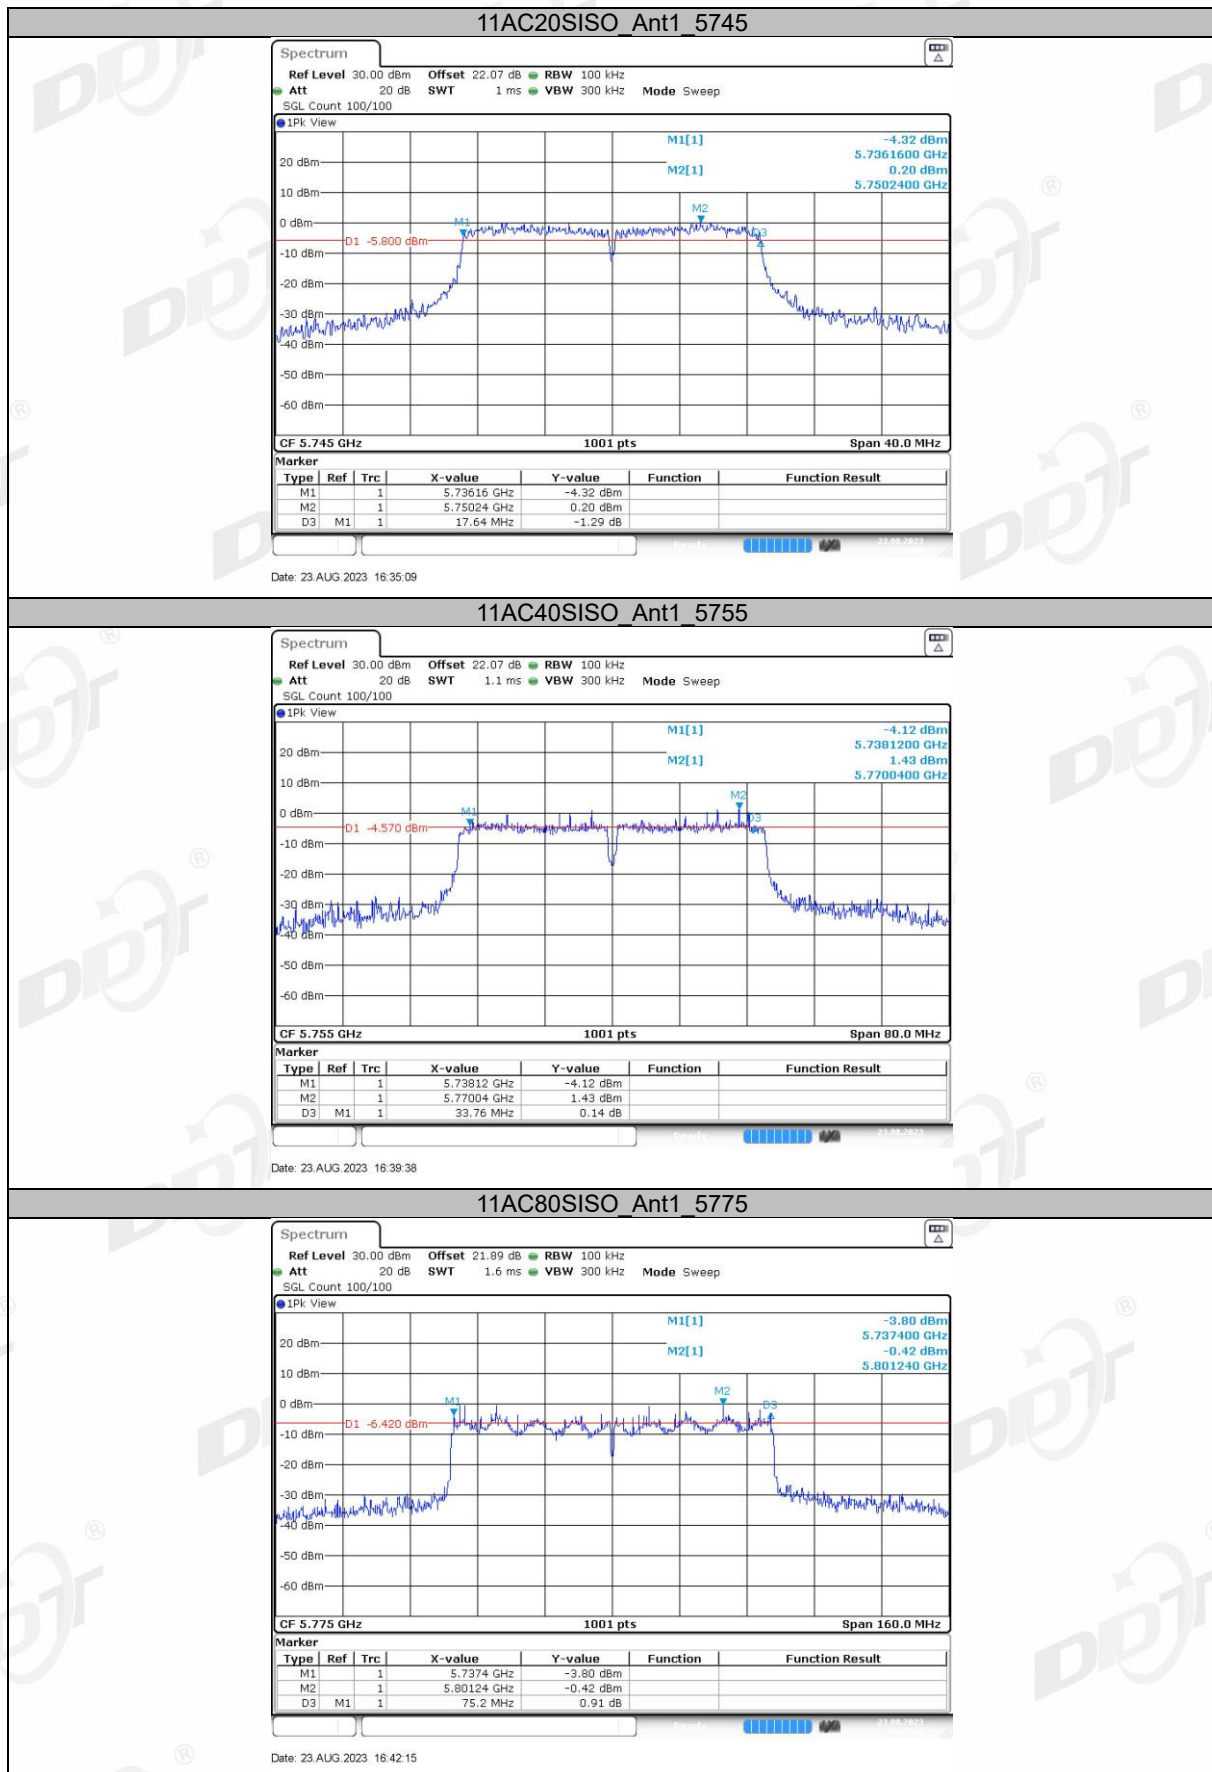

6. Duty Cycle

6.1. Block diagram of test setup

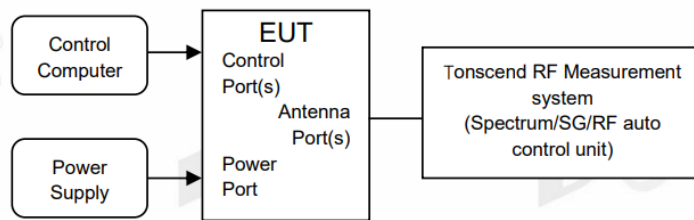

6.2. Limit

Just for Report.

6.3. Test procedure

- (1) Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, The cable loss and attenuator loss have been put into spectrum analyzer as amplitude offset.

set the Spectrum Analyzer as below:

Centre Frequency: The centre frequency of the middle hopping channel.

Resolution BW: 10 MHz.

Video BW: 10 MHz.

Span: Zero span.

Detector: Peak.

Trace Mode: Clear Write.

Sweep: Video Trigger

- (2) When the trace is complete, measure the sending time of 1 burst and the duty cycle of 1 burst cycle.


- (3) Calculate dwell time follow below formula:

Duty cycle= Pulse's on time / Burst cycle

6.4. Test result

Test Mode	Antenna	Frequency [MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
11A	Ant1	5745	2.02	3.03	66.67
11N20SISO	Ant1	5745	1.89	2.90	65.17
11N40SISO	Ant1	5755	0.93	1.94	47.94
11AC20SISO	Ant1	5745	1.90	2.90	65.52
11AC40SISO	Ant1	5755	0.93	1.94	47.94
11AC80SISO	Ant1	5775	0.45	1.45	31.03


6.5. Test graphs

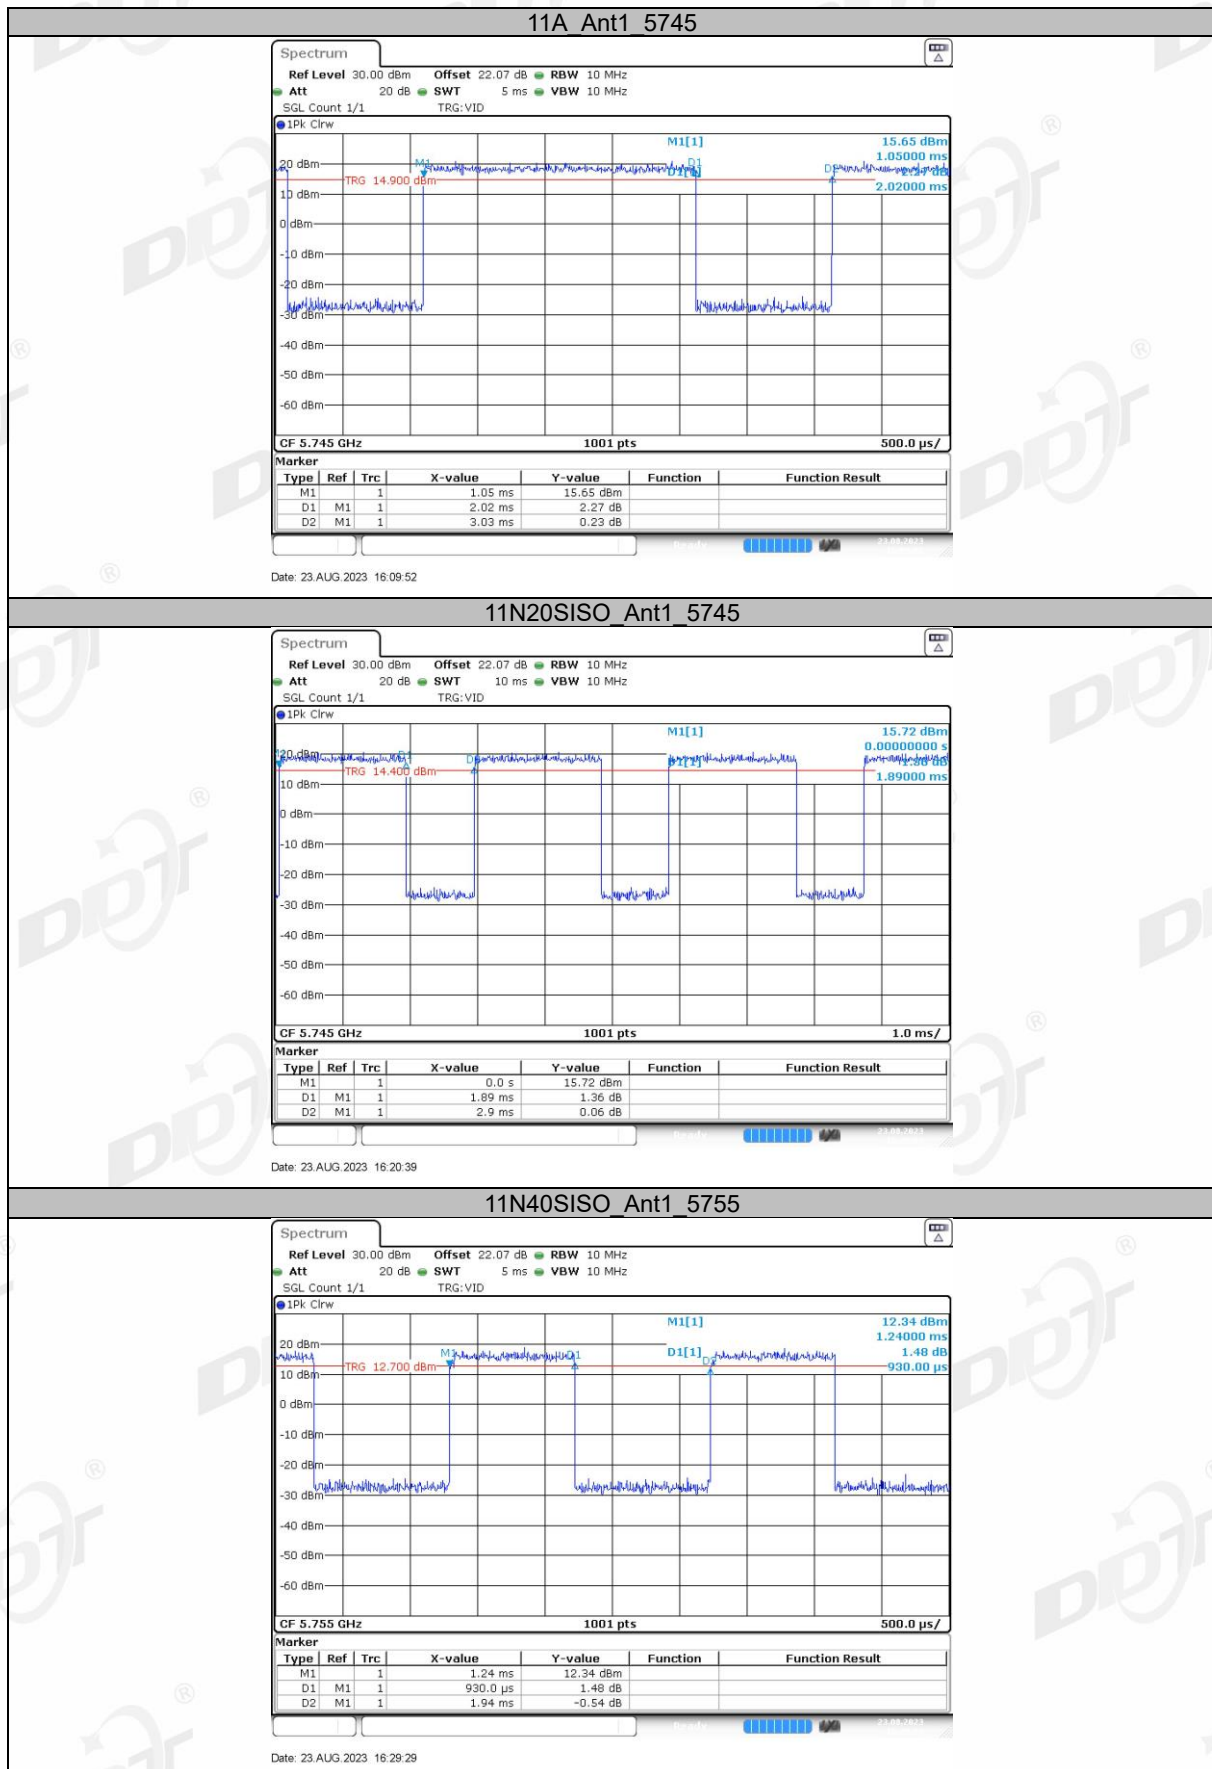



7. Maximum Output Power

7.1. Block diagram of test setup

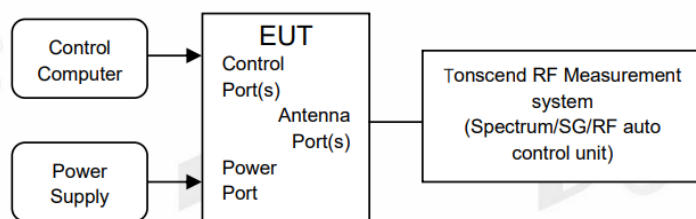

7.2. Limits

FCC Part15, Subpart E/ RSS-247		
Test Item	Limit	Frequency Range (MHz)
Maximum Output Power	outdoor access point: 1 W(30 dBm) indoor access point: 1 W(30 dBm) fixed point-to-point access points1 W(30 dBm) client devices: 250 mW (24 dBm)	5150-5250
	250 mW (24 dBm) or $11 + 10 \log_{10} B$	5250-5350
	250 mW (24 dBm) or $11 + 10 \log_{10} B$	5470 - 5725
	1 Watt (30 dBm)	5725-5850
Note: B=26 bandwidth		

7.3. Test procedure

Connect each EUT's antenna output to power sensor by RF cable and attenuator


Measure the output power of each antenna port by power sensor.

7.4. Test result channel power

Test Mode	Antenna	Frequency [MHz]	Duty Cycle [%]	DC Factor [dBm]	Result [dBm]	Limit [dBm]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
11A	Ant1	5745	66.67	1.76	8.98	≤30.00	12.18	---	PASS
11N20SISO	Ant1	5745	65.17	1.86	8.88	≤30.00	12.08	---	PASS
11N40SISO	Ant1	5755	47.94	3.19	8.86	≤30.00	12.06	---	PASS
11AC20SISO	Ant1	5745	65.52	1.84	8.80	≤30.00	12.00	---	PASS
11AC40SISO	Ant1	5755	47.94	3.19	8.77	≤30.00	11.97	---	PASS
11AC80SISO	Ant1	5775	31.03	5.08	9.42	≤30.00	12.62	---	PASS

8. Power Spectral Density

8.1. Block diagram of test setup

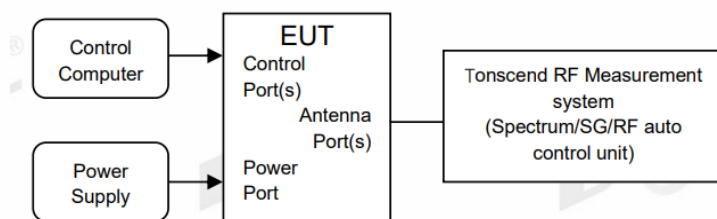

8.2. Limits

FCC Part15, Subpart E		
Test Item	Limit	Frequency Range (MHz)
Power Spectral Density	Other than Mobile and portable:17 dBm/MHz Mobile and portable client devices:11 dBm/MHz	5150-5250
	11 dBm/MHz	5250-5350
	11 dBm/MHz	5470 - 5725
	30 dBm/500 kHz	5725-5850

8.3. Test procedure

The transmitter output was connected to a spectrum analyzer. Power density was measured by spectrum analyzer with 1MHz RBW and 3MHz VBW.

Connect the UUT to the spectrum analyser and use the following settings:

5150 MHz~5250 MHz, 5250 MHz~5350 MHz, 5470 MHz~5725 MHz

Center Frequency	The centre frequency of the channel under test
Detector	RMS
RBW	1MHz
VBW	$\geq 3 \times \text{RBW}$
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Max hold
Sweep time	Auto

5725 MHz-5850 MHz

Center Frequency	The centre frequency of the channel under test
Detector	RMS
RBW	500 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Max hold
Sweep time	Auto


8.4. Test result

Test Mode	Antenna	Frequency[MHz]	Result [dBm/MHz]	Limit[dBm/MHz]	Verdict
11A	Ant1	5745	-5.29	≤ 30.00	PASS
11N20SISO	Ant1	5745	-5.75	≤ 30.00	PASS
11N40SISO	Ant1	5755	-8.93	≤ 30.00	PASS
11AC20SISO	Ant1	5745	-5.83	≤ 30.00	PASS
11AC40SISO	Ant1	5755	-8.91	≤ 30.00	PASS
11AC80SISO	Ant1	5775	-9.81	≤ 30.00	PASS

Note: 1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.

2.The Duty Cycle Factor is compensated in the graph.

8.5. Test graphs

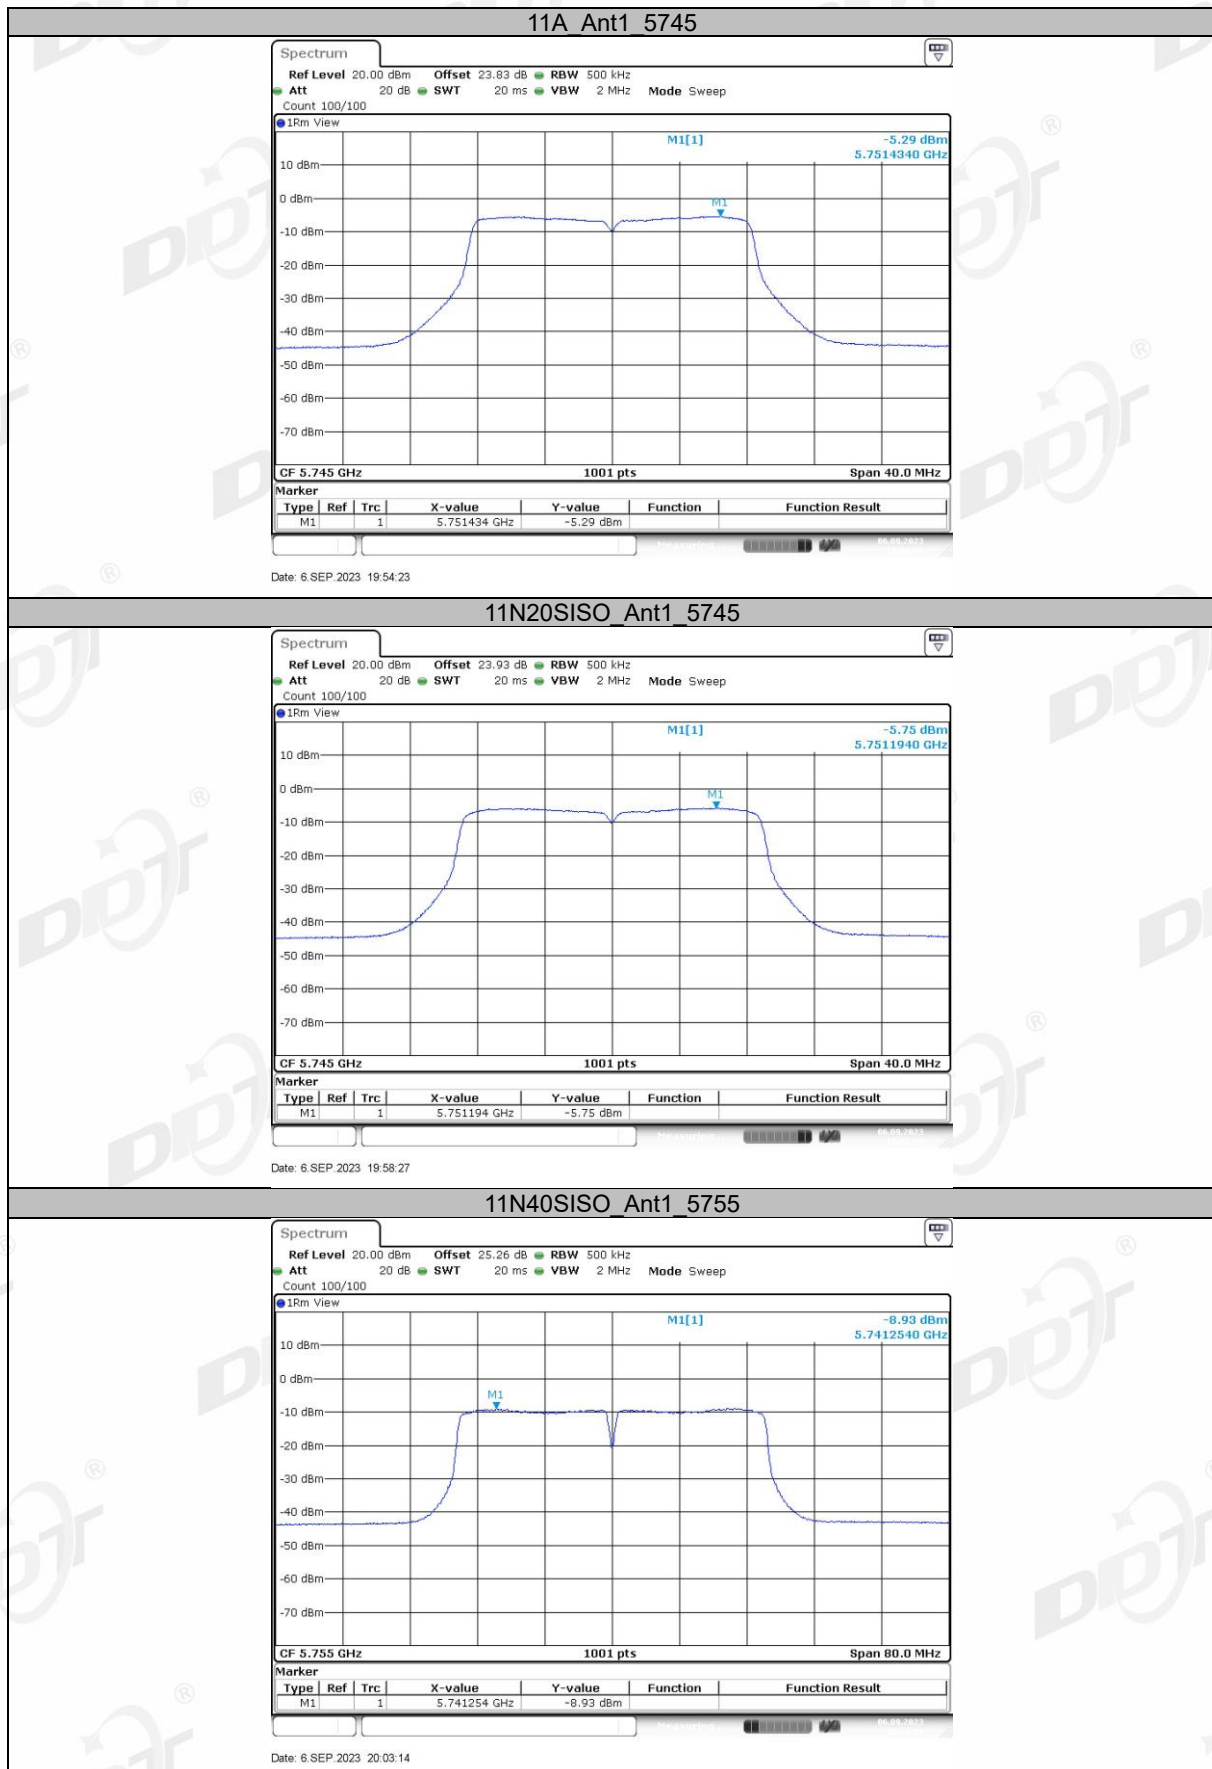



9. Frequency Stability Measurement

9.1. Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.


9.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

9.3. Test procedures

- (1) To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
- (2) The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10 dB lower than the measured peak value.
- (3) The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

9.4. Test setup

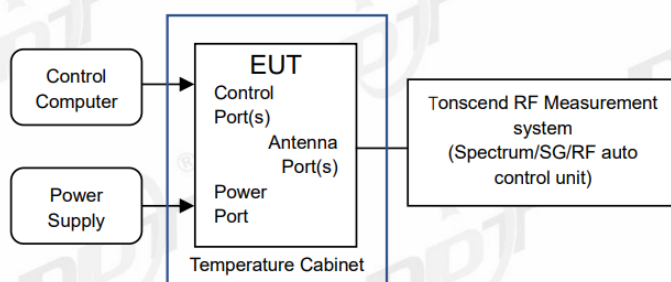

9.5. Test result

Voltage								
Test Mode	Antenna	Frequency [MHz]	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
11A	Ant1	5745	NV	NT	-40000.00	-6.962576	20	PASS
			LV	NT	-20000.00	-3.481288	20	PASS
			HV	NT	-20000.00	-3.481288	20	PASS
11N20SISO	Ant1	5745	NV	NT	-40000.00	-6.962576	20	PASS
			LV	NT	-40000.00	-6.962576	20	PASS
			HV	NT	-40000.00	-6.962576	20	PASS
11N40SISO	Ant1	5755	NV	NT	-40000.00	-6.950478	20	PASS
			LV	NT	0.00	0.000000	20	PASS
			HV	NT	0.00	0.000000	20	PASS
11AC20SISO	Ant1	5745	NV	NT	-20000.00	-3.481288	20	PASS
			LV	NT	-60000.00	-10.443864	20	PASS
			HV	NT	-40000.00	-6.962576	20	PASS
11AC40SISO	Ant1	5755	NV	NT	-40000.00	-6.950478	20	PASS
			LV	NT	-40000.00	-6.950478	20	PASS
			HV	NT	0.00	0.000000	20	PASS
11AC80SISO	Ant1	5775	NV	NT	0.00	0.000000	20	PASS
			LV	NT	0.00	0.000000	20	PASS
			HV	NT	-80000.00	-13.852814	20	PASS

Temperature								
Test Mode	Antenna	Frequency [MHz]	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
11A	Ant1	5745	NV	-30	-20000.00	-3.481288	20	PASS
			NV	-20	-40000.00	-6.962576	20	PASS
			NV	-10	-20000.00	-3.481288	20	PASS
			NV	0	-60000.00	-10.443864	20	PASS
			NV	10	-20000.00	-3.481288	20	PASS
			NV	20	-40000.00	-6.962576	20	PASS
			NV	30	-40000.00	-6.962576	20	PASS
			NV	40	-40000.00	-6.962576	20	PASS
			NV	50	-20000.00	-3.481288	20	PASS
11N20SISO	Ant1	5745	NV	-30	-60000.00	-10.443864	20	PASS
			NV	-20	-20000.00	-3.481288	20	PASS
			NV	-10	-40000.00	-6.962576	20	PASS
			NV	0	-40000.00	-6.962576	20	PASS
			NV	10	-40000.00	-6.962576	20	PASS
			NV	20	-40000.00	-6.962576	20	PASS
			NV	30	-40000.00	-6.962576	20	PASS
			NV	40	-40000.00	-6.962576	20	PASS
			NV	50	-40000.00	-6.962576	20	PASS
11N40SISO	Ant1	5755	NV	-30	0.00	0.000000	20	PASS
			NV	-20	-40000.00	-6.950478	20	PASS
			NV	-10	0.00	0.000000	20	PASS
			NV	0	-40000.00	-6.950478	20	PASS
			NV	10	0.00	0.000000	20	PASS
			NV	20	-40000.00	-6.950478	20	PASS
			NV	30	0.00	0.000000	20	PASS
			NV	40	-40000.00	-6.950478	20	PASS
			NV	50	0.00	0.000000	20	PASS
11AC20SISO	Ant1	5745	NV	-30	-40000.00	-6.962576	20	PASS
			NV	-20	-60000.00	-10.443864	20	PASS
			NV	-10	-60000.00	-10.443864	20	PASS
			NV	0	-40000.00	-6.962576	20	PASS
			NV	10	-40000.00	-6.962576	20	PASS
			NV	20	-40000.00	-6.962576	20	PASS
			NV	30	-40000.00	-6.962576	20	PASS
			NV	40	-40000.00	-6.962576	20	PASS
			NV	50	-40000.00	-6.962576	20	PASS
11AC40SISO	Ant1	5755	NV	-30	0.00	0.000000	20	PASS

			NV	-20	0.00	0.000000	20	PASS
			NV	-10	-80000.00	-13.900956	20	PASS
			NV	0	0.00	0.000000	20	PASS
			NV	10	-40000.00	-6.950478	20	PASS
			NV	20	-80000.00	-13.900956	20	PASS
			NV	30	0.00	0.000000	20	PASS
			NV	40	-80000.00	-13.900956	20	PASS
			NV	50	-80000.00	-13.900956	20	PASS
11AC80SISO	Ant1	5775	NV	-30	0.00	0.000000	20	PASS
			NV	-20	0.00	0.000000	20	PASS
			NV	-10	0.00	0.000000	20	PASS
			NV	0	-80000.00	-13.852814	20	PASS
			NV	10	-80000.00	-13.852814	20	PASS
			NV	20	0.00	0.000000	20	PASS
			NV	30	0.00	0.000000	20	PASS
			NV	40	-80000.00	-13.852814	20	PASS
			NV	50	0.00	0.000000	20	PASS

10. Dynamic Frequency Selection

10.1. Applicability of DFS requirements

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	☐ Master	☒ Client Without Radar Detection	☐ Client with Radar Detection
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode	
	☐ Master Device or Client with Radar Detection	☒ Client Without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	☐ Master Device or Client with Radar Detection	☒ Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required

Note: Frequencies selected for statistical performance check should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

10.2. Limit

(1) DFS Detection Thresholds

Table 3: DFS Detection Thresholds for Master Devices and Client Devices with Radar Detection

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP $<$ 200 milliwatt and power spectral density $<$ 10 dBm/MHz	-62 dBm
EIRP $<$ 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.	

(2) DFS Response Requirements

Table 4: DFS Response Requirement Values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.
Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required facilitating a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.	

10.3. Parameters of radar test waveforms

This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of

specific test waveforms.

Table 5 Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A	Roundup $\left\{ \frac{1}{360} \right\}$	60%	30
		Test B			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests. Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A					


A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B. Test aggregate is average of the percentage of successful detections of short pulse radar types 1-4

10.4. Calibration of radar waveform

Radar Waveform Calibration Procedure:

- (1) A 50 ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected to place of the master
- (2) The interference Radar Detection Threshold Level is $-62\text{dBm} + 0\text{dBi} + 1\text{dB} = -61\text{dBm}$ that had been taken into account the output power range and antenna gain.
- (3) The following equipment setup was used to calibrate the conducted radar waveform. A vector signal generator was utilized to establish the test signal level for radar type 0. During this process there were no transmissions by either the master or client device. The spectrum analyzer was switched to the zero spans (time domain) at the frequency of the radar waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 3 MHz. The spectrum analyzer had offset -1.0dB to compensate RF cable loss 1.0dB.
- (4) The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was $-62\text{dBm} + 0\text{dBi} + 1\text{dB} = -61\text{dBm}$. Capture the spectrum analyzer plots on short pulse radar waveform.

Conducted Calibration Setup:

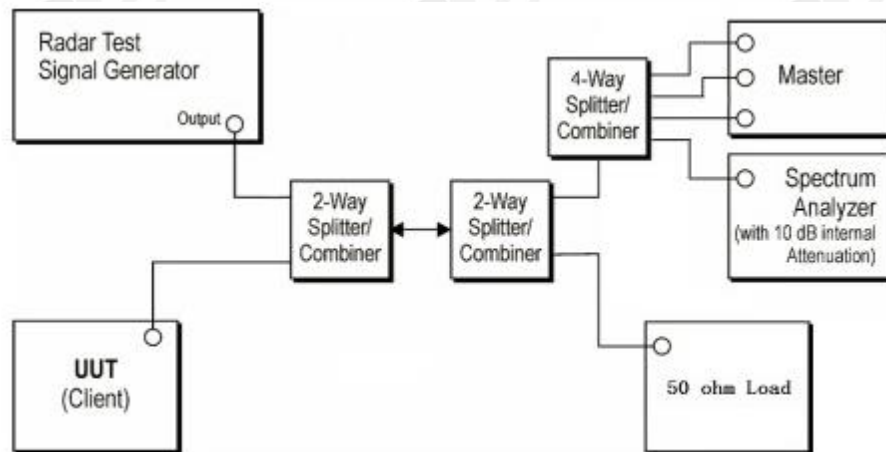

- Note: 1. Use the software "Web" to set the frequency channel.
 2. EUT is not support TPC and not with Radar detection.

10.5. Channel closing transmission time, channel move time and non-occupancy period

Block diagram of test setup Test Procedure:


- (1) The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
- (2) The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device.
- (3) A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
- (4) EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Test Software in order to properly load the network for the entire period of the test.
- (5) When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
- (6) Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type.
- (7) Measurement of the aggregate duration of the Channel Closed Transmission Time method.
 With the

- (8) spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell (0.3ms) = S (12000ms) / B (4000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C (ms) = N \times Dwell (0.3ms)$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.

Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

10.6. Test setup

Setup for Client with injection at the Master

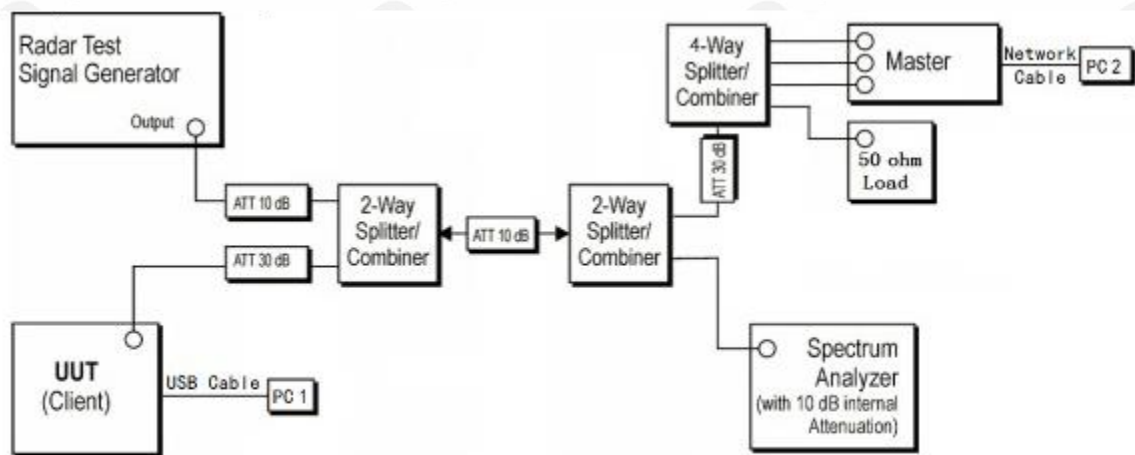


10.7. Test result

Not Applicable


11. Emissions in Restricted Frequency Bands

11.1. Block diagram of test setup


In 3 m Anechoic Chamber, test setup diagram for 9 kHz - 30 MHz:

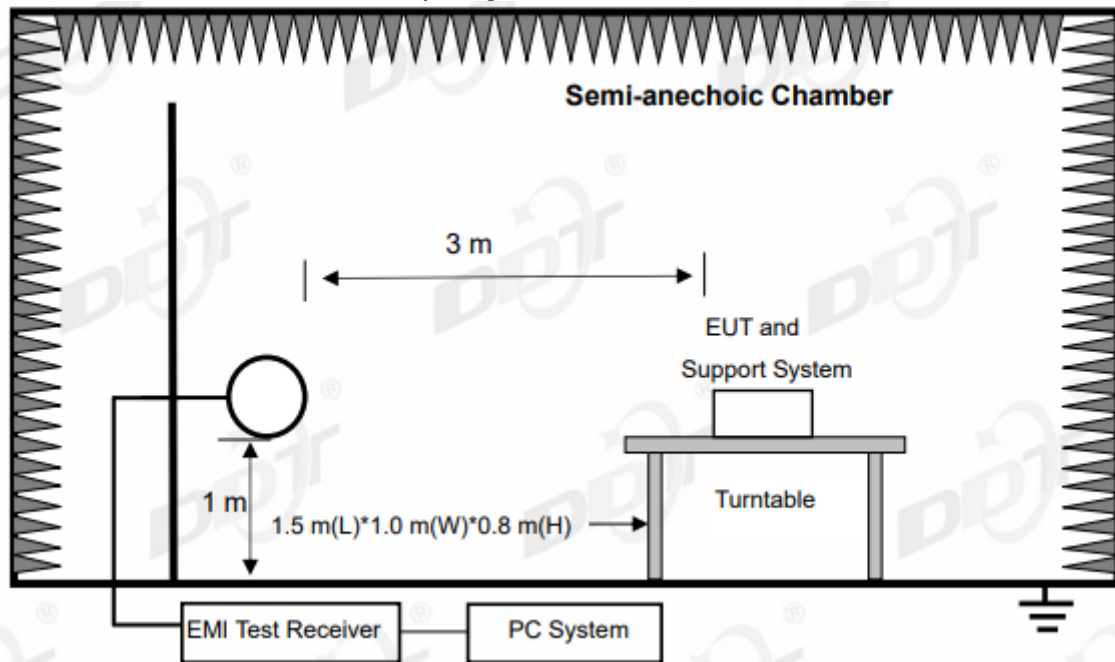

In 3 m Anechoic Chamber, test setup diagram for 30 MHz - 1 GHz:

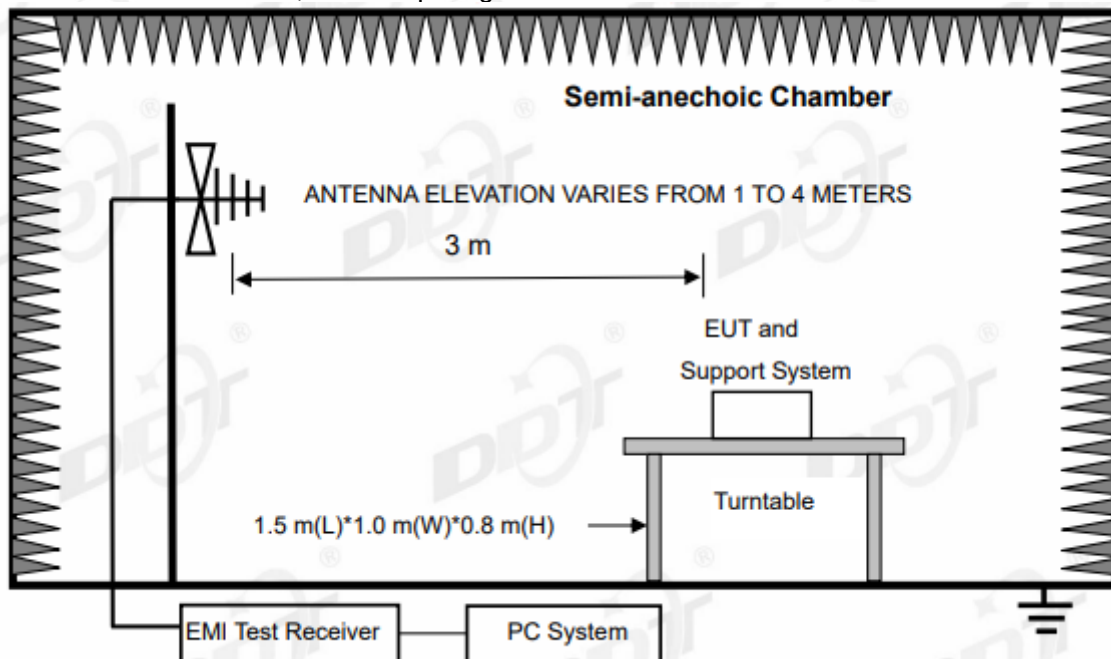

In 3 m Anechoic Chamber, test setup diagram for frequency above 1 GHz:

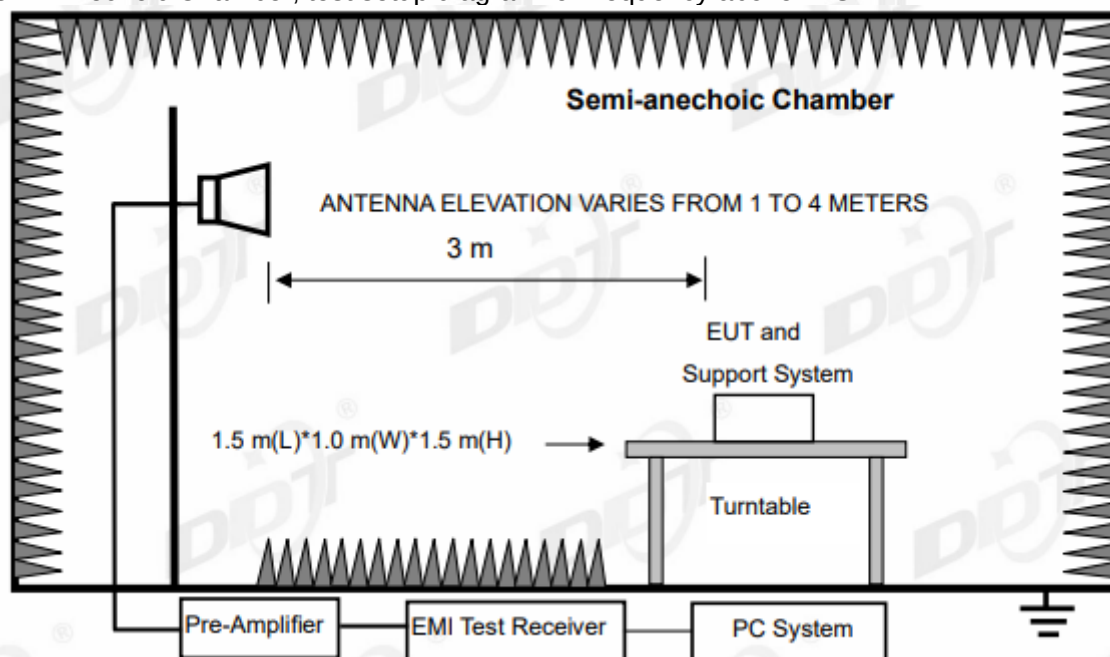

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP.

11.2. Limit

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6

(2) FCC 15.209 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009 ~ 0.490	300	$2400/F(\text{kHz})$	$67.6-20\log(F)$
0.490 ~ 1.705	30	$24000/F(\text{kHz})$	$87.6-20\log(F)$
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

Note: (1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz and above 1000 MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3\text{m}}(\text{dB}\mu\text{V/m}) = \text{Limit}_{30\text{m}}(\text{dB}\mu\text{V/m}) + 40\log(30\text{m}/3\text{m})$$

(3) Limit for this EUT

The emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 limits.

11.3. Test Procedure

(1) EUT height should be 0 m for below 1 GHz at a semi - anechoic chamber while EUT height should be 0 m for above 1GHz at full chamber or semi - anechoic chamber ground with absorbers

(2) Setup EUT and assistant system according clause 2.3 and 8.2

(3) Test antenna was located 3m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used	Test distance
9 kHz-30 MHz	Active Loop antenna	3 m
30 MHz-1 GHz	Trilog Broadband Antenna	3 m
1 GHz-18 GHz	Double Ridged Horn Antenna(1GHz-18GHz)	3 m
18 GHz-40 GHz	Horn Antenna(18GHz-40GHz)	1 m

According ANSI C63.10:2013 clause 6.4.4.2 and 6.5.3, for measurements below 30 MHz, the loop antenna was positioned with its plane vertical from the EUT and rotated about its vertical axis for maximum response at each azimuth position around the EUT. And the loop antenna also be positioned with its plane horizontal at the specified distance from the EUT. The center of the loop is 1 m above the ground. for measurement above 30 MHz, the Trilog Broadband Antenna or Horn Antenna was located 3m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(4) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 40 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 40 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 9 kHz to 30 MHz and 18 GHz to 40 GHz, so below final test was performed with frequency range from 30 MHz to 18 GHz.

(5) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1m and 4m in order to maximize the emission.

Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10:2013 on Radiated Emission test.

(6) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9-90 kHz, 110-490 kHz, for emissions from 9 kHz-90kHz,110kHz-490kHz and above 1GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(7) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW

Frequency band	RBW
9 kHz-150 kHz	200 Hz
150 kHz-30 MHz	9 kHz
30 MHz-1 GHz	120 kHz

(8) For emissions above 1 GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3MHz for Peak measure, the RBW is set at 1 MHz, VBW is set at 10 Hz for AV value.

11.4. Test result

Pass. (See below detailed test result)

All the emissions except fundamental emission from 9 kHz to 25 GHz were comply with 15.209 limits.

Note1: According exploratory test no any obvious emission was detected from 9 kHz to 30 MHz and 18 GHz to 40 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

Note2: For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in 802.11a 5745 MHz mode.

Note3: For emissions above 1 GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit. According to engineering judgment, the final test was reported with EUT working in 802.11a, n40, ac80 mode.

Radiated Emission test (below 1GHz)

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-08-19

Tested By: Bairong

EUT: RDS AV RECEIVER

Model Number: DMH-W3050NEX

Test Mode: Tx mode


Power Supply: DC 14.4V

Condition: Temp:22.4°C;Humi:58.5%

Test Site: DDT 3# Chamber

File Path: d:\ts\2023 report data\Q23060602-2E\FCC BELOW 1G\20230819-013254_H

Memo:

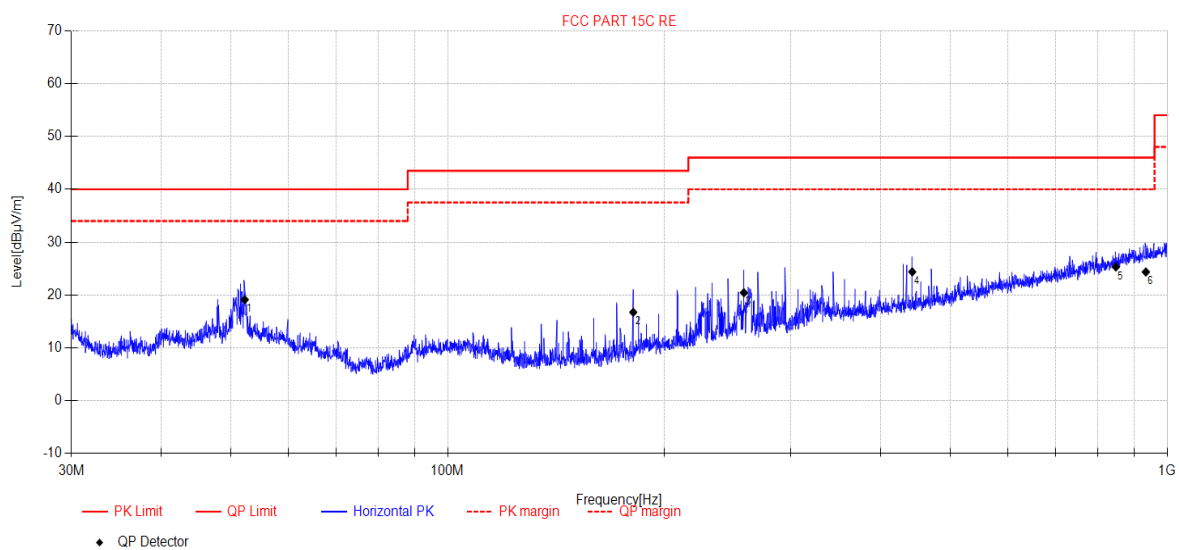


Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	AMP [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	52.24	32.09	12.98	4.74	-30.69	19.12	40.00	20.88	QP	Horizontal
2	181.09	32.51	9.31	5.57	-30.66	16.73	43.50	26.77	QP	Horizontal
3	258.03	32.43	12.46	5.97	-30.43	20.43	46.00	25.57	QP	Horizontal
4	442.12	31.6	16.00	6.80	-30.02	24.38	46.00	21.62	QP	Horizontal
5	848.08	24.78	21.86	8.15	-29.47	25.32	46.00	20.68	QP	Horizontal
6	933.59	22.03	22.57	8.46	-28.70	24.36	46.00	21.64	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

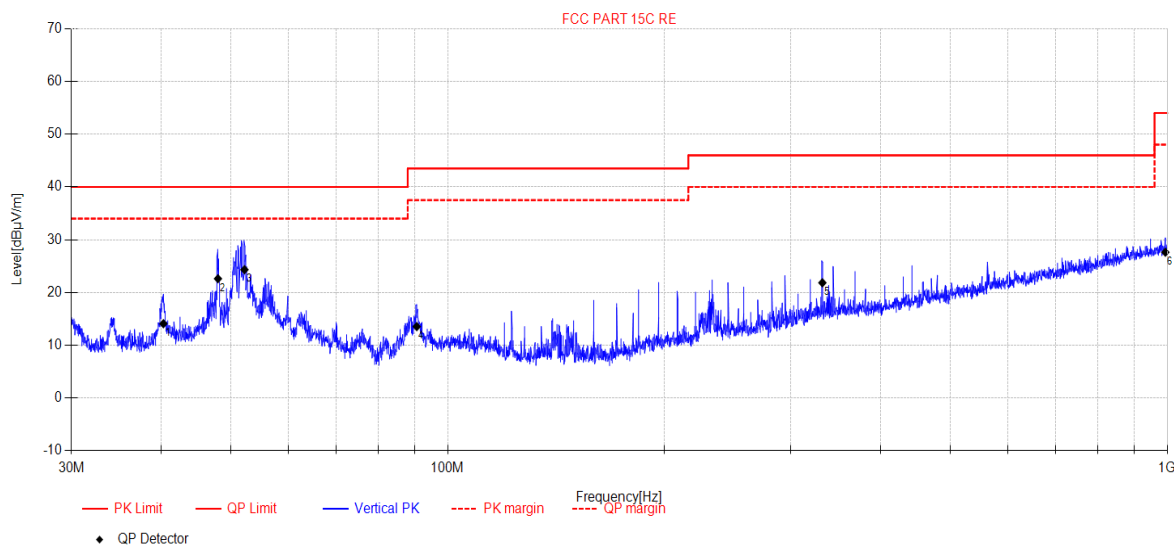
Test Date: 2023-08-19**Tested By:** Bairong**EUT:** RDS AV RECEIVER**Model Number:** DMH-W3050NEX**Test Mode:** Tx mode**Power Supply:** DC 14.4V**Condition:** Temp:22.4°C;Humi:58.5%**Test Site:** DDT 3# Chamber**File Path:** d:\ts\2023 report data\Q23060602-2E\FCC BELOW 1G\20230819-013336_V**Memo:**

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	AMP [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	40.27	28.19	12.15	4.60	-30.85	14.09	40.00	25.91	QP	Vertical
2	47.96	35.44	13.20	4.70	-30.73	22.61	40.00	17.39	QP	Vertical
3	52.20	37.29	12.98	4.74	-30.69	24.32	40.00	15.68	QP	Vertical
4	90.58	29.78	9.52	4.95	-30.71	13.54	43.50	29.96	QP	Vertical
5	331.66	31.63	14.13	6.32	-30.24	21.84	46.00	24.16	QP	Vertical
6	993.71	24.12	23.00	8.67	-28.16	27.63	54.00	26.37	QP	Vertical

Note:

- Result Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
- Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

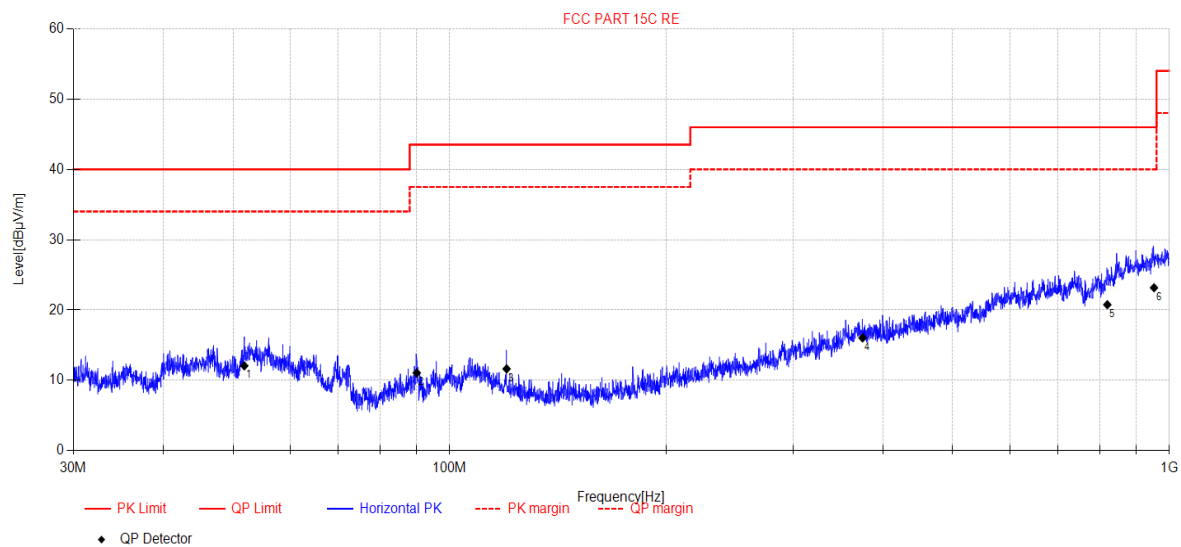
Test Date: 2023-11-22**Tested By:** Junchang Du**EUT:** RDS AV RECEIVER**Model Number:** DMH-W3000NEX**Test Mode:** Tx mode**Power Supply:** DC 14.4V**Condition:** Temp:22.4°C;Humi:58.5%**Test Site:** DDT 3# Chamber**File Path:** d:\ts\2023 report data\Q23060602-2E 24UL\FCC BELOW 1G\20231122-091501_H**Memo:**

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	AMP [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	51.84	25.25	12.77	4.74	-30.69	12.07	40.00	27.93	QP	Horizontal
2	90.01	27.32	9.50	4.95	-30.70	11.07	43.50	32.43	QP	Horizontal
3	119.99	27.31	10.00	5.17	-30.84	11.64	43.50	31.86	QP	Horizontal
4	374.70	24.21	15.42	6.56	-30.15	16.04	46.00	29.96	QP	Horizontal
5	820.02	22.33	20.10	8.05	-29.72	20.76	46.00	25.24	QP	Horizontal
6	952.10	20.95	22.24	8.52	-28.53	23.18	46.00	22.82	QP	Horizontal

Note:

- Result Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
- Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

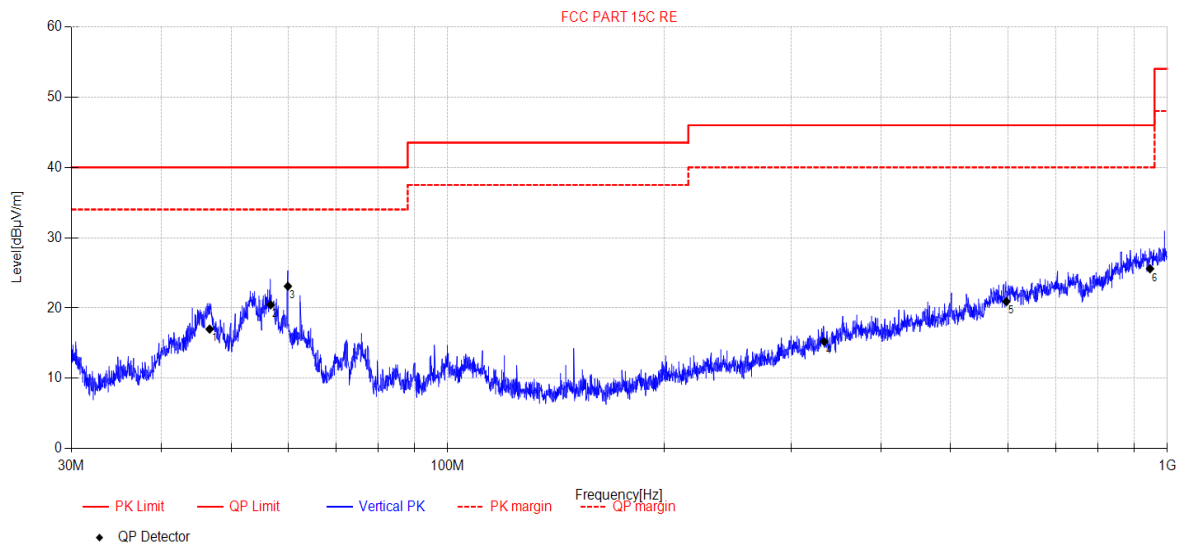Test Date: 2023-11-22**Tested By:** Junchang Du**EUT:** RDS AV RECEIVER**Model Number:** DMH-W3000NEX**Test Mode:** Tx mode**Power Supply:** DC 14.4V**Condition:** Temp:22.4°C;Humi:58.5%**Test Site:** DDT 3# Chamber**File Path:** d:\ts\2023 report data\Q23060602-2E 24UL\FCC BELOW 1G\20231122-091545_V**Memo:**

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	AMP [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	46.69	30.28	12.79	4.69	-30.75	17.01	40.00	22.99	QP	Vertical
2	56.74	34.22	12.15	4.75	-30.66	20.46	40.00	19.54	QP	Vertical
3	59.98	36.18	12.79	4.76	-30.63	23.10	40.00	16.90	QP	Vertical
4	333.53	24.62	14.51	6.33	-30.23	15.23	46.00	30.77	QP	Vertical
5	597.28	24.52	18.98	7.32	-29.90	20.92	46.00	25.08	QP	Vertical
6	946.11	23.9	21.77	8.50	-28.58	25.59	46.00	20.41	QP	Vertical

Note:


- Result Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
- Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Radiated Emission test (above 1GHz)

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-08-19 **Tested By:** Bairong
EUT: RDS AV RECEIVER **Model Number:** DMH-W3050NEX
Test Mode: Tx mode **Power Supply:** DC 14.4V
Condition: Temp:22.4°C;Humi:58.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23060602-2E\FCC ABOVE 1G 5.8GWIFI\1
Memo: 11A 5745

Test Graph

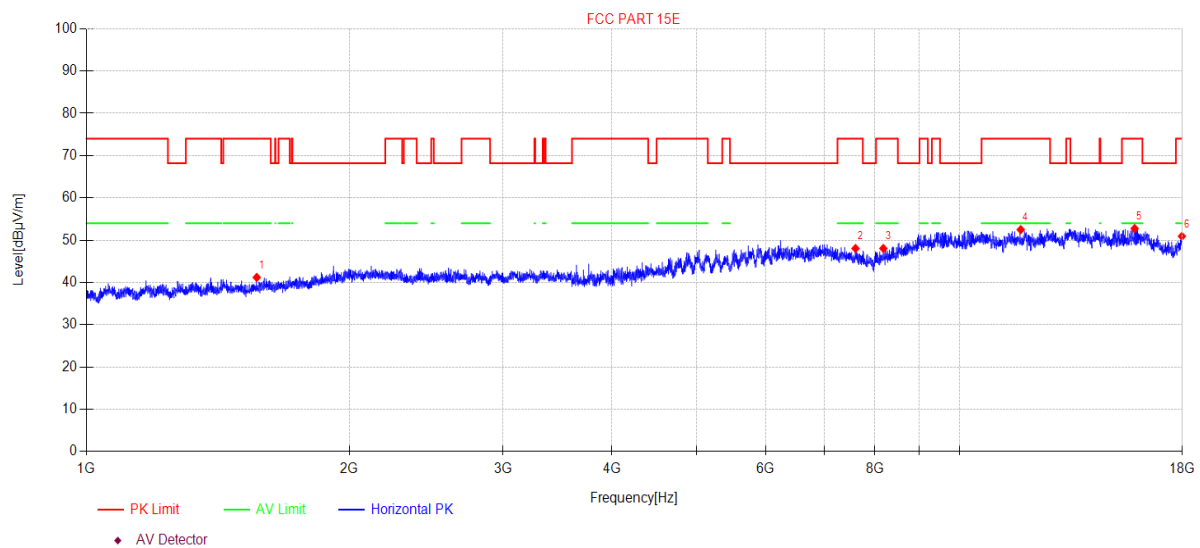

Suspected Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1567.38	47.94	4.80	25.40	-36.95	41.19	74.00	32.81	PK	Horizontal
2	7603.05	44.97	8.86	36.41	-42.21	48.03	74.00	25.97	PK	Horizontal
3	8182.17	44.53	8.84	37.06	-42.40	48.03	74.00	25.97	PK	Horizontal
4	11752.72	43.01	10.12	38.80	-39.44	52.49	74.00	21.51	PK	Horizontal
5	15873.53	38.46	15.43	38.13	-39.28	52.74	74.00	21.26	PK	Horizontal
6	17979.20	38.75	12.83	41.68	-42.35	50.91	74.00	23.09	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-08-19 **Tested By:** Bairong
EUT: RDS AV RECEIVER **Model Number:** DMH-W3050NEX
Test Mode: Tx mode **Power Supply:** DC 14.4V
Condition: Temp:22.4°C;Humi:58.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23060602-2E\FCC ABOVE 1G 5.8GWIFI\2
Memo: 11A 5745

Test Graph

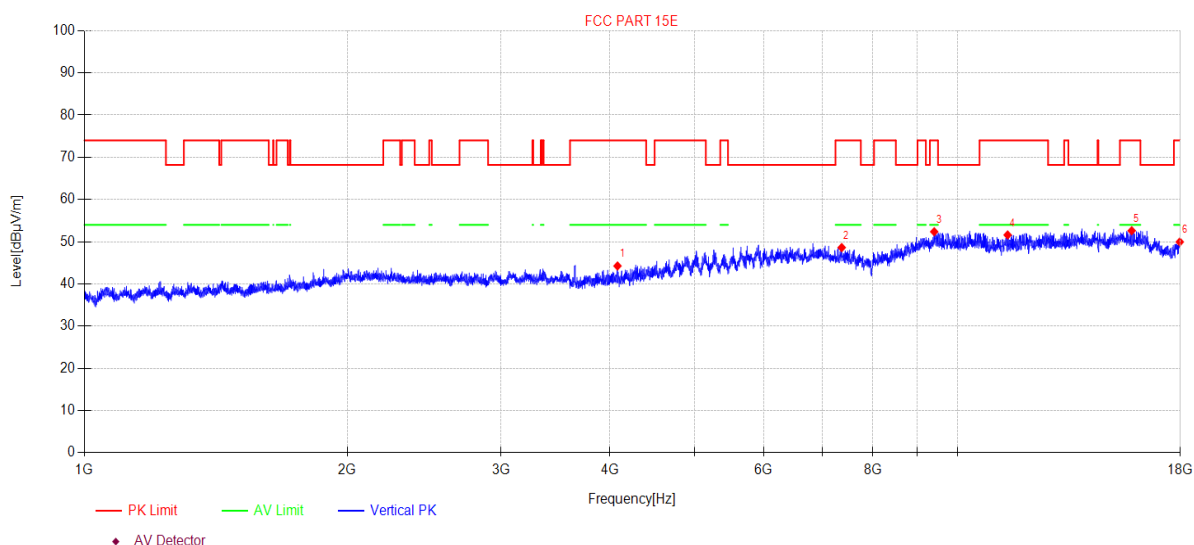

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4079.71	47.59	6.23	30.86	-40.42	44.26	74.00	29.74	PK	Vertical
2	7369.40	44.84	8.90	36.50	-41.62	48.62	74.00	25.38	PK	Vertical
3	9405.17	43.54	9.19	38.40	-38.76	52.37	74.00	21.63	PK	Vertical
4	11414.62	41.94	9.85	39.09	-39.28	51.60	74.00	22.40	PK	Vertical
5	15832.30	38.48	15.22	38.17	-39.26	52.61	74.00	21.39	PK	Vertical
6	17974.01	37.83	12.82	41.64	-42.34	49.95	74.00	24.05	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-08-19 **Tested By:** Bairong
EUT: RDS AV RECEIVER **Model Number:** DMH-W3050NEX
Test Mode: Tx mode **Power Supply:** DC 14.4V
Condition: Temp:22.4°C;Humi:58.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23060602-2E\FCC ABOVE 1G 5.8GWIFI\35
Memo: 11N40 5755

Test Graph

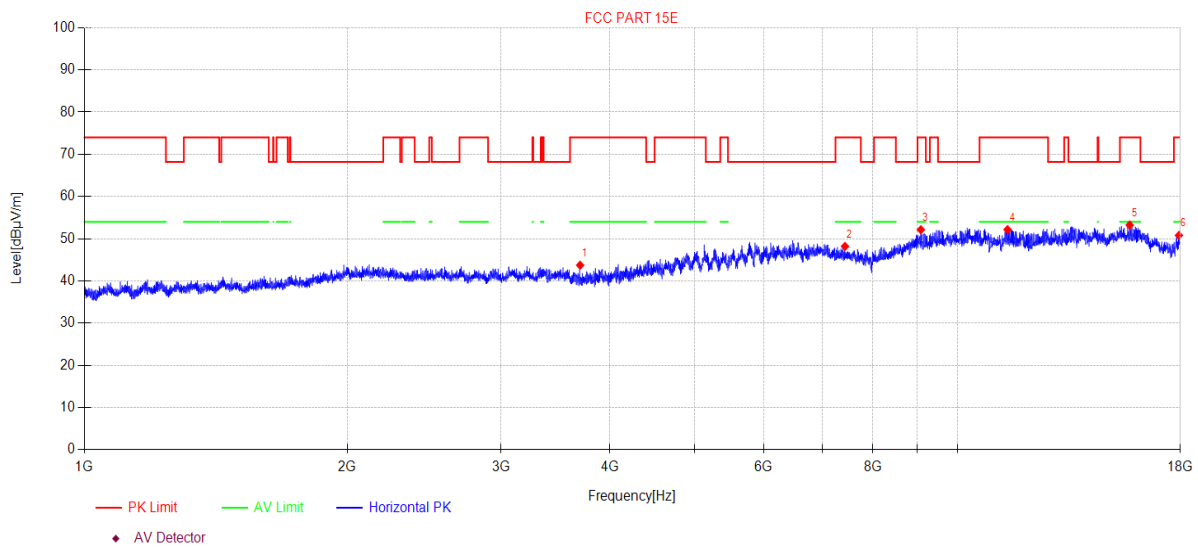

Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3696.82	48.15	29.99	5.86	-40.27	43.73	74.00	30.27	PK	Horizontal
2	7433.57	44.58	36.50	8.89	-41.78	48.19	74.00	25.81	PK	Horizontal
3	9079.33	43.64	38.20	9.07	-38.78	52.13	74.00	21.87	PK	Horizontal
4	11411.32	42.49	39.09	9.85	-39.28	52.15	74.00	21.85	PK	Horizontal
5	15750.15	39.40	38.25	14.81	-39.21	53.25	74.00	20.75	PK	Horizontal
6	17932.50	38.88	41.39	12.78	-42.25	50.80	74.00	23.20	PK	Horizontal


Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-08-19 **Tested By:** Bairong
EUT: RDS AV RECEIVER **Model Number:** DMH-W3050NEX
Test Mode: Tx mode **Power Supply:** DC 14.4V
Condition: Temp:22.4°C;Humi:58.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23060602-2E\FCC ABOVE 1G 5.8GWIFI\36
Memo: 11N40 5755

Test Graph

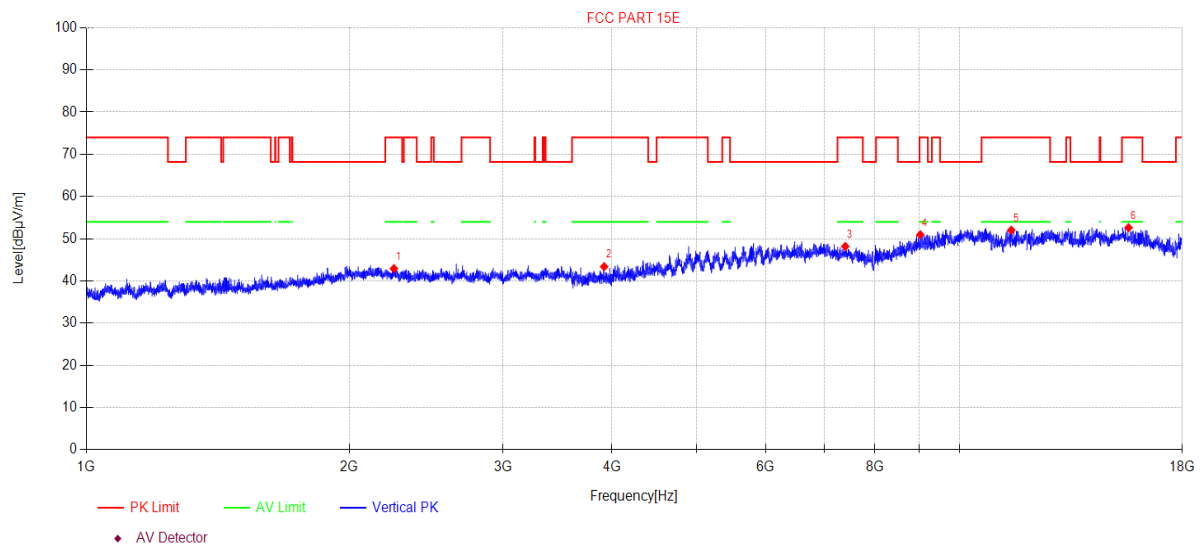

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2250.06	47.33	27.30	6.01	-37.72	42.92	74.00	31.08	PK	Vertical
2	3917.93	47.22	30.54	6.02	-40.40	43.38	74.00	30.62	PK	Vertical
3	7399.28	44.47	36.50	8.90	-41.70	48.17	74.00	25.83	PK	Vertical
4	9019.18	42.49	38.20	9.05	-38.79	50.95	74.00	23.05	PK	Vertical
5	11464.21	42.40	39.04	9.89	-39.31	52.02	74.00	21.98	PK	Vertical
6	15618.70	39.22	38.38	14.15	-39.13	52.62	74.00	21.38	PK	Vertical


Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-08-19 **Tested By:** Bairong
EUT: RDS AV RECEIVER **Model Number:** DMH-W3050NEX
Test Mode: Tx mode **Power Supply:** DC 14.4V
Condition: Temp:22.4°C;Humi:58.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23060602-2E\FCC ABOVE 1G 5.8GWIFI\37
Memo: 11AC80 5825

Test Graph

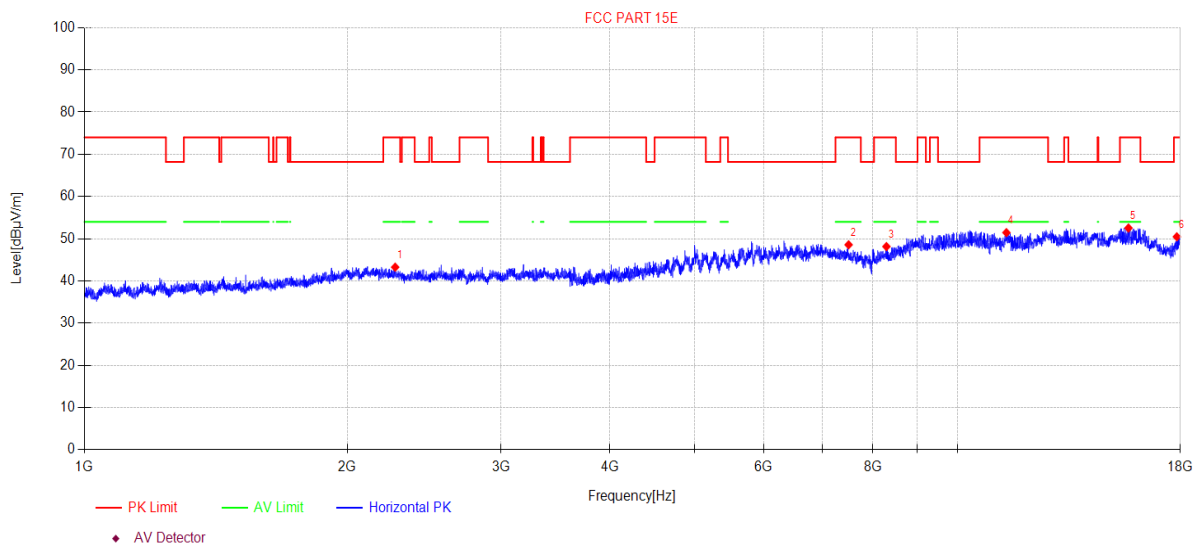

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2269.65	47.74	27.30	5.99	-37.77	43.26	74.00	30.74	PK	Horizontal
2	7504.81	45.24	36.40	8.88	-41.96	48.56	74.00	25.44	PK	Horizontal
3	8291.67	44.01	37.18	8.87	-41.91	48.15	74.00	25.85	PK	Horizontal
4	11378.39	41.80	39.10	9.82	-39.27	51.45	74.00	22.55	PK	Horizontal
5	15700.16	38.86	38.30	14.56	-39.18	52.54	74.00	21.46	PK	Horizontal
6	17834.30	39.06	40.74	12.69	-42.03	50.46	74.00	23.54	PK	Horizontal


Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-08-19 **Tested By:** Bairong
EUT: RDS AV RECEIVER **Model Number:** DMH-W3050NEX
Test Mode: Tx mode **Power Supply:** DC 14.4V
Condition: Temp:22.4°C;Humi:58.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23060602-2E\FCC ABOVE 1G 5.8GWIFI\38
Memo: 11AC80 5825

Test Graph

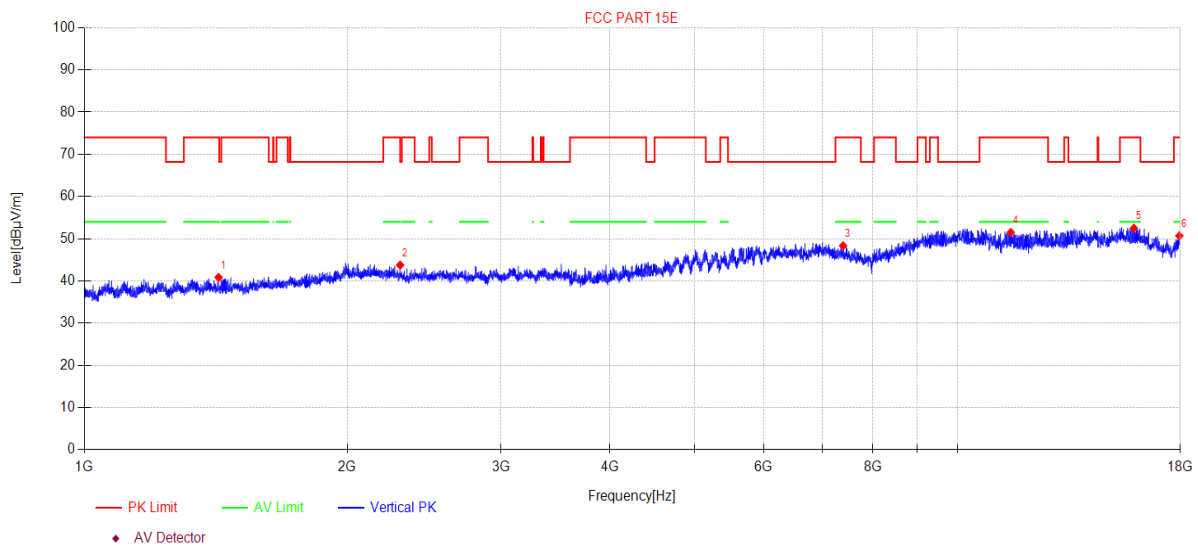


Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1424.81	47.85	25.60	4.33	-36.94	40.84	74.00	33.16	PK	Vertical
2	2300.03	48.34	27.30	5.97	-37.86	43.75	68.20	24.45	PK	Vertical
3	7395.00	44.63	36.50	8.90	-41.69	48.34	74.00	25.66	PK	Vertical
4	11510.69	41.90	38.99	9.93	-39.33	51.49	74.00	22.51	PK	Vertical
5	15924.08	38.06	38.05	15.69	-39.31	52.49	74.00	21.51	PK	Vertical
6	17953.24	38.66	41.52	12.80	-42.30	50.68	74.00	23.32	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

12. Band Edge Compliance

12.1. Block diagram of test setup

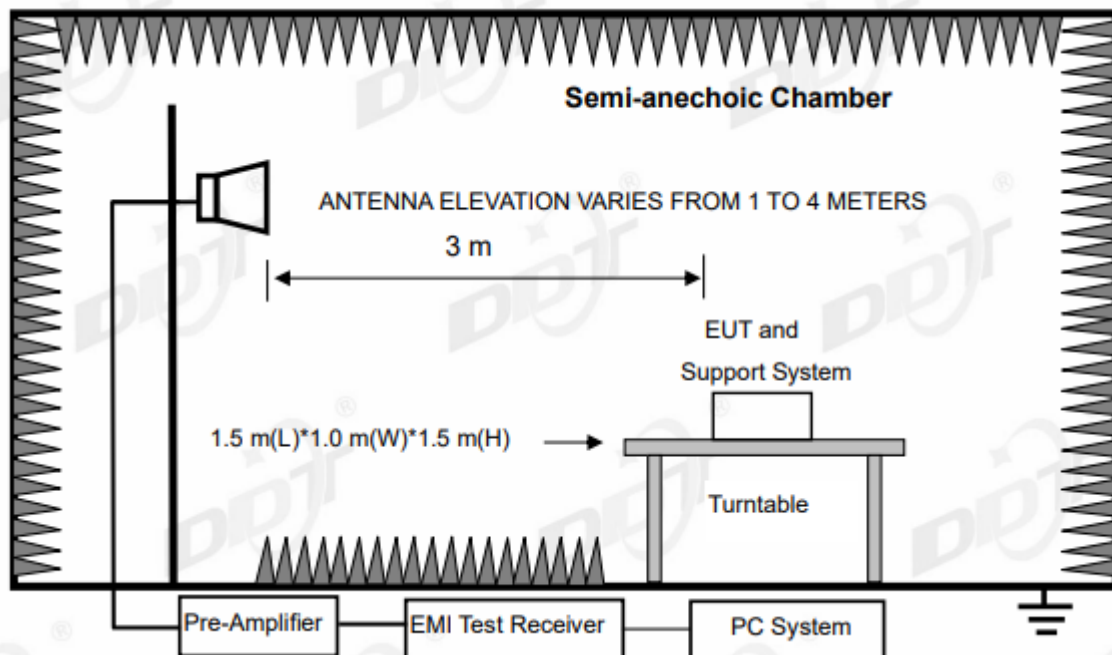

12.2. Limit

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating solely in the 5.725-5.850 GHz band:
All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

12.3. Test Procedure

Same with Emissions in Restricted Frequency Bands except change investigated frequency range from 5.725-5.85 GHz.

12.4. Test result


Pass. (See below detailed test result)

Note: As specified in 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz. However, out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz peak emission limit

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-08-19 **Tested By:** Bairong
EUT: RDS AV RECEIVER **Model Number:** DMH-W3050NEX
Test Mode: Tx mode **Power Supply:** DC 14.4V
Condition: Temp:22.4°C;Humi:58.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23060602-2E\FCC ABOVE 1G 5.8GWIFI\7
Memo: 11A 5745

Test Graph

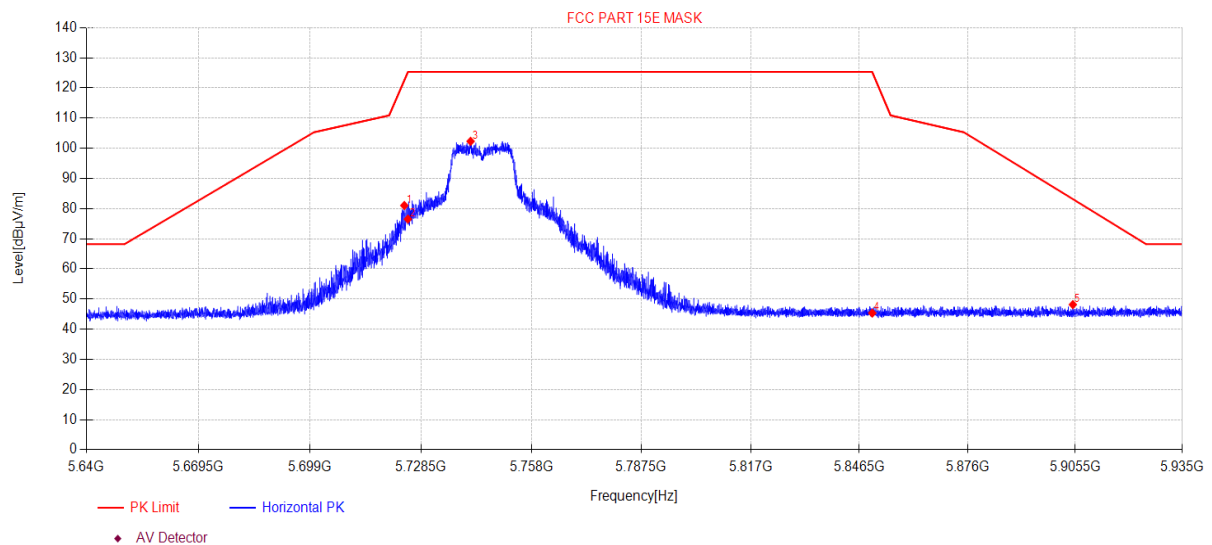

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5724.05	82.51	5.87	33.45	-40.81	81.02	122.55	41.53	PK	Horizontal
2	5725.00	78.01	5.87	33.45	-40.81	76.52	125.30	48.78	PK	Horizontal
3	5741.72	103.74	5.88	33.48	-40.80	102.30	125.30	23.00	PK	Horizontal
4	5850.00	46.36	5.94	33.80	-40.76	45.34	125.27	79.93	PK	Horizontal
5	5904.85	49.02	5.96	33.91	-40.74	48.15	83.15	35.00	PK	Horizontal


Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-08-19 **Tested By:** Bairong
EUT: RDS AV RECEIVER **Model Number:** DMH-W3050NEX
Test Mode: Tx mode **Power Supply:** DC 14.4V
Condition: Temp:22.4°C;Humi:58.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23060602-2E\FCC ABOVE 1G 5.8GWIFI\8
Memo: 11A 5745

Test Graph

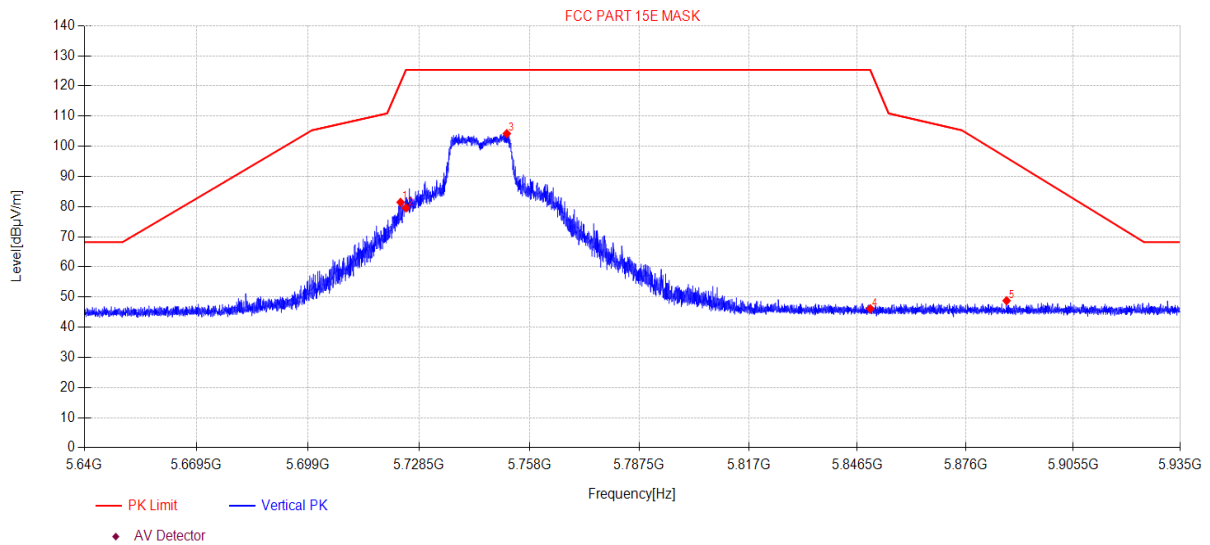

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5723.57	82.91	5.87	33.45	-40.81	81.42	121.19	39.77	PK	Vertical
2	5725.00	81.03	5.87	33.45	-40.81	79.54	125.30	45.76	PK	Vertical
3	5751.92	105.60	5.89	33.51	-40.80	104.20	125.30	21.10	PK	Vertical
4	5850.00	47.15	5.94	33.80	-40.76	46.13	125.27	79.14	PK	Vertical
5	5887.24	49.71	5.95	33.87	-40.75	48.78	96.22	47.44	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-08-21 **Tested By:** Bairong
EUT: RDS AV RECEIVER **Model Number:** DMH-W3050NEX
Test Mode: Tx mode **Power Supply:** DC 14.4V
Condition: Temp:22.4°C;Humi:58.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23060602-2E\FCC ABOVE 1G 5.8GWIFI\13
Memo: 11N20 5745

Test Graph

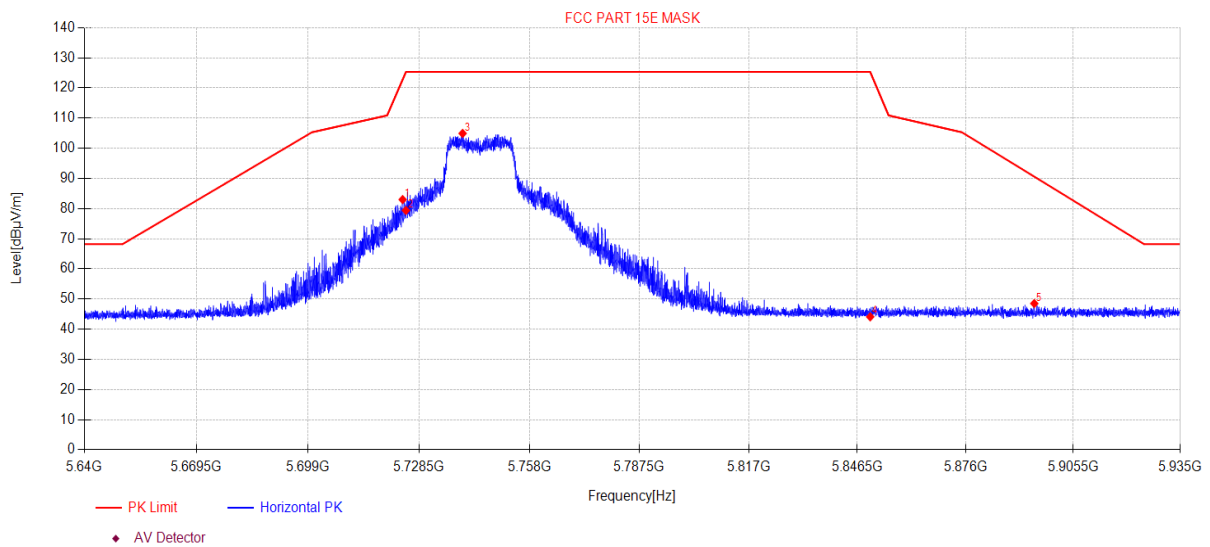

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5724.13	84.48	5.87	33.45	-40.81	82.99	122.81	39.82	PK	Horizontal
2	5725.00	80.88	5.87	33.45	-40.81	79.39	125.30	45.91	PK	Horizontal
3	5740.12	106.36	5.88	33.48	-40.80	104.92	125.30	20.38	PK	Horizontal
4	5850.00	45.12	5.94	33.80	-40.76	44.10	125.27	81.17	PK	Horizontal
5	5894.82	49.40	5.96	33.89	-40.74	48.51	90.59	42.08	PK	Horizontal


Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-08-21 **Tested By:** Bairong
EUT: RDS AV RECEIVER **Model Number:** DMH-W3050NEX
Test Mode: Tx mode **Power Supply:** DC 14.4V
Condition: Temp:22.4°C;Humi:58.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23060602-2E\FCC ABOVE 1G 5.8GWIFI\14
Memo: 11N20 5745

Test Graph

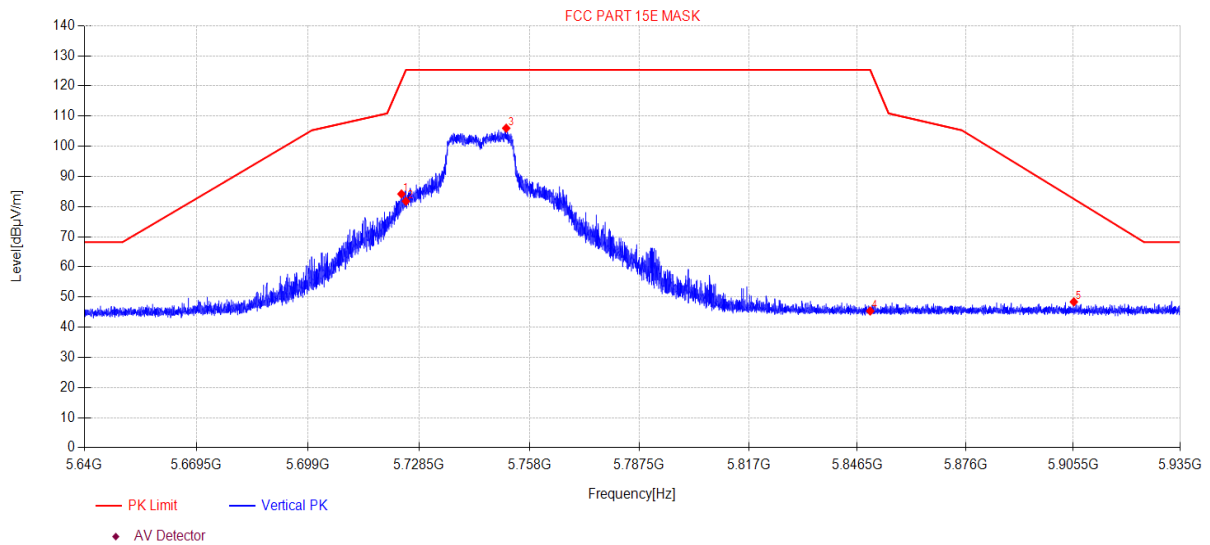

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5723.81	85.67	5.87	33.45	-40.81	84.18	121.87	37.69	PK	Vertical
2	5725.00	83.27	5.87	33.45	-40.81	81.78	125.30	43.52	PK	Vertical
3	5751.78	107.39	5.89	33.51	-40.80	105.99	125.30	19.31	PK	Vertical
4	5850.00	46.38	5.94	33.80	-40.76	45.36	125.27	79.91	PK	Vertical
5	5905.68	49.26	5.96	33.91	-40.74	48.39	82.54	34.15	PK	Vertical


Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-08-21 **Tested By:** Bairong
EUT: RDS AV RECEIVER **Model Number:** DMH-W3050NEX
Test Mode: Tx mode **Power Supply:** DC 14.4V
Condition: Temp:22.4°C;Humi:58.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23060602-2E\FCC ABOVE 1G 5.8GWIFI\19
Memo: 11N40 5755

Test Graph

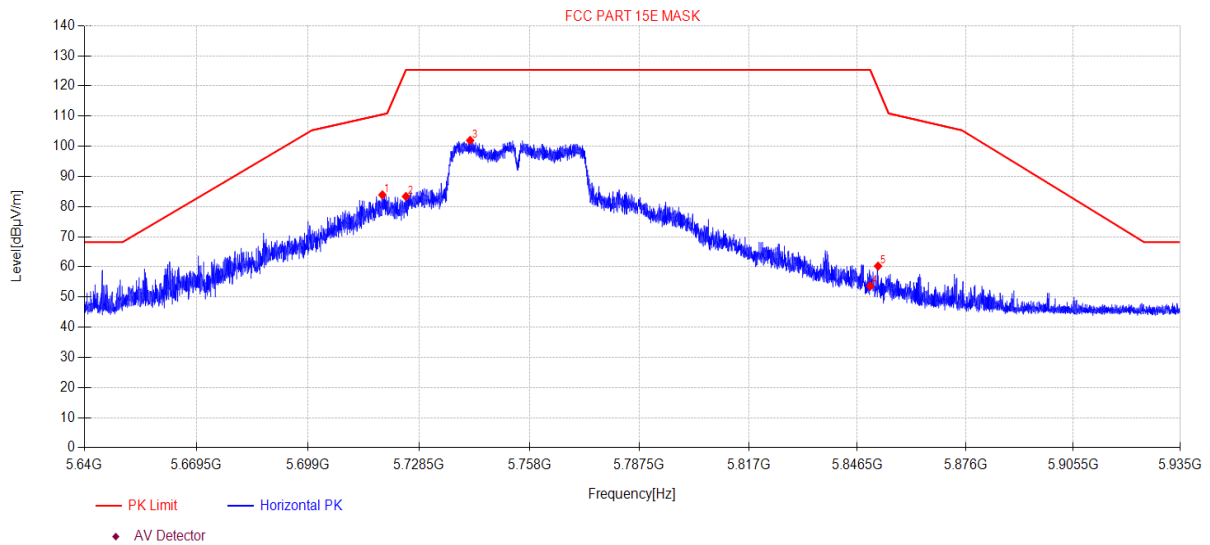

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5718.74	85.39	5.87	33.44	-40.81	83.89	110.55	26.66	PK	Horizontal
2	5725.00	84.84	5.87	33.45	-40.81	83.35	125.30	41.95	PK	Horizontal
3	5742.13	103.38	5.88	33.48	-40.80	101.94	125.30	23.36	PK	Horizontal
4	5850.00	54.68	5.94	33.80	-40.76	53.66	125.27	71.61	PK	Horizontal
5	5852.13	61.28	5.94	33.80	-40.76	60.26	119.15	58.89	PK	Horizontal


Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-08-21 **Tested By:** Bairong
EUT: RDS AV RECEIVER **Model Number:** DMH-W3050NEX
Test Mode: Tx mode **Power Supply:** DC 14.4V
Condition: Temp:22.4°C;Humi:58.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23060602-2E\FCC ABOVE 1G 5.8GWIFI\20
Memo: 11N40 5755

Test Graph

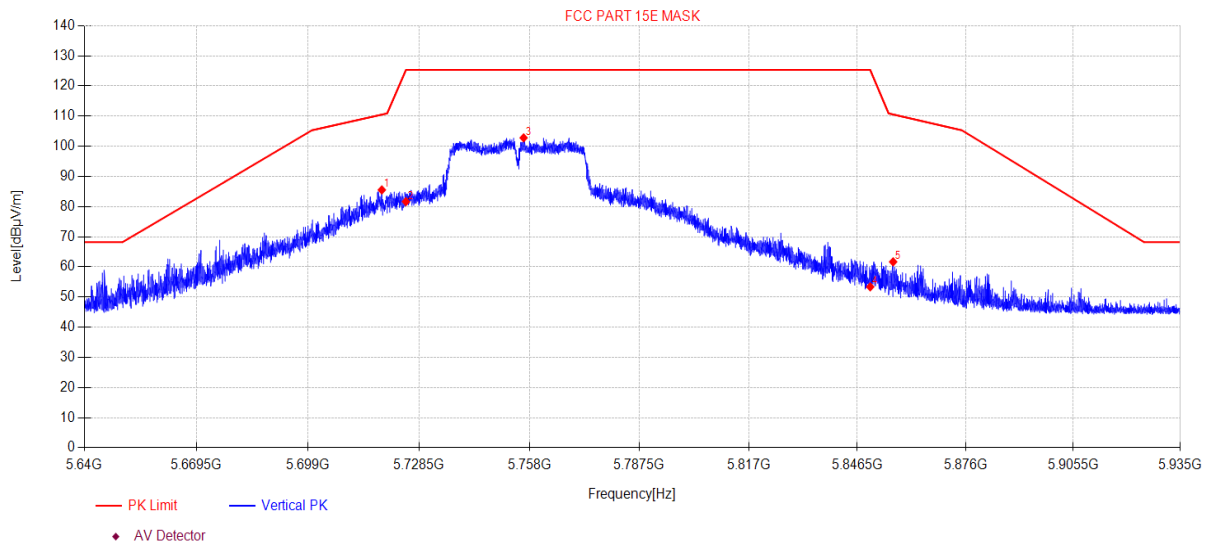

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5718.59	87.03	5.87	33.44	-40.81	85.53	110.50	24.97	PK	Vertical
2	5725.00	83.13	5.87	33.45	-40.81	81.64	125.30	43.66	PK	Vertical
3	5756.44	104.19	5.89	33.53	-40.80	102.81	125.30	22.49	PK	Vertical
4	5850.00	54.39	5.94	33.80	-40.76	53.37	125.27	71.90	PK	Vertical
5	5856.24	62.69	5.94	33.81	-40.76	61.68	110.55	48.87	PK	Vertical


Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-08-21 **Tested By:** Bairong
EUT: RDS AV RECEIVER **Model Number:** DMH-W3050NEX
Test Mode: Tx mode **Power Supply:** DC 14.4V
Condition: Temp:22.4°C;Humi:58.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23060602-2E\FCC ABOVE 1G 5.8GWIFI\23
Memo: 11AC20 5745

Test Graph

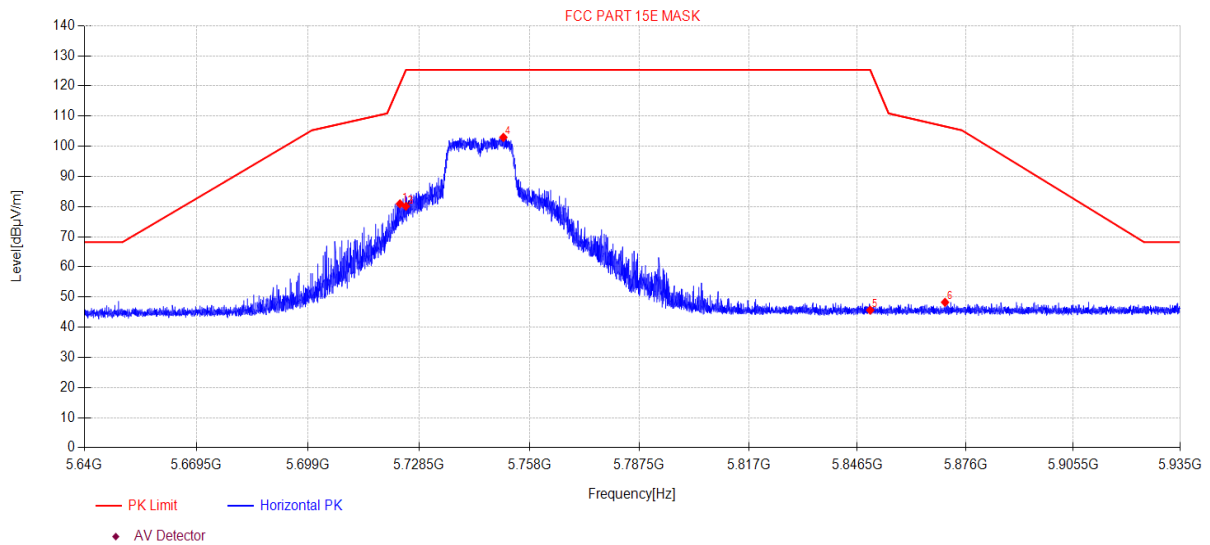

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5723.43	82.40	5.87	33.45	-40.81	80.91	120.77	39.86	PK	Horizontal
2	5725.00	81.59	5.87	33.45	-40.81	80.10	125.30	45.20	PK	Horizontal
3	5725.00	81.59	5.87	33.45	-40.81	80.10	125.30	45.20	PK	Horizontal
4	5751.01	104.36	5.89	33.50	-40.80	102.95	125.30	22.35	PK	Horizontal
5	5850.00	46.66	5.94	33.80	-40.76	45.64	125.27	79.63	PK	Horizontal
6	5870.40	49.21	5.95	33.84	-40.75	48.25	106.59	58.34	PK	Horizontal


Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-08-21 **Tested By:** Bairong
EUT: RDS AV RECEIVER **Model Number:** DMH-W3050NEX
Test Mode: Tx mode **Power Supply:** DC 14.4V
Condition: Temp:22.4°C;Humi:58.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23060602-2E\FCC ABOVE 1G 5.8GWIFI\24
Memo: 11AC20 5745

Test Graph

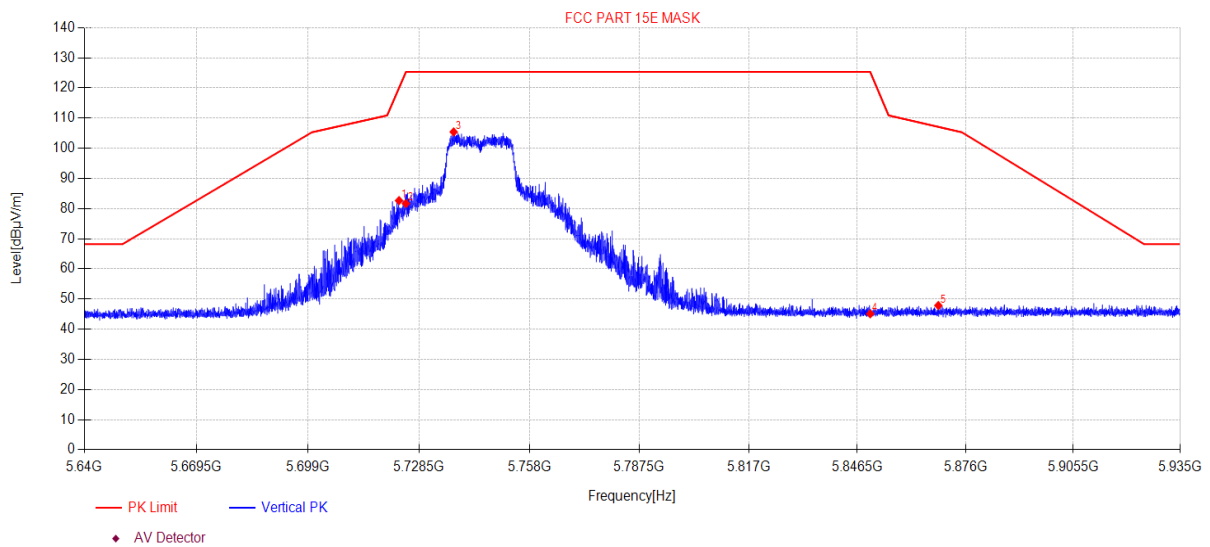

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5723.16	84.15	5.87	33.45	-40.81	82.66	120.00	37.34	PK	Vertical
2	5725.00	83.16	5.87	33.45	-40.81	81.67	125.30	43.63	PK	Vertical
3	5737.73	106.85	5.88	33.48	-40.80	105.41	125.30	19.89	PK	Vertical
4	5850.00	46.11	5.94	33.80	-40.76	45.09	125.27	80.18	PK	Vertical
5	5868.57	48.81	5.94	33.84	-40.75	47.84	107.10	59.26	PK	Vertical


Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-08-21 **Tested By:** Bairong
EUT: RDS AV RECEIVER **Model Number:** DMH-W3050NEX
Test Mode: Tx mode **Power Supply:** DC 14.4V
Condition: Temp:22.4°C;Humi:58.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23060602-2E\FCC ABOVE 1G 5.8GWIFI\29
Memo: 11AC40 5755

Test Graph

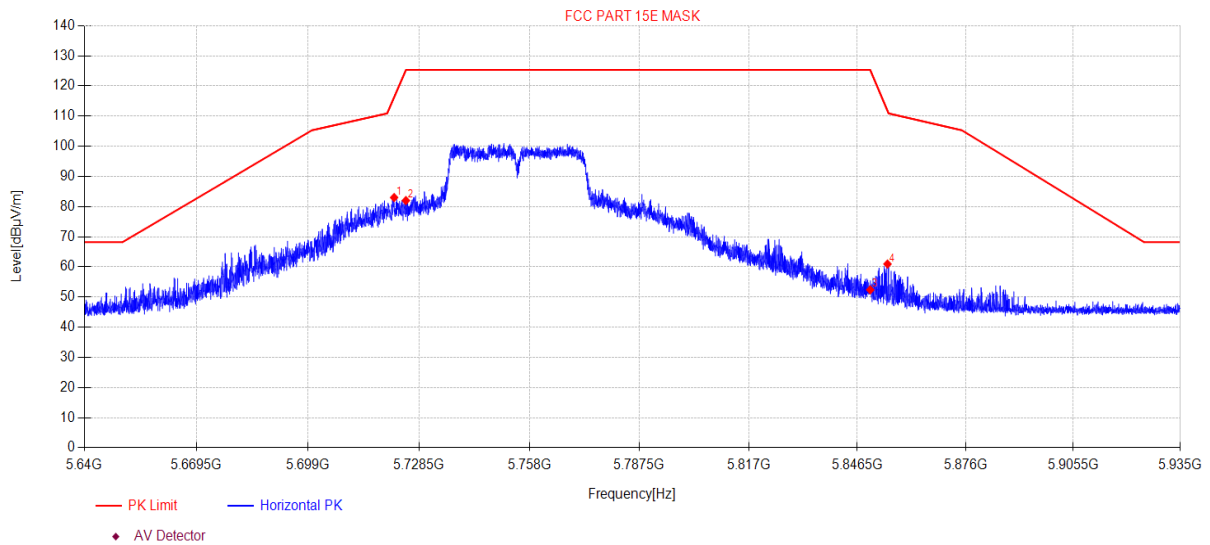

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5721.86	84.51	5.87	33.44	-40.81	83.01	116.26	33.25	PK	Horizontal
2	5725.00	83.49	5.87	33.45	-40.81	82.00	125.30	43.30	PK	Horizontal
3	5850.00	53.41	5.94	33.80	-40.76	52.39	125.27	72.88	PK	Horizontal
4	5854.70	61.95	5.94	33.81	-40.76	60.94	111.76	50.82	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-08-21 **Tested By:** Bairong
EUT: RDS AV RECEIVER **Model Number:** DMH-W3050NEX
Test Mode: Tx mode **Power Supply:** DC 14.4V
Condition: Temp:22.4°C;Humi:58.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23060602-2E\FCC ABOVE 1G 5.8GWIFI\30
Memo: 11AC40 5755

Test Graph

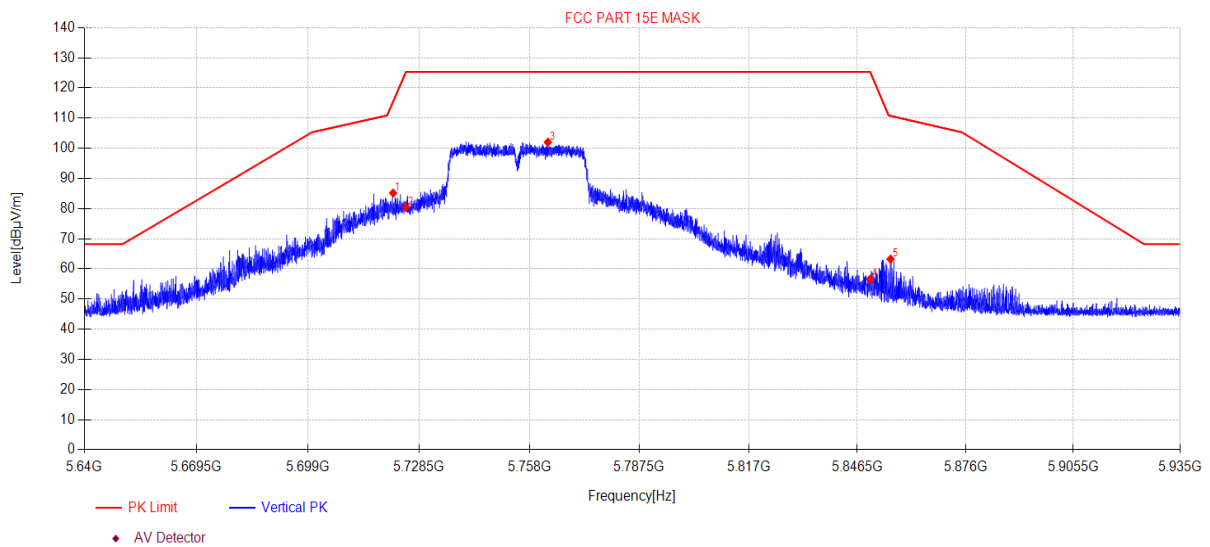

Suspected Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5721.60	86.65	5.87	33.44	-40.81	85.15	115.50	30.35	PK	Vertical
2	5725.00	81.91	5.87	33.45	-40.81	80.42	125.30	44.88	PK	Vertical
3	5762.93	103.37	5.89	33.55	-40.79	102.02	125.30	23.28	PK	Vertical
4	5850.00	57.62	5.94	33.80	-40.76	56.60	125.27	68.67	PK	Vertical
5	5855.53	64.24	5.94	33.81	-40.76	63.23	110.75	47.52	PK	Vertical


Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-08-21 **Tested By:** Bairong
EUT: RDS AV RECEIVER **Model Number:** DMH-W3050NEX
Test Mode: Tx mode **Power Supply:** DC 14.4V
Condition: Temp:22.4°C;Humi:58.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23060602-2E\FCC ABOVE 1G 5.8GWIFI\33
Memo: 11AC80 5775

Test Graph

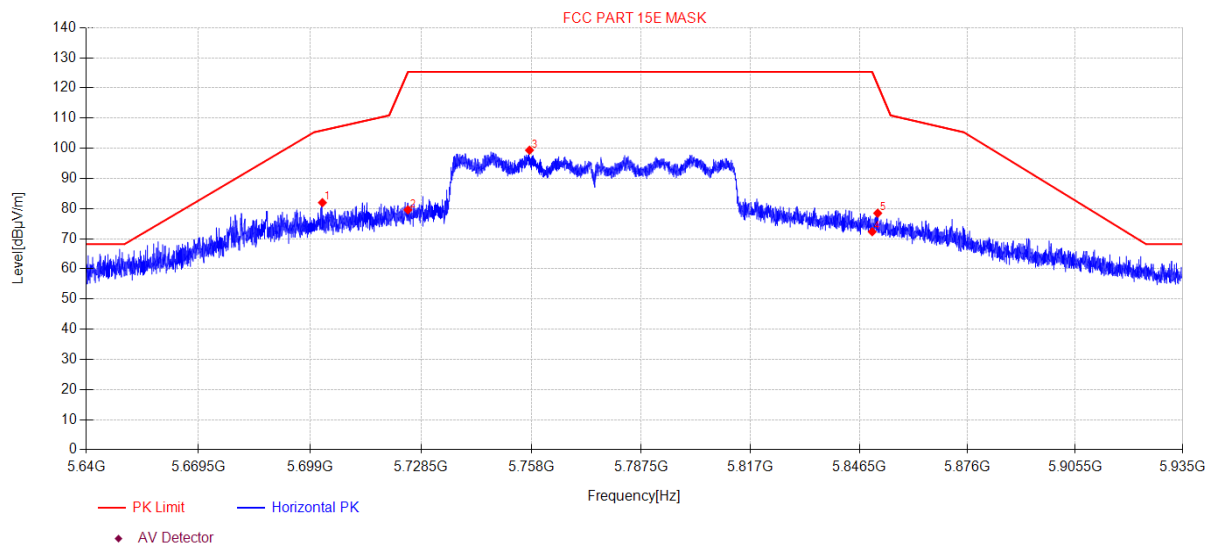

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5702.27	83.53	5.86	33.40	-40.82	81.97	105.94	23.97	PK	Horizontal
2	5725.00	81.06	5.87	33.45	-40.81	79.57	125.30	45.73	PK	Horizontal
3	5757.47	100.74	5.89	33.53	-40.80	99.36	125.30	25.94	PK	Horizontal
4	5850.00	73.33	5.94	33.80	-40.76	72.31	125.27	52.96	PK	Horizontal
5	5851.49	79.48	5.94	33.80	-40.76	78.46	121.02	42.56	PK	Horizontal


Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-08-21 **Tested By:** Bairong
EUT: RDS AV RECEIVER **Model Number:** DMH-W3050NEX
Test Mode: Tx mode **Power Supply:** DC 14.4V
Condition: Temp:22.4°C;Humi:58.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23060602-2E\FCC ABOVE 1G 5.8GWIFI\34
Memo: 11AC80 5775

Test Graph

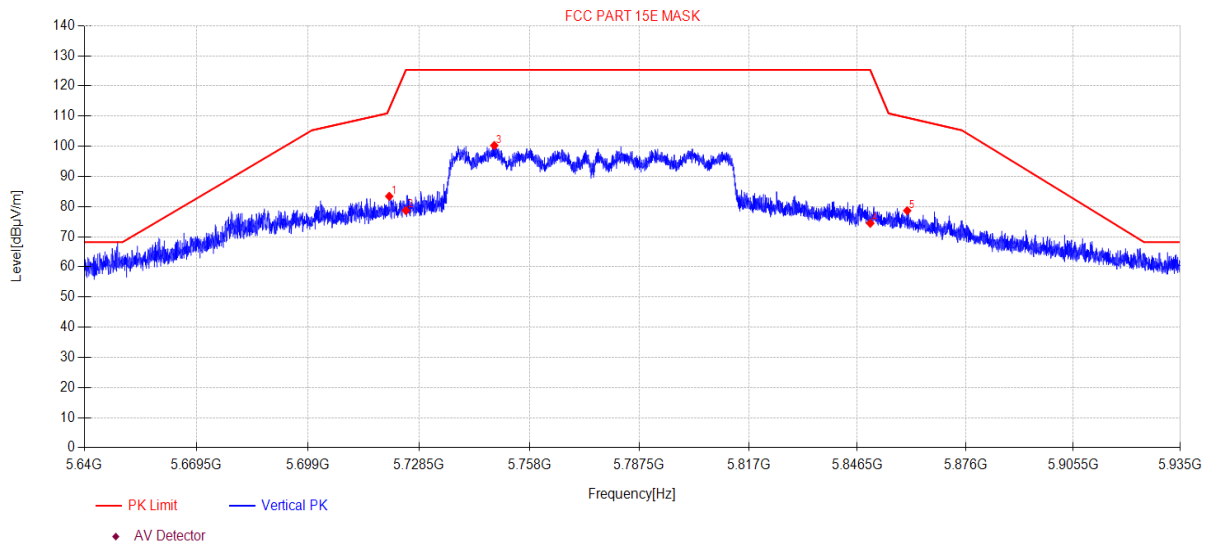

Suspected Data List


N O.	Freq. [MHz]	Reading [dBμV/m]	Cable loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5720.56	84.91	5.87	33.44	-40.81	83.41	112.53	29.12	PK	Vertical
2	5725.00	80.18	5.87	33.45	-40.81	78.69	125.30	46.61	PK	Vertical
3	5748.59	101.67	5.88	33.50	-40.80	100.25	125.30	25.05	PK	Vertical
4	5850.00	75.48	5.94	33.80	-40.76	74.46	125.27	50.81	PK	Vertical
5	5860.07	79.64	5.94	33.82	-40.76	78.64	109.48	30.84	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

13. Power Line Conducted Emission

13.1. Block diagram of test setup

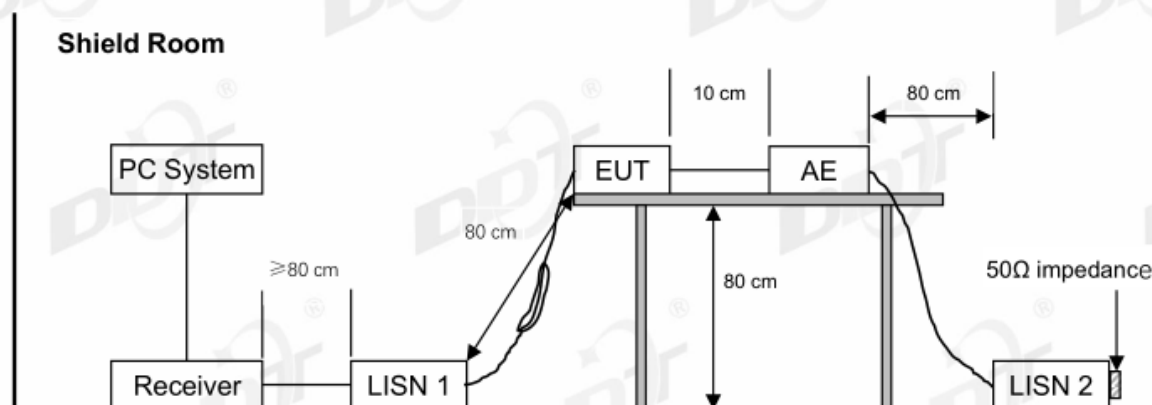

13.2. Power Line Conducted Emission Limits

Frequency	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150 kHz ~ 500 kHz	66 ~ 56*	56 ~ 46*
500 kHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

13.3. Test Procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. The bandwidth of test receiver is set at 9 kHz.

13.4. Test Result

Not Applicable

Remark: Conducted limits are not required for devices which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines according to 15.207(C).

14. Antenna Requirements

14.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

14.2. Result

The antenna used for this product and no antenna other than that furnished by the responsible party shall be used with the device, maximum antenna gain is 3.2 dBi.

16. Photos of the EUT

Please refer to DDT-Q23060602 Appendix II&IV.

END OF REPORT