




System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	4/17/2006 8:39:15 AM	DUT Battery Model/No:	
Filename:	5260_3d.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	Sony Electronics	Relative Permittivity:	50.19
Relative Humidity:	30%	Conductivity:	5.37
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	4.80 mm
DUT Position:	In pouch back towards phantom	Max SAR Y-axis Location:	1.20 mm
Antenna Configuration:	integral	Max E Field:	4.56 V/m
Test Frequency:	5180MHz	SAR 1g:	0.121 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.061 W/kg
Conversion Factors:	.502 / .502 / .502	SAR Start:	0.019 W/kg
Type of Modulation:		SAR End:	0.019 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.82 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	4/17/2006
Input Power Level:	max	Extrapolation:	poly4

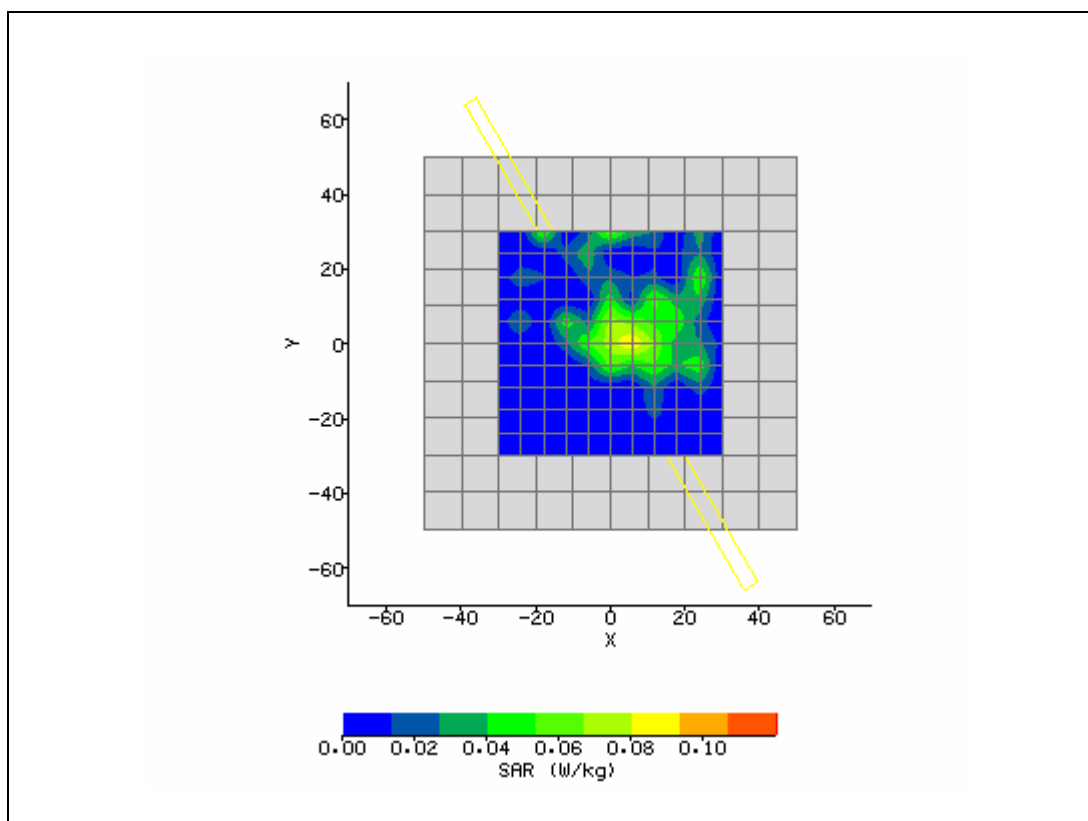


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	4/17/2006 8:18:37 AM	DUT Battery Model/No:	
Filename:	5260_3d.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	Sony Electronics	Relative Permittivity:	49.83
Relative Humidity:	30%	Conductivity:	5.236
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	12.00 mm
DUT Position:	In pouch back towards phantom	Max SAR Y-axis Location:	7.20 mm
Antenna Configuration:	integral	Max E Field:	4.75 V/m
Test Frequency:	5260MHz	SAR 1g:	0.110 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.043 W/kg
Conversion Factors:	.502 / .502 / .502	SAR Start:	0.049 W/kg
Type of Modulation:		SAR End:	0.050 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.04 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	4/17/2006
Input Power Level:	max	Extrapolation:	poly4

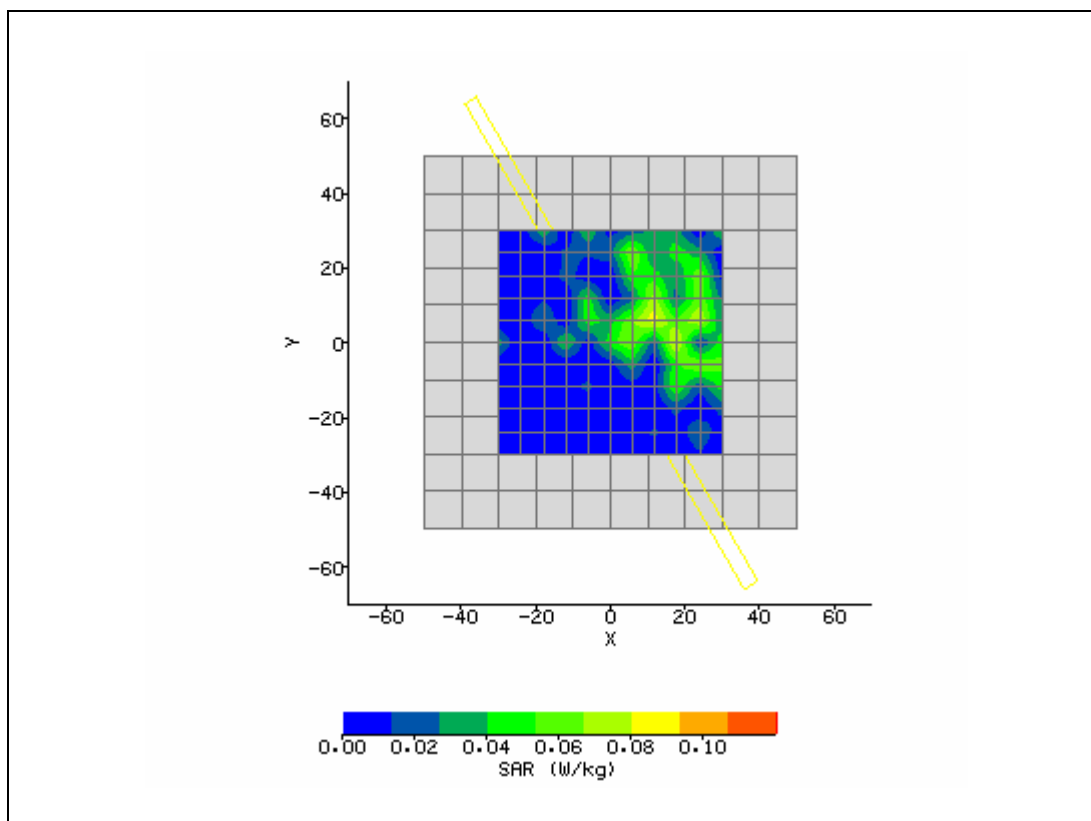


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	4/17/2006 9:11:25 AM	DUT Battery Model/No:	
Filename:	5180_3d.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	Sony Electronics	Relative Permittivity:	48.91
Relative Humidity:	30%	Conductivity:	5.133
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-1.20 mm
DUT Position:	In pouch back towards phantom	Max SAR Y-axis Location:	30.00 mm
Antenna Configuration:	integral	Max E Field:	4.00 V/m
Test Frequency:	5320MHz	SAR 1g:	0.045 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.059 W/kg
Conversion Factors:	.502 / .502 / .502	SAR Start:	0.034 W/kg
Type of Modulation:		SAR End:	0.035 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.94 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	4/17/2006
Input Power Level:	max	Extrapolation:	poly4

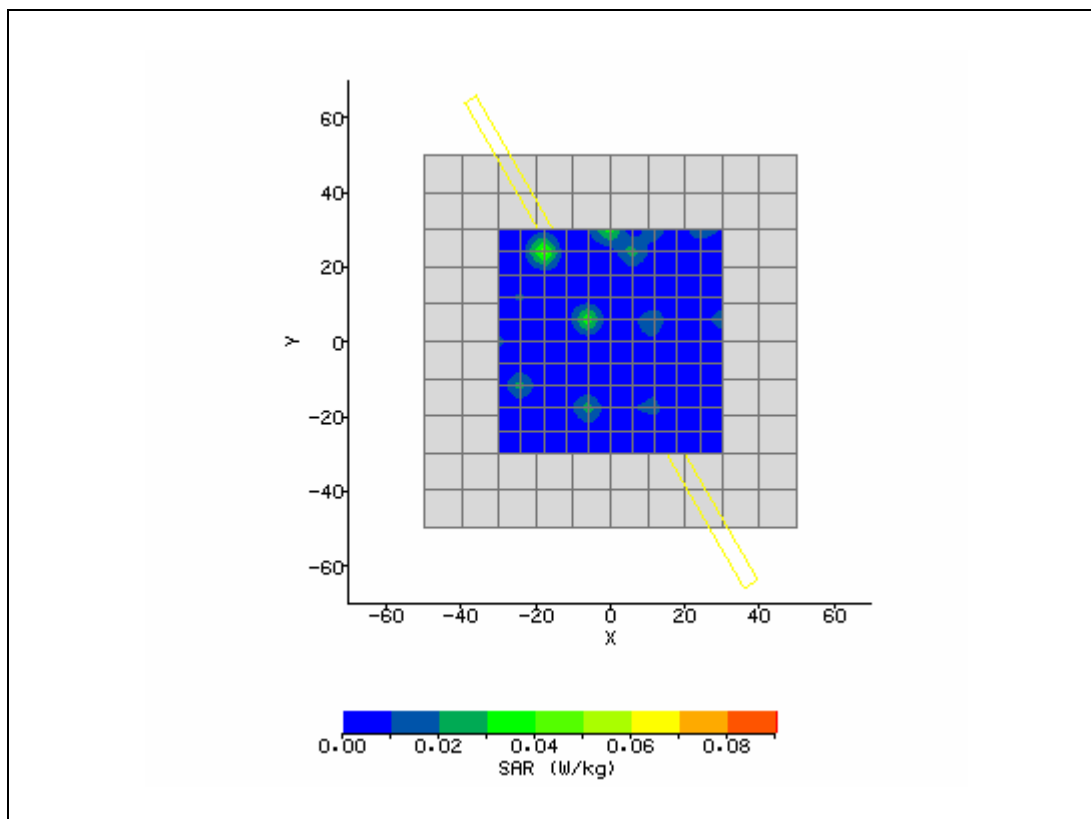


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	4/18/2006 2:50:51 PM	DUT Battery Model/No:	
Filename:	5785_3d.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	Sony Electronics	Relative Permittivity:	47.41
Relative Humidity:	30%	Conductivity:	6.38
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-15.60 mm
DUT Position:	In pouch back towards phantom	Max SAR Y-axis Location:	30.00 mm
Antenna Configuration:	integral	Max E Field:	3.70 V/m
Test Frequency:	5745MHz	SAR 1g:	0.066 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.051 W/kg
Conversion Factors:	.459 / .459 / .459	SAR Start:	0.010 W/kg
Type of Modulation:		SAR End:	0.010 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.77 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	4/17/2006
Input Power Level:	max	Extrapolation:	poly4

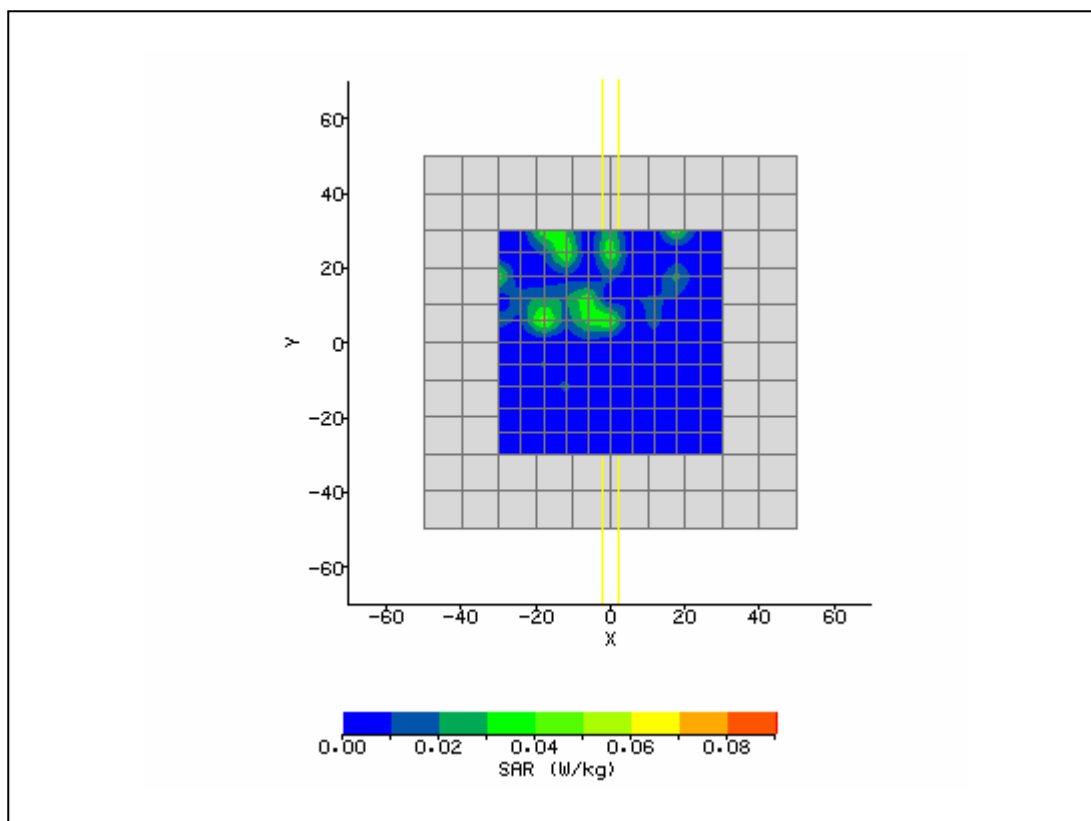

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	4/18/2006 2:16:03 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	Sony Electronics	Relative Permittivity:	47.02
Relative Humidity:	30%	Conductivity:	6.38
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-9.00 mm
DUT Position:	In pouch back towards phantom	Max SAR Y-axis Location:	24.60 mm
Antenna Configuration:	integral	Max E Field:	3.46 V/m
Test Frequency:	5785MHz	SAR 1g:	0.065 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.017 W/kg
Conversion Factors:	.459 / .459 / .459	SAR Start:	0.046 W/kg
Type of Modulation:		SAR End:	0.045 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-2.17 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	4/17/2006
Input Power Level:	max	Extrapolation:	poly4

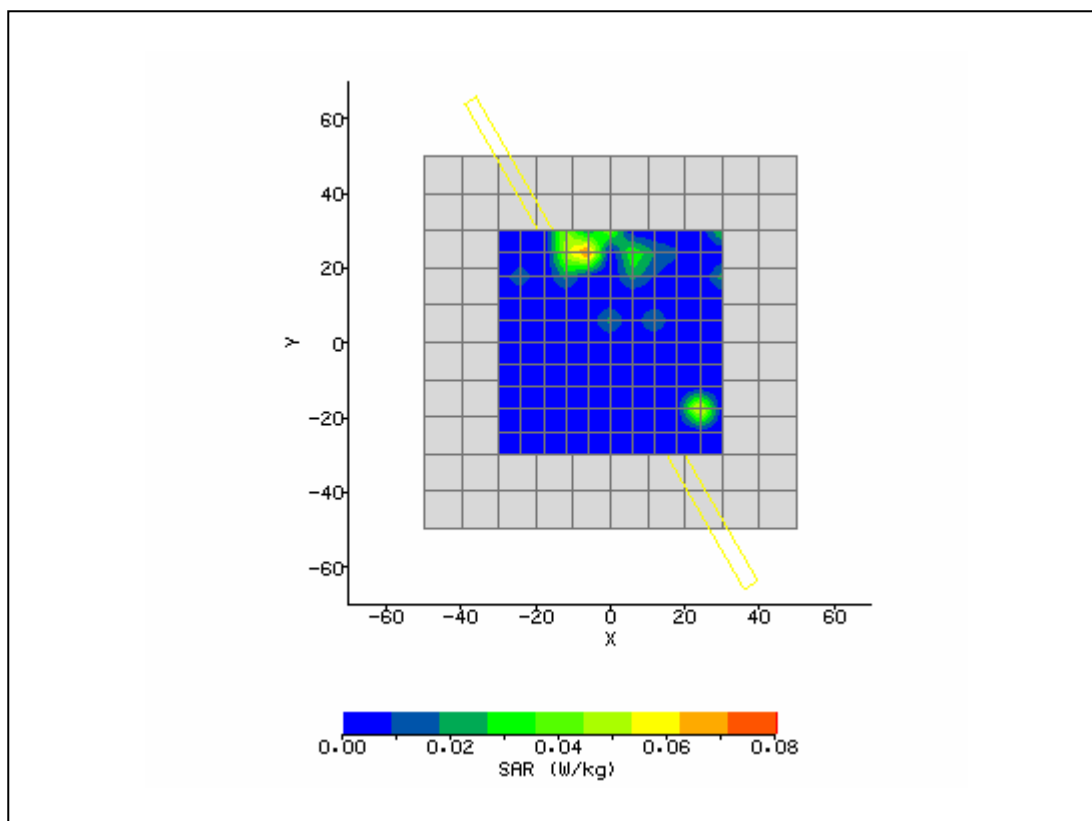

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	4/18/2006 3:40:37 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	Sony Electronics	Relative Permittivity:	46.91
Relative Humidity:	30%	Conductivity:	6.4
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-3.60 mm
DUT Position:	In pouch back towards phantom	Max SAR Y-axis Location:	6.60 mm
Antenna Configuration:	integral	Max E Field:	2.98 V/m
Test Frequency:	5825MHz	SAR 1g:	0.108 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.022 W/kg
Conversion Factors:	.459 / .459 / .459	SAR Start:	0.019 W/kg
Type of Modulation:		SAR End:	0.019 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.82 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	4/17/2006
Input Power Level:	max	Extrapolation:	poly4

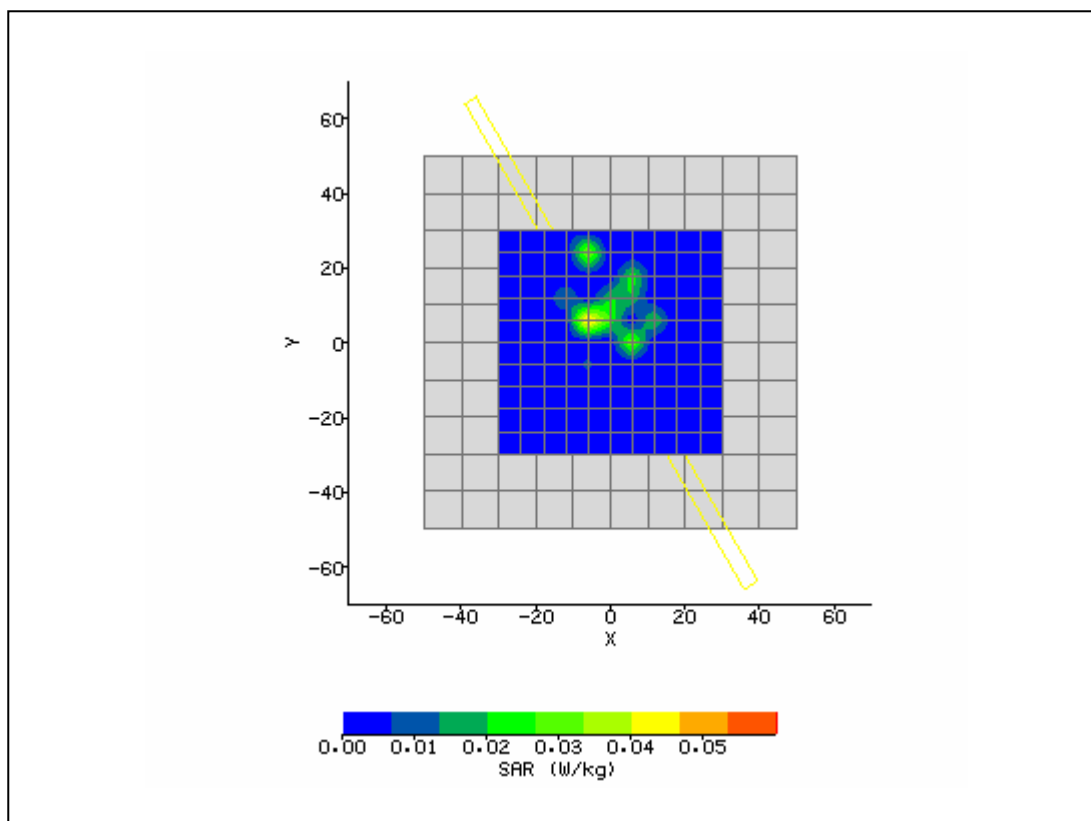

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	4/17/2006 11:52:26 AM	DUT Battery Model/No:	
Filename:	5260_3d.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	Sony Electronics	Relative Permittivity:	50.19
Relative Humidity:	30%	Conductivity:	5.37
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-4.83 mm
DUT Position:	In pouch back towards phantom	Max SAR Y-axis Location:	-24.07 mm
Antenna Configuration:	integral	Max E Field:	5.35 V/m
Test Frequency:	5180MHz & BT 2441	SAR 1g:	0.142 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.079 W/kg
Conversion Factors:	.502 / .502 / .502	SAR Start:	0.021 W/kg
Type of Modulation:		SAR End:	0.022 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.76 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	4/17/2006
Input Power Level:	max	Extrapolation:	poly4

