




System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	7/21/2009 10:02:39 AM	DUT Battery Model/No:	
Filename:	2437_b_lap.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.0°C	Liquid Simulant:	2450
Device Under Test:	PCG21112L	Relative Permittivity:	49.33
Relative Humidity:	45%	Conductivity:	1.958
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-50.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	0.00 mm
Antenna Configuration:	Integral	Max E Field:	2.87 V/m
Test Frequency:	2437MHz	SAR 1g:	0.002 W/kg
Air Factors:	2573 / 2262 / 2365	SAR 10g:	0.000 W/kg
Conversion Factors:	.487 / .487 / .487	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/21/09
Input Power Level:	Set by software	Extrapolation:	poly4

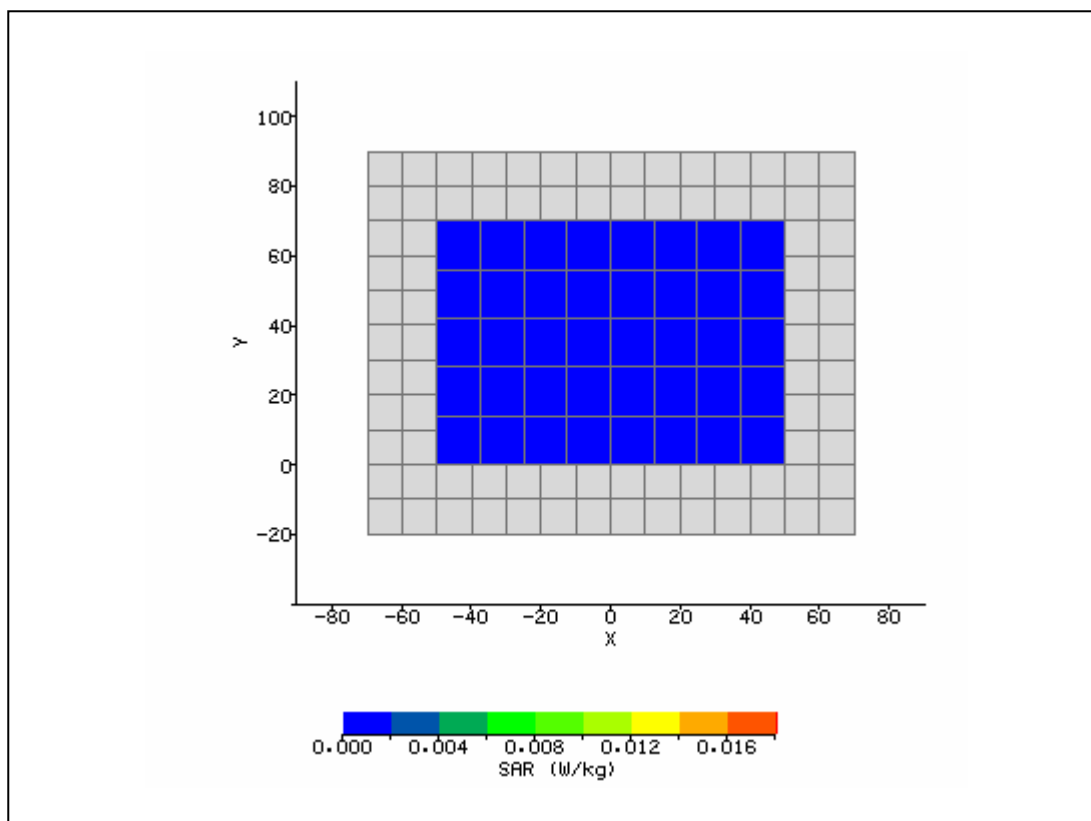

System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	7/21/2009 11:10:20 AM	DUT Battery Model/No:	
Filename:	2437_n_h20_lap.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.0°C	Liquid Simulant:	2450
Device Under Test:	PCG21112L	Relative Permittivity:	49.33
Relative Humidity:	45%	Conductivity:	1.958
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-20.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	-10.00 mm
Antenna Configuration:	Integral	Max E Field:	2.07 V/m
Test Frequency:	2437, n mode H20MHz	SAR 1g:	0.002 W/kg
Air Factors:	2573 / 2262 / 2365	SAR 10g:	0.000 W/kg
Conversion Factors:	.487 / .487 / .487	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/21/09
Input Power Level:	Set by software	Extrapolation:	poly4

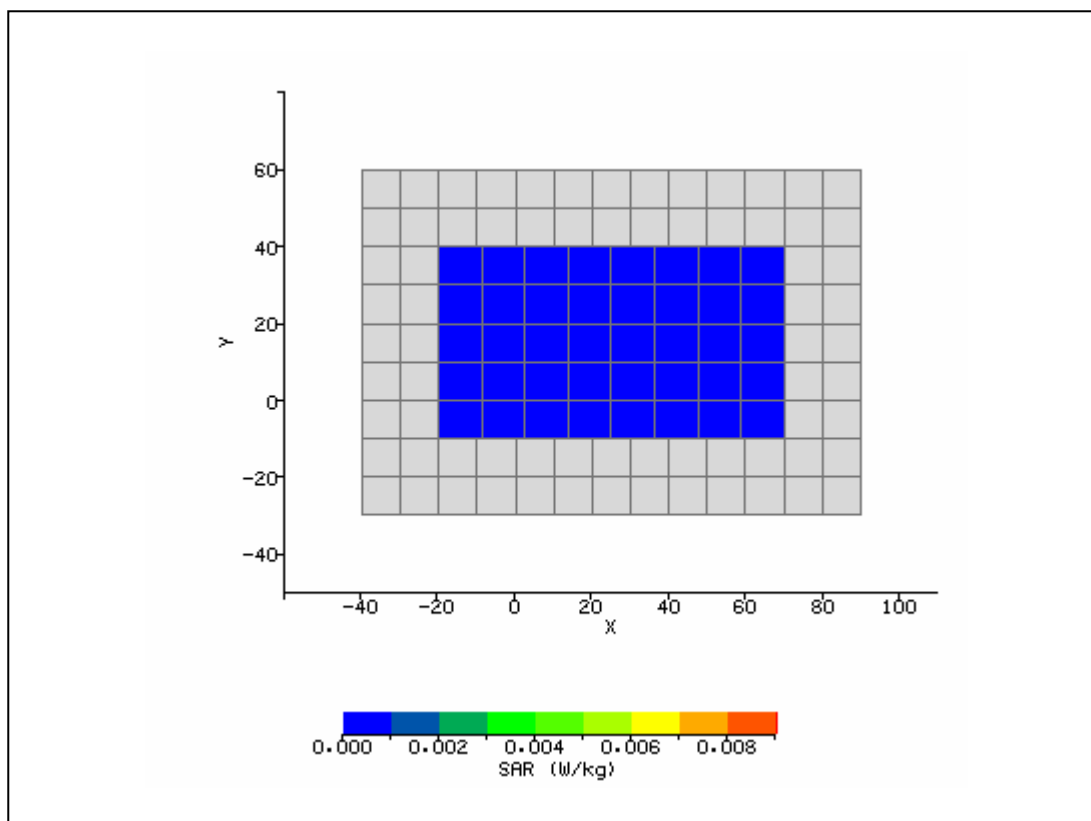

System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	7/21/2009 10:41:45 AM	DUT Battery Model/No:	
Filename:	2437_n_h20_lap.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.0°C	Liquid Simulant:	2450
Device Under Test:	PCG21112L	Relative Permittivity:	49.33
Relative Humidity:	45%	Conductivity:	1.958
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	36.25 mm
DUT Position:	Lap	Max SAR Y-axis Location:	11.00 mm
Antenna Configuration:	Integral	Max E Field:	3.64 V/m
Test Frequency:	2437, n mode H40MHz	SAR 1g:	0.005 W/kg
Air Factors:	2573 / 2262 / 2365	SAR 10g:	0.001 W/kg
Conversion Factors:	.487 / .487 / .487	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.002 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/21/09
Input Power Level:	Set by software	Extrapolation:	poly4

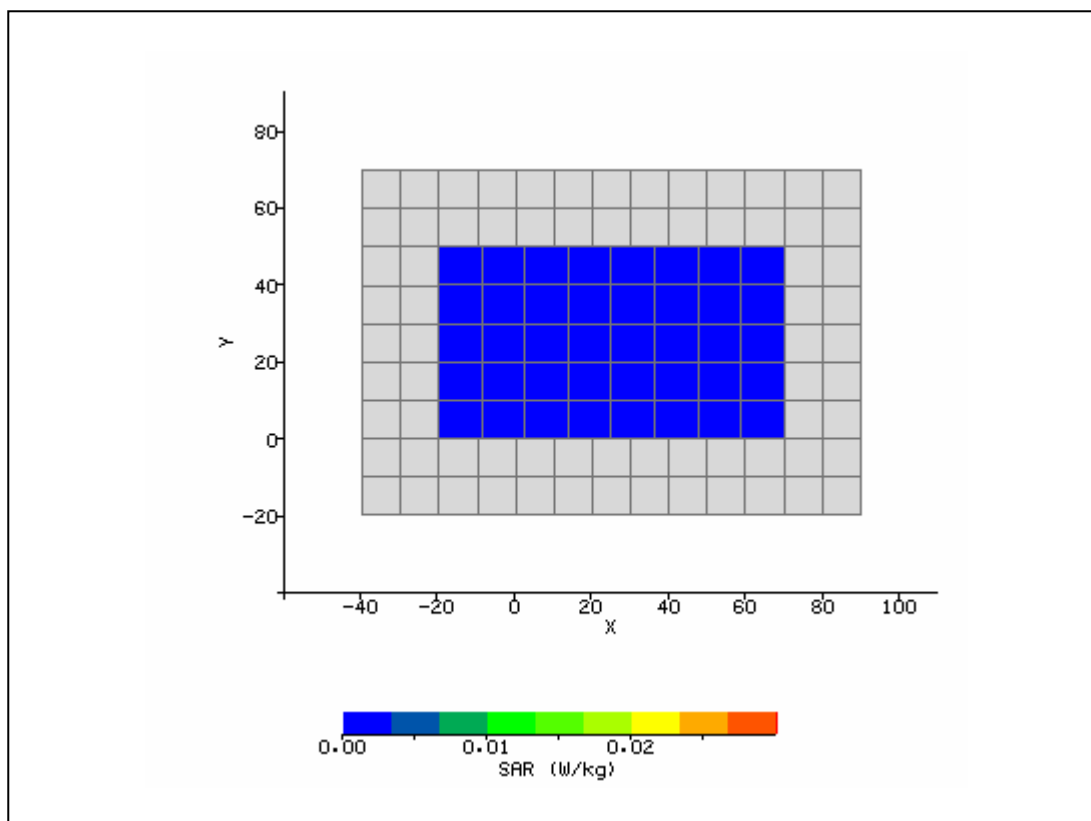

System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	7/21/2009 8:42:36 AM	DUT Battery Model/No:	
Filename:	1748_back0mm.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.0°C	Liquid Simulant:	2450
Device Under Test:	System	Relative Permittivity:	49.33
Relative Humidity:	45%	Conductivity:	1.958
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-1.25 mm
DUT Position:	10mm	Max SAR Y-axis Location:	-1.25 mm
Antenna Configuration:	Dipole	Max E Field:	134.43 V/m
Test Frequency:	2450MHz	SAR 1g:	46.963 W/kg
Air Factors:	2573 / 2262 / 2365	SAR 10g:	23.723 W/kg
Conversion Factors:	.487 / .487 / .487	SAR Start:	4.150 W/kg
Type of Modulation:		SAR End:	4.299 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.59 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	07/21/09
Input Power Level:	1W	Extrapolation:	poly4

