



A D T

FCC TEST REPORT (For WLAN)

REPORT NO.: RF991207D25B-1

MODEL NO.: PCG-41215L,
PCG-41216L

FCC ID: AK8PCG41215L

RECEIVED: Dec. 12, 2010

TESTED: Dec. 13 ~ 15, 2010

ISSUED: Dec. 24, 2010

APPLICANT: SONY Corporation

ADDRESS: 1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB LOCATION: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou
Hsiang, Taipei Hsien, 244 Taiwan

This test report consists of 75 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





A D T

TABLE OF CONTENTS

RELEASE CONTROL RECORD.....	4
1. CERTIFICATION.....	5
2. SUMMARY OF TEST RESULTS	6
2.1 MEASUREMENT UNCERTAINTY	6
3. GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 DESCRIPTION OF TEST MODES	10
3.2.1 CONFIGURATION OF SYSTEM UNDER TEST.....	10
3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	11
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS.....	14
3.4 DESCRIPTION OF SUPPORT UNITS.....	14
4. TEST TYPES AND RESULTS.....	15
4.1 CONDUCTED EMISSION MEASUREMENT.....	15
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	15
4.1.2 TEST INSTRUMENTS	15
4.1.3 TEST PROCEDURES	16
4.1.4 DEVIATION FROM TEST STANDARD	16
4.1.5 TEST SETUP	17
4.1.6 EUT OPERATING CONDITIONS.....	17
4.1.7 TEST RESULTS	18
4.2 RADIATED EMISSION MEASUREMENT	20
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	20
4.2.2 TEST INSTRUMENTS	21
4.2.3 TEST PROCEDURES	22
4.2.4 DEVIATION FROM TEST STANDARD	22
4.2.5 TEST SETUP.....	23
4.2.6 EUT OPERATING CONDITIONS.....	23
4.2.7 TEST RESULTS	24
4.3 6dB BANDWIDTH MEASUREMENT	38
4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT.....	38
4.3.2 TEST INSTRUMENTS.....	38
4.3.3 TEST PROCEDURE	38
4.3.4 DEVIATION FROM TEST STANDARD	38
4.3.5 TEST SETUP	39
4.3.6 EUT OPERATING CONDITIONS.....	39
4.3.7 TEST RESULTS	40
4.4 MAXIMUM OUTPUT POWER	44
4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT.....	44
4.4.2 INSTRUMENTS.....	44
4.4.3 TEST PROCEDURES	44
4.4.4 DEVIATION FROM TEST STANDARD	45
4.4.5 TEST SETUP	45



4.4.6	EUT OPERATING CONDITIONS.....	45
4.4.7	TEST RESULTS	46
4.5	POWER SPECTRAL DENSITY MEASUREMENT	48
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	48
4.5.2	TEST INSTRUMENTS	48
4.5.3	TEST PROCEDURE	48
4.5.4	DEVIATION FROM TEST STANDARD	49
4.5.5	TEST SETUP	49
4.5.6	EUT OPERATING CONDITION	49
4.5.7	TEST RESULTS	50
4.6	BAND EDGES MEASUREMENT.....	54
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	54
4.6.2	TEST INSTRUMENTS	55
4.6.3	TEST PROCEDURE	56
4.6.4	DEVIATION FROM TEST STANDARD	56
4.6.5	EUT OPERATING CONDITION	56
4.6.6	TEST RESULTS	57
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION	73
6.	INFORMATION ON THE TESTING LABORATORIES.....	74
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	75



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
Original release	N/A	Dec. 24, 2010



A D T

1. CERTIFICATION

PRODUCT: Personal Computer

BRAND NAME: SONY

MODEL NO.: PCG-41215L, PCG-41216L

APPLICANT: SONY Corporation

TEST ITEM: ENGINEERING SAMPLE

TESTED: Dec. 13 ~ 15, 2010

STANDARDS: FCC Part 15, Subpart C (Section 15.247)

ANSI C63.4-2003

ANSI C63.10-2009

The above equipment (Model: PCG-41215L) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Annie Chang , **DATE:** Dec. 24, 2010
(Annie Chang / Senior Specialist)

APPROVED BY : Ken Liu , **DATE:** Dec. 24, 2010
(Ken Liu / Manager)

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -30.75dB at 18.090MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -0.2dB at 2483.50MHz
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is Hirose U.FL not a standard connector.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	150kHz~30MHz	2.41 dB
Radiated emissions	30MHz ~ 1GHz	3.67 dB
	Above 1GHz	2.89 dB

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Personal Computer
MODEL NO.	PCG-41215L, PCG-41216L
FCC ID	AK8PCG41215L
NOMINAL VOLTAGE	19.5Vdc from AC adapter or 11.1Vdc from battery
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11/ 5.5/ 2/ 1Mbps 802.11g: 54/ 48/ 36/ 24/ 18/ 12/ 9/ 6Mbps 802.11n: up to 150Mbps
OPERATING FREQUENCY	2412 ~ 2462MHz
NUMBER OF CHANNEL	11 for 802.11b, 802.11g, 802.11n (20MHz) 7 for 802.11n (40MHz)
OUTPUT POWER	131.8mW
ANTENNA TYPE	Refer to note below
ANTENNA CONNECTOR	Refer to note below
DATA CABLE	NA
I/O PORTS	Refer to User's manual
ASSOCIATED DEVICES	Refer to note below

Note:

- The EUT is a Personal Computer, the functions of EUT listed as below:

Function	Test Standard	Reference Report
WLAN IEEE802.11bgn Mini-PCI Card (Brand: Intel, Model: 112BNHMW)	FCC Part 15, Subpart C (Section 15.247)	RF991207D25B-1
Bluetooth module (Brand: Foxconn, Model: T77H114)	FCC Part 15, Subpart C (Section 15.247)	RF991207D25B-2

2. The EUT incorporates a SIMO function. Physically, the EUT provides one completed transmitter and two receivers.

Modulation Mode	Tx Function
802.11b	1TX
802.11g	1TX
802.11n (20MHz)	1TX
802.11n (40MHz)	1TX

3. The EUT has several models, which are identical to each other except for the Topcover less of ODD differences only, as the following:

Brand	Model No.	Topcover less of ODD
SONY	PCG-41215L	Without
	PCG-41216L	With

During the test, the **model no.: PCG-41215L** was the worst case and only its test data was recorded in this report.

4. The case of EUT has two kinds of material: MG & CFRP. During the test, the **MG material case** was the worst case and only its test data was recorded in this report.
5. The following antennas were applied to the EUT:

Type	Connector	Gain
PIFA	Hirose U.FL	1.74

6. The EUT consumes power from a power adapter/ battery and there are the following sources could be chosen:

Power Source	Brand	Model No.	Spec.
AC adapter 1	NJRC	VGP-AC19V31	AC Input: 100-240V, 1.5A, 50-60Hz DC Output: 19.5V, 4.7A Non-shielded AC 2Pin (0.8m) Non-shielded DC (1.8m)
AC adapter 2	NJRC	VGP-AC19V32	AC Input: 100-240V, 1.5A, 50-60Hz DC Output: 19.5V, 4.7A Non-shielded AC 3Pin (0.8m) Non-shielded DC (1.8m)
AC adapter 3	Liteon	VGP-AC19V36	AC Input: 100-240V, 1.5A, 50/60Hz DC Output: 19.5V, 4.7A Non-shielded AC 3Pin (0.8m) Non-shielded DC (1.8m)
AC adapter 4	Delta	VGP-AC19V42	AC Input: 100-240V, 1.5A 50-60Hz DC Output: 19.5V, 4.7A Non-shielded AC 3Pin (0.8m) Non-shielded DC (1.8m)
AC adapter 5	Delta	VGP-AC19V51	AC Input: 100-240V, 1.5A, 50/60Hz DC Output 1: 19.5Vdc 4.7A DC Output 2: 5Vdc 1.5A DC Output 3: 5Vdc 1.5A Non-shielded AC 3Pin (0.8m) Non-shielded DC (1.8m)
Battery	Sony	VGP-BPS24	11.1V, 4400mAh

After pre-tested above AC adapters, the **AC Adapter 3** was the worst case, therefore, only its test data was recorded in this report.

7. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 DESCRIPTION OF TEST MODES

11 channels are provided for 802.11b, 802.11g and 802.11n (20MHz):


CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (40MHz):


CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2422MHz	5	2442MHz
2	2427MHz	6	2447MHz
3	2432MHz	7	2452MHz
4	2437MHz		

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Test Mode A:

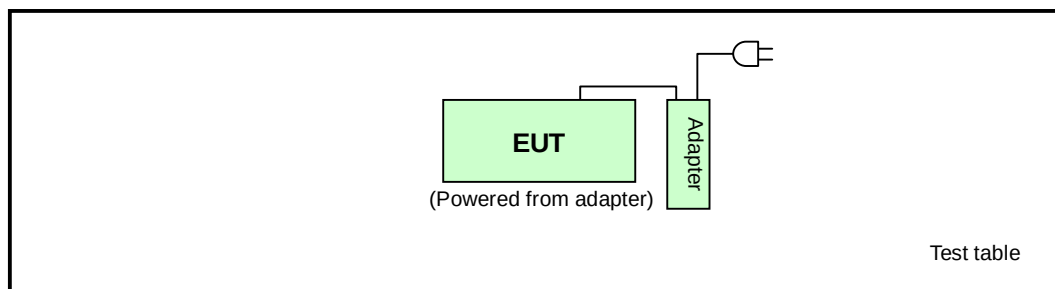

Test Mode B:

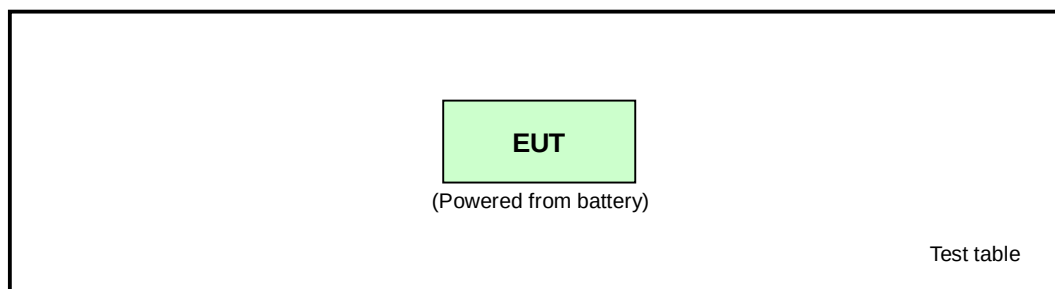

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE ³ 1G	RE<1G	PLC	APCM	
A	√	√	√	√	EUT powered from adapter
B	-	√	Note	-	EUT powered from battery

Where **RE³1G**: Radiated Emission above 1GHz **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement
Note: No need to concern of Conducted Emission due to the EUT is powered by battery.

RADIATED EMISSION TEST (ABOVE 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
A	802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	13.5

RADIATED EMISSION TEST (BELOW 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A & B	802.11n (20MHz)	1 to 11	11	OFDM	BPSK	6.5

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11n (20MHz)	1 to 11	11	OFDM	BPSK	6.5

BANDEDGE MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
A	802.11n (20MHz)	1 to 11	1, 11	OFDM	BPSK	6.5
A	802.11n (40MHz)	1 to 7	1, 7	OFDM	BPSK	13.5

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
A	802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	13.5

**A D T****TEST CONDITION:**

APPLICABLE TO	EUT CONFIGURE MODE	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE ³ 1G	A	20deg. C, 76% RH, 1009hPa	120Vac, 60Hz	Nick Chen
RE <1G	A	20deg. C, 76% RH, 1009hPa	120Vac, 60Hz	Nick Chen
	B	20deg. C, 76% RH, 1009hPa	11.1Vdc	Nick Chen
PLC	A	20deg. C, 81% RH, 1018hPa	120Vac, 60Hz	Chad Lee
APCM	A	16deg. C, 80% RH, 1018hPa	120Vac, 60Hz	Jun Wu



A D T

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

ANSI C63.4-2003

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with its adapter or battery.

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:** 1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	100276	Dec. 15, 2010	Dec. 14, 2011
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	100219	Nov. 24, 2010	Nov. 23, 2011
LISN With Adapter (for EUT)	AD10	C10Ada-001	Nov. 24, 2010	Nov. 23, 2011
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	100218	Nov. 24, 2010	Nov. 23, 2011
Software	ADT_Cond_V7.3.7	NA	NA	NA
Software	ADT_ISN_V7.3.7	NA	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C10.01	Feb. 23, 2010	Feb. 22, 2011
SUHNTER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-010773	Feb. 23, 2010	Feb. 22, 2011

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. 10.
3. The VCCI Site Registration No. C-1852.

4.1.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

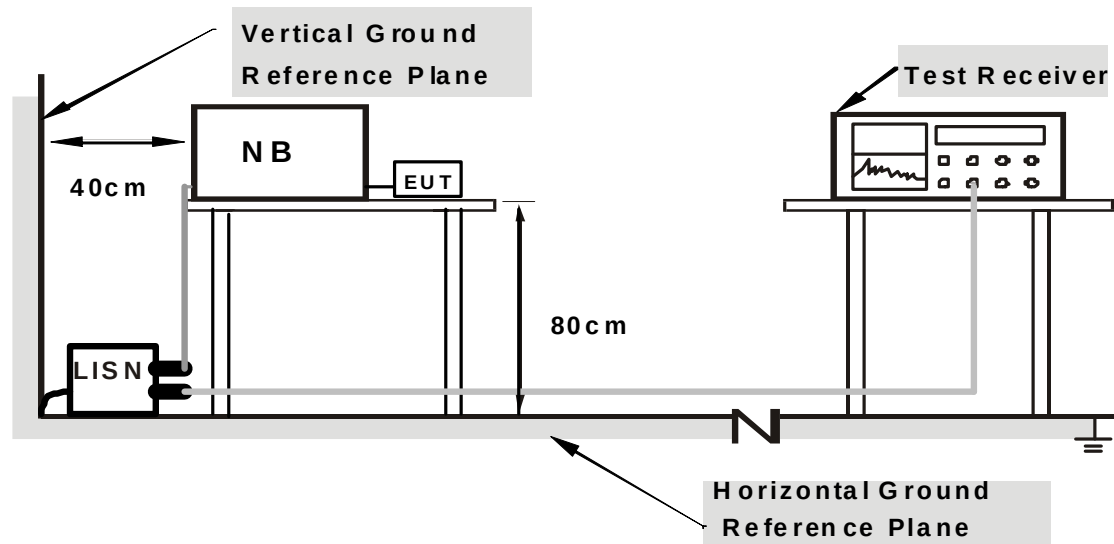

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- Turn on the power of all equipment.
- EUT ran a test program (provided by manufacture) to enable it under transmitting condition at specific channel continuously.


4.1.7 TEST RESULTS

CONDUCTED WORST-CASE DATA : 802.11n (20MHz)

TEST MODE	A	6dB BANDWIDTH	9kHz
CHANNEL	Channel 11	PHASE	Line 1

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.158	0.19	25.38	-	25.57	-	65.58	55.58	-40.01	-
2	0.197	0.19	19.11	-	19.30	-	63.74	53.74	-44.44	-
3	0.397	0.30	19.90	-	20.20	-	57.91	47.91	-37.71	-
4	3.387	0.44	13.05	-	13.49	-	56.00	46.00	-42.51	-
5	4.137	0.50	13.66	-	14.16	-	56.00	46.00	-41.84	-
6	18.414	1.19	26.08	-	27.27	-	60.00	50.00	-32.73	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

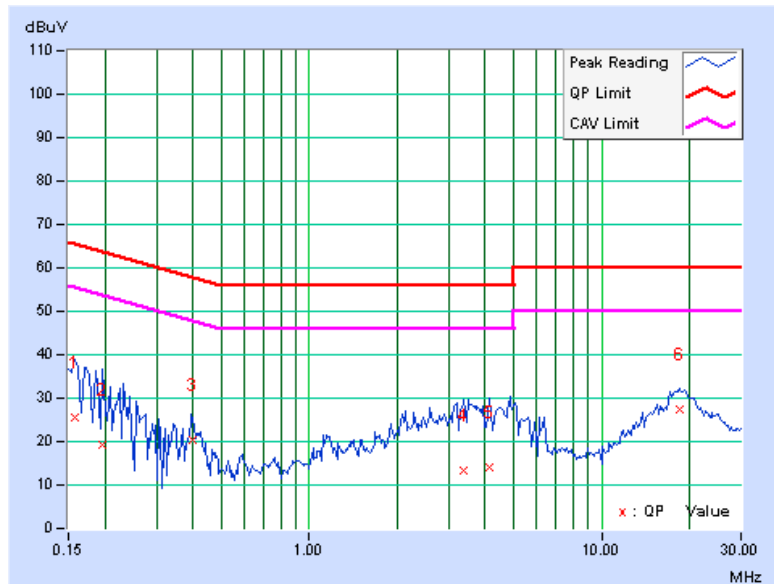

TEST MODE	A	6dB BANDWIDTH	9kHz
CHANNEL	Channel 11	PHASE	Line 2

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.158	0.29	23.99	-	24.28	-	65.58	55.58	-41.30	-
2	0.170	0.29	23.53	-	23.82	-	64.98	54.98	-41.17	-
3	0.435	0.38	14.28	-	14.66	-	57.15	47.15	-42.49	-
4	1.225	0.39	11.83	-	12.22	-	56.00	46.00	-43.78	-
5	4.076	0.55	17.49	-	18.04	-	56.00	46.00	-37.96	-
6	18.090	1.00	28.25	-	29.25	-	60.00	50.00	-30.75	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

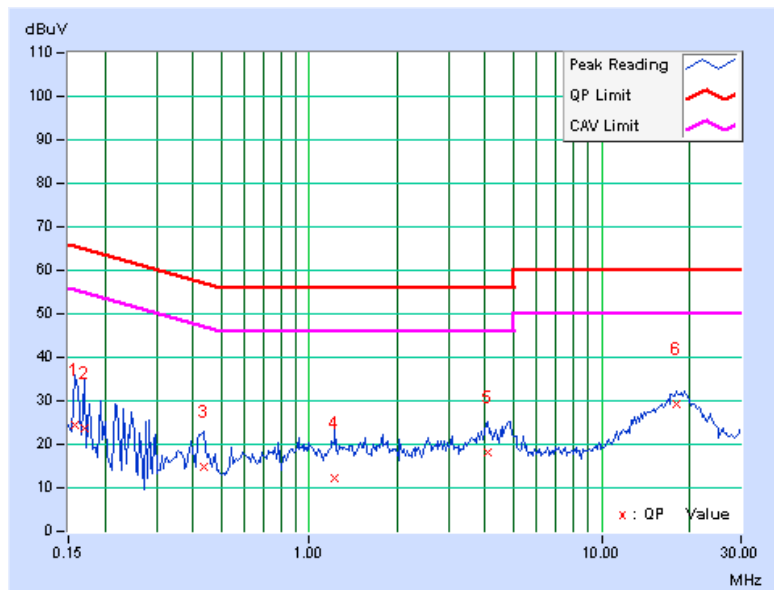

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

**A D T**

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
HP Preamplifier	8447D	2432A03504	May 06, 2010	May 05, 2011
HP Preamplifier	8449B	3008A01924	Jul. 14, 2010	Jul. 13, 2011
HP Preamplifier	8449B	3008A01292	Jul. 14, 2010	Jul. 13, 2011
ROHDE & SCHWARZ TEST RECEIVER	ESU26	100005	Jun. 10, 2010	Jun. 09, 2011
Schwarzbeck Antenna	VULB 9168	137	Apr. 29, 2010	Apr. 28, 2011
Schwarzbeck Antenna	VHBA 9123	480	Apr. 29, 2010	Apr. 28, 2011
ADT. Turn Table	TT100	0306	NA	NA
ADT. Tower	AT100	0306	NA	NA
Software	ADT_Radiated_V 7.6.15.9.2	NA	NA	NA
SUHNER RF cable	SF102	CABLE-CH6	Aug. 20, 2010	Aug. 19, 2011
EMCO Horn Antenna	3115	6714	Oct. 26, 2010	Oct. 25, 2011
EMCO Horn Antenna	3115	9312-4192	Apr. 23, 2010	Apr. 22, 2011
Highpass filter Wainwright Instruments	WHK 3.1/18G-10SS	SN 8	NA	NA

- NOTE:** 1. The calibration interval of the above test instruments is 12/24 months. And the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in Chamber No. 6.
4. The Industry Canada Reference No. IC 7450E-6.
5. The FCC Site Registration No. is 447212.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

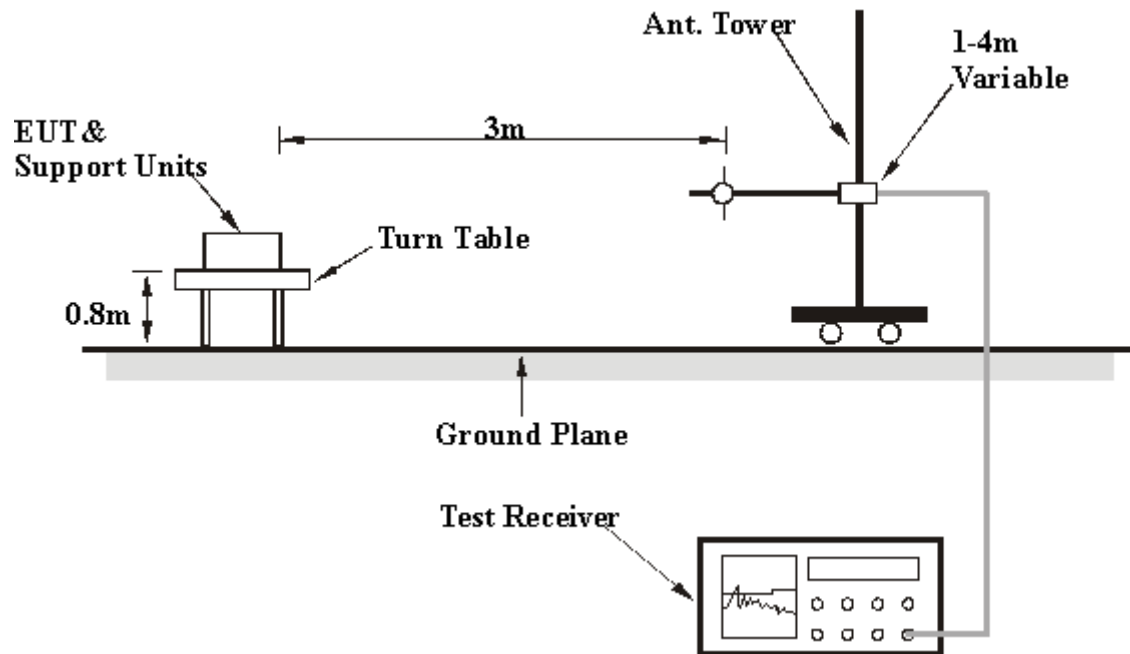

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as item 4.1.6.



A D T

4.2.7 TEST RESULTS

802.11b

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 76% RH 1009hPa	TESTED BY	Nick Chen
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.2 PK	74.0	-4.8	1.04 H	186	36.75	32.47
2	2390.00	48.1 AV	54.0	-5.9	1.04 H	186	15.61	32.47
3	*2412.00	109.0 PK			1.04 H	186	76.41	32.55
4	*2412.00	103.4 AV			1.04 H	186	70.85	32.55
5	#3216.00	49.2 PK	89.0	-39.8	1.12 H	114	13.50	35.69
6	#3216.00	43.3 AV	83.4	-40.1	1.12 H	114	7.63	35.69
7	4824.00	49.7 PK	74.0	-24.3	1.11 H	75	9.80	39.92
8	4824.00	38.8 AV	54.0	-15.3	1.11 H	75	-1.17	39.92
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.0 PK	74.0	-8.0	1.22 V	350	33.52	32.47
2	2390.00	47.9 AV	54.0	-6.1	1.22 V	350	15.45	32.47
3	*2412.00	106.5 PK			1.22 V	350	73.97	32.55
4	*2412.00	101.7 AV			1.22 V	350	69.12	32.55
5	#3216.00	47.9 PK	86.5	-38.6	1.23 V	87	12.25	35.69
6	#3216.00	40.7 AV	81.7	-41.0	1.23 V	87	5.03	35.69
7	4824.00	50.5 PK	74.0	-23.5	1.22 V	96	10.56	39.92
8	4824.00	42.2 AV	54.0	-11.8	1.22 V	96	2.30	39.92

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”:The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 76% RH 1009hPa	TESTED BY	Nick Chen
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	109.6 PK			1.03 H	185	76.97	32.64
2	*2437.00	104.5 AV			1.03 H	185	71.89	32.64
3	#3249.00	48.7 PK	89.6	-40.9	1.14 H	115	12.91	35.76
4	#3249.00	41.4 AV	84.5	-43.1	1.14 H	115	5.67	35.76
5	4874.00	50.0 PK	74.0	-24.0	1.00 H	77	9.89	40.08
6	4874.00	39.4 AV	54.0	-14.6	1.00 H	77	-0.71	40.08
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	106.4 PK			1.21 V	354	73.77	32.64
2	*2437.00	101.0 AV			1.21 V	354	68.37	32.64
3	#3249.00	47.4 PK	86.4	-39.0	1.07 V	86	11.67	35.76
4	#3249.00	40.4 AV	81.0	-40.7	1.07 V	86	4.60	35.76
5	4874.00	52.0 PK	74.0	-22.0	1.22 V	77	11.92	40.08
6	4874.00	43.0 AV	54.0	-11.0	1.22 V	77	2.92	40.08

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.
6. “ # ”: The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 76% RH 1009hPa	TESTED BY	Nick Chen
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	109.4 PK			1.03 H	188	76.65	32.73
2	*2462.00	104.4 AV			1.03 H	188	71.62	32.73
3	2483.50	67.5 PK	74.0	-6.5	1.03 H	188	34.69	32.81
4	2483.50	49.9 AV	54.0	-4.1	1.03 H	188	17.12	32.81
5	#3282.00	49.2 PK	89.4	-40.2	1.12 H	117	13.34	35.83
6	#3282.00	44.0 AV	84.4	-40.4	1.12 H	117	8.14	35.83
7	4924.00	49.7 PK	74.0	-24.4	1.12 H	74	9.41	40.24
8	4924.00	36.4 AV	54.0	-17.6	1.12 H	74	-3.82	40.24
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	108.5 PK			1.05 V	236	75.72	32.73
2	*2462.00	103.9 AV			1.05 V	236	71.15	32.73
3	2483.50	69.0 PK	74.0	-5.0	1.05 V	236	36.21	32.81
4	2483.50	50.2 AV	54.0	-3.8	1.05 V	236	17.38	32.81
5	#3282.00	49.6 PK	88.5	-38.9	1.06 V	85	13.74	35.83
6	#3282.00	43.6 AV	83.9	-40.3	1.06 V	85	7.79	35.83
7	4924.00	49.2 PK	74.0	-24.8	1.00 V	95	8.92	40.24
8	4924.00	38.2 AV	54.0	-15.8	1.00 V	95	-2.04	40.24

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.
6. “#”: The radiated frequency is out the restricted band.



A D T

802.11g

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 76% RH 1009hPa	TESTED BY	Nick Chen
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.1 PK	74.0	-4.9	1.07 H	186	36.60	32.47
2	2390.00	53.1 AV	54.0	-0.9	1.07 H	186	20.66	32.47
3	*2412.00	105.0 PK			1.07 H	186	72.42	32.55
4	*2412.00	94.7 AV			1.07 H	186	62.12	32.55
5	#3216.00	49.1 PK	85.0	-35.9	1.11 H	117	13.39	35.69
6	#3216.00	43.9 AV	74.7	-30.8	1.11 H	117	8.20	35.69
7	4824.00	48.4 PK	74.0	-25.6	1.09 H	66	8.48	39.92
8	4824.00	36.3 AV	54.0	-17.7	1.09 H	66	-3.63	39.92
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.1 PK	74.0	-5.9	1.10 V	201	35.64	32.47
2	2390.00	52.4 AV	54.0	-1.6	1.10 V	201	19.96	32.47
3	*2412.00	103.8 PK			1.10 V	201	71.27	32.55
4	*2412.00	93.6 AV			1.10 V	201	61.04	32.55
5	#3216.00	48.5 PK	83.8	-35.3	1.13 V	80	12.84	35.69
6	#3216.00	41.6 AV	73.6	-32.0	1.13 V	80	5.90	35.69
7	4824.00	48.0 PK	74.0	-26.0	1.18 V	109	8.08	39.92
8	4824.00	35.6 AV	54.0	-18.4	1.18 V	109	-4.31	39.92

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”: The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 76% RH 1009hPa	TESTED BY	Nick Chen
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	110.3 PK			1.03 H	186	77.66	32.64
2	*2437.00	100.0 AV			1.03 H	186	67.32	32.64
3	#3249.00	48.9 PK	90.3	-41.4	1.10 H	113	13.15	35.76
4	#3249.00	41.5 AV	80.0	-38.4	1.10 H	113	5.77	35.76
5	4874.00	48.2 PK	74.0	-25.9	1.08 H	86	8.07	40.08
6	4874.00	35.6 AV	54.0	-18.4	1.08 H	86	-4.47	40.08
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	109.3 PK			1.08 V	187	76.70	32.64
2	*2437.00	99.3 AV			1.08 V	187	66.70	32.64
3	#3249.00	48.4 PK	89.3	-41.0	1.12 V	79	12.60	35.76
4	#3249.00	41.3 AV	79.3	-38.0	1.12 V	79	5.56	35.76
5	4874.00	48.5 PK	74.0	-25.5	1.19 V	87	8.41	40.08
6	4874.00	36.1 AV	54.0	-18.0	1.19 V	87	-4.03	40.08

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.
6. “ # ”: The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 76% RH 1009hPa	TESTED BY	Nick Chen
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	107.9 PK			1.25 H	175	75.20	32.73
2	*2462.00	97.9 AV			1.25 H	175	65.12	32.73
3	2483.50	73.3 PK	74.0	-0.7	1.25 H	175	40.51	32.81
4	2483.50	53.0 AV	54.0	-1.1	1.25 H	175	20.14	32.81
5	#3282.00	49.1 PK	87.9	-38.9	1.17 H	109	13.22	35.83
6	#3282.00	44.2 AV	77.9	-33.7	1.17 H	109	8.34	35.83
7	4924.00	48.2 PK	74.0	-25.8	1.08 H	66	7.93	40.24
8	4924.00	36.7 AV	54.0	-17.3	1.08 H	66	-3.51	40.24
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	107.0 PK			1.04 V	235	74.30	32.73
2	*2462.00	96.7 AV			1.04 V	235	64.01	32.73
3	2483.50	71.3 PK	74.0	-2.7	1.04 V	235	38.49	32.81
4	2483.50	53.2 AV	54.0	-0.8	1.04 V	235	20.36	32.81
5	#3282.00	47.1 PK	87.0	-40.0	1.00 V	85	11.24	35.83
6	#3282.00	40.5 AV	76.7	-36.3	1.00 V	85	4.65	35.83
7	4924.00	48.0 PK	74.0	-26.0	1.09 V	83	7.75	40.24
8	4924.00	36.4 AV	54.0	-17.6	1.09 V	83	-3.84	40.24

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.
6. “ # ”: The radiated frequency is out the restricted band.



A D T

802.11n (20MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 76% RH 1009hPa	TESTED BY	Nick Chen
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	73.3 PK	74.0	-0.7	1.04 H	185	40.86	32.47
2	2390.00	52.7 AV	54.0	-1.3	1.04 H	185	20.19	32.47
3	*2412.00	104.8 PK			1.04 H	185	72.21	32.55
4	*2412.00	94.3 AV			1.04 H	185	61.77	32.55
5	#3216.00	49.7 PK	84.8	-35.1	1.11 H	119	13.98	35.69
6	#3216.00	43.7 AV	74.3	-30.6	1.11 H	119	8.04	35.69
7	4824.00	48.1 PK	74.0	-25.9	1.09 H	79	8.15	39.92
8	4824.00	36.3 AV	54.0	-17.7	1.09 H	79	-3.65	39.92
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	71.5 PK	74.0	-2.5	1.08 V	185	39.04	32.47
2	2390.00	51.3 AV	54.0	-2.7	1.08 V	185	18.86	32.47
3	*2412.00	104.0 PK			1.08 V	185	71.45	32.55
4	*2412.00	94.1 AV			1.08 V	185	61.56	32.55
5	#3216.00	49.0 PK	84.0	-35.0	1.15 V	81	13.29	35.69
6	#3216.00	42.4 AV	74.1	-31.7	1.15 V	81	6.71	35.69
7	4824.00	48.0 PK	74.0	-26.0	1.21 V	83	8.12	39.92
8	4824.00	35.3 AV	54.0	-18.7	1.21 V	83	-4.65	39.92

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”: The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 76% RH 1009hPa	TESTED BY	Nick Chen
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	110.5 PK			1.04 H	189	77.81	32.64
2	*2437.00	99.4 AV			1.04 H	189	66.73	32.64
3	#3249.00	47.8 PK	90.5	-42.6	1.12 H	114	12.08	35.76
4	#3249.00	41.9 AV	79.4	-37.4	1.12 H	114	6.17	35.76
5	4874.00	48.6 PK	74.0	-25.4	1.05 H	132	8.51	40.08
6	4874.00	36.2 AV	54.0	-17.8	1.05 H	132	-3.86	40.08
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	109.4 PK			1.07 V	186	76.76	32.64
2	*2437.00	99.1 AV			1.07 V	186	66.45	32.64
3	#3249.00	47.9 PK	89.4	-41.5	1.12 V	81	12.18	35.76
4	#3249.00	40.1 AV	79.1	-39.0	1.12 V	81	4.34	35.76
5	4874.00	48.6 PK	74.0	-25.4	1.21 V	88	8.51	40.08
6	4874.00	36.5 AV	54.0	-17.6	1.21 V	88	-3.63	40.08

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.
6. “ # ”: The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 76% RH 1009hPa	TESTED BY	Nick Chen
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	107.6 PK			1.02 H	188	74.88	32.73
2	*2462.00	97.3 AV			1.02 H	188	64.56	32.73
3	2483.50	73.6 PK	74.0	-0.4	1.02 H	188	40.75	32.81
4	2483.50	53.3 AV	54.0	-0.7	1.02 H	188	20.52	32.81
5	#3282.00	49.4 PK	87.6	-38.2	1.08 H	119	13.61	35.83
6	#3282.00	44.3 AV	77.3	-33.0	1.08 H	119	8.51	35.83
7	4924.00	48.8 PK	74.0	-25.2	1.09 H	63	8.53	40.24
8	4924.00	36.3 AV	54.0	-17.7	1.09 H	63	-3.91	40.24
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	106.6 PK			1.05 V	235	73.86	32.73
2	*2462.00	96.4 AV			1.05 V	235	63.62	32.73
3	2483.50	68.1 PK	74.0	-5.9	1.05 V	235	35.25	32.81
4	2483.50	52.2 AV	54.0	-1.8	1.05 V	235	19.41	32.81
5	#3282.00	50.0 PK	86.6	-36.6	1.07 V	85	14.20	35.83
6	#3282.00	44.7 AV	76.4	-31.7	1.07 V	85	8.82	35.83
7	4924.00	48.7 PK	74.0	-25.3	1.32 V	109	8.42	40.24
8	4924.00	36.2 AV	54.0	-17.8	1.32 V	109	-4.08	40.24

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.
6. “#”: The radiated frequency is out the restricted band.



A D T

802.11n (40MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 76% RH 1009hPa	TESTED BY	Nick Chen
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	71.8 PK	74.0	-2.2	1.08 H	185	39.35	32.47
2	2390.00	52.4 AV	54.0	-1.6	1.08 H	185	19.96	32.47
3	*2422.00	100.6 PK			1.08 H	185	67.98	32.59
4	*2422.00	90.4 AV			1.08 H	185	57.87	32.59
5	#3229.00	49.1 PK	80.6	-31.5	1.13 H	117	13.38	35.71
6	#3229.00	43.3 AV	70.5	-27.2	1.13 H	117	7.60	35.71
7	4844.00	48.5 PK	74.0	-25.6	1.09 H	86	8.47	39.99
8	4844.00	36.3 AV	54.0	-17.7	1.09 H	86	-3.64	39.99
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.6 PK	74.0	-5.4	1.09 V	202	36.10	32.47
2	2390.00	52.5 AV	54.0	-1.5	1.09 V	202	19.99	32.47
3	*2422.00	99.6 PK			1.09 V	202	67.03	32.59
4	*2422.00	89.8 AV			1.09 V	202	57.17	32.59
5	#3229.00	49.6 PK	79.6	-30.0	1.09 V	84	13.88	35.71
6	#3229.00	42.7 AV	69.8	-27.0	1.09 V	84	7.03	35.71
7	4844.00	47.9 PK	74.0	-26.1	1.21 V	116	7.93	39.99
8	4844.00	35.3 AV	54.0	-18.7	1.21 V	116	-4.65	39.99

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”: The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 4	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 76% RH 1009hPa	TESTED BY	Nick Chen
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	108.2 PK			1.04 H	185	75.57	32.64
2	*2437.00	98.2 AV			1.04 H	185	65.57	32.64
3	#3249.00	48.8 PK	88.2	-39.4	1.13 H	113	13.05	35.76
4	#3249.00	41.9 AV	78.2	-36.3	1.13 H	113	6.14	35.76
5	4874.00	48.6 PK	74.0	-25.5	1.08 H	68	8.47	40.08
6	4874.00	36.5 AV	54.0	-17.6	1.08 H	68	-3.63	40.08
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	107.3 PK			1.09 V	188	74.65	32.64
2	*2437.00	97.1 AV			1.09 V	188	64.46	32.64
3	#3249.00	48.2 PK	87.3	-39.1	1.07 V	85	12.46	35.76
4	#3249.00	41.0 AV	77.1	-36.1	1.07 V	85	5.22	35.76
5	4874.00	48.5 PK	74.0	-25.6	1.23 V	85	8.37	40.08
6	4874.00	36.5 AV	54.0	-17.5	1.23 V	85	-3.60	40.08

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.
6. “ # ”: The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 7	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 76% RH 1009hPa	TESTED BY	Nick Chen
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	101.9 PK			1.03 H	186	69.21	32.70
2	*2452.00	91.8 AV			1.03 H	186	59.10	32.70
3	2483.50	73.2 PK	74.0	-0.9	1.03 H	186	40.34	32.81
4	2483.50	53.8 AV	54.0	-0.2	1.03 H	186	20.98	32.81
5	#3269.00	48.8 PK	81.9	-33.1	1.10 H	117	12.99	35.80
6	#3269.00	43.8 AV	71.8	-28.0	1.10 H	117	7.97	35.80
7	4904.00	48.7 PK	74.0	-25.3	1.08 H	99	8.49	40.18
8	4904.00	36.3 AV	54.0	-17.7	1.08 H	99	-3.90	40.18
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	100.8 PK			1.07 V	188	68.10	32.70
2	*2452.00	90.7 AV			1.07 V	188	57.99	32.70
3	2483.50	72.8 PK	74.0	-1.2	1.07 V	188	39.98	32.81
4	2483.50	52.7 AV	54.0	-1.3	1.07 V	188	19.91	32.81
5	#3269.00	48.9 PK	80.8	-31.9	1.10 V	84	13.10	35.80
6	#3269.00	43.1 AV	70.7	-27.6	1.10 V	84	7.24	35.80
7	4904.00	48.6 PK	74.0	-25.4	1.02 V	154	8.38	40.18
8	4904.00	36.0 AV	54.0	-18.0	1.02 V	154	-4.16	40.18

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.
6. “ # ”: The radiated frequency is out the restricted band.



A D T

BELOW 1GHz WORST-CASE DATA : 802.11n (20MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	20deg. C, 76% RH 1009hPa	TESTED BY	Nick Chen
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	39.33	29.0 QP	40.0	-11.0	1.08 H	82	15.55	13.42
2	99.95	33.3 QP	43.5	-10.2	1.07 H	250	24.20	9.12
3	159.02	32.1 QP	43.5	-11.4	1.28 H	226	17.17	14.89
4	221.20	41.2 QP	46.0	-4.8	1.03 H	211	29.12	12.11
5	331.57	34.2 QP	46.0	-11.8	1.02 H	274	17.62	16.61
6	395.30	37.9 QP	46.0	-8.1	1.16 H	223	19.60	18.29
7	499.46	34.9 QP	46.0	-11.1	1.08 H	220	14.06	20.84
8	600.50	34.5 QP	46.0	-11.5	1.13 H	274	11.23	23.31
9	667.34	34.3 QP	46.0	-11.7	1.07 H	28	9.96	24.35
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	39.33	35.7 QP	40.0	-4.3	1.02 V	88	22.25	13.42
2	221.20	38.3 QP	46.0	-7.7	1.11 V	10	26.17	12.11
3	232.08	36.6 QP	46.0	-9.4	1.07 V	10	23.93	12.71
4	359.55	34.4 QP	46.0	-11.7	1.26 V	136	17.01	17.34
5	399.97	34.1 QP	46.0	-11.9	1.04 V	88	15.71	18.41
6	516.55	35.0 QP	46.0	-11.1	1.28 V	268	13.67	21.28
7	527.44	37.7 QP	46.0	-8.3	1.26 V	262	16.17	21.56
8	581.84	35.3 QP	46.0	-10.7	1.00 V	283	12.43	22.88

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	11.1Vdc	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	20deg. C, 76% RH 1009hPa	TESTED BY	Nick Chen
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	33.11	33.7 QP	40.0	-6.3	1.18 H	49	21.22	12.52
2	62.64	29.4 QP	40.0	-10.6	1.08 H	271	16.20	13.21
3	278.72	33.5 QP	46.0	-12.5	1.32 H	223	18.62	14.89
4	331.57	31.3 QP	46.0	-14.8	1.06 H	196	14.64	16.61
5	376.65	34.3 QP	46.0	-11.7	1.17 H	10	16.54	17.79
6	396.86	33.0 QP	46.0	-13.0	1.02 H	355	14.68	18.33
7	451.27	34.2 QP	46.0	-11.9	1.16 H	10	14.86	19.29
8	567.85	30.5 QP	46.0	-15.5	1.00 H	70	7.93	22.55
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	59.54	33.9 QP	40.0	-6.1	1.15 V	217	20.31	13.55
2	278.72	31.1 QP	46.0	-14.9	1.08 V	211	16.18	14.89
3	330.02	33.3 QP	46.0	-12.7	1.11 V	136	16.70	16.57
4	373.54	34.8 QP	46.0	-11.2	1.07 V	10	17.11	17.71
5	396.86	35.5 QP	46.0	-10.6	1.03 V	28	17.12	18.33
6	449.71	32.6 QP	46.0	-13.4	1.11 V	358	13.31	19.25
7	465.26	30.8 QP	46.0	-15.2	1.23 V	10	11.03	19.74
8	673.56	30.7 QP	46.0	-15.3	1.00 V	223	6.26	24.44

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
R&S SPECTRUM ANALYZER	FSP 40	100036	Apr. 27, 2010	Apr. 26, 2011

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 300kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP

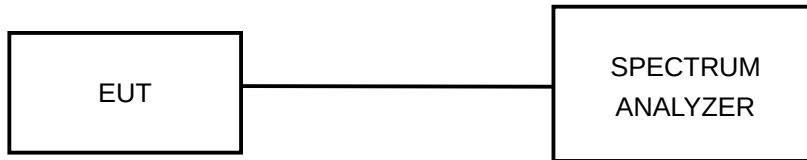

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.3.7 TEST RESULTS

TEST MODE A:

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	9.20	0.5	PASS
6	2437	10.10	0.5	PASS
11	2462	10.15	0.5	PASS


CH 11

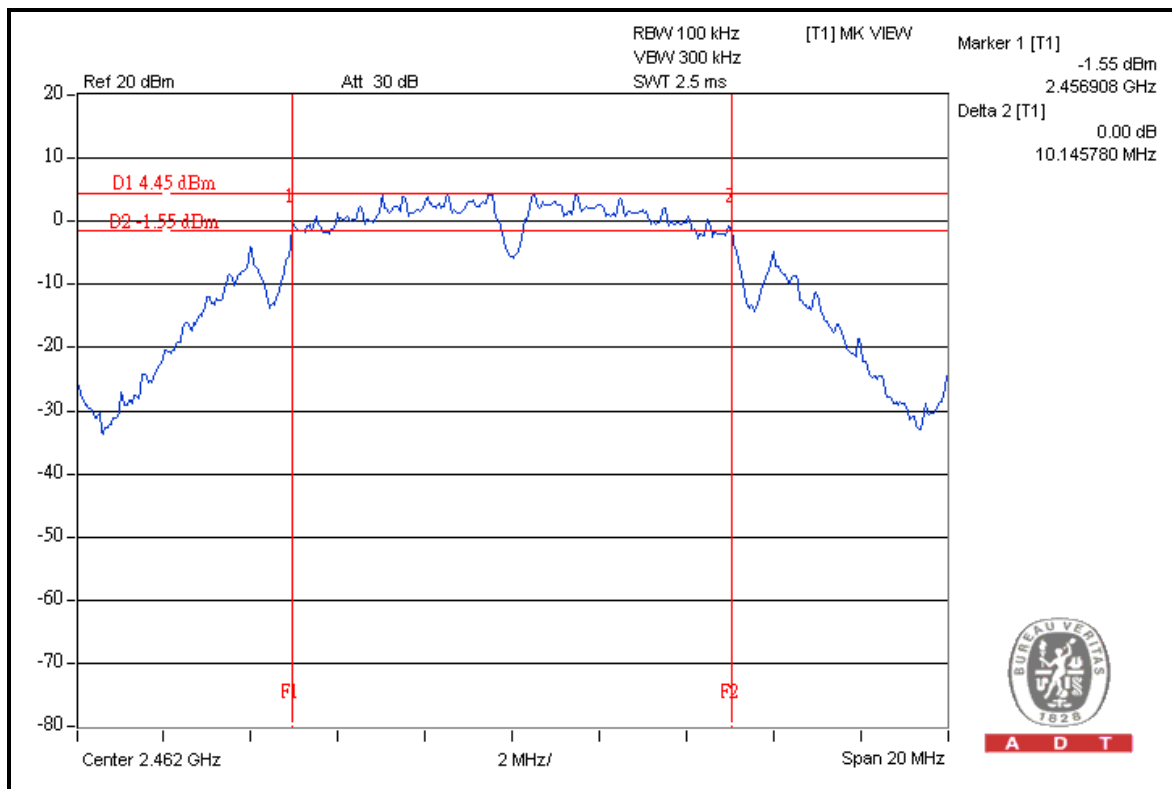

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.38	0.5	PASS
6	2437	16.39	0.5	PASS
11	2462	16.45	0.5	PASS

CH 11

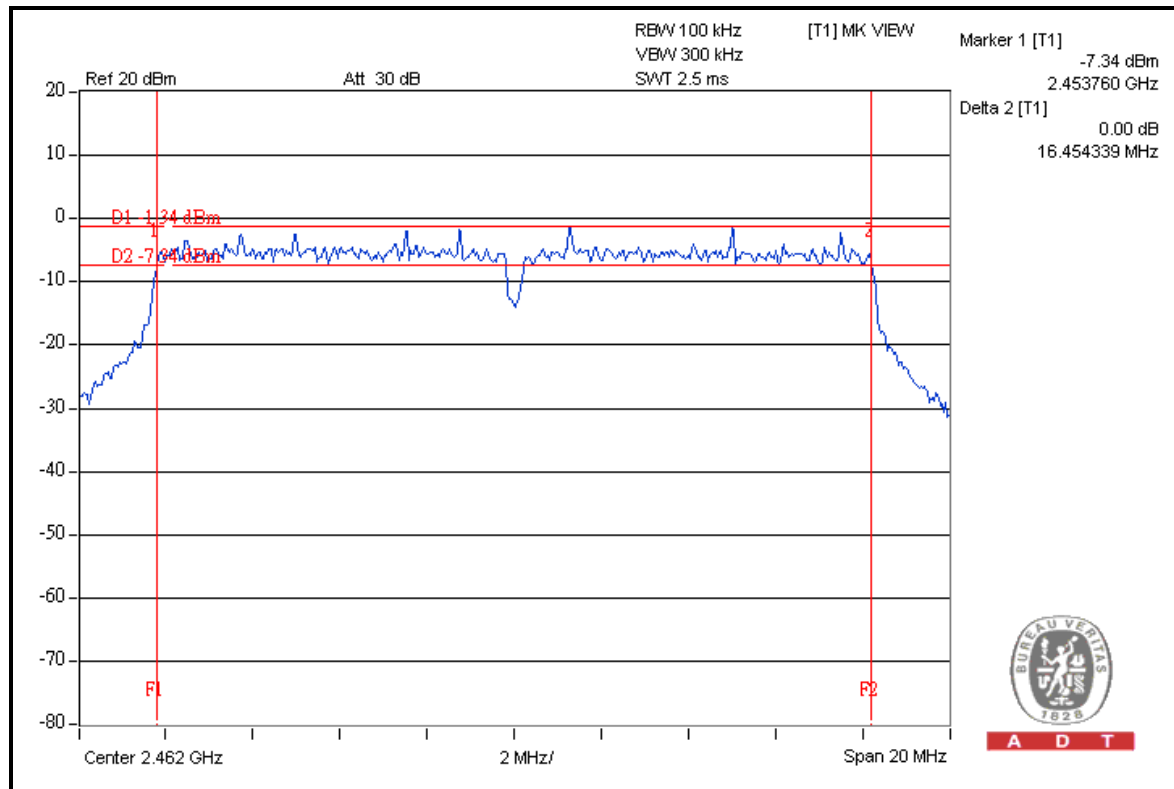




A D T

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	17.73	0.5	PASS
6	2437	17.68	0.5	PASS
11	2462	17.62	0.5	PASS

CH 1

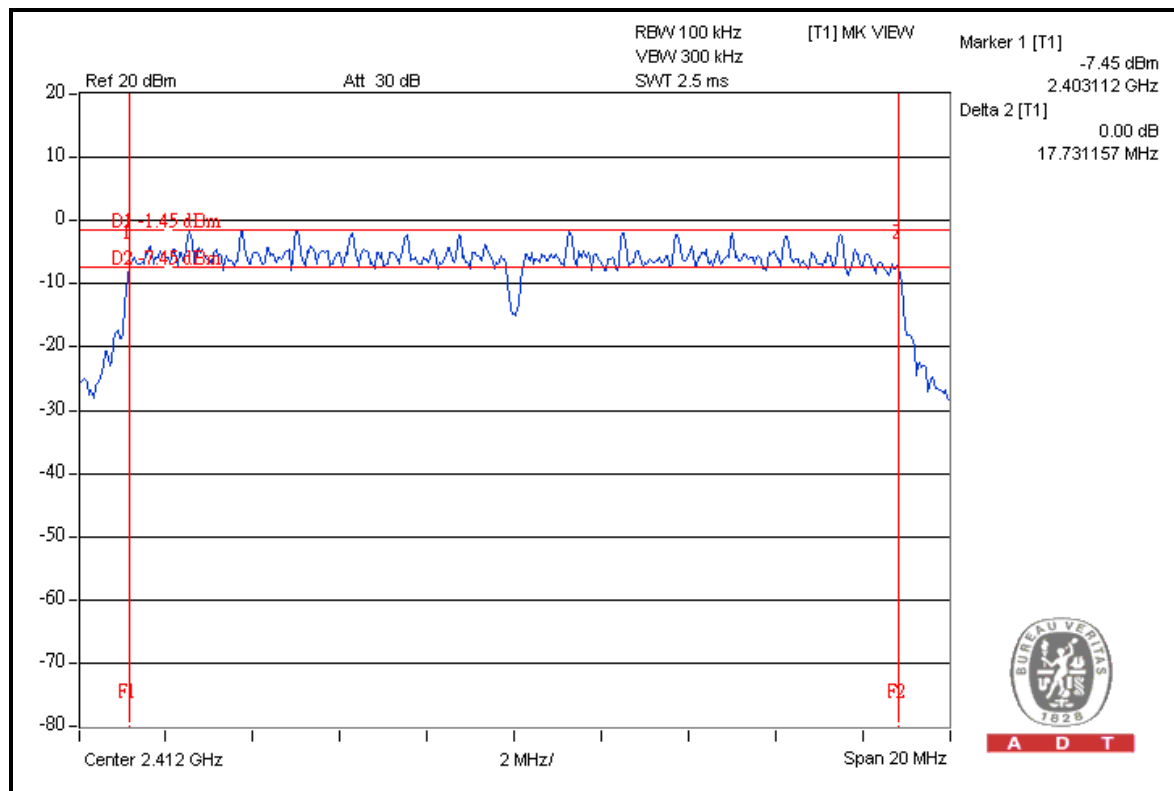


A D T

802.11n (40MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2422	35.59	0.5	PASS
4	2437	35.75	0.5	PASS
7	2452	35.50	0.5	PASS

CH 4

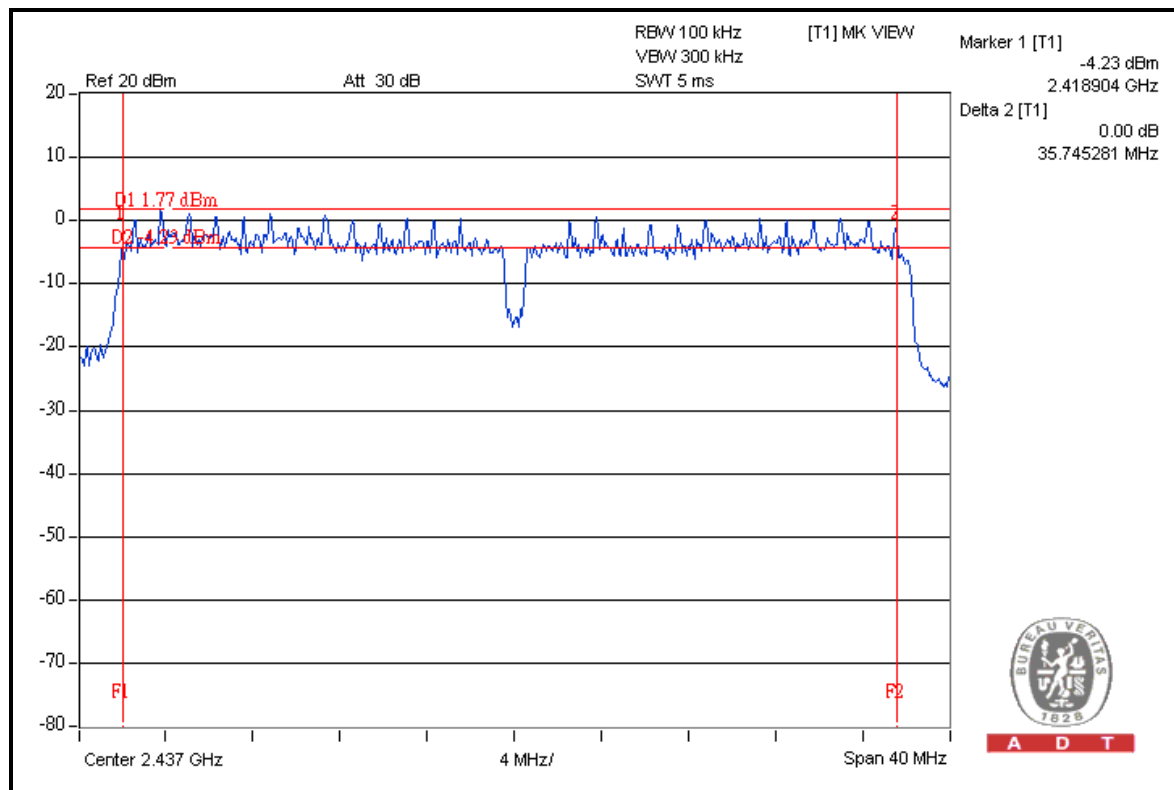



A D T

4.4 MAXIMUM OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Anritsu Power Sensor	MA2411B	0738404	Apr. 21, 2010	Apr. 20, 2011
Anritsu Power Meter	ML2495A	0842014	Apr. 21, 2010	Apr. 20, 2011

- Note:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Measurement Bandwidth of ML2495A is 65MHz greater than 6dB bandwidth of emission.


4.4.3 TEST PROCEDURES

A power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP

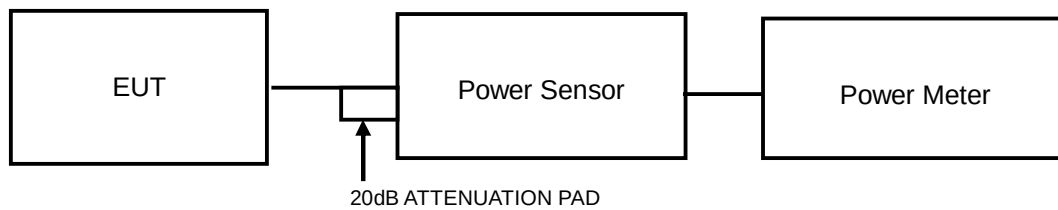

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6

**A D T**

4.4.7 TEST RESULTS

TEST MODE A: 802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK OUTPUT POWER (dBm)	PEAK OUTPUT POWER (mW)	PEAK OUTPUT POWER (dBm)	PASS / FAIL
1	2412	17.8	60.3	30	PASS
6	2437	18.2	66.1	30	PASS
11	2462	18.0	63.1	30	PASS

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK OUTPUT POWER (dBm)	PEAK OUTPUT POWER (mW)	PEAK OUTPUT POWER (dBm)	PASS / FAIL
1	2412	19.6	91.2	30	PASS
6	2437	20.8	120.2	30	PASS
11	2462	20.5	112.2	30	PASS

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK OUTPUT POWER (dBm)	PEAK OUTPUT POWER (mW)	PEAK OUTPUT POWER (dBm)	PASS / FAIL
1	2412	19.6	91.2	30	PASS
6	2437	21.2	131.8	30	PASS
11	2462	19.7	93.3	30	PASS



A D T

802.11n (40MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK OUTPUT POWER (dBm)	PEAK OUTPUT POWER (mW)	PEAK OUTPUT POWER (dBm)	PASS / FAIL
1	2422	18.1	64.6	30	PASS
4	2437	21.1	128.8	30	PASS
7	2452	19.1	81.3	30	PASS



A D T

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
R&S SPECTRUM ANALYZER	FSP 40	100036	Apr. 27, 2010	Apr. 26, 2011

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP

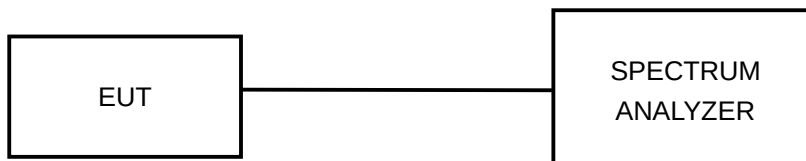

4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6


4.5.7 TEST RESULTS

TEST MODE A:

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
1	2412	-9.76	8	PASS
6	2437	-4.03	8	PASS
11	2462	-9.44	8	PASS


CH 6

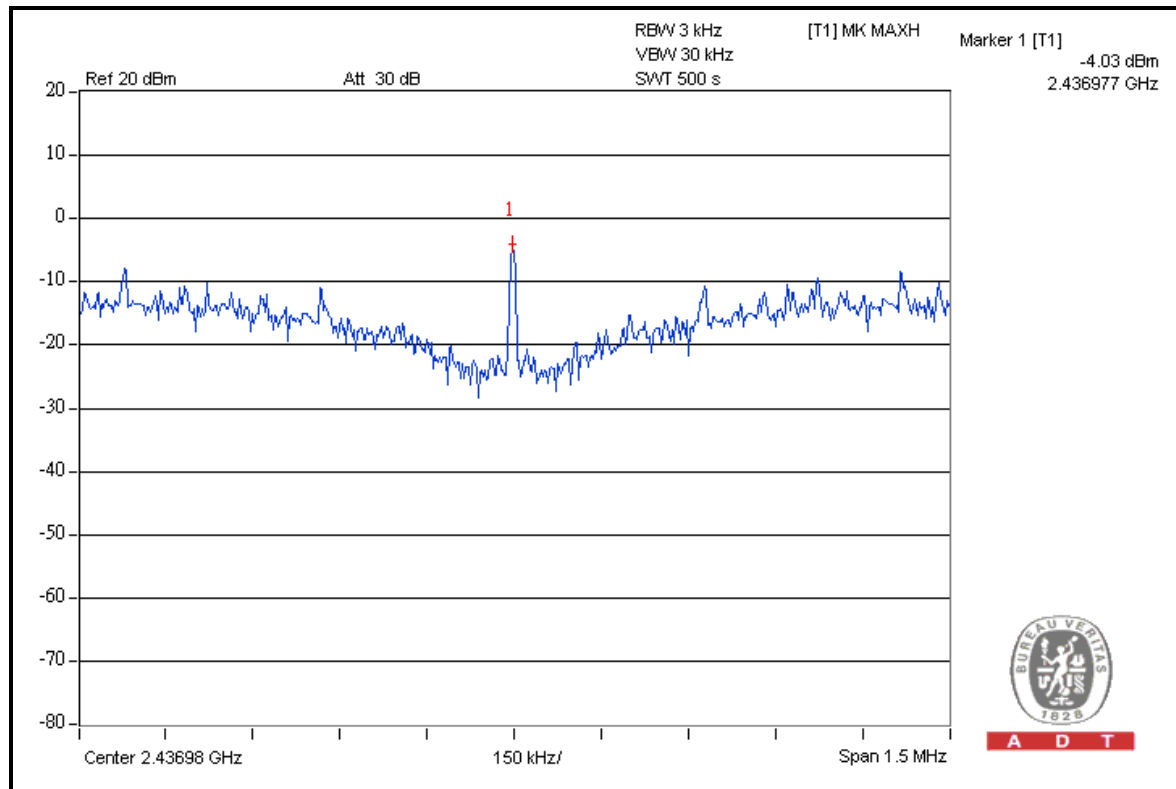

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
1	2412	-16.19	8	PASS
6	2437	-12.41	8	PASS
11	2462	-16.83	8	PASS


CH 6

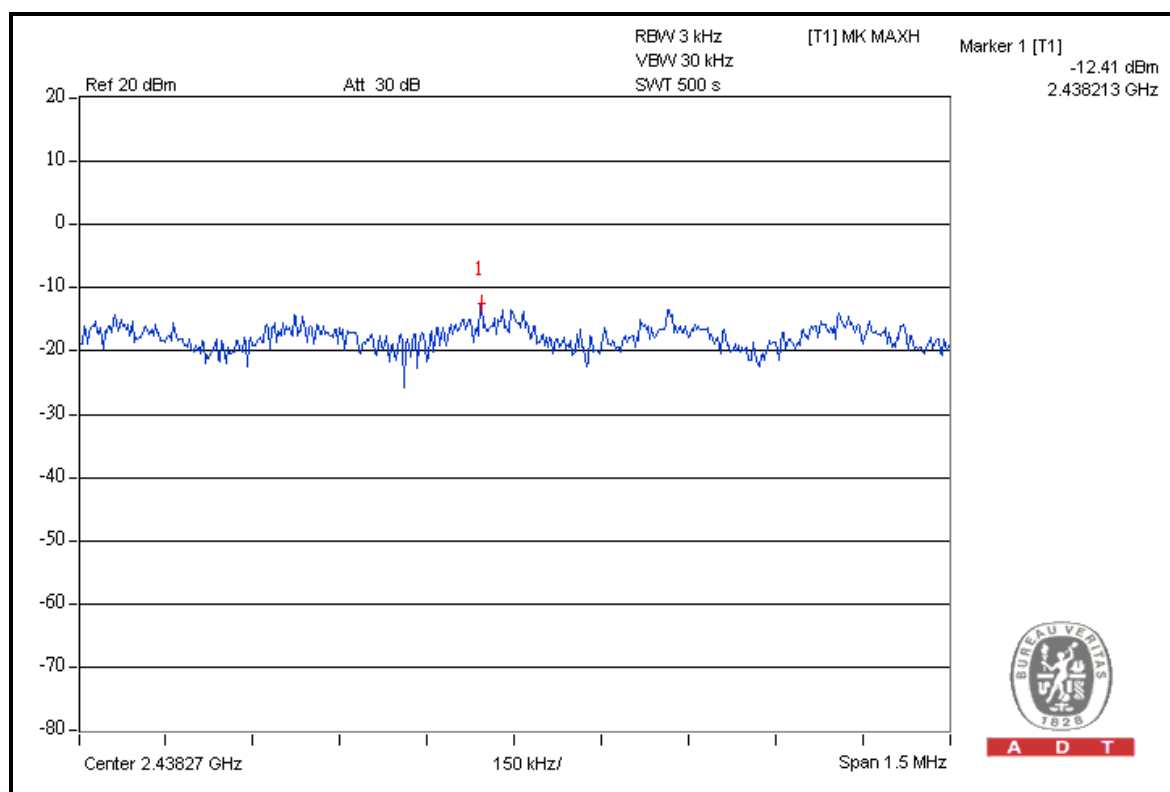

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
1	2412	-16.19	8	PASS
6	2437	-10.84	8	PASS
11	2462	-16.87	8	PASS


CH 6

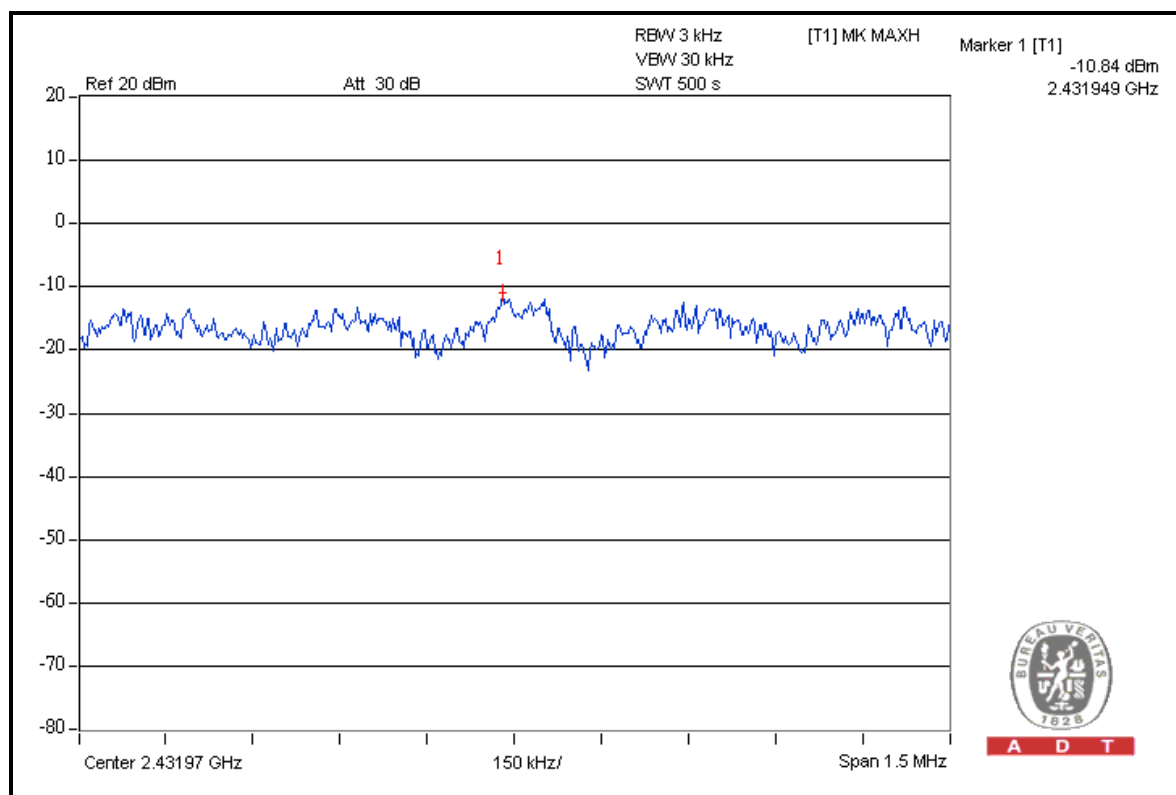

802.11n (40MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
1	2422	-17.74	8	PASS
4	2437	-11.26	8	PASS
7	2452	-17.44	8	PASS

CH 4

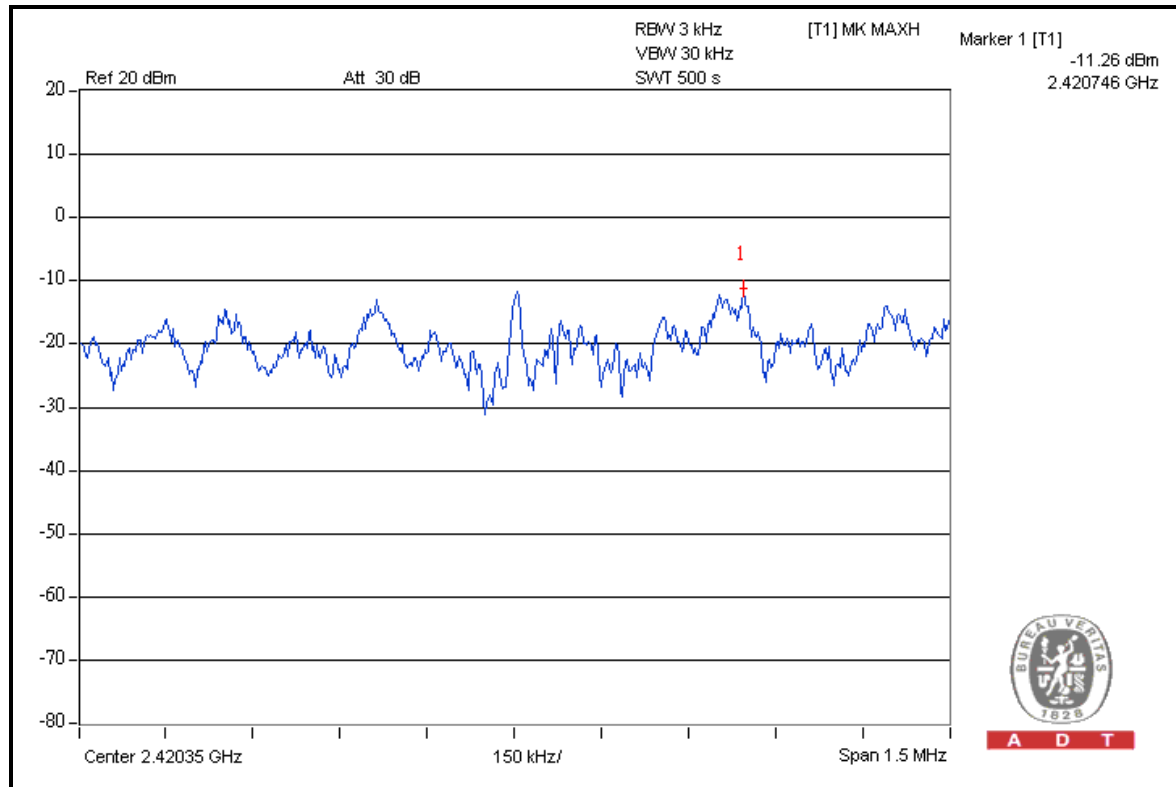



A D T

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

**A D T**

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	CALIBRATED UNTIL
FOR CONDUCTED MEASUREMENT:				
R&S SPECTRUM ANALYZER	FSP 40	100036	Apr. 27, 2010	Apr. 26, 2011
FOR RADIATED MEASUREMENT:				
HP Preamplifier	8447D	2432A03504	May 06, 2010	May 05, 2011
HP Preamplifier	8449B	3008A01924	Jul. 14, 2010	Jul. 13, 2011
HP Preamplifier	8449B	3008A01292	Jul. 14, 2010	Jul. 13, 2011
ROHDE & SCHWARZ TEST RECEIVER	ESU26	100005	Jun. 10, 2010	Jun. 09, 2011
Schwarzbeck Antenna	VULB 9168	137	Apr. 29, 2010	Apr. 28, 2011
Schwarzbeck Antenna	VHBA 9123	480	Apr. 29, 2010	Apr. 28, 2011
ADT. Turn Table	TT100	0306	NA	NA
ADT. Tower	AT100	0306	NA	NA
Software	ADT_Radiated_V7.6.15.9.2	NA	NA	NA
SUHNER RF cable	SF102	CABLE-CH6	Aug. 20, 2010	Aug. 19, 2011
EMCO Horn Antenna	3115	6714	Oct. 26, 2010	Oct. 25, 2011
EMCO Horn Antenna	3115	9312-4192	Apr. 23, 2010	Apr. 22, 2011
Highpass filter Wainwright Instruments	WHK 3.1/18G-10SS	SN 8	NA	NA

- NOTE:** 1. The calibration interval of the above test instruments is 12/24 months. And the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in Chamber No. 6.
4. The Industry Canada Reference No. IC 7450E-6.
5. The FCC Site Registration No. is 447212.

4.6.3 TEST PROCEDURE

FOR CONDUCTED MEASUREMENT:

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100kHz and 300kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW = 100kHz, VBW = 300kHz; Average RBW = 1MHz, VBW = 10Hz) are attached on the following pages.

FOR RADIATED MEASUREMENT:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. Set both RBW and VBW of spectrum analyzer to 100kHz and 300kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW = 100kHz, VBW = 300kHz; Average RBW = 1MHz, VBW = 10Hz) are attached on the following pages.

NOTE: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6

4.6.6 TEST RESULTS

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

TEST MODE A:

802.11b

RESTRICT BAND (2310 ~ 2390 MHz)

FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2412.00 (PK)	109.0	49.2	59.8	74.00
2412.00 (AV)	103.4	54.4	49.0	54.00

RESTRICT BAND (2483.5 ~ 2500 MHz)


FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2462.00 (PK)	109.4	51.5	57.9	74.00
2462.00 (AV)	104.4	58.2	46.2	54.00

NOTE:


1. Delta = Amplitude between the peak of the fundamental and the peak of the band edge emission. Please check following 3 pages.
2. Maximum field strength in restrict band = Fundamental emission – Delta.



A D T

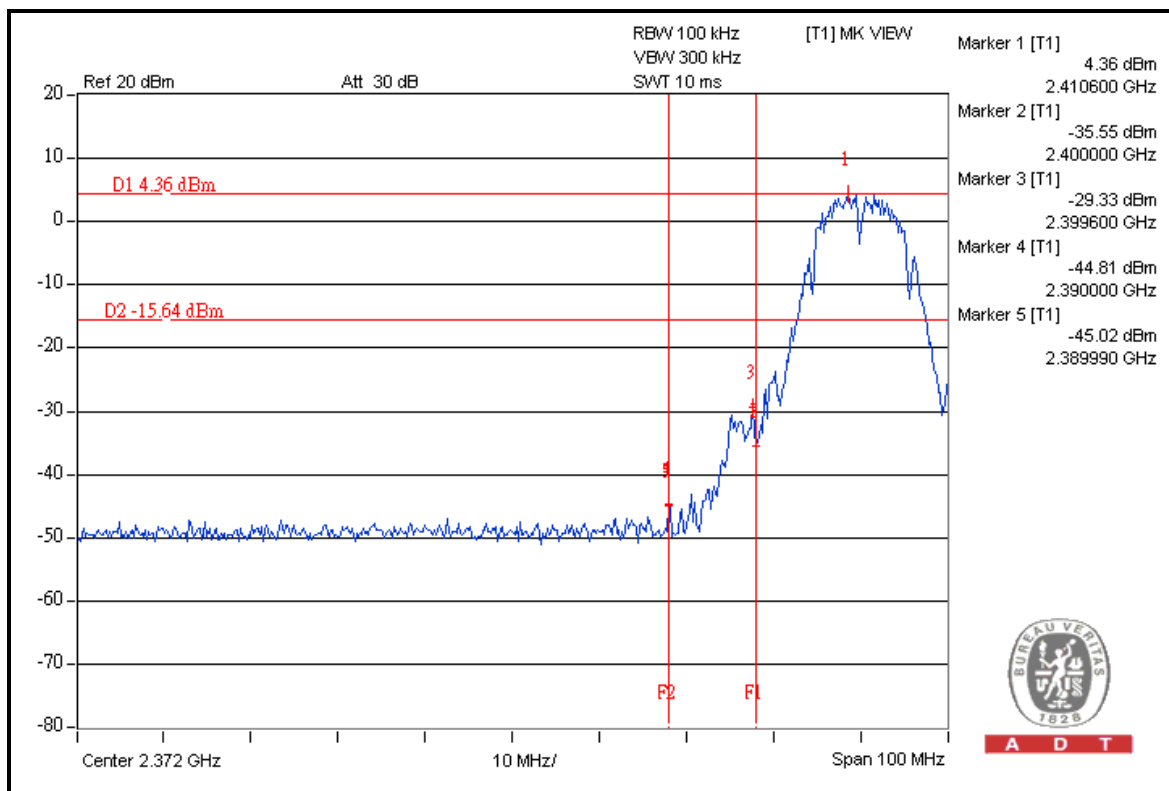



A D T

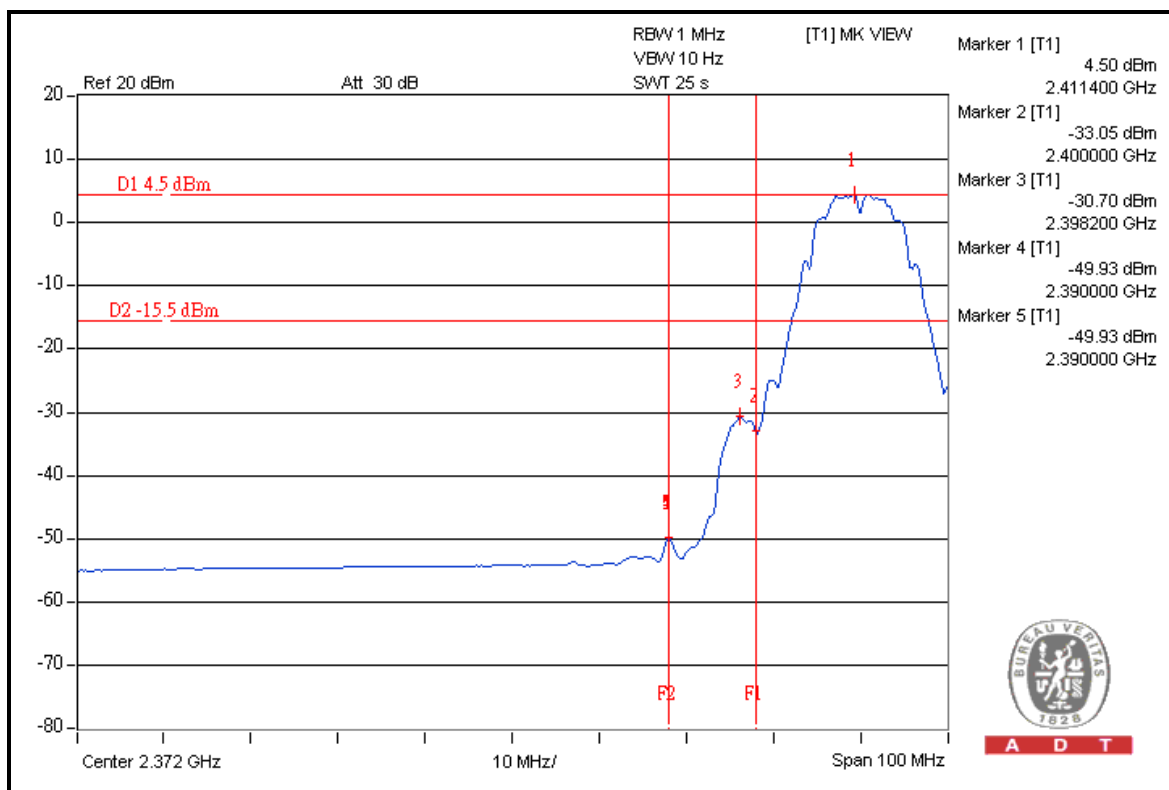

A D T





A D T

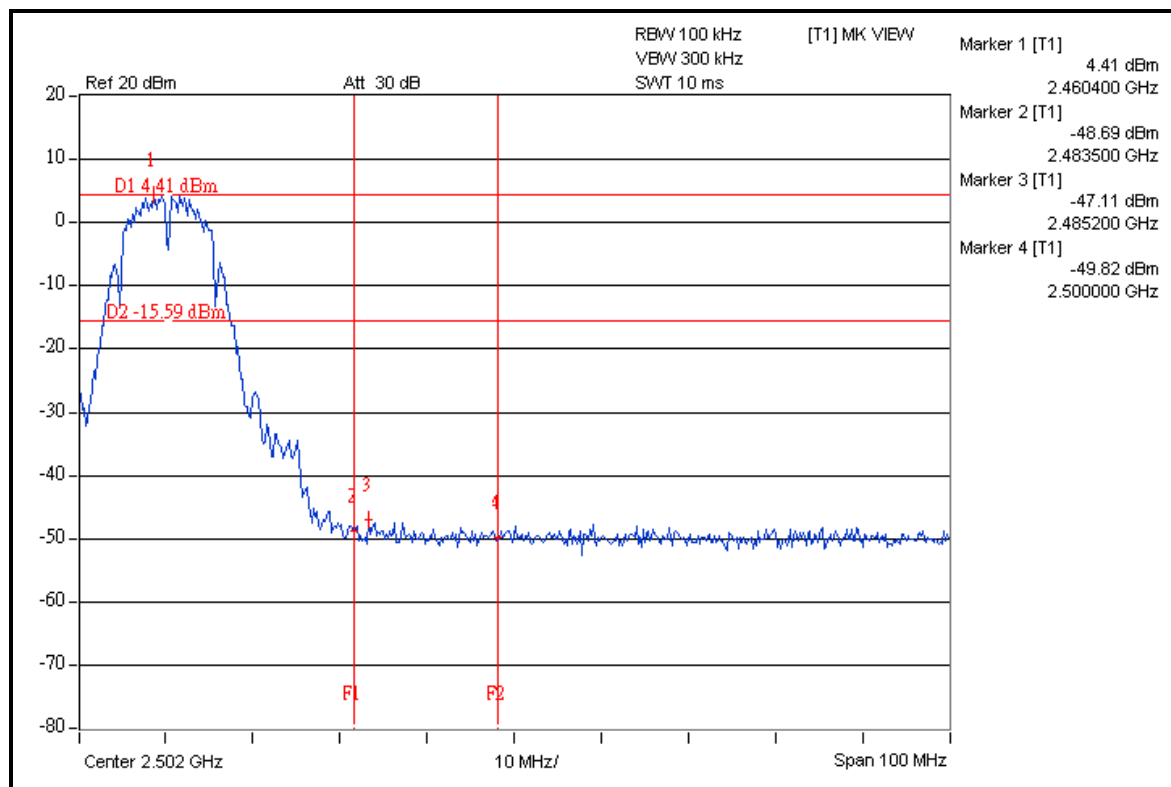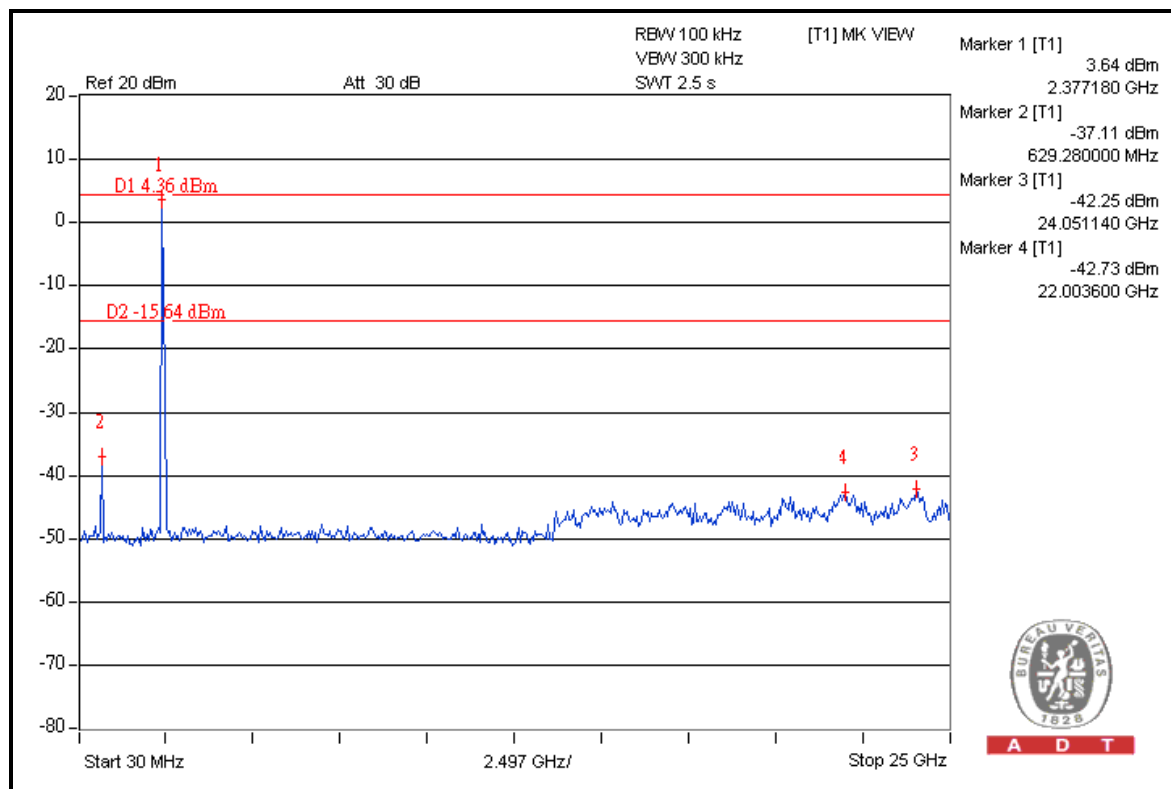



A D T

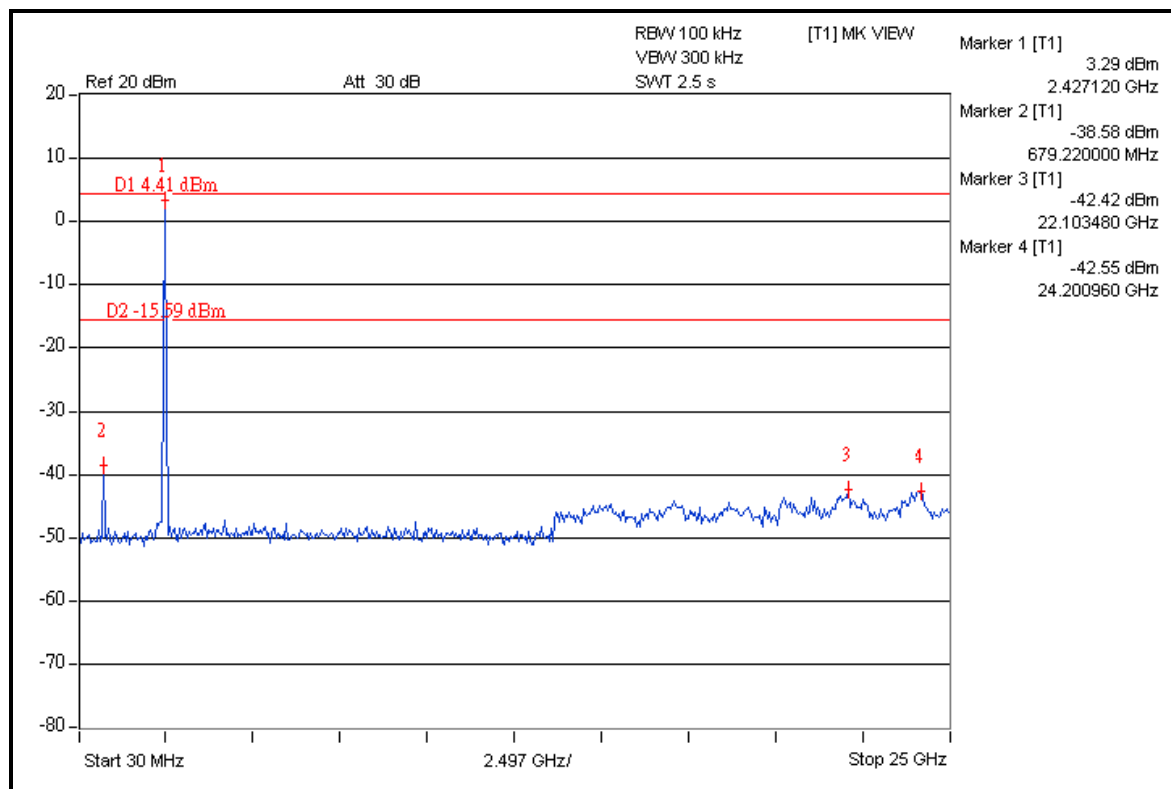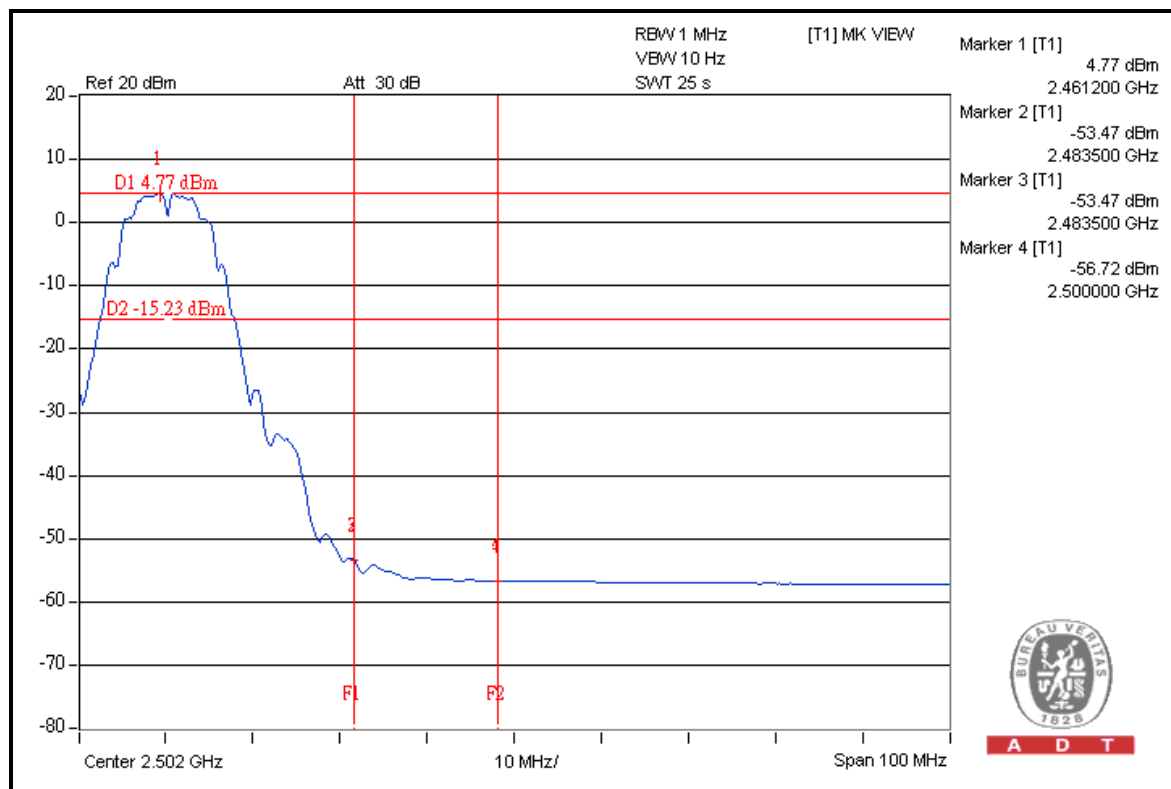

802.11g

RESTRICT BAND (2310 ~ 2390 MHz)

FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2412.00 (PK)	105.0	40.4	64.6	74.00
2412.00 (AV)	94.7	42.8	51.9	54.00

RESTRICT BAND (2483.5 ~ 2500 MHz)



FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2462.00 (PK)	107.9	40.6	67.3	74.00
2462.00 (AV)	97.9	44.8	53.1	54.00

NOTE:

1. Delta = Amplitude between the peak of the fundamental and the peak of the band edge emission. Please check following 3 pages.
2. Maximum field strength in restrict band = Fundamental emission – Delta.




A D T

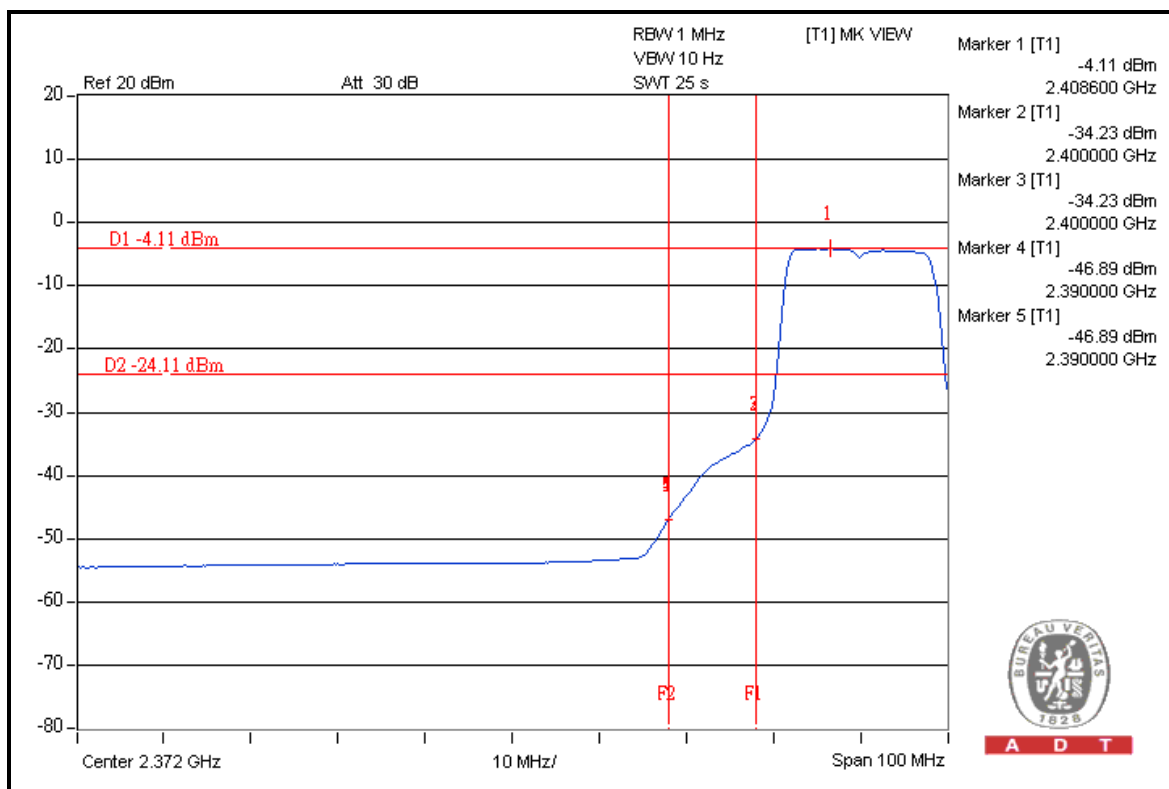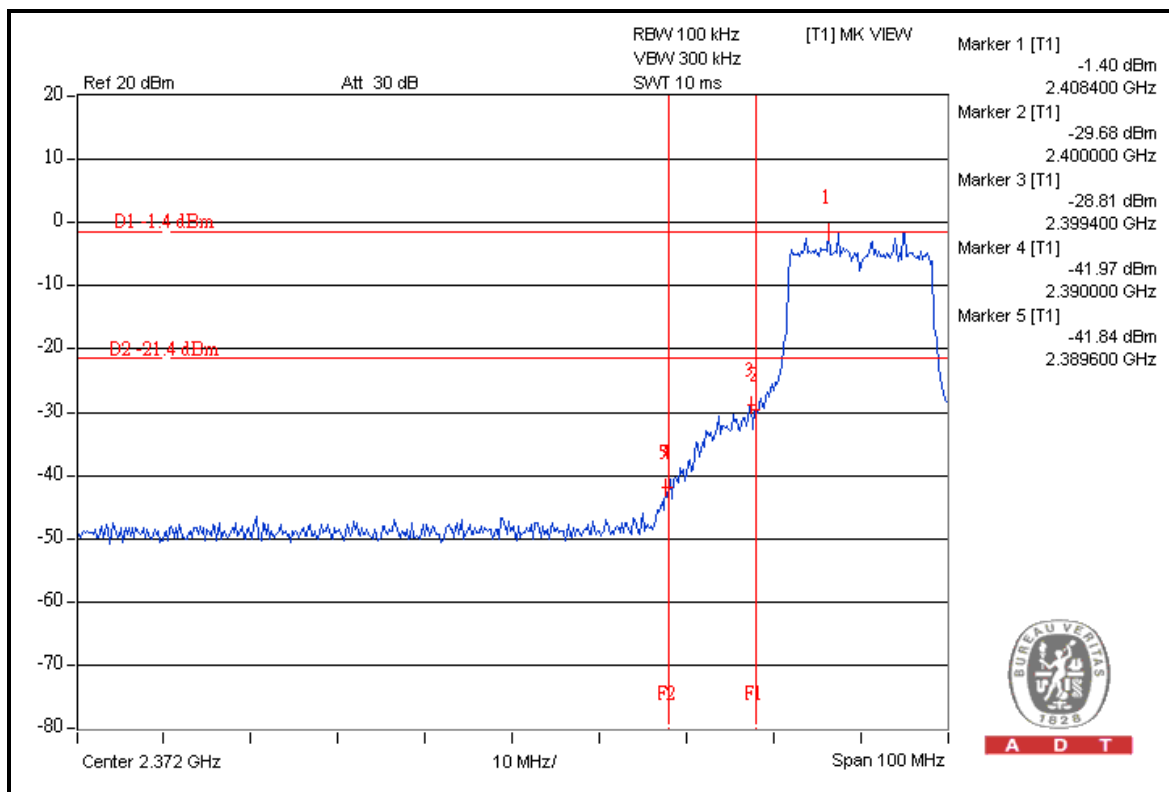




A D T

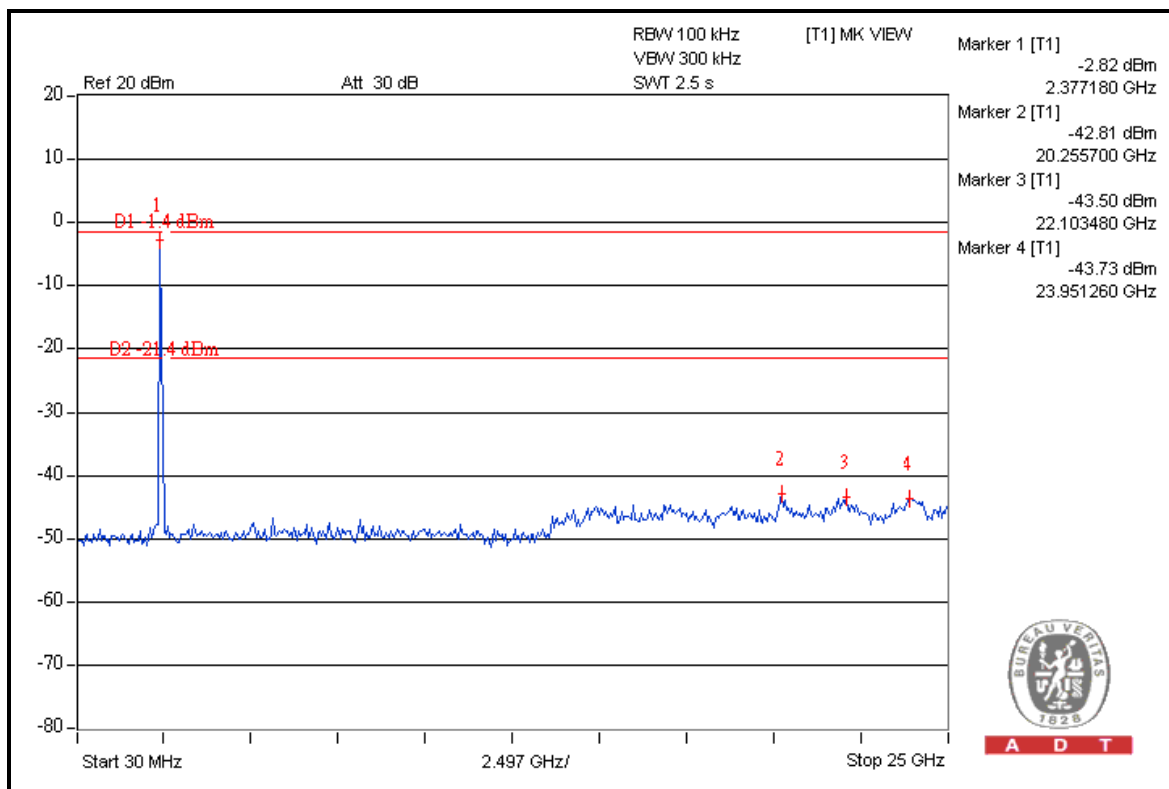



A D T

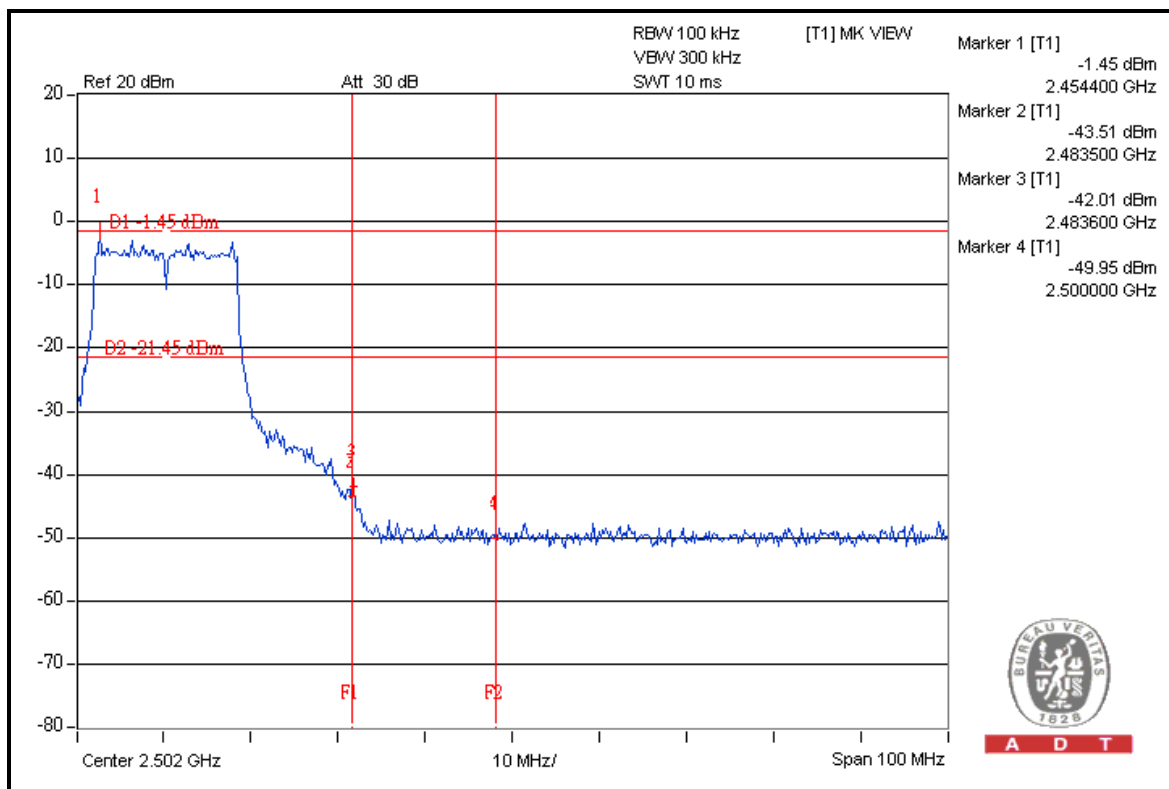

A D T



A D T

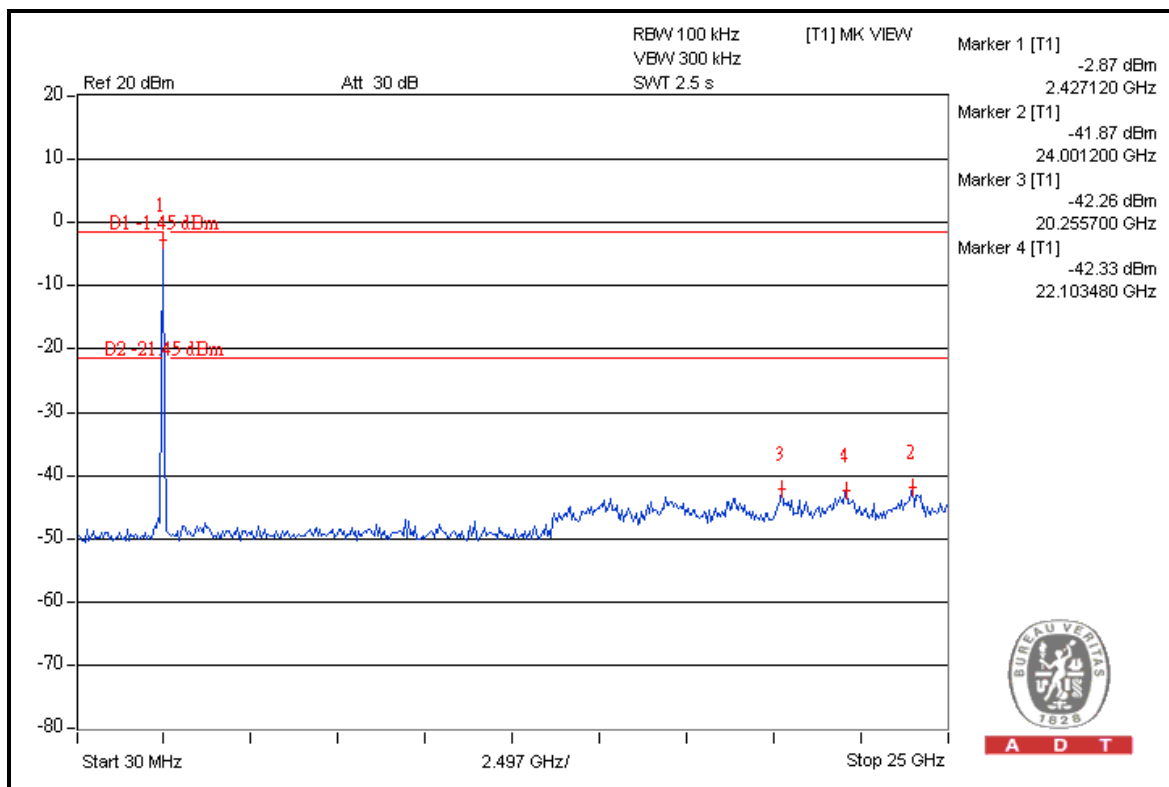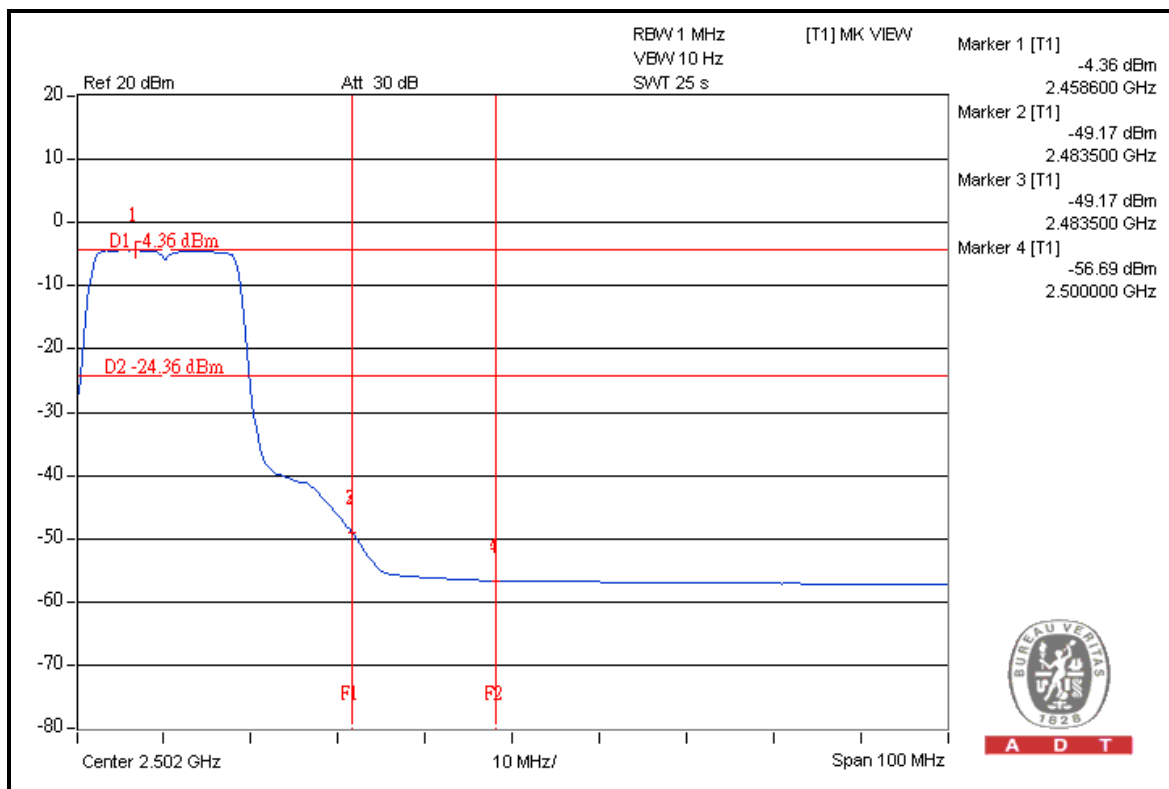

**A D T****802.11n (20MHz)****RESTRICT BAND (2310 ~ 2390 MHz)**

FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2412.00 (PK)	104.8	39.4	65.4	74.00
2412.00 (AV)	94.3	41.6	52.7	54.00

RESTRICT BAND (2483.5 ~ 2500 MHz)


FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2462.00 (PK)	107.6	43.2	64.4	74.00
2462.00 (AV)	97.3	45.2	52.1	54.00

NOTE:


1. Delta = Amplitude between the peak of the fundamental and the peak of the band edge emission. Please check following 3 pages.
2. Maximum field strength in restrict band = Fundamental emission – Delta.



A D T

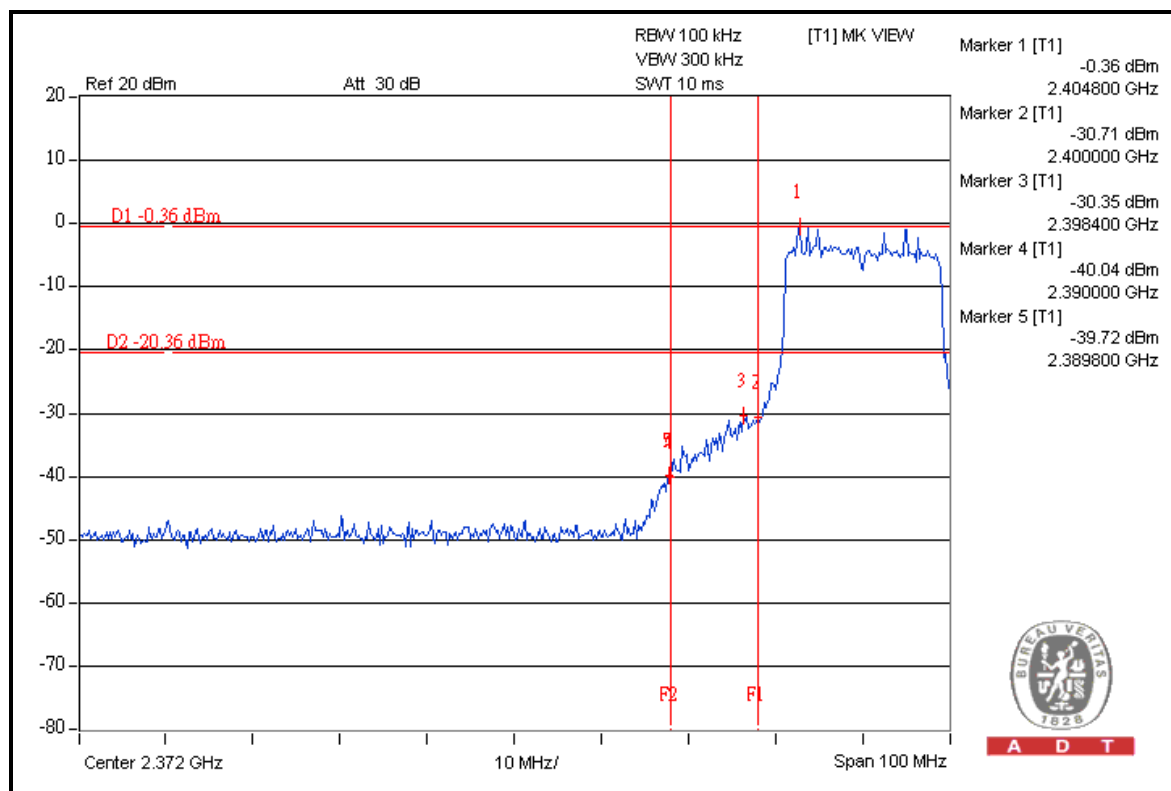


A D T

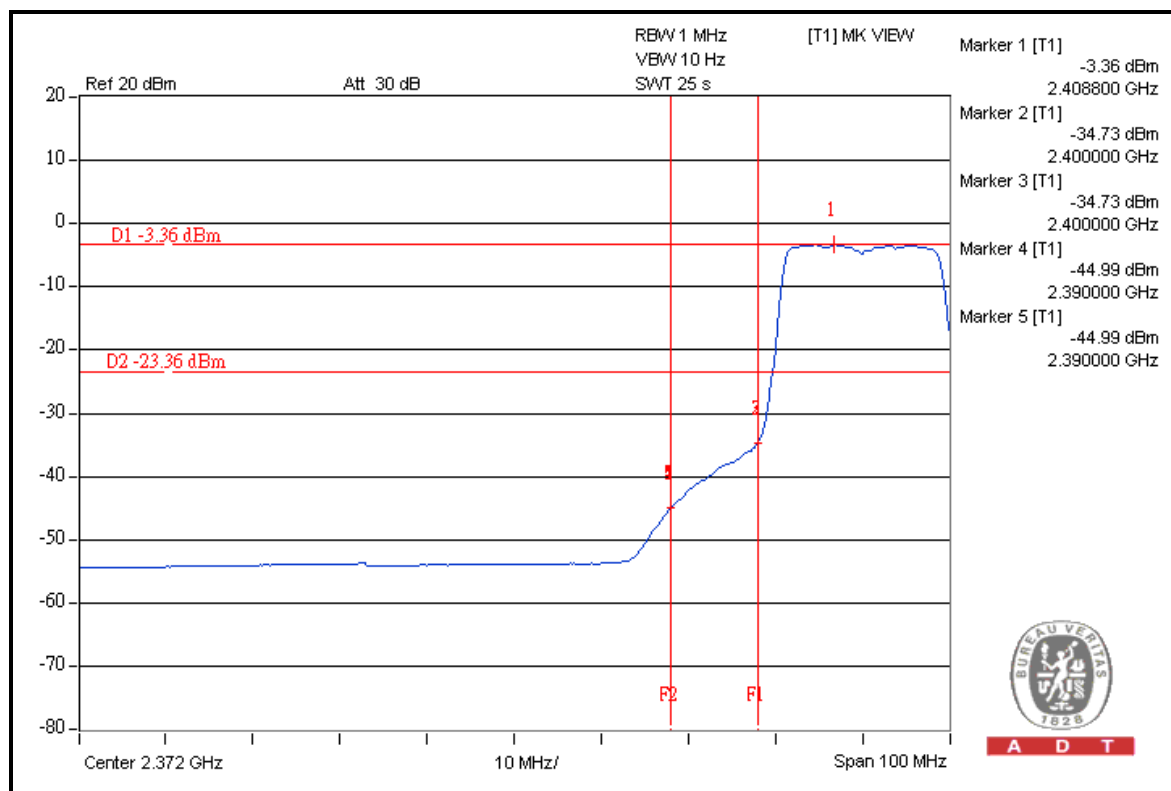


A D T



A D T

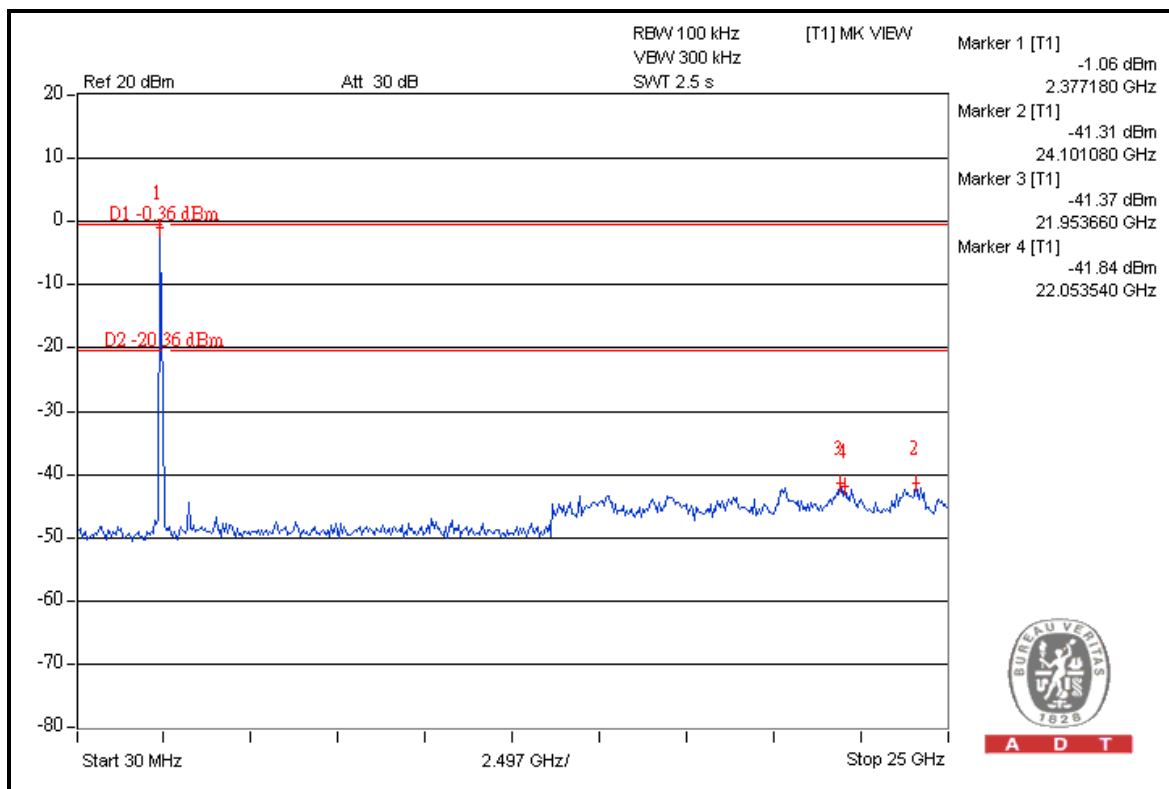



A D T

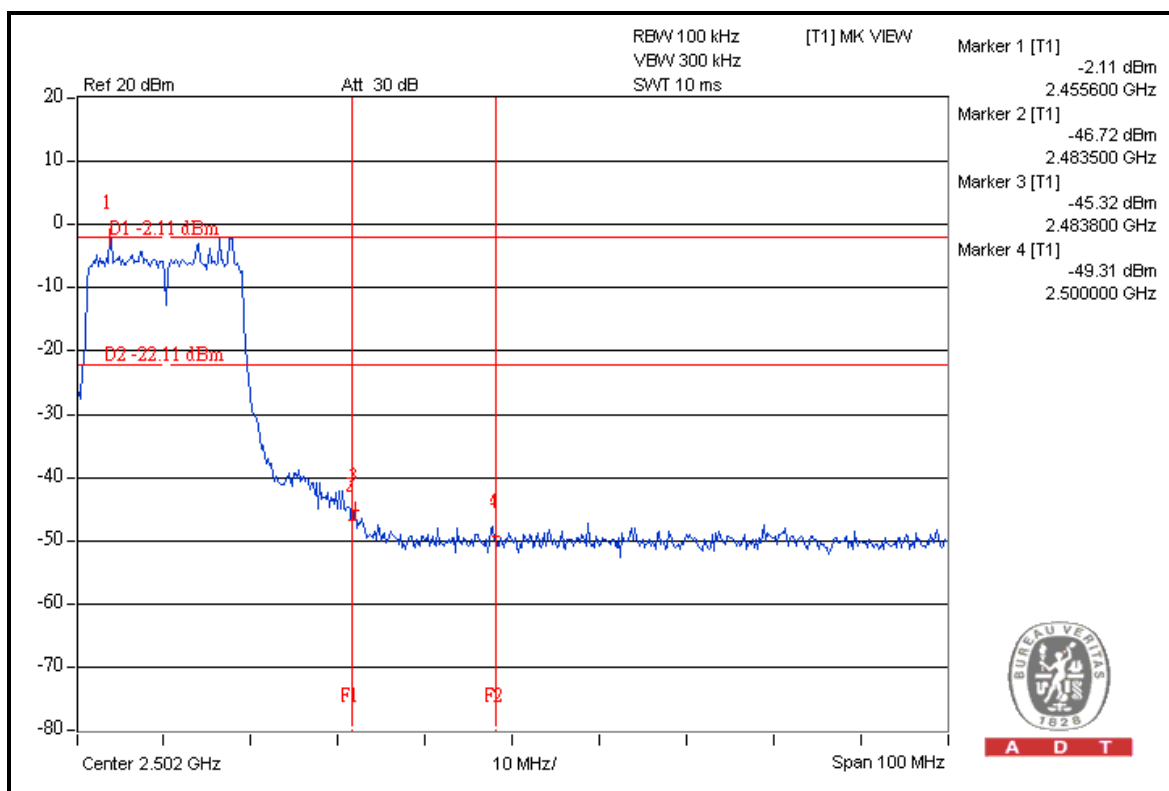

A D T



A D T

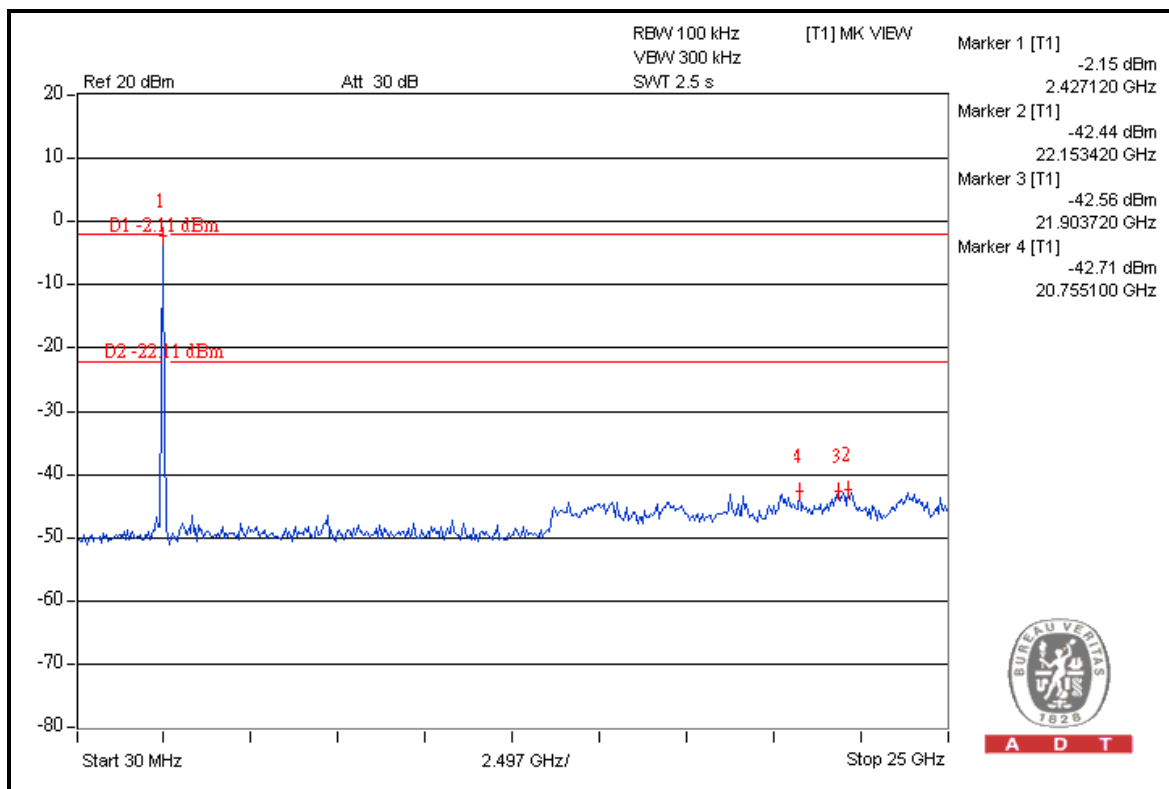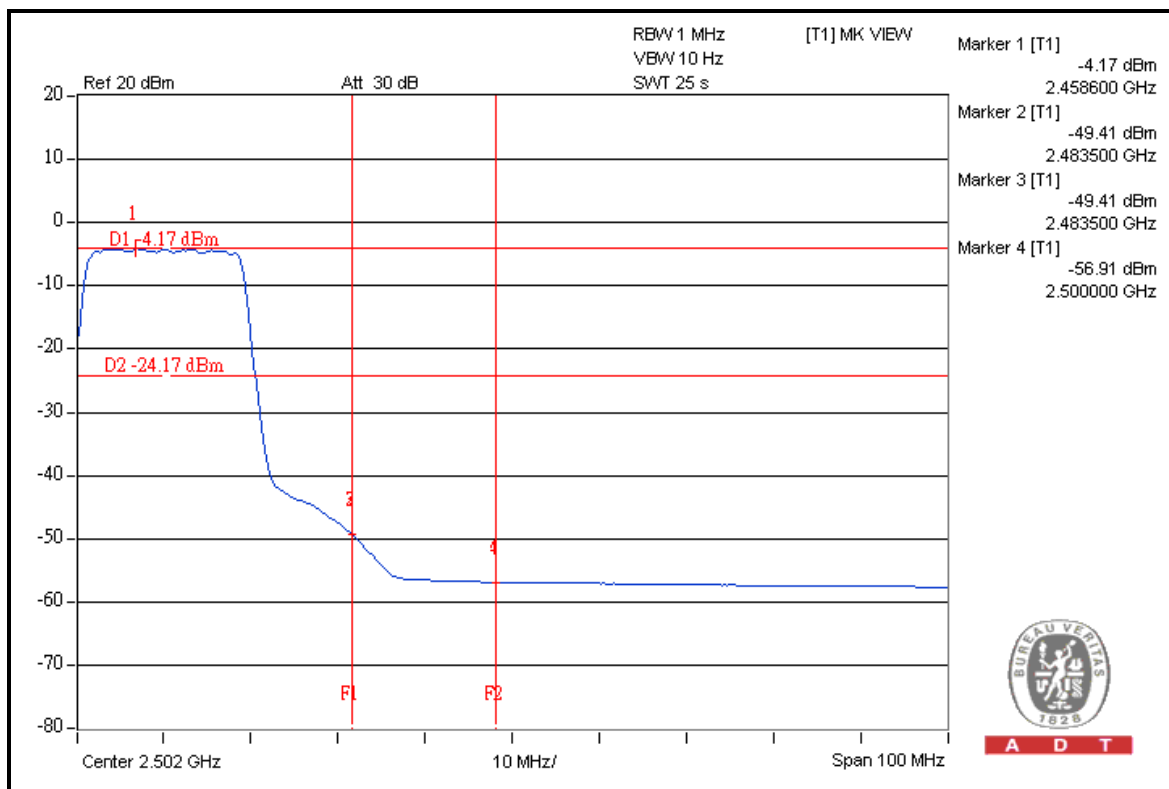

**A D T****802.11n (40MHz)****RESTRICT BAND (2310 ~ 2390 MHz)**

FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2422.00 (PK)	100.6	34.8	65.8	74.00
2422.00 (AV)	90.4	36.5	53.9	54.00

RESTRICT BAND (2483.5 ~ 2500 MHz)



FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2452.00 (PK)	101.9	36.2	65.7	74.00
2452.00 (AV)	91.8	37.9	53.9	54.00

NOTE:

1. Delta = Amplitude between the peak of the fundamental and the peak of the band edge emission. Please check following 3 pages.
2. Maximum field strength in restrict band = Fundamental emission – Delta.





A D T

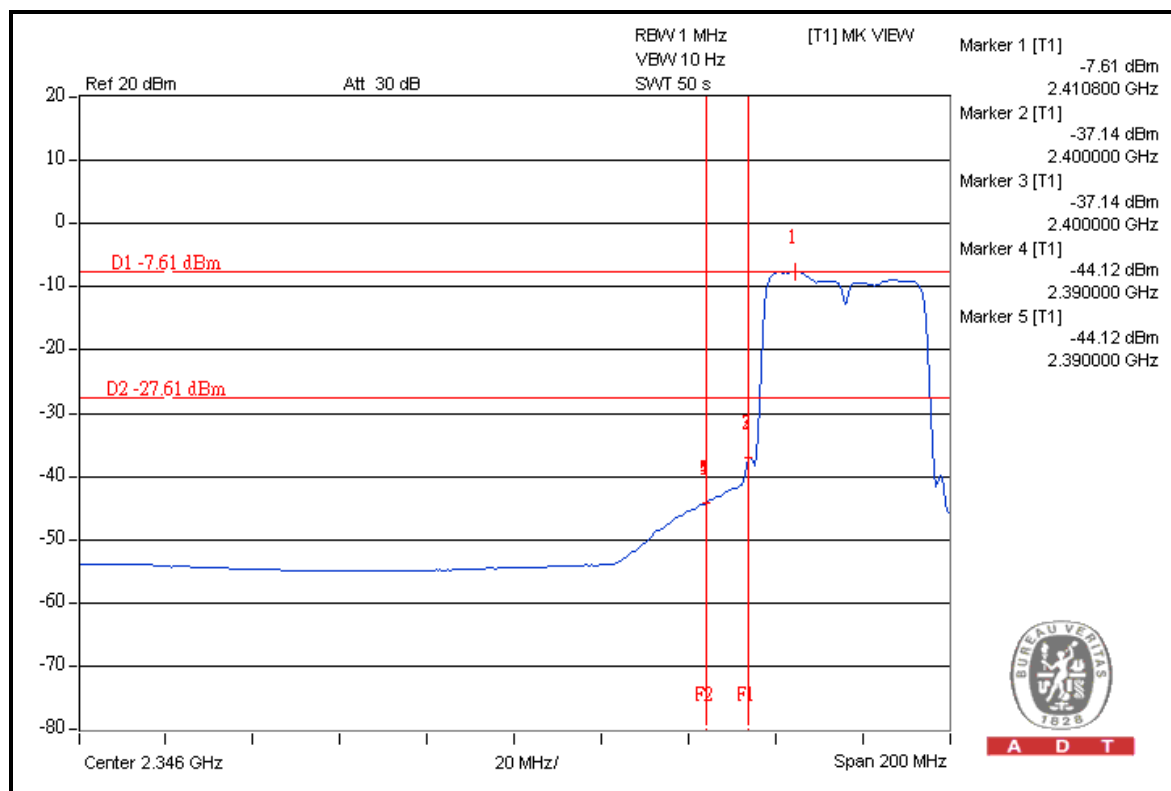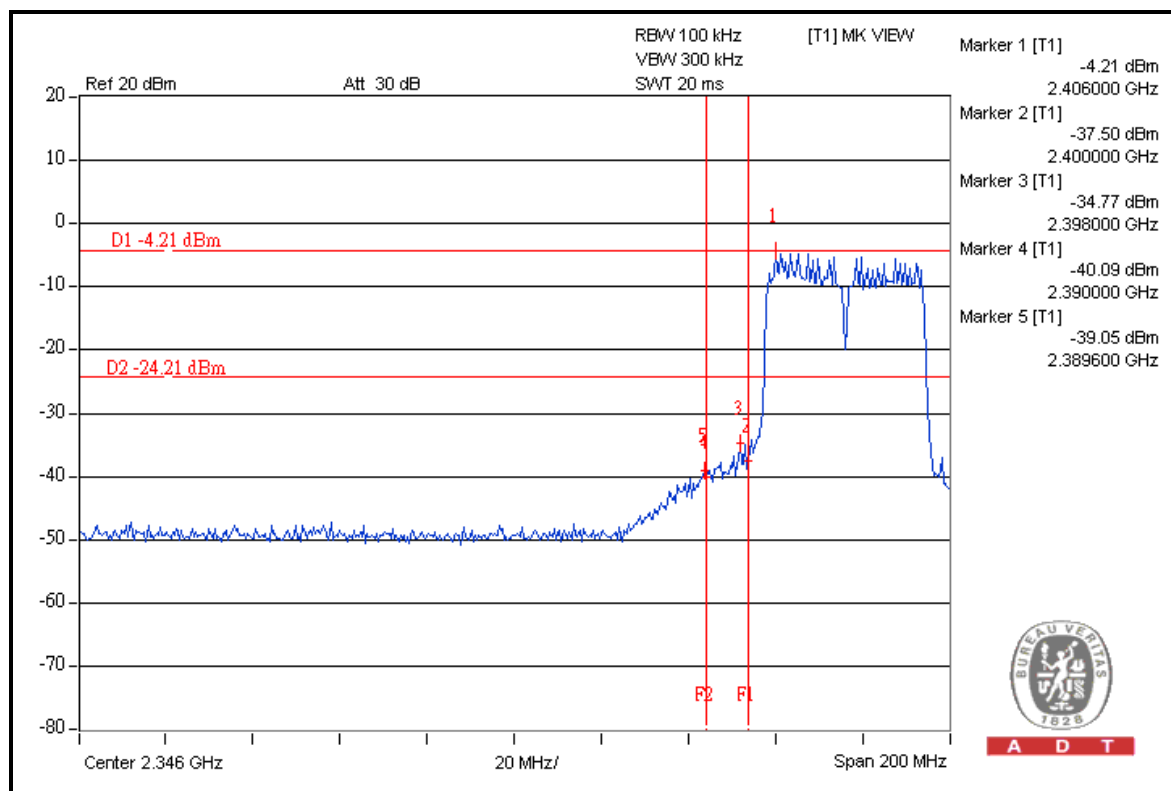




A D T

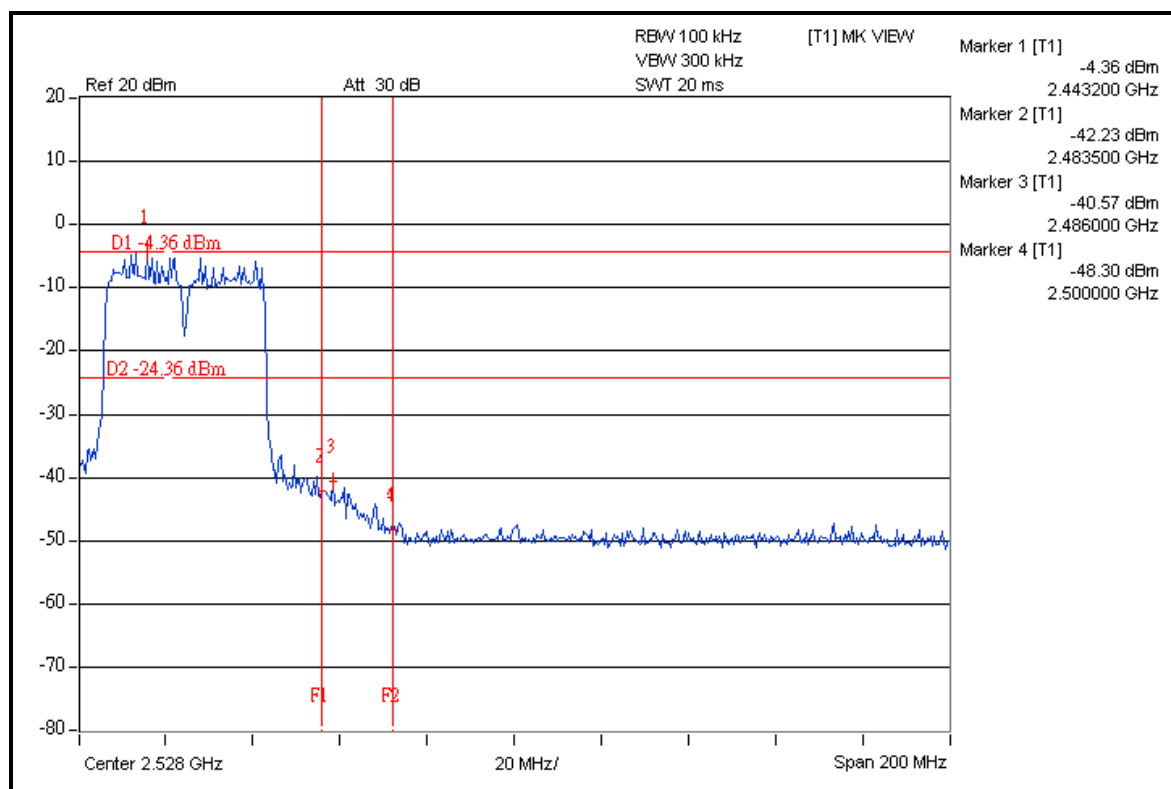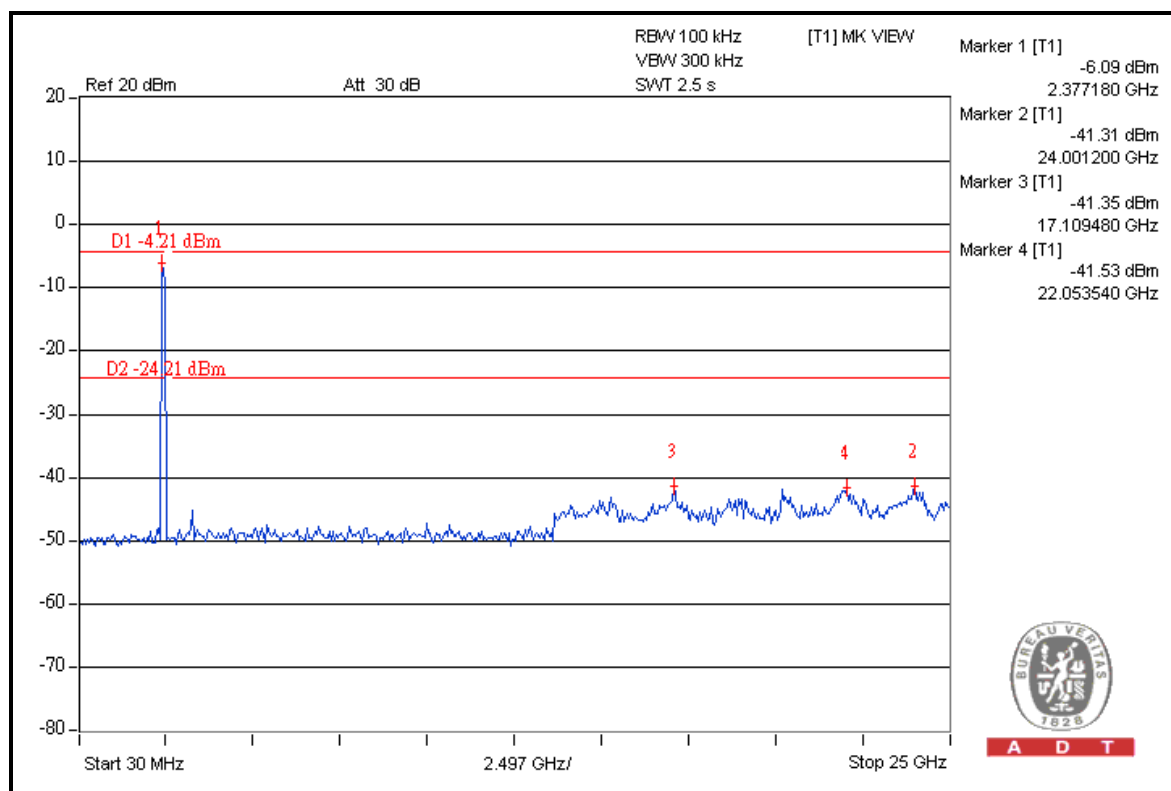




A D T

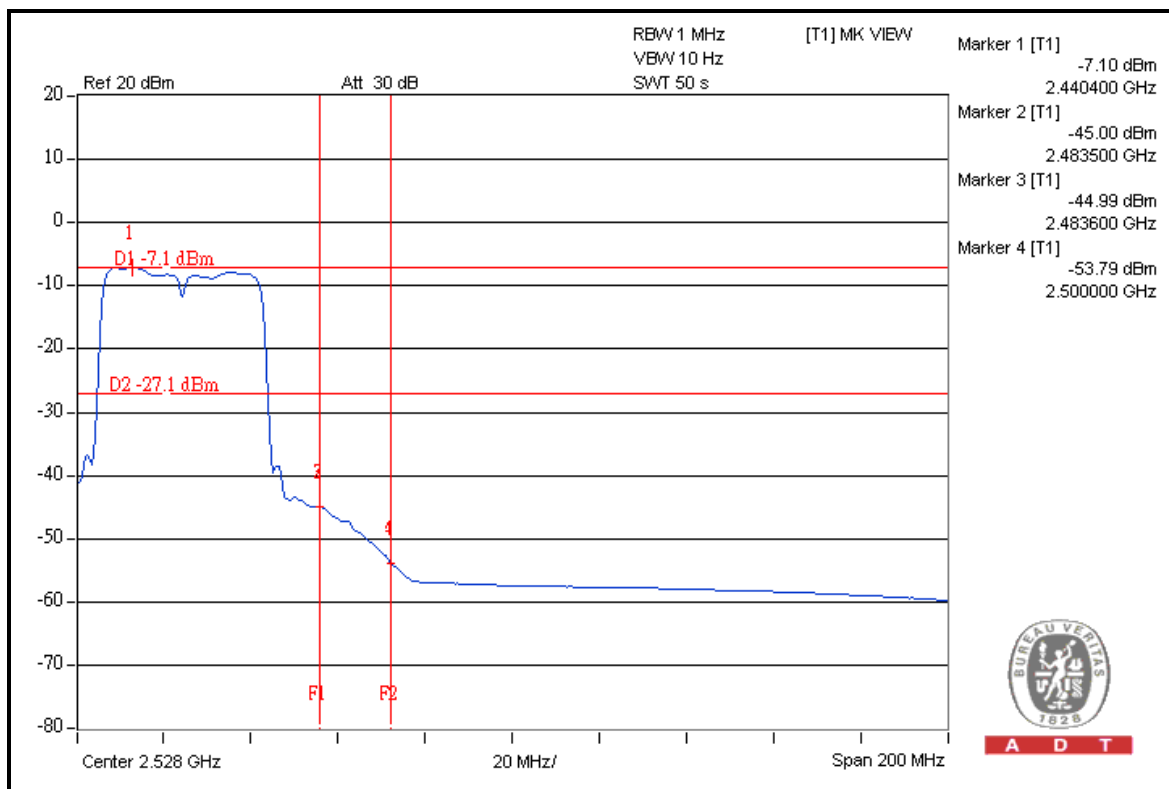

A D T

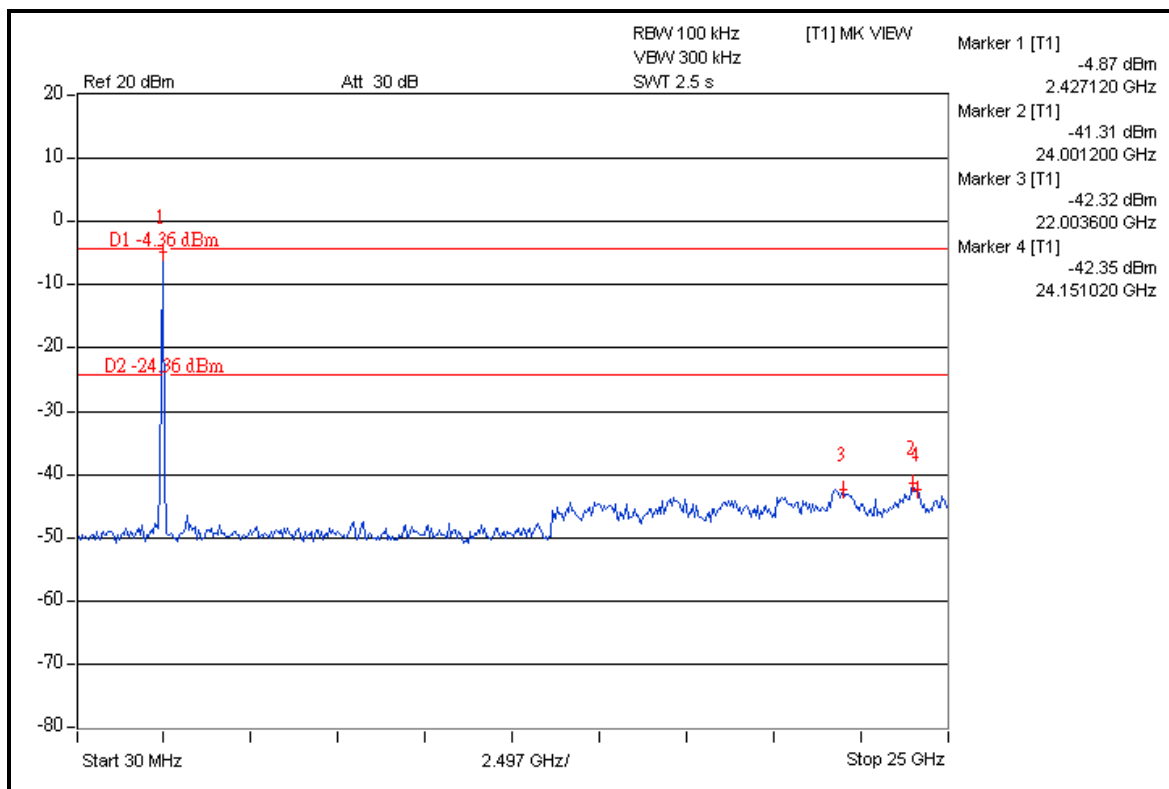



A D T

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



A D T

6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.
If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety / Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



A D T

7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---