

FCC TEST REPORT

(Part 24)

REPORT NO.: RF110617D07-4

MODEL NO.: PCG-4121DL, PCG-4121EL

FCC ID: AK8PCG4121DL

RECEIVED: Jun. 17, 2011

TESTED: Jul. 13 ~ Jul. 17, 2011

ISSUED: Jul. 20, 2011

APPLICANT: Sony Corporation

ADDRESS: 1-7-1 Konan Minato-Ku, Tokyo, 108-0075 Japan

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou
Hsiang, Taipei Hsien 244, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 93 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 CERTIFICATION	5
2 SUMMARY OF TEST RESULTS	6
2.1 MEASUREMENT UNCERTAINTY	6
3 GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 DESCRIPTION OF TEST MODES	10
3.2.1 CONFIGURATION OF SYSTEM UNDER TEST	11
3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	12
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	18
3.4 DESCRIPTION OF SUPPORT UNITS	18
4 TEST TYPES AND RESULTS	19
4.1 OUTPUT POWER MEASUREMENT	19
4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT	19
4.1.2 TEST INSTRUMENTS	20
4.1.3 TEST PROCEDURES	21
4.1.4 TEST SETUP	22
4.1.5 EUT OPERATING CONDITIONS	22
4.1.6 TEST RESULTS	23
4.2 FREQUENCY STABILITY MEASUREMENT	31
4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT	31
4.2.2 TEST INSTRUMENTS	31
4.2.3 TEST PROCEDURE	32
4.2.4 TEST SETUP	32
4.2.5 TEST RESULTS	33
4.3 OCCUPIED BANDWIDTH MEASUREMENT	36
4.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT	36
4.3.2 TEST INSTRUMENTS	36
4.3.3 TEST SETUP	36
4.3.4 TEST PROCEDURES	37
4.3.5 EUT OPERATING CONDITION	37
4.3.6 TEST RESULTS	38
4.4 BAND EDGE MEASUREMENT	46
4.4.1 LIMITS OF BAND EDGE MEASUREMENT	46
4.4.2 TEST INSTRUMENTS	46
4.4.3 TEST SETUP	46
4.4.4 TEST PROCEDURES	47
4.4.5 EUT OPERATING CONDITION	47
4.4.6 TEST RESULTS	48
4.5 CONDUCTED SPURIOUS EMISSIONS	56
4.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	56
4.5.2 TEST INSTRUMENTS	56
4.5.3 TEST PROCEDURE	57
4.5.4 TEST SETUP	57
4.5.5 EUT OPERATING CONDITIONS	57
4.5.6 TEST RESULTS	58
4.6 RADIATED EMISSION MEASUREMENT (BELOW 1GHz)	73
4.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT	73



A D T

4.6.2	TEST INSTRUMENTS.....	73
4.6.3	TEST PROCEDURES	74
4.6.4	DEVIATION FROM TEST STANDARD	74
4.6.5	TEST SETUP.....	75
4.6.6	EUT OPERATING CONDITIONS	75
4.6.7	TEST RESULTS	76
4.7	RADIATED EMISSION MEASUREMENT (ABOVE 1GHz)	79
4.7.1	LIMITS OF RADIATED EMISSION MEASUREMENT	79
4.7.2	TEST INSTRUMENTS.....	79
4.7.3	TEST PROCEDURES	80
4.7.4	DEVIATION FROM TEST STANDARD	80
4.7.5	TEST SETUP.....	81
4.7.6	EUT OPERATING CONDITIONS	81
4.7.7	TEST RESULTS	82
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	91
6	INFORMATION ON THE TESTING LABORATORIES	92
7	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	93



RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
Original release	N/A	Jul. 20, 2011

1 CERTIFICATION

PRODUCT: Personal Computer

MODEL NO.: PCG-4121DL, PCG-4121EL

BRAND: SONY

APPLICANT: Sony Corporation

TEST SAMPLE: ENGINEERING SAMPLE

TESTED : Jul. 13 ~ Jul. 17, 2011

TEST STANDARDS: FCC Part 24, Subpart E
ANSI C63.4-2003

The above equipment (model: PCG-4121DL) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Andrea Hsia , DATE : Jul. 20, 2011
Andrea Hsia / Specialist

APPROVED BY : Gary Chang , DATE : Jul. 20, 2011
Gary Chang / Assistant Manager

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 24 & Part 2 / IC RSS-133			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
2.1046 24.232	Maximum Peak Output Power Limit: max. 2 watts e.i.r.p peak power	PASS	Meet the requirement of limit. Minimum passing margin is 29.6dBm at 1850.2MHz.
2.1055 24.235	Frequency Stability AFC Freq. Error vs. Voltage AFC Freq. Error vs. Temperature Limit: max. ± 2.5 ppm	PASS	Meet the requirement of limit.
2.1049 24.238(b)	Occupied Bandwidth	PASS	Meet the requirement of limit.
24.238(b)	Band Edge Measurements	PASS	Meet the requirement of limit.
2.1051 24.238	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
2.1053 24.238	Radiated Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -20.5dB at 3815.2MHz.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.34 dB
	200MHz ~1000MHz	3.35 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Personal Computer
MODEL NO.	PCG-4121DL, PCG-4121EL
FCC ID	AK8PCG4121DL
NOMINAL VOLTAGE	11.1Vdc (Li-Lon battery) 19.5Vdc (Adapter) 5Vdc (Adapter)
OPERATION TEMPERATURE RANGE	-20°C ~ 60°C
MODULATION TYPE	GMSK, 8PSK (for GPRS, E-GPRS) QPSK, OQPSK, HPSK (for CDMA) BPSK (for WCDMA)
FREQUENCY RANGE	1850.2MHz ~ 1909.8MHz (for GPRS, E-GPRS) 1851.25MHz ~ 1908.75MHz (for CDMA) 1852.4MHz ~ 1907.6MHz (for WCDMA)
NUMBER OF CHANNEL	299 (for GPRS, E-GPRS) 1151 (for CDMA) 277 (for WCDMA)
MULTI-SLOTS CLASS	10
WCDMA RELEASE VERSION	6
MAX. EIRP POWER	GPRS Mode: 29.6dBm (0.9120Watts) E-GPRS Mode: 25.5dBm (0.3548Watts) CDMA Mode: 23.8dBm (0.2399Watts) WCDMA Mode: 26.6dBm (0.4571Watts)
ANTENNA TYPE	Refer to note as below
MAX. ANTENNA GAIN	Refer to note as below
I/O PORTS	Refer to user's manual
DATA CABLE	NA
ACCESSORY DEVICES	Adapter, Battery

NOTE:

1. All models are electrically identical, which are identical to each other except for the Top cover less of ODD differences only, as the following:

BRAND	MODELNAME	TOPCOVER LESS OF ODD
SONY	PCG-4121DL	Without
SONY	PCG-4121EL	With

**During the test, the model no.: PCG-4121DL was the worst case and only its test data was recorded in this report.

2. The case of EUT has two kinds of material: MG & CFRP. During the test, the MG material case was the worst case and only its test data was recorded in this report.

3. The following antennas are used in this EUT.

Type	Connector	Manufacture	Gain	
			MG material case	CFRP material case
PIFA	Hirose U.FL	ACON	1.76dBi	1.39dBi

4. The EUT is a Personal Computer. The test data are separated into following test reports:

Function	Test Standard	Reference Report
802.11abgn Mini-PCI Card+ Bluetooth module (Brand: Intel, Model: 62230ANHMW)	802.11a/n (5180~5320MHz, 5500~5700MHz) FCC Part 15, Subpart E (Section 15.407)	RF110617D07
		RF110617D07-5
	802.11a/n (For DFS report) (5260~5320MHz, 5500~5700MHz) FCC Part 15, Subpart C (Section 15.247)	RF110617D07-1
		RF110617D07-2
		RF110617D07-3
GSM 850 / CDMA 850 / WCDMA 850 (Brand: Huawei, Model: Gobi3000)	FCC Part 22	RF110617D07-3
PCS 1900 / CDMA 1900 / WCDMA 1900 (Brand: Huawei, Model: Gobi3000)	FCC Part 24	RF110617D07-4

5. The EUT were powered by the following adapters & battery:

Power Source	Brand	Model No.	Spec.
AC adapter 1	NJRC	VGP-AC19V31	AC Input: 100-240V, 1.5A, 50-60Hz DC Output: 19.5V, 4.7A Non-shielded AC 2Pin (0.8m) Non-shielded DC (1.8m)
AC adapter 2	NJRC	VGP-AC19V32	AC Input: 100-240V, 1.5A, 50-60Hz DC Output: 19.5V, 4.7A Non-shielded AC 3Pin (0.8m) Non-shielded DC (1.8m)
AC adapter 3	Liteon	VGP-AC19V36	AC Input: 100-240V, 1.5A, 50/60Hz DC Output: 19.5V, 4.7A Non-shielded AC 3Pin (0.8m) Non-shielded DC (1.8m)
AC adapter 4	Delta	VGP-AC19V42	AC Input: 100-240V, 1.5A 50-60Hz DC Output: 19.5V, 4.7A Non-shielded AC 3Pin (0.8m) Non-shielded DC (1.8m)
AC adapter 5	Delta	VGP-AC19V51	AC Input: 100-240V, 1.5A, 50/60Hz DC Output 1: 19.5Vdc 4.7A DC Output 2: 5Vdc 1.5A DC Output 3: 5Vdc 1.5A Non-shielded AC 3Pin (0.8m) Non-shielded DC (1.8m)
Battery	Sony	VGP-BPS24	11.1V, 4400mAh

6. The communicated functions of EUT listed as below:

		GSM (850&1900MHz)	CDMA (850&1900MHz)	WCDMA (850&1900MHz)	With 802.11a/b/g/n + Bluetooth + GPS functions
2G	GPRS	√			
	EDGE	√			
3G	CDMA		√		
	1*EVDO		√		
	WCDMA			√	
	Release 5 HSDPA			√	
	Release 6 HSUPA			√	

7. The EUT has no voice function.

8. Speed mode worst enable during the test

9. Hardware version: P4.

10. Software version: D3200-STSVN-1576 (for CDMA)

D3200-STSUGN-1575 (for GPRS & WCDMA)

11. IMEI Code: 867548000021394

12. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

FOR GPRS & E-GPRS:

299 channels are provided to this EUT. Therefore, the low, middle and high channels are chosen for testing.

	CHANNEL	FREQUENCY	TX MODE
LOW	512	1850.2 MHz	GPRS, E-GPRS
MIDDLE	661	1880.0 MHz	GPRS, E-GPRS
HIGH	810	1909.8 MHz	GPRS, E-GPRS

NOTE:

- Below 1 GHz, the channel 512, 661, and 810 were pre-tested in chamber. The channel 512 was chosen for final test.
- Above 1 GHz, the channel 512, 661, and 810 were tested individually.
- The worst case for final test is chosen when the power control level set 0.
- The channel space is 0.2MHz.
- The EUT is a GPRS class 10 device (Multislot class: 10, Mobile Terminal B), which provide 2 up-link. After pre-tested both functions, found up-link with 1 time slot is worse, therefore, test results of output power, frequency stability, occupied bandwidth and band edge tests came out from this.
- The EUT is an E-GPRS class 10 device (Multislot class: 10, Mobile Terminal B), which provide 2 up-link. After pre-tested both functions, found up-link with 1 time slot is worse, therefore, test results of output power, frequency stability, occupied bandwidth and band edge tests came out from this.
- After pretest of output power and spurious emission under GPRS & E-GPRS mode, find the worst mode is GPRS. Therefore, select GPRS mode to do final test

FOR CDMA:

1151 channels are provided to this EUT in the CDMA1900 band. Therefore, the low, middle and high channels are chosen for testing.

	CHANNEL	FREQUENCY	TX MODE
LOW	25	1851.25 MHz	SO55
MIDDLE	600	1880.00 MHz	SO55
HIGH	1175	1908.75 MHz	SO55

NOTE:

- Below 1 GHz, the channel 25, 600 and 1175 were pre-tested in chamber. The channel 25 was the worst case and chosen for final test.
- Above 1 GHz, the channel 25, 600 and 1175 were tested individually.
- The channel space is 0.05MHz.
- After pretest of output power and spurious emission under 1xEVDO, CDMA2000(SO32), CDMA2000(SO2) & CDMA2000(SO55) mode, find the worst mode is CDMA2000(SO55). Therefore, select CDMA2000(SO55) mode to do final test

FOR WCDMA:


277 channels are provided to this EUT. Therefore, the low, middle and high channels are chosen for testing.

	CHANNEL	FREQUENCY	TX MODE
LOW	9262	1852.4 MHz	WCDMA, HSDPA, HSUPA
MIDDLE	9400	1880.0 MHz	WCDMA, HSDPA, HSUPA
HIGH	9538	1907.6 MHz	WCDMA, HSDPA, HSUPA

NOTE:

1. Below 1 GHz, the channel 9262, 9400 and 9538 were pre-tested in chamber. The channel 9400 was chosen for final test.
2. Above 1 GHz, the channel 9262, 9400 and 9538 were tested individually.
3. The channel space is 0.2MHz.
4. After pretest of output power and spurious emission under WCDMA-RMC & HSDPA mode, find the worst mode is WCDMA-RMC. Therefore, select WCDMA-RMC mode to do final test

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

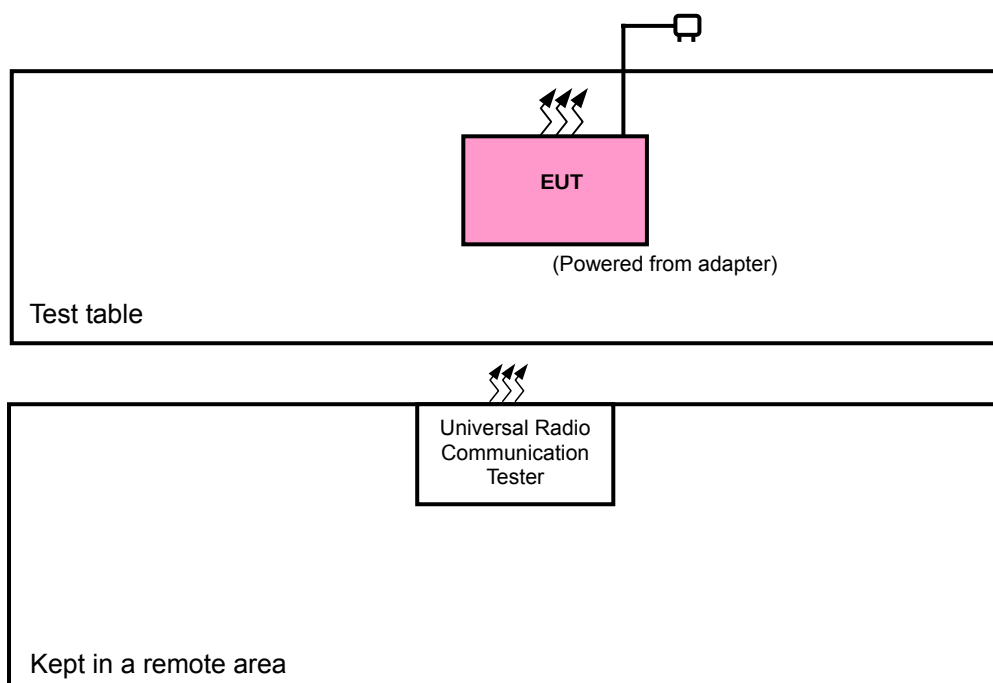

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

FOR GPRS & E-GPRS:

EUT CONFIGURE MODE	APPLICABLE TO							DESCRIPTION
	OP	FS	OB	BE	CE	RE<1G	RE≥1G	
-	√	√	√	√	√	√	√	-

Where **OP**: Output power **FS**: Frequency stability
OB: Occupied bandwidth **BE**: Band edge
CE: Conducted spurious emissions **RE<1G**: Radiated emission below 1GHz
RE≥1G: Radiated emission above 1GHz

NOTE: Speed mode worst enable during the test

OUTPUT POWER MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY
512 to 810	512, 661, 810	GPRS, EGPRS

FREQUENCY STABILITY MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY
512 to 810	661	GPRS

OCCUPIED BANDWIDTH MEASUREMENT:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY
512 to 810	512, 661, 810	GPRS, EGPRS

BAND EDGE MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY
512 to 810	512, 810	GPRS, EGPRS

CONDUCTED SPURIOUS EMISSIONS MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY
512 to 810	512, 661, 810	GPRS

RADIATED EMISSION MEASUREMENT (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY
512 to 810	512	GPRS

RADIATED EMISSION MEASUREMENT (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY
512 to 810	512, 661, 810	GPRS

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (SYSTEM)	TESTED BY
OP	23deg. C, 63%RH, 1008 hPa	120Vac, 60Hz	Mark Liao
FS	23deg. C, 63%RH, 1008 hPa	120Vac, 60Hz	Mark Liao
OB	23deg. C, 63%RH, 1008 hPa	120Vac, 60Hz	Mark Liao
EM	23deg. C, 63%RH, 1008 hPa	120Vac, 60Hz	Mark Liao
BE	23deg. C, 63%RH, 1008 hPa	120Vac, 60Hz	Mark Liao
CE	23deg. C, 63%RH, 1008 hPa	120Vac, 60Hz	Mark Liao
RE < 1G	25deg. C, 65%RH, 991 hPa	120Vac, 60Hz	David Huang
RE ≥ 1G	27deg. C, 65%RH, 991 hPa	120Vac, 60Hz	Mark Liao

FOR CDMA:

EUT CONFIGURE MODE	APPLICABLE TO							DESCRIPTION
	OP	FS	OB	BE	CE	RE<1G	RE≥1G	
-	√	√	√	√	√	√	√	-

Where **OP**: Output power **FS**: Frequency stability
OB: Occupied bandwidth **BE**: Band edge
CE: Conducted spurious emissions **RE<1G**: Radiated emission below 1GHz
RE≥1G: Radiated emission above 1GHz

NOTE: Speed mode worst enable during the test

OUTPUT POWER MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY
25 to 1175	25, 600, 1175	CDMA

FREQUENCY STABILITY MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY
25 to 1175	600	CDMA

OCCUPIED BANDWIDTH MEASUREMENT:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY
25 to 1175	25, 600, 1175	CDMA

BAND EDGE MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY
25 to 1175	25, 1175	CDMA

CONDUCTED SPURIOUS EMISSIONS MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY
25 to 1175	25, 600, 1175	CDMA

RADIATED EMISSION MEASUREMENT (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY
25 to 1175	25	CDMA

RADIATED EMISSION MEASUREMENT (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY
25 to 1175	25, 600, 1175	CDMA

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (SYSTEM)	TESTED BY
OP	23deg. C, 63%RH, 1008 hPa	120Vac, 60Hz	Mark Liao
FS	23deg. C, 63%RH, 1008 hPa	120Vac, 60Hz	Mark Liao
OB	23deg. C, 63%RH, 1008 hPa	120Vac, 60Hz	Mark Liao
EM	23deg. C, 63%RH, 1008 hPa	120Vac, 60Hz	Mark Liao
BE	23deg. C, 63%RH, 1008 hPa	120Vac, 60Hz	Mark Liao
CE	23deg. C, 63%RH, 1008 hPa	120Vac, 60Hz	Mark Liao
RE < 1G	25deg. C, 65%RH, 991 hPa	120Vac, 60Hz	David Huang
RE ≥ 1G	27deg. C, 65%RH, 991 hPa	120Vac, 60Hz	Mark Liao

FOR WCDMA:

EUT CONFIGURE MODE	APPLICABLE TO							DESCRIPTION
	OP	FS	OB	BE	CE	RE<1G	RE≥1G	
-	√	√	√	√	√	√	√	-

Where **OP**: Output power **FS**: Frequency stability
OB: Occupied bandwidth **BE**: Band edge
CE: Conducted spurious emissions **RE<1G**: Radiated emission below 1GHz
RE≥1G: Radiated emission above 1GHz

NOTE: Speed mode worst enable during the test

OUTPUT POWER MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY
9262 to 9538	9262, 9400, 9538	WCDMA

FREQUENCY STABILITY MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY
9262 to 9538	9400	WCDMA

OCCUPIED BANDWIDTH MEASUREMENT:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY
9262 to 9538	9262, 9400, 9538	WCDMA

BAND EDGE MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY
9262 to 9538	9262, 9538	WCDMA

CONDUCTED SPURIOUS EMISSIONS MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY
9262 to 9538	9262, 9400, 9538	WCDMA

RADIATED EMISSION MEASUREMENT (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY
9262 to 9538	9400	WCDMA

RADIATED EMISSION MEASUREMENT (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY
9262 to 9538	9262, 9400, 9538	WCDMA

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (SYSTEM)	TESTED BY
OP	23deg. C, 63%RH, 1008 hPa	120Vac, 60Hz	Mark Liao
FS	23deg. C, 63%RH, 1008 hPa	120Vac, 60Hz	Mark Liao
OB	23deg. C, 63%RH, 1008 hPa	120Vac, 60Hz	Mark Liao
EM	23deg. C, 63%RH, 1008 hPa	120Vac, 60Hz	Mark Liao
BE	23deg. C, 63%RH, 1008 hPa	120Vac, 60Hz	Mark Liao
CE	23deg. C, 63%RH, 1008 hPa	120Vac, 60Hz	Mark Liao
RE < 1G	25deg. C, 65%RH, 991 hPa	120Vac, 60Hz	David Huang
RE ≥ 1G	27deg. C, 65%RH, 991 hPa	120Vac, 60Hz	Mark Liao

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 24

IC RSS-133

ANSI C63.4-2003

ANSI/TIA/EIA-603-C 2004

NOTE: All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	UNIVERSAL RADIO COMMUNICATION TESTER	R&S	CMU200	104484	NA
2	NJZ-2000 (GPRS+WCDMA SIMULATOR)	JRC	NJZ-2000	ET00054	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	NA

NOTE 1: All power cords of the above support units are non shielded (1.8m).

NOTE 2: Item 1-2 acted as a communication partners to transfer data.

4 TEST TYPES AND RESULTS

4.1 OUTPUT POWER MEASUREMENT

4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

The radiated peak output power shall be according to the specific rule Part 24.232(b) that “Mobile / Portable station are limited to 2 watts e.i.r.p” and 24.232(c) specific that “Peak transmit power must be measure over any interval of continuous transmission using instrumentation calibration in terms of rms-equivalent voltage.”

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESIB7	100212	Jul. 22, 2010	Jul. 21, 2011
Spectrum Analyzer Agilent	E4446A	MY48250266	Aug. 11, 2010	Aug. 10, 2011
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Apr. 13, 2011	Apr. 12, 2012
HORN Antenna SCHWARZBECK	9120D	9120D-405	Feb. 08, 2011	Feb. 07, 2012
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170243	Dec. 27, 2010	Dec. 26, 2011
Preamplifier Agilent	8447D	2944A10633	Nov. 02, 2010	Nov. 01, 2011
Preamplifier Agilent	8449B	3008A01964	Nov. 02, 2010	Nov. 01, 2011
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	295014/4	Sep. 03, 2010	Sep. 02, 2011
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	12738/6	Sep. 03, 2010	Sep. 02, 2011
Software ADT.	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA	NA
Turn Table ADT.	TT100.	TT93021703	NA	NA
Turn Table Controller ADT.	SC100.	SC93021703	NA	NA


- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 3.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 988962.
5. The IC Site Registration No. is IC 7450F-3.

4.1.3 TEST PROCEDURES

- a. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels, 512, 661 and 810 (GPRS & E-GPRS) / 25, 600 and 1175 (CDMA) / 9262, 9400 and 9538 (WCDMA) (low, middle and high operational frequency range.)
- b. The conducted peak output power used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. The path loss included the splitter loss, cable loss and 20dB pad loss. The spectrum set RB/VB 1MHz (GPRS & E-GPRS), 3MHz (CDMA), and 5MHz (WCDMA), then read peak power value and record to the test. (All transmitted path loss shall be considered in the test report data.)
- c. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The " Read Value " is the spectrum reading the maximum power value.
- d. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable . Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to " Read Value " of step c. Record the power level of S.G
- e. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn.}$


4.1.4 TEST SETUP

EIRP POWER MEASUREMENT:

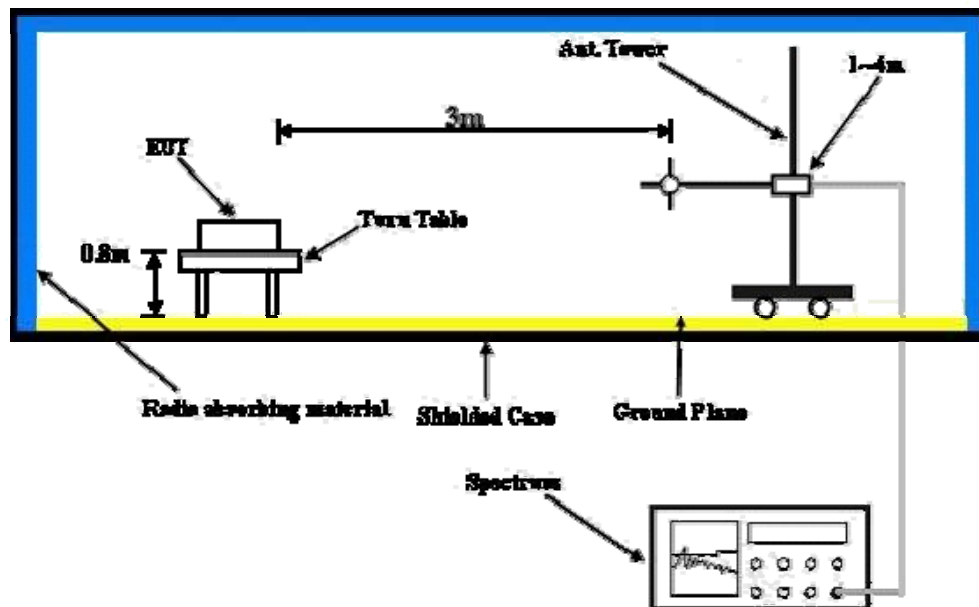

For the actual test configuration, please refer to the attached file (Test Setup Photo).

CONDUCTED POWER MEASUREMENT:

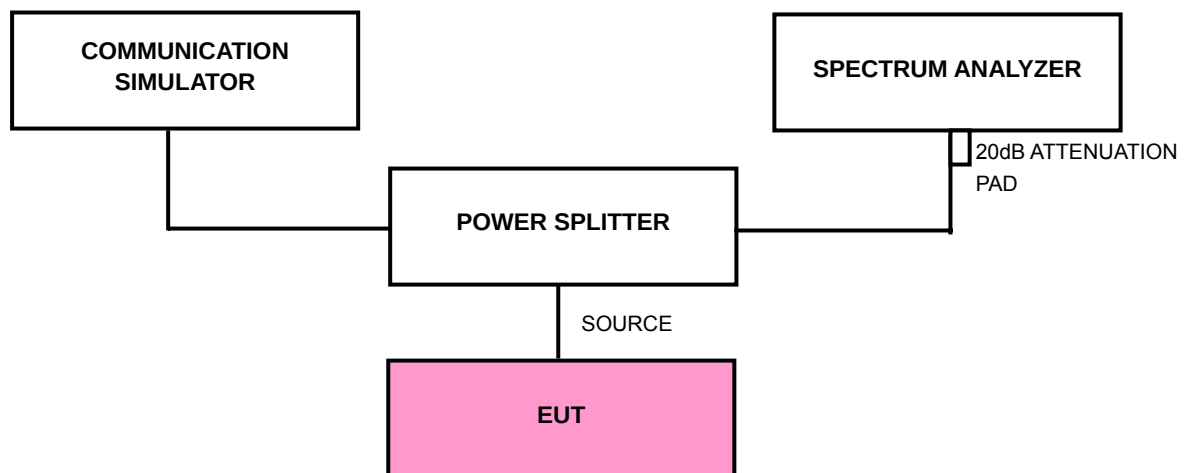

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.5 EUT OPERATING CONDITIONS

- The EUT makes a call to the communication simulator.
- The communication simulator station system controlled an EUT to export maximum output power under transmission mode and specific channel frequency.

4.1.6 TEST RESULTS

FOR GPRS & E-GPRS:

FOR GPRS MODE (UP-LINK WITH 1 TIME SLOT)

CONDUCTED OUTPUT POWER					
CHANNEL NO.	FREQUENCY (MHz)	RAW VALUE (dBm)	CORRECTION FACTOR (dB)	OUTPUT POWER	
				dBm	Watt
512	1850.2	4.21	24.80	29.01	0.7962
661	1880.0	4.52	24.80	29.32	0.8551
810	1909.8	4.32	24.80	29.12	0.8166

FOR E-GPRS MODE (UP-LINK WITH 1 TIME SLOT)

CONDUCTED OUTPUT POWER					
CHANNEL NO.	FREQUENCY (MHz)	RAW VALUE (dBm)	CORRECTION FACTOR (dB)	OUTPUT POWER	
				dBm	Watt
512	1850.2	0.18	24.80	24.98	0.3148
661	1880.0	0.75	24.80	25.55	0.3589
810	1909.8	0.63	24.80	25.43	0.3491

REMARKS: 1. Peak Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).
 2. Correction Factor (dB) = Power Splitter Loss (dB) + Cable Loss (dB) + 20dB Pad.

FOR GPRS MODE (UP-LINK WITH 1 TIME SLOT)

EIRP POWER					
CHANNEL NO.	FREQUENCY (MHz)	S.G VALUE (dBm)	CORRECTION FACTOR (dB)	OUTPUT POWER	
				dBm	Watt
512	1850.2	21.2	8.4	29.6	0.9120
661	1880.0	20.9	8.6	29.5	0.8913
810	1909.8	20.9	8.5	29.4	0.8710

FOR E-GPRS MODE (UP-LINK WITH 1 TIME SLOT)

EIRP POWER					
CHANNEL NO.	FREQUENCY (MHz)	S.G VALUE (dBm)	CORRECTION FACTOR (dB)	OUTPUT POWER	
				dBm	Watt
512	1850.2	17.0	8.4	25.4	0.3467
661	1880.0	16.9	8.6	25.5	0.3548
810	1909.8	16.9	8.5	25.4	0.3467

REMARKS: 1. Peak Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
 2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

FOR CDMA:

WORST CASE CONDUCTED POWER OF 1x EV-DO									
CHANNEL	FREQ. (MHz)	Revision A	Release 0	CORR. FACTOR (dB)	Revision A		Release 0		
		RAW VALUE (dBm)			OUTPUT POWER				
					dBm	Watt	dBm	Watt	
25	1851.25	-2.45	-2.39	24.80	22.35	0.1718	22.41	0.1742	
600	1880.00	-1.88	-1.79	24.80	22.92	0.1959	23.01	0.2000	
1175	1908.75	-2.08	-2.04	24.80	22.72	0.1871	22.76	0.1888	

CDMA 2000 CONDUCTED POWER											
CHAN.	FREQ. (MHz)	CDMA 2000	RAW VALUE (dBm)				CORR. FACTOR (dB)	OUTPUT POWER (dBm)			
		RC	SO2	SO55	TDSO SO32 (FCH)	TDSO SO32 (FCH+S CH)		SO2	SO55	TDSO SO32 (FCH)	TDSO SO32 (FCH+S CH)
25	1851.25	RC1	18.01	18.04	-	-	4.50	22.51	22.54	-	-
		RC3	18.10	18.16	18.07	18.09	4.50	22.60	22.66	22.57	22.59
600	1880.00	RC1	18.43	18.49	-	-	4.50	22.93	22.99	-	-
		RC3	18.48	18.58	18.41	18.51	4.50	22.98	23.08	22.91	23.01
1175	1908.75	RC1	18.21	18.25	-	-	4.50	22.71	22.75	-	-
		RC3	18.27	18.31	18.26	18.28	4.50	22.77	22.81	22.76	22.78

REMARKS: 1. Peak Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).
 2. Correction Factor (dB) = Power Splitter Loss (dB) + Cable Loss (dB) + 20dB Pad.

1xEV-DO MODE

EIRP POWER (1x EV-DO)								
CHANNEL	FREQ. (MHz)	S.G. VALUE (dBm)		CORR. FACTOR (dB)	OUTPUT POWER			
					Revision A		Release 0	
		Revision A	Release 0		dBm	Watt	dBm	Watt
25	1851.25	14.4	14.6	8.4	22.8	0.1905	23.0	0.1995
60	1880.00	14.4	14.6	8.6	23.0	0.1995	23.2	0.2089
1175	1908.75	14.2	14.4	8.5	22.7	0.1862	22.9	0.1950

CDMA MODE

EIRP POWER (SO55)					
CHANNEL NO.	FREQUENCY (MHz)	S.G. VALUE (dBm)	CORRECTION FACTOR (dB)	OUTPUT POWER	
				dBm	Watt
25	1851.25	15.1	8.4	23.5	0.2239
600	1880.00	15.2	8.6	23.8	0.2399
1175	1908.75	14.9	8.5	23.4	0.2188

REMARKS: 1. Peak Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

FOR WCDMA:

WCDMA-RMC MODE

CONDUCTED OUTPUT POWER					
CHANNEL NO.	FREQUENCY (MHz)	RAW VALUE (dBm)	CORRECTION FACTOR (dB)	OUTPUT POWER	
				dBm	Watt
9262	1852.40	-1.03	24.80	23.77	0.2382
9400	1880.00	-1.24	24.80	23.56	0.2270
9538	1907.60	-1.44	24.80	23.36	0.2168

HSDPA MODE-R5 Subtest 1

CONDUCTED OUTPUT POWER					
CHANNEL NO.	FREQUENCY (MHz)	RAW VALUE (dBm)	CORRECTION FACTOR (dB)	OUTPUT POWER	
				dBm	Watt
9262	1852.40	-2.34	24.80	22.46	0.1762
9400	1880.00	-2.51	24.80	22.29	0.1694
9538	1907.60	-2.62	24.80	22.18	0.1652

HSDPA MODE-R5 Subtest 2

CONDUCTED OUTPUT POWER					
CHANNEL NO.	FREQUENCY (MHz)	RAW VALUE (dBm)	CORRECTION FACTOR (dB)	OUTPUT POWER	
				dBm	Watt
9262	1852.40	-2.42	24.80	22.38	0.1730
9400	1880.00	-2.59	24.80	22.21	0.1663
9538	1907.60	-2.77	24.80	22.03	0.1596

HSDPA MODE-R5 Subtest 3

CONDUCTED OUTPUT POWER					
CHANNEL NO.	FREQUENCY (MHz)	RAW VALUE (dBm)	CORRECTION FACTOR (dB)	OUTPUT POWER	
				dBm	Watt
9262	1852.40	-2.42	24.80	22.38	0.173.0
9400	1880.00	-2.59	24.80	22.21	0.166.3
9538	1907.60	-2.77	24.80	22.03	0.159.6

REMARKS: 1. Peak Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).
 2. Correction Factor (dB) = Power Splitter Loss (dB) + Cable Loss (dB) + 20dB Pad.

HSDPA MODE-R5 Subtest 4

CONDUCTED OUTPUT POWER					
CHANNEL NO.	FREQUENCY (MHz)	RAW VALUE (dBm)	CORRECTION FACTOR (dB)	OUTPUT POWER	
				dBm	Watt
9262	1852.40	-2.36	24.80	22.44	0.1754
9400	1880.00	-2.54	24.80	22.26	0.1683
9538	1907.60	-2.75	24.80	22.05	0.1603

HSUPA MODE-R6 Subtest 1

CONDUCTED OUTPUT POWER					
CHANNEL NO.	FREQUENCY (MHz)	RAW VALUE (dBm)	CORRECTION FACTOR (dB)	OUTPUT POWER	
				dBm	Watt
9262	1852.40	-1.54	24.80	23.26	0.2118
9400	1880.00	-1.65	24.80	23.15	0.2065
9538	1907.60	-1.82	24.80	22.98	0.1986

HSUPA MODE-R6 Subtest 2

CONDUCTED OUTPUT POWER					
CHANNEL NO.	FREQUENCY (MHz)	RAW VALUE (dBm)	CORRECTION FACTOR (dB)	OUTPUT POWER	
				dBm	Watt
9262	1852.40	-2.64	24.80	22.16	0.1644
9400	1880.00	-2.71	24.80	22.09	0.1618
9538	1907.60	-2.94	24.80	21.86	0.1535

HSUPA MODE-R6 Subtest 3

CONDUCTED OUTPUT POWER					
CHANNEL NO.	FREQUENCY (MHz)	RAW VALUE (dBm)	CORRECTION FACTOR (dB)	OUTPUT POWER	
				dBm	Watt
9262	1852.40	-2.56	24.80	22.24	0.1675
9400	1880.00	-2.75	24.80	22.05	0.1603
9538	1907.60	-2.67	24.80	22.13	0.1633

REMARKS: 1. Peak Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).
 2. Correction Factor (dB) = Power Splitter Loss (dB) + Cable Loss (dB) + 20dB Pad.

HSUPA MODE-R6 Subtest 4

CONDUCTED OUTPUT POWER					
CHANNEL NO.	FREQUENCY (MHz)	RAW VALUE (dBm)	CORRECTION FACTOR (dB)	OUTPUT POWER	
				dBm	Watt
9262	1852.40	-2.37	24.80	22.43	0.1750
9400	1880.00	-2.57	24.80	22.23	0.1671
9538	1907.60	-2.84	24.80	21.96	0.1570

HSUPA MODE-R6 Subtest 5

CONDUCTED OUTPUT POWER					
CHANNEL NO.	FREQUENCY (MHz)	RAW VALUE (dBm)	CORRECTION FACTOR (dB)	OUTPUT POWER	
				dBm	Watt
9262	1852.40	-0.95	24.80	23.85	0.2427
9400	1880.00	-1.26	24.80	23.54	0.2259
9538	1907.60	-1.57	24.80	23.23	0.2104

REMARKS: 1. Peak Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).
 2. Correction Factor (dB) = Power Splitter Loss (dB) + Cable Loss (dB) + 20dB Pad.

WCDMA-RMC MODE

EIRP POWER					
CHANNEL NO.	FREQUENCY (MHz)	S.G VALUE (dBm)	CORRECTION FACTOR (dB)	OUTPUT POWER	
				dBm	Watt
9262	1852.40	18.0	8.4	26.4	0.4365
9400	1880.00	18.0	8.6	26.6	0.4571
9538	1907.60	18.0	8.5	26.5	0.4467

REMARKS: 1. Peak Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
 2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

4.2 FREQUENCY STABILITY MEASUREMENT

4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

According to the FCC part 24.235 shall be tested the frequency stability. The rule is defined that "The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block." The frequency error rate is according to the JTC standard that the frequency error rate shall be accurate to within 2.5ppm of the received frequency from the base station. The test extreme voltage is according to the 2.1055(d)(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment and the extreme temperature rule is comply with the 2.1055(a)(1) -30°C $\sim 60^{\circ}\text{C}$.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL	CALIBRATED UNTIL
Spectrum Analyzer Agilent	E4446A	MY48250266	Aug. 11, 2010	Aug. 10, 2011
Hewlett Packard RF cable	8120-6192	01428251	NA	NA
RF cable	SUCOFLEX 104	257029	Sep. 11, 2010	Sep. 10, 2011
WIT Standard Temperature & Humidity Chamber	MHU-225AU	920842	Jun. 15, 2011	Jun. 14, 2012


NOTE: The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.2.3 TEST PROCEDURE

- Because of the measure the carrier frequency under the condition of the AFC lock, it shall be used the mobile station in the GPRS / CDMA / WCDMA link mode. This is accomplished with the use of the R&S CMU200 / JRC NJZ-2000 simulator station. The oven room could control the temperatures and humidity. The GPRS link channel is the 190, the CDMA link channel is the 600 and the WCDMA link channel is the 9400.
- Power must be removed when changing from one temperature to another or one voltage to another voltage. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the AC input power. The various Volts from the minimum 93.5 Volts to 126.5 Volts. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the ± 0.5 during the measurement testing.
- The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the GSM simulator.

4.2.4 TEST SETUP

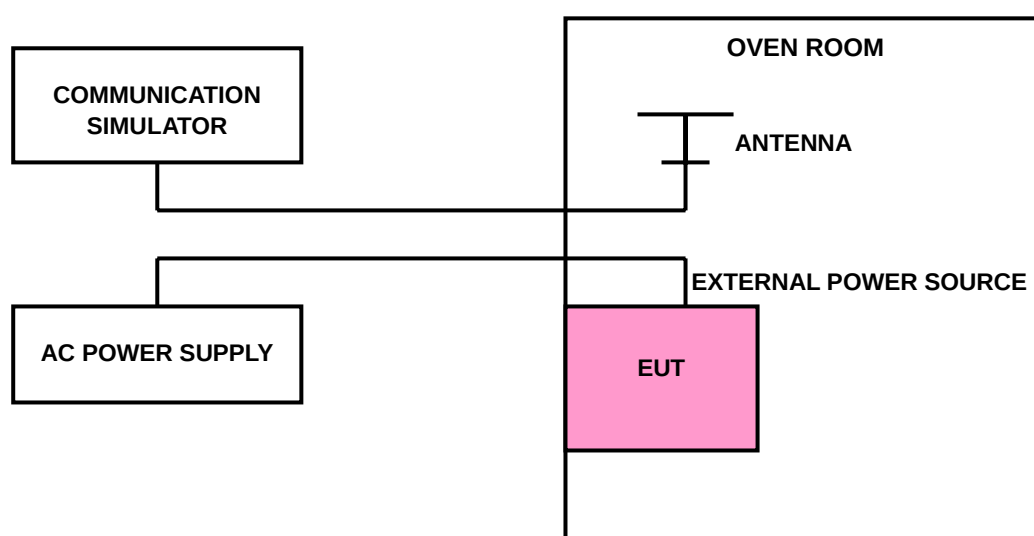

4.2.5 TEST RESULTS

FOR GSM:

AFC FREQUENCY ERROR vs. VOLTAGE			
VOLTAGE (Volts)	FREQUENCY ERROR (Hz)	FREQUENCY ERROR (ppm)	LIMIT (ppm)
126.5	15	0.008	2.5
93.5	14	0.007	2.5

NOTE: The applicant defined the normal working voltage of the AC adapter is from 93.5Vac to 126.5Vac.

AFC FREQUENCY ERROR vs. TEMP.			
TEMP. ()	FREQUENCY ERROR (Hz)	FREQUENCY ERROR (ppm)	LIMIT (ppm)
60	16	0.009	2.5
50	15	0.008	2.5
40	15	0.008	2.5
30	16	0.009	2.5
20	13	0.007	2.5
10	15	0.008	2.5
0	14	0.007	2.5
-10	12	0.006	2.5
-20	13	0.007	2.5
-30	15	0.008	2.5

FOR CDMA:

AFC FREQUENCY ERROR vs. VOLTAGE			
VOLTAGE (Volts)	FREQUENCY ERROR (Hz)	FREQUENCY ERROR (ppm)	LIMIT (ppm)
126.5	-17	-0.009	2.5
93.5	-16	-0.009	2.5

NOTE: The applicant defined the normal working voltage of the AC adapter is from 93.5Vac to 126.5Vac.

AFC FREQUENCY ERROR vs. TEMP.			
TEMP. ()	FREQUENCY ERROR (Hz)	FREQUENCY ERROR (ppm)	LIMIT (ppm)
60	-19	-0.010	2.5
50	-18	-0.010	2.5
40	-17	-0.009	2.5
30	-16	-0.009	2.5
20	-15	-0.008	2.5
10	-17	-0.009	2.5
0	-17	-0.009	2.5
-10	-18	-0.010	2.5
-20	-16	-0.009	2.5
-30	-18	-0.010	2.5

FOR WCDMA:

AFC FREQUENCY ERROR vs. VOLTAGE			
VOLTAGE (Volts)	FREQUENCY ERROR (Hz)	FREQUENCY ERROR (ppm)	LIMIT (ppm)
126.5	15	0.008	2.5
93.5	16	0.009	2.5

NOTE: The applicant defined the normal working voltage of the AC adapter is from 93.5Vac to 126.5Vac.

AFC FREQUENCY ERROR vs. TEMP.			
TEMP. ()	FREQUENCY ERROR (Hz)	FREQUENCY ERROR (ppm)	LIMIT (ppm)
60	18	0.010	2.5
50	17	0.009	2.5
40	18	0.010	2.5
30	18	0.010	2.5
20	16	0.009	2.5
10	15	0.008	2.5
0	16	0.009	2.5
-10	15	0.008	2.5
-20	18	0.010	2.5
-30	17	0.009	2.5

4.3 OCCUPIED BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT


According to FCC 47.238(b) specified that emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
ROHDE & SCHWARZ Spectrum Analyzer	FSP40	100039	Feb. 23, 2011	Feb. 22, 2012
Mini-Circuits Power Splitter	ZN2PD-9G	NA	May 26, 2011	May 25, 2012
RF cable	SUCOFLEX 104	274403/4	Aug. 20, 2010	Aug. 19, 2011
RF cable	SUCOFLEX 104	250729/4	Aug. 19, 2010	Aug. 18, 2011
RF cable	SUCOFLEX 104	214377/4	Aug. 19, 2010	Aug. 18, 2011
JFW 20dB attenuation	50HF-020-SMA	NA	NA	NA

NOTE: The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST SETUP

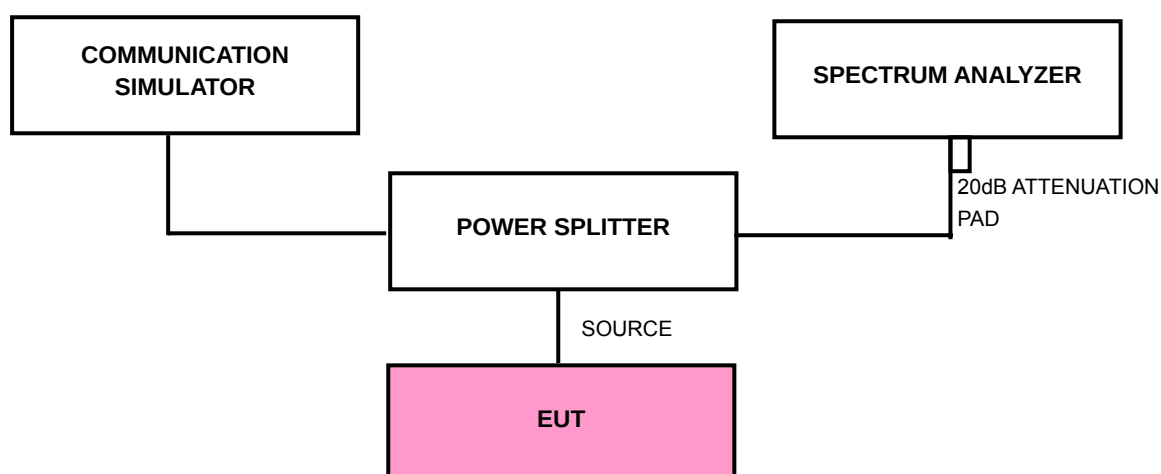

4.3.4 TEST PROCEDURES

- a. The EUT makes a call to the communication simulator. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels, 512, 661 and 810 (GPRS / E-GPRS) / 25, 600 and 1175 (CDMA) / 9262, 9400 and 9538 (WCDMA) (low, middle and high operational frequency range.)
- b. The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- c. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

4.3.5 EUT OPERATING CONDITION

- a. The EUT makes a call to the communication simulator.
- b. The communication simulator station system controlled a EUT to export maximum and minimum output power under transmission mode and specific channel frequency.


4.3.6 TEST RESULTS

FOR GPRS & E-GPRS:

FOR GPRS MODE (UP-LINK WITH 1 TIME SLOT)

CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (kHz)
512	1850.2	244
661	1880.0	242
810	1909.8	248


CH 810

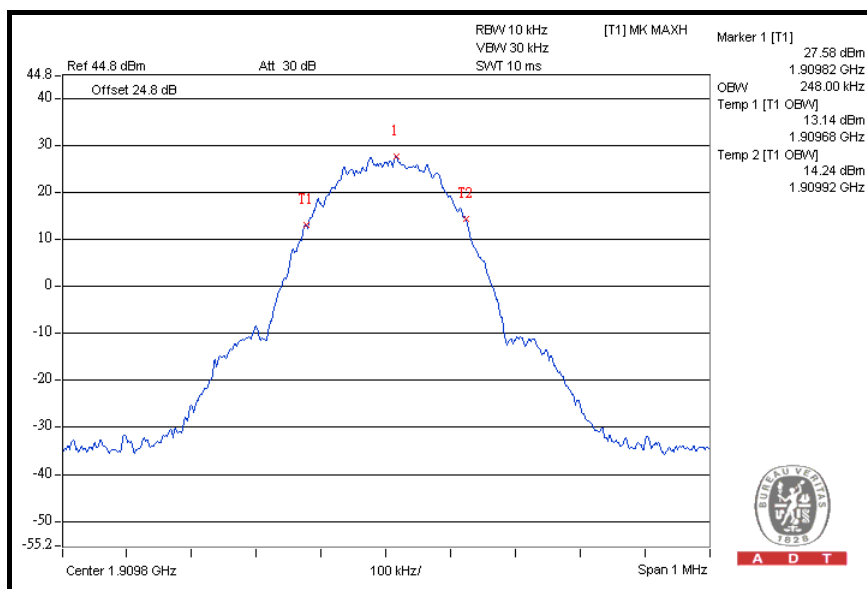

FOR E-GPRS MODE (UP-LINK WITH 1 TIME SLOT)

CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (kHz)
512	1850.2	238
661	1880.0	248
810	1909.8	244

CH 661

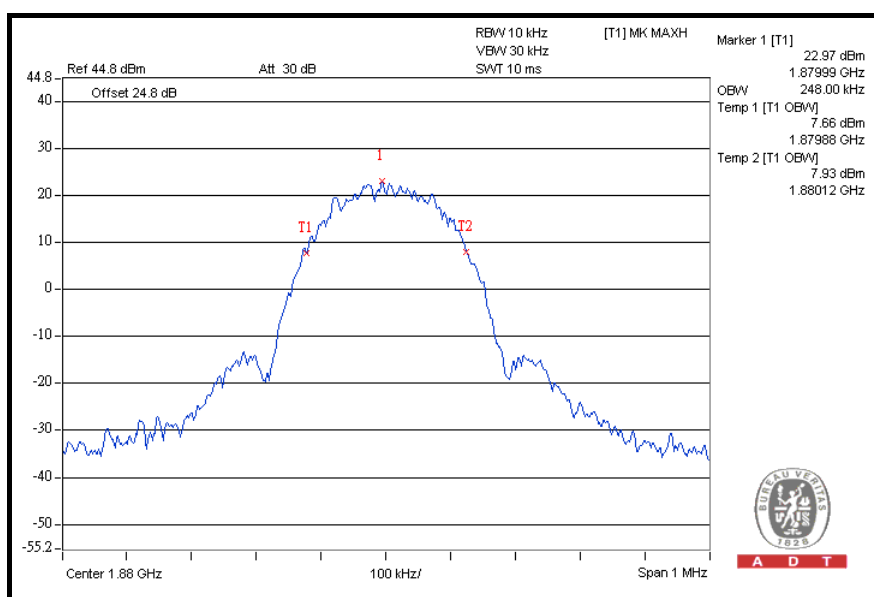




A D T

FOR CDMA:

FOR S055:

CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)
25	1851.25	1.28
600	1880.00	1.27
1175	1908.75	1.27

CH 25

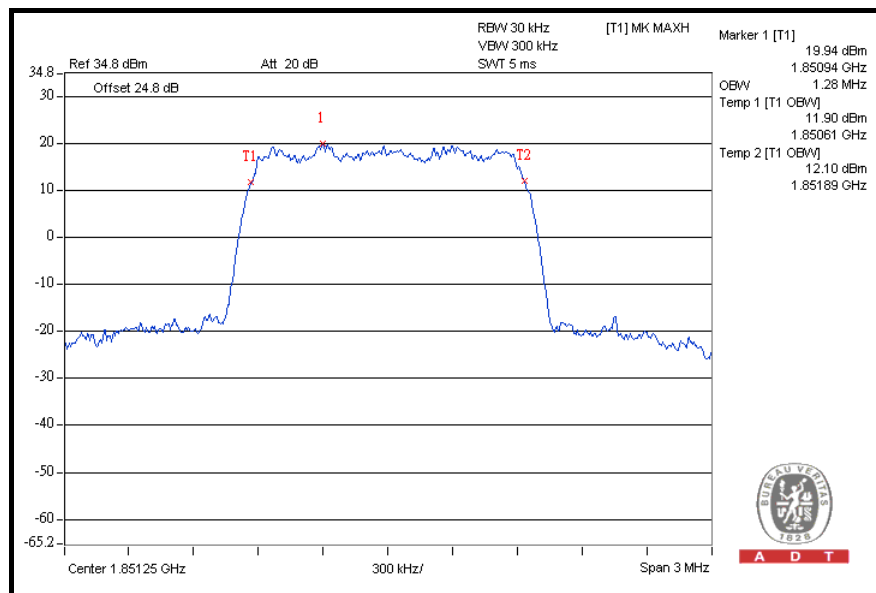


A D T

FOR EV-DO Rev. A:

CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)
25	1851.25	1.28
600	1880.00	1.28
1175	1908.75	1.28


CH 25

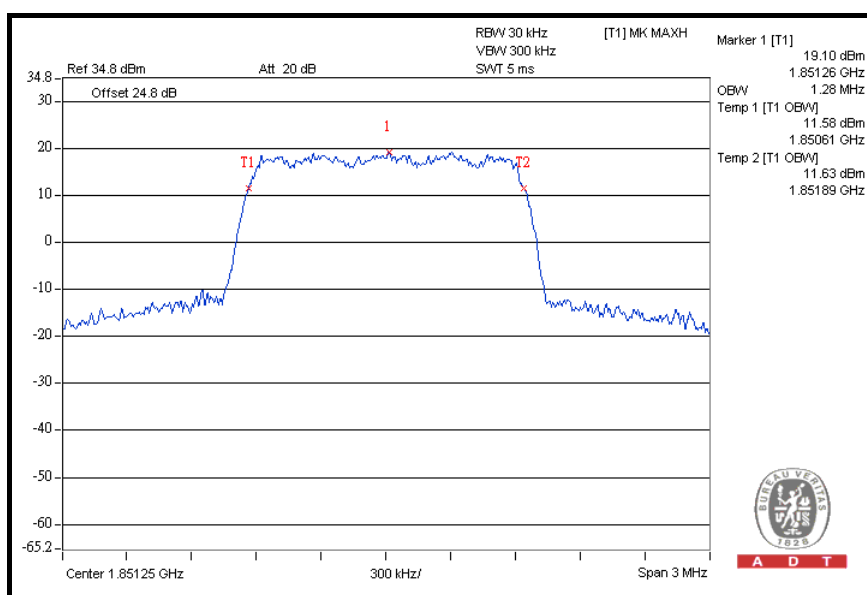

FOR EV-DO Rev. 0:

CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)
25	1851.25	1.28
600	1880.00	1.28
1175	1908.75	1.28

CH 25

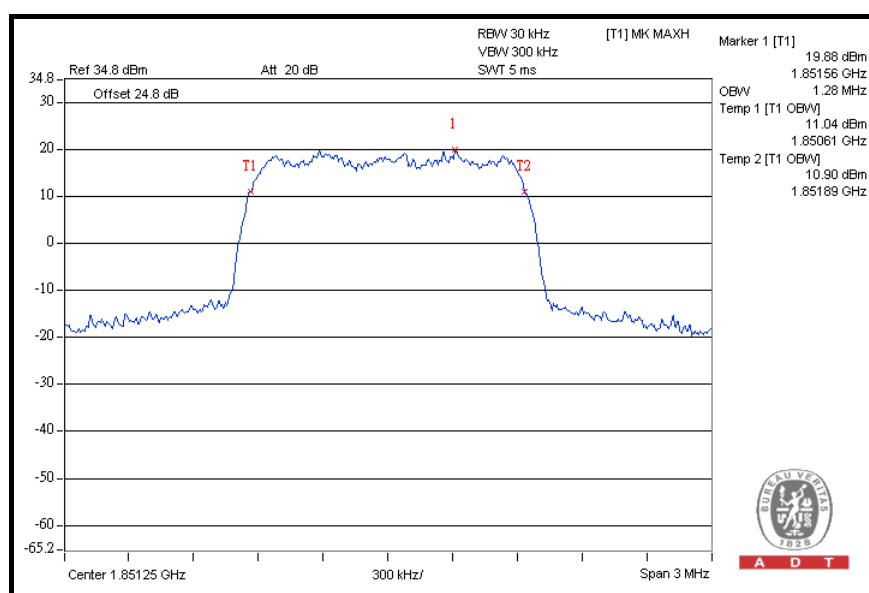


FOR WCDMA

FOR RMC:

CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)
9262	1852.4	4.16
9400	1880.0	4.16
9538	1907.6	4.16


CH 9400

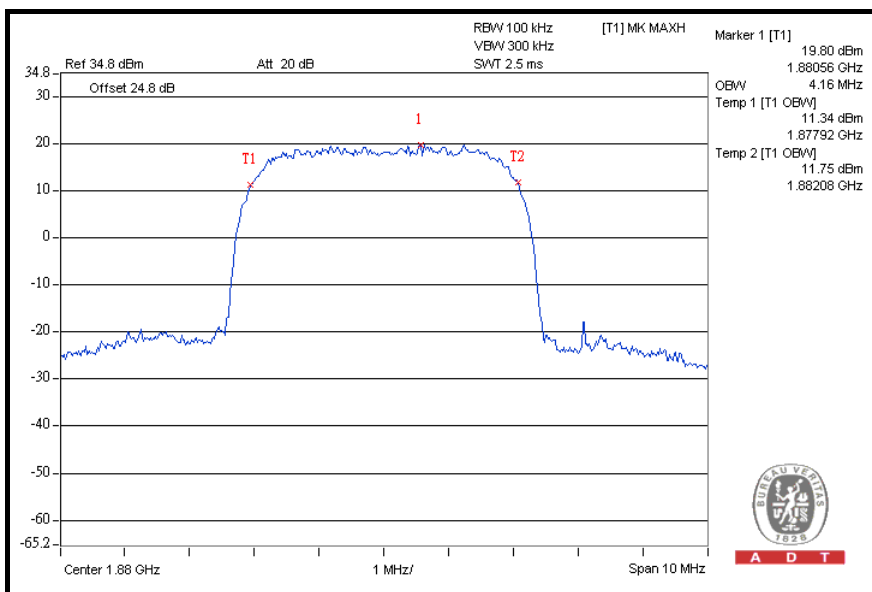

FOR HSDPA:

CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)
9262	1852.4	4.14
9400	1880.0	4.16
9538	1907.6	4.16


CH 9538

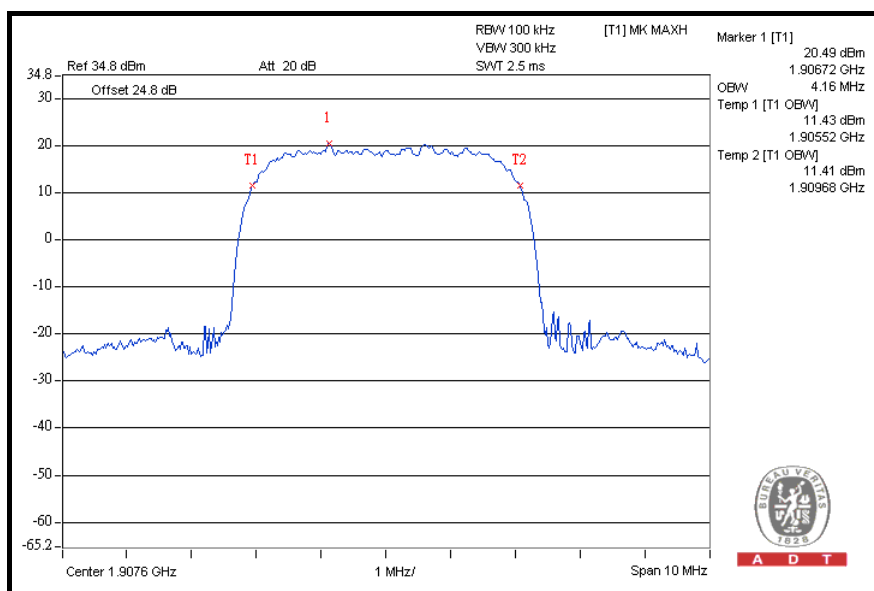

FOR HSUPA:

CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)
9262	1852.4	4.16
9400	1880.0	4.16
9538	1907.6	4.14

CH 9400

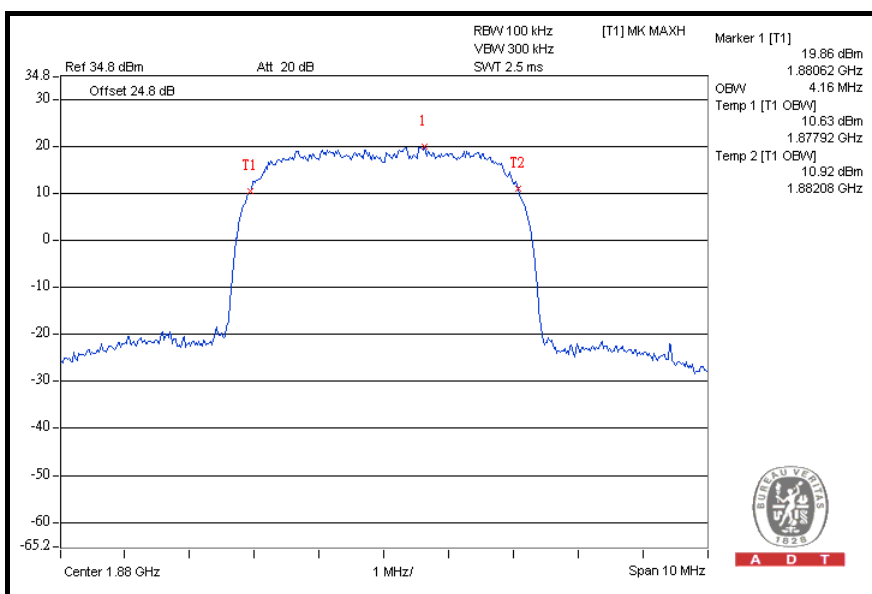

4.4 BAND EDGE MEASUREMENT

4.4.1 LIMITS OF BAND EDGE MEASUREMENT


According to FCC 24.238(a) specified that power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
ROHDE & SCHWARZ Spectrum Analyzer	FSP40	100039	Feb. 23, 2011	Feb. 22, 2012
Mini-Circuits Power Splitter	ZN2PD-9G	NA	May 26, 2011	May 25, 2012
RF cable	SUCOFLEX 104	274403/4	Aug. 20, 2010	Aug. 19, 2011
RF cable	SUCOFLEX 104	250729/4	Aug. 19, 2010	Aug. 18, 2011
RF cable	SUCOFLEX 104	214377/4	Aug. 19, 2010	Aug. 18, 2011
JFW 20dB attenuation	50HF-020-SMA	NA	NA	NA

NOTE: The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST SETUP

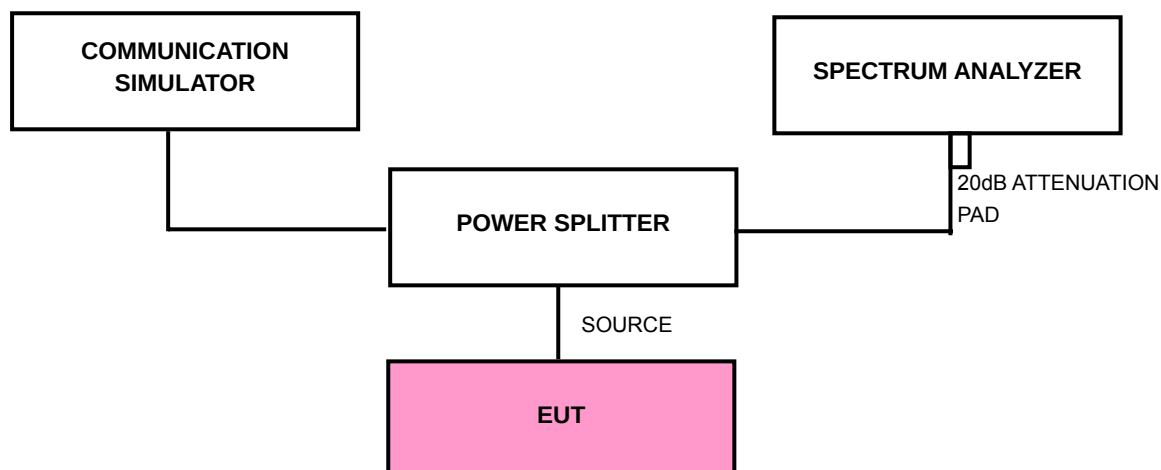

4.4.4 TEST PROCEDURES

- a. The EUT makes a call to the communication simulator. The power was measured with R&S Spectrum Analyzer. All measurements were done at 2 channels, 512 and 810 (GPRS/ E-GPRS) / 25 and 1175 (CDMA) / 9262 and 9538 (WCDMA) (low and high operational frequency range.)
- b. The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- c. The center frequency of spectrum is the band edge frequency and span is 1.5 MHz. RB of the spectrum is 3kHz and VB of the spectrum is 10kHz (GPRS/ E-GPRS).
- d. The center frequency of spectrum is the band edge frequency and span is 3 MHz. RB of the spectrum is 15kHz and VB of the spectrum is 15kHz (CDMA).
- e. The center frequency of spectrum is the band edge frequency and span is 10 MHz. RB of the spectrum is 100kHz and VB of the spectrum is 300kHz (WCDMA).
- f. Record the max trace plot into the test report.

4.4.5 EUT OPERATING CONDITION


- a. The EUT makes a call to the communication simulator.
- b. The communication simulator station system controlled an EUT to export maximum output power under transmission mode and specific channel frequency.

4.4.6 TEST RESULTS


FOR GPRS / E-GPRS:

FOR GPRS MODE (UP-LINK WITH 1 TIME SLOT)

LOWER BAND EDGE

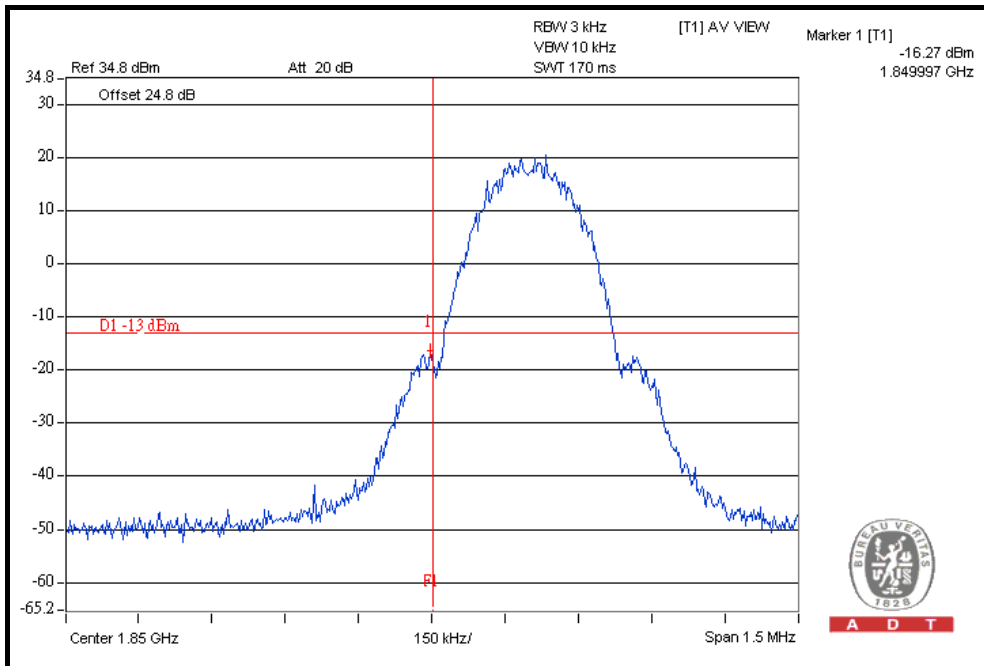

HIGHER BAND EDGE

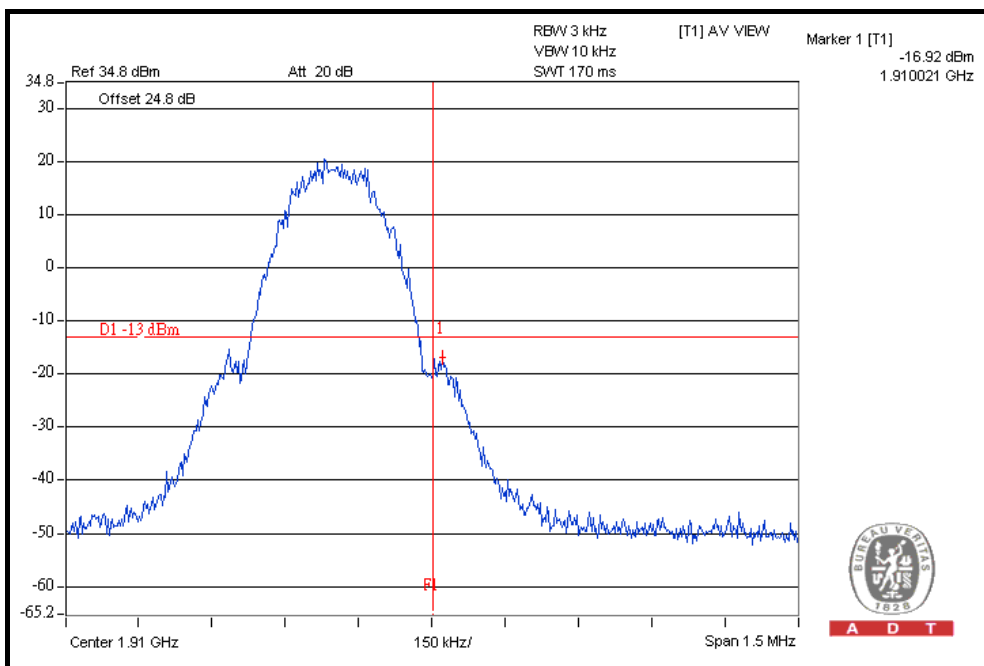





A D T

FOR E-GPRS MODE (UP-LINK WITH 1 TIME SLOT)

LOWER BAND EDGE

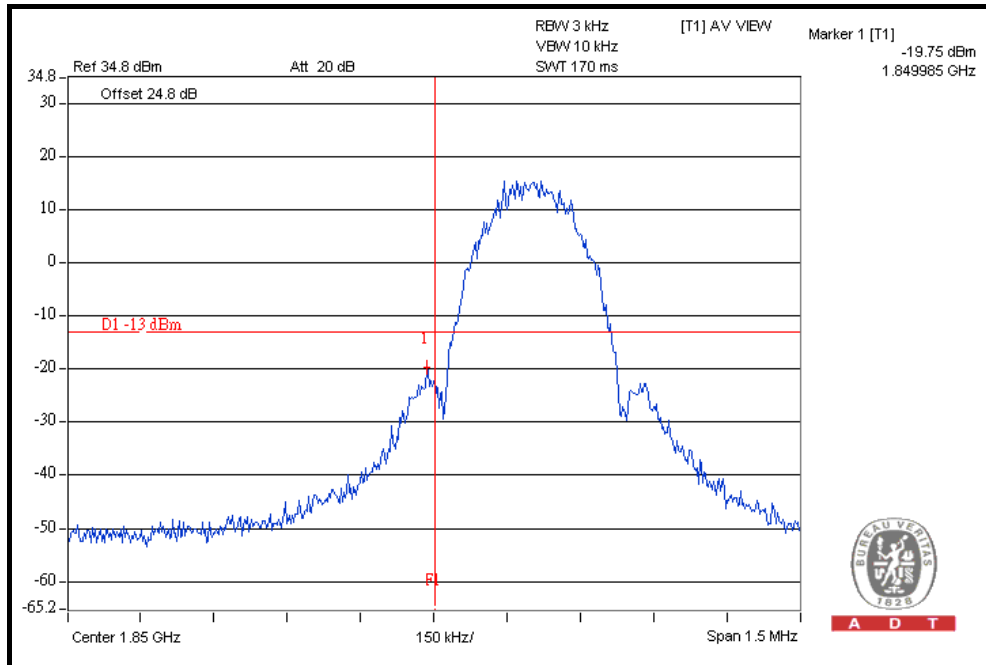

HIGHER BAND EDGE

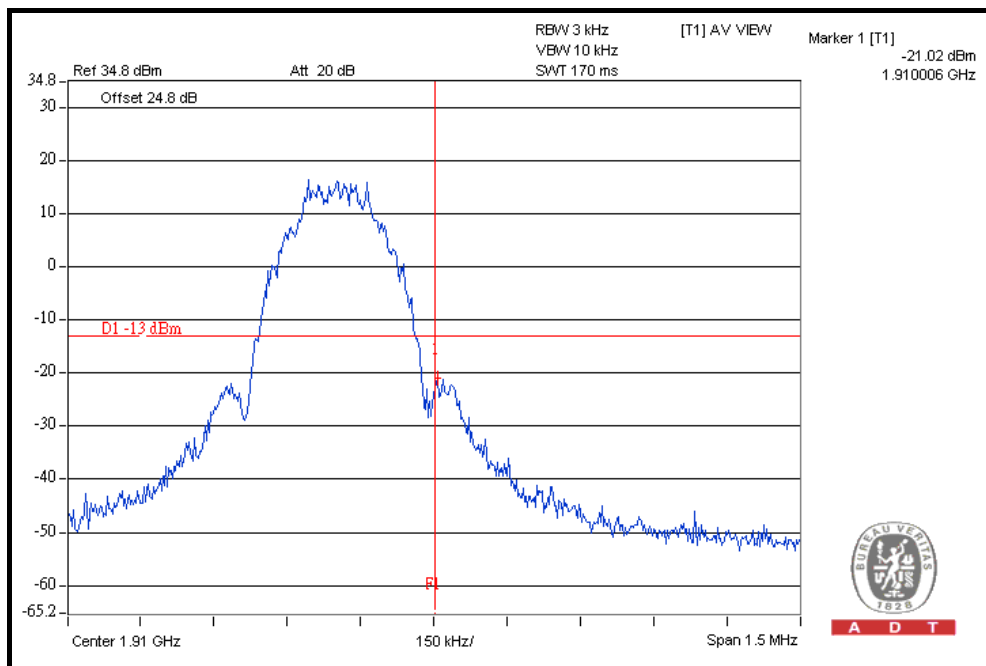




A D T


FOR CDMA:

FOR SO55:

LOWER BAND EDGE

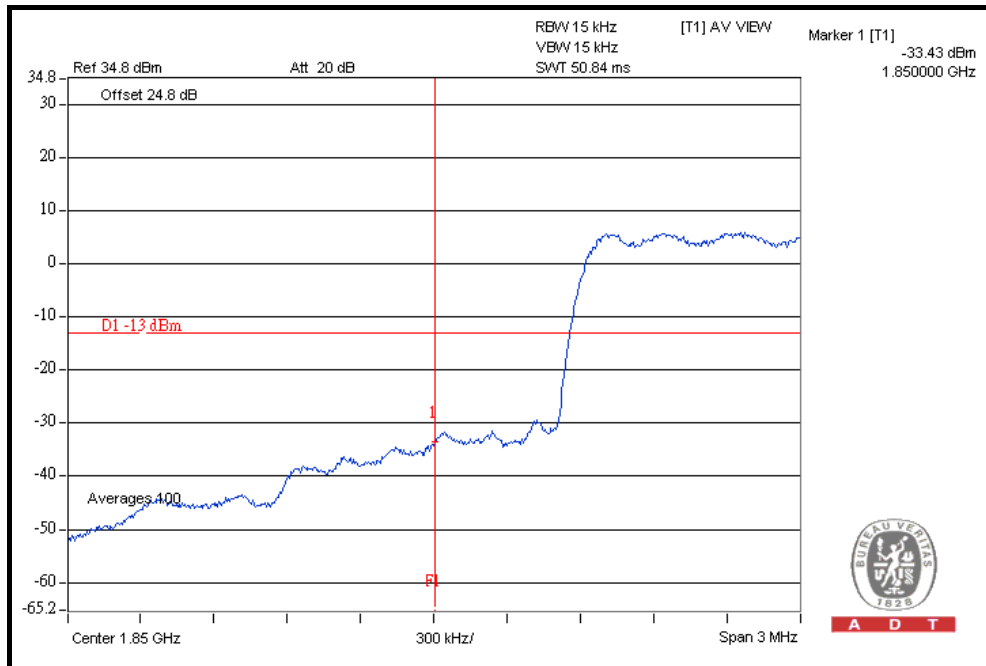

HIGHER BAND EDGE

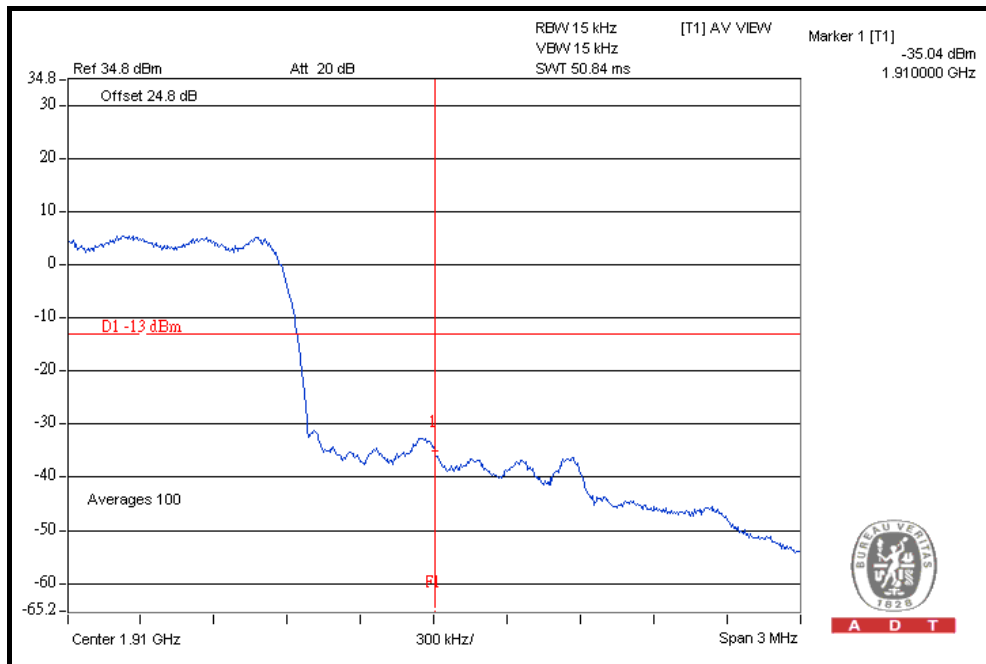





A D T

FOR EV-DO Rev. A:

LOWER BAND EDGE

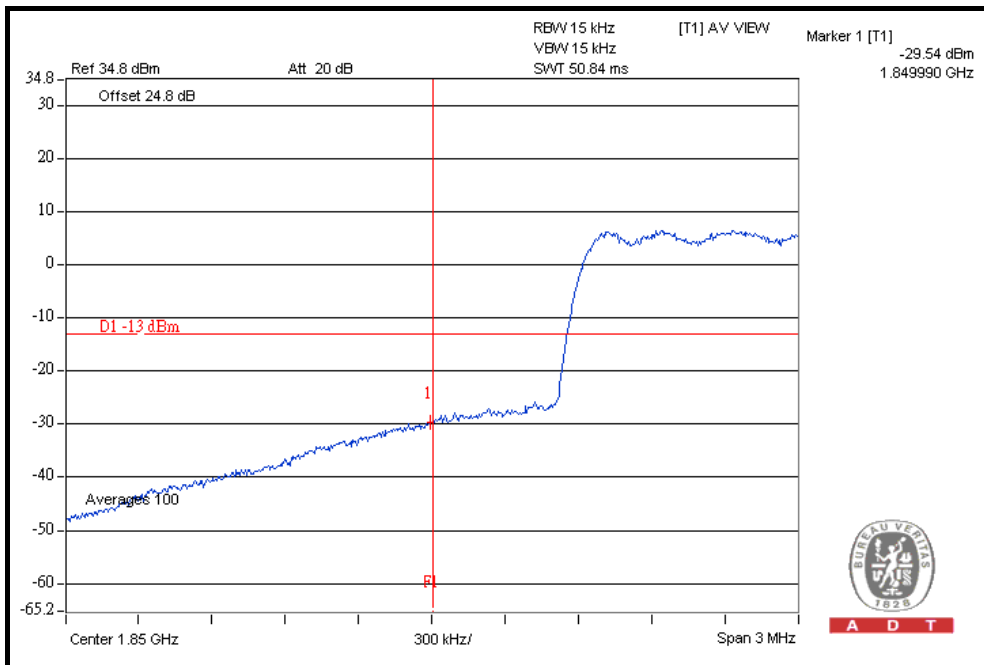


HIGHER BAND EDGE

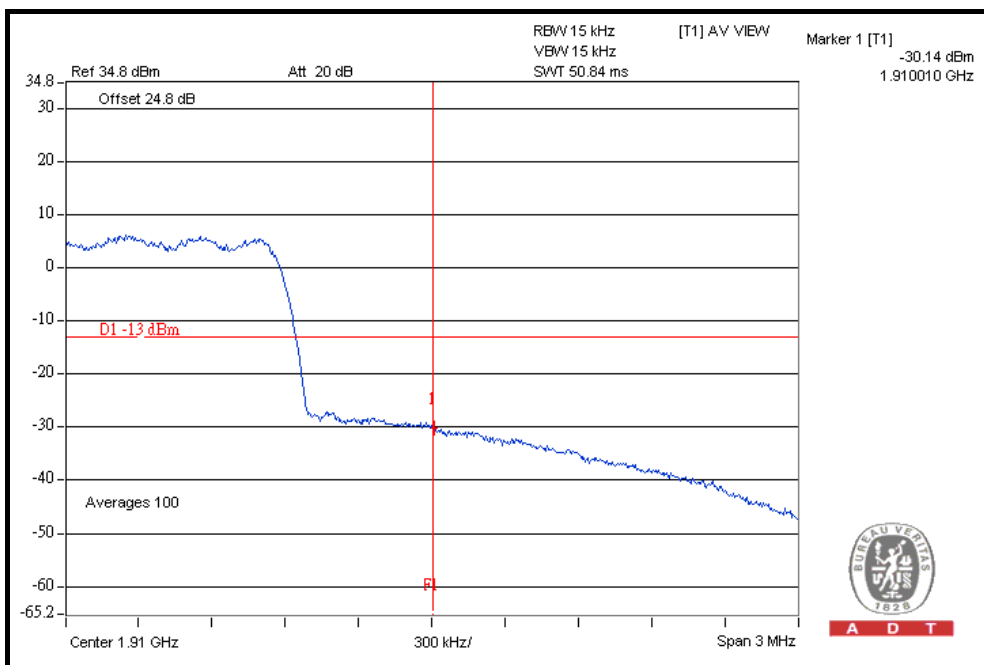




A D T

FOR EV-DO Rev. 0:
LOWER BAND EDGE

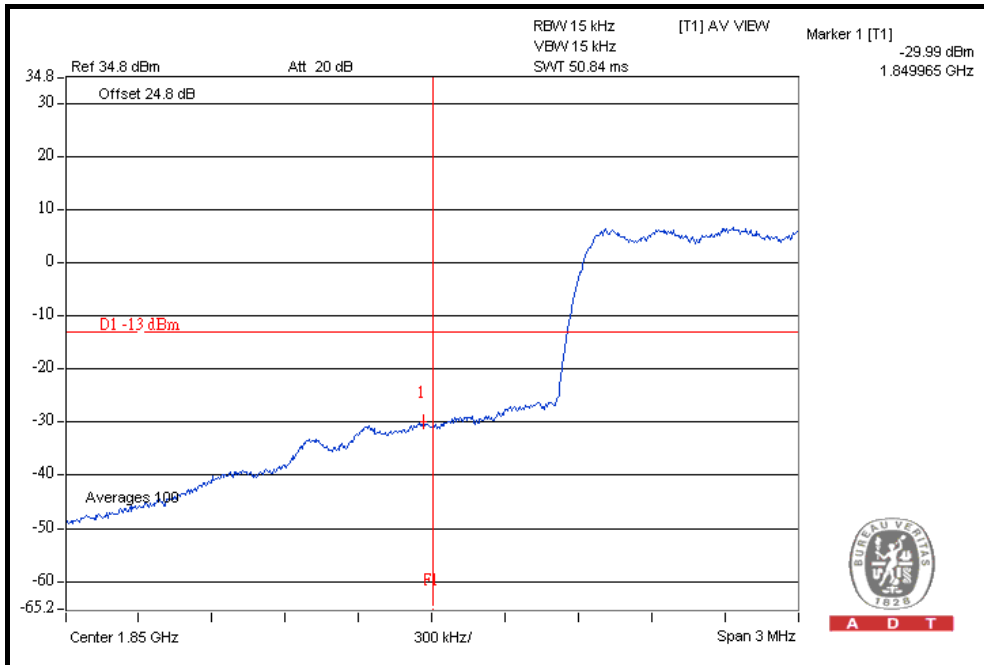

HIGHER BAND EDGE

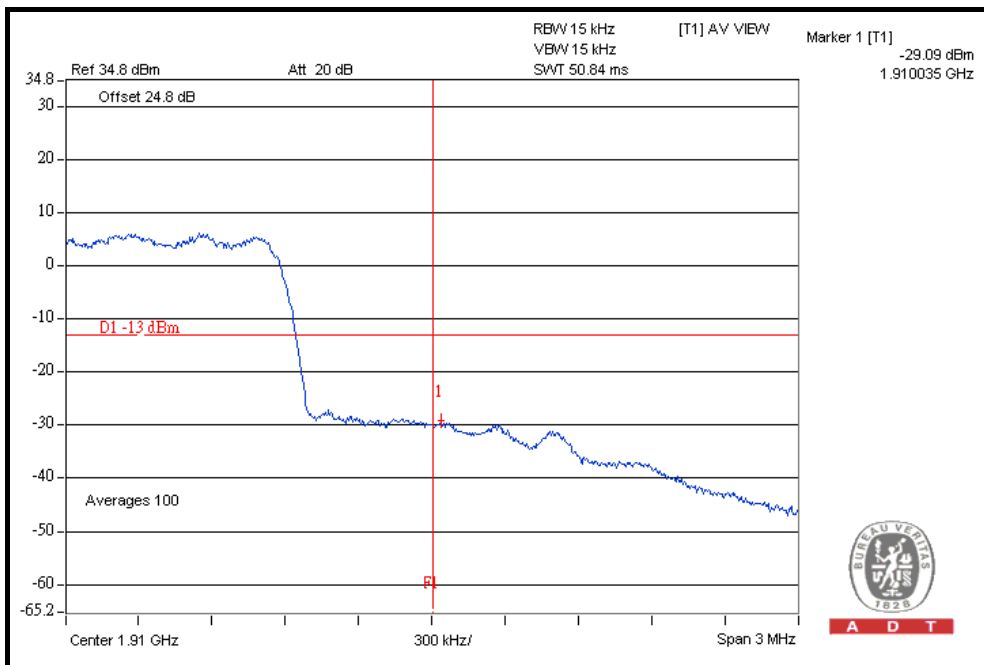




A D T


FOR WCDMA:

WCDMA MODE

LOWER BAND EDGE

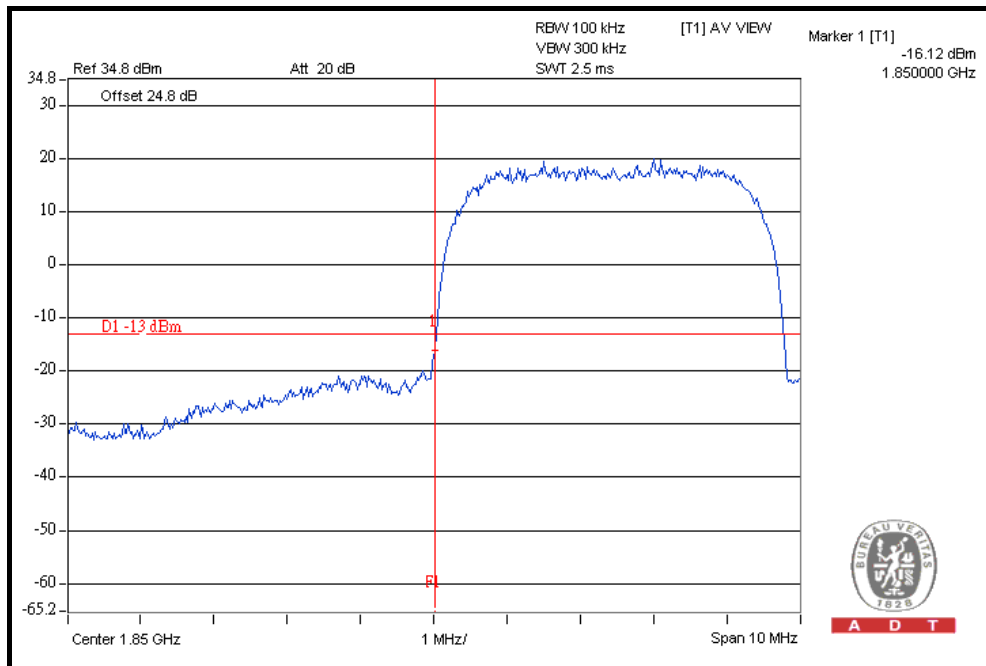

HIGHER BAND EDGE

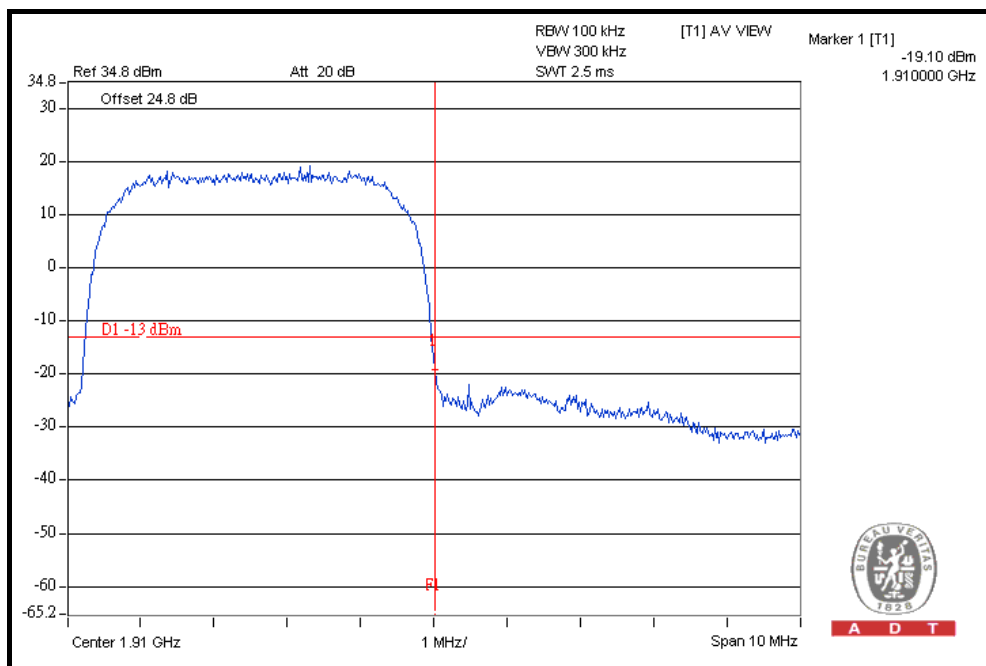





A D T

FOR HSDPA MODE

LOWER BAND EDGE

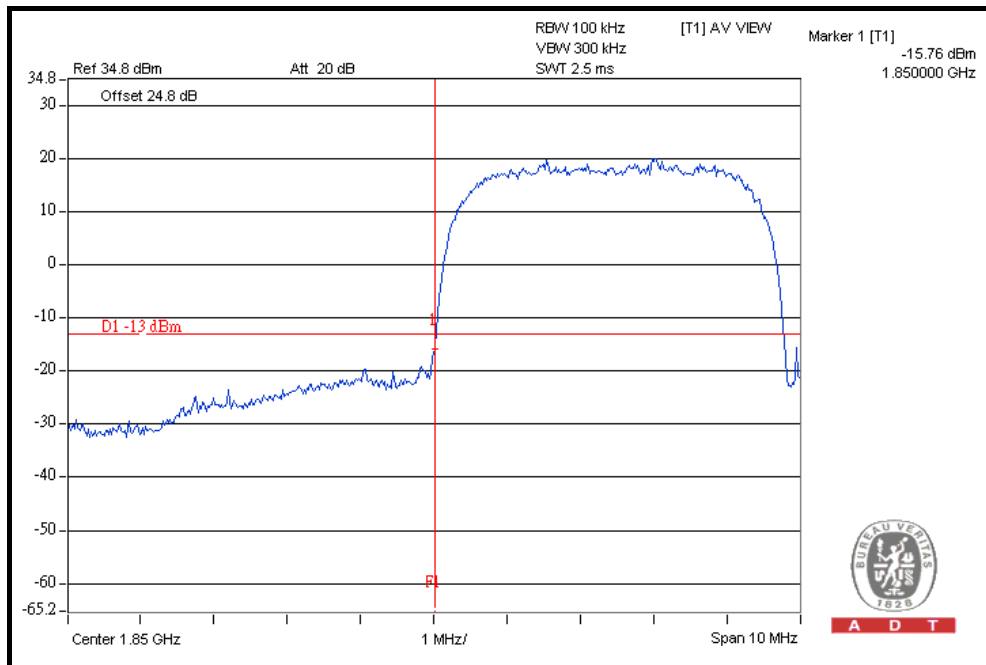

HIGHER BAND EDGE

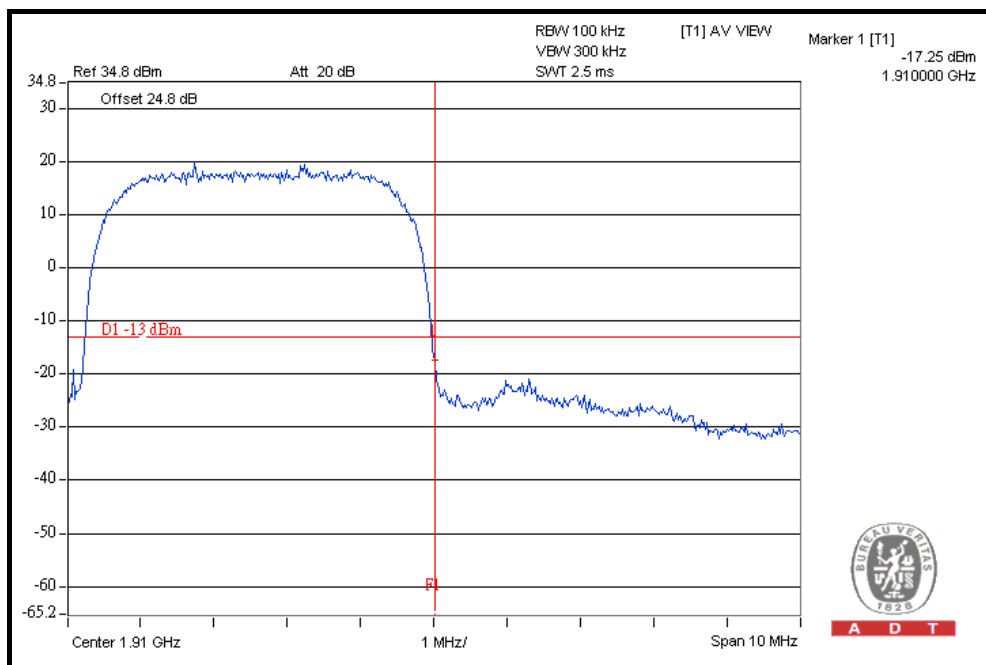





A D T

FOR HSUPA MODE

LOWER BAND EDGE

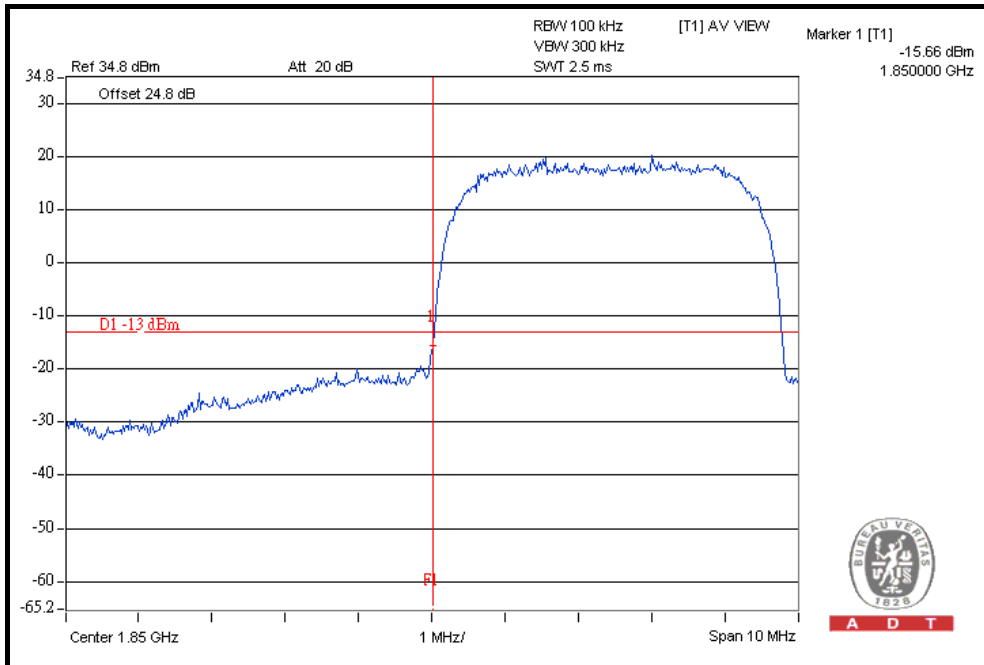

HIGHER BAND EDGE

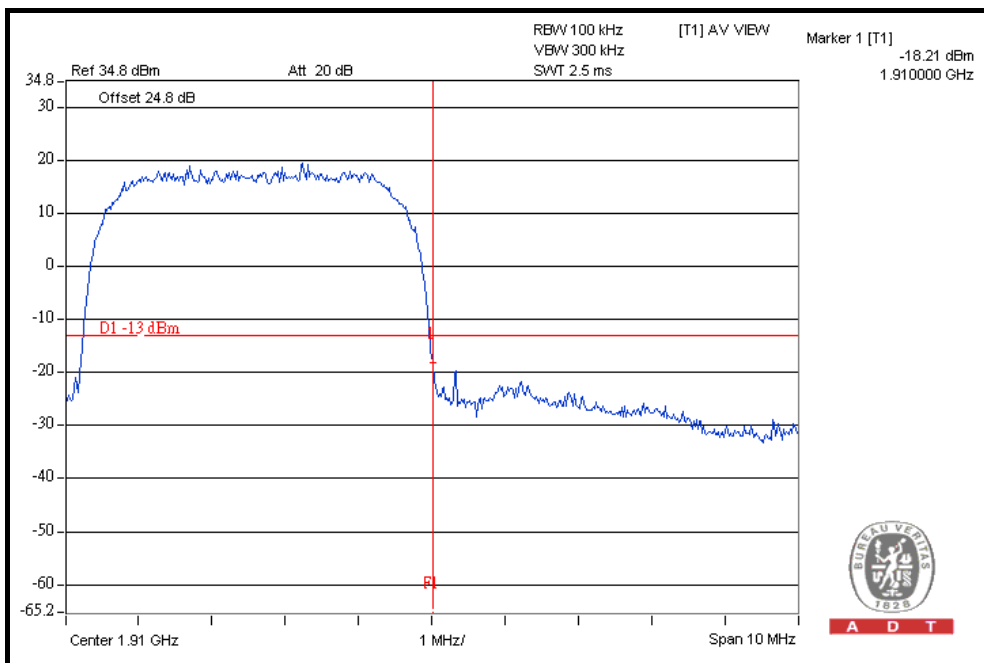

4.5 CONDUCTED SPURIOUS EMISSIONS

4.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

In the FCC 24.238(a), On any frequency outside a licensee's frequency block within USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. The specified minimum attenuation becomes 43dB and the limit of emission equal to -13dBm .

4.5.2 TEST INSTRUMENTS


DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
ROHDE & SCHWARZ Spectrum Analyzer	FSP40	100039	Feb. 23, 2011	Feb. 22, 2012
Wainwright Instruments Band Reject Filter	WRCG 824/849-810/ 863-60/9SS	SN1	Mar. 24, 2011	Mar. 23, 2012
WI Highpass filter	WHK1.5/15G-10ST	SN1	Mar. 29, 2011	Mar. 28, 2012
Mini-Circuits Power Splitter	ZN2PD-9G	NA	May 26, 2011	May 25, 2012
RF cable	SUCOFLEX 104	274403/4	Aug. 20, 2010	Aug. 19, 2011
RF cable	SUCOFLEX 104	250729/4	Aug. 19, 2010	Aug. 18, 2011
RF cable	SUCOFLEX 104	214377/4	Aug. 19, 2010	Aug. 18, 2011
JFW 20dB attenuation	50HF-020-SMA	NA	NA	NA

NOTE: The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

- The EUT makes a phone call to the communication simulator. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels, 512, 661 and 810 (GPRS) / 25, 600 and 1175 (CDMA) / 9262, 9400 and 9538 (WCDMA) (low, middle and high operational frequency range.)
- The conducted spurious emission used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- When the spectrum scanned from 9kHz to 3GHz, it shall be connected to the band reject filter attenuated the carried frequency. The spectrum set RB=1MHz, VB=3MHz.
- When the spectrum scanned from 3kHz to 20GHz, it shall be connected to the high pass filter attenuated the carried frequency. The spectrum set set RB=1MHz, VB=3MHz .

4.5.4 TEST SETUP

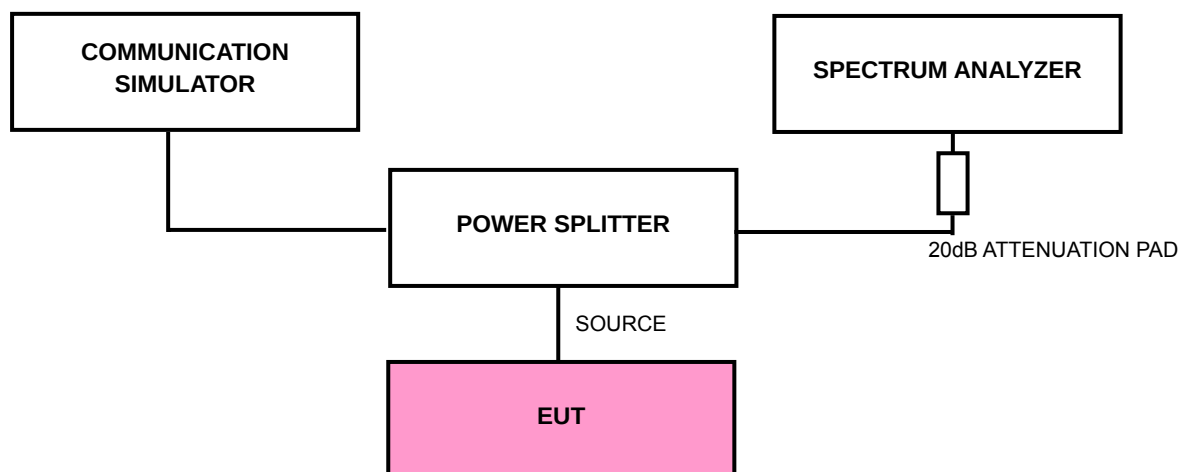


4.5.5 EUT OPERATING CONDITIONS

- The EUT makes a phone call to the communication simulator.
- The communication simulator station system controlled an EUT to export maximum output power under transmission mode and specific channel frequency.


4.5.6 TEST RESULTS

FOR GPRS:


CH 512: 9kHz ~ 3GHz

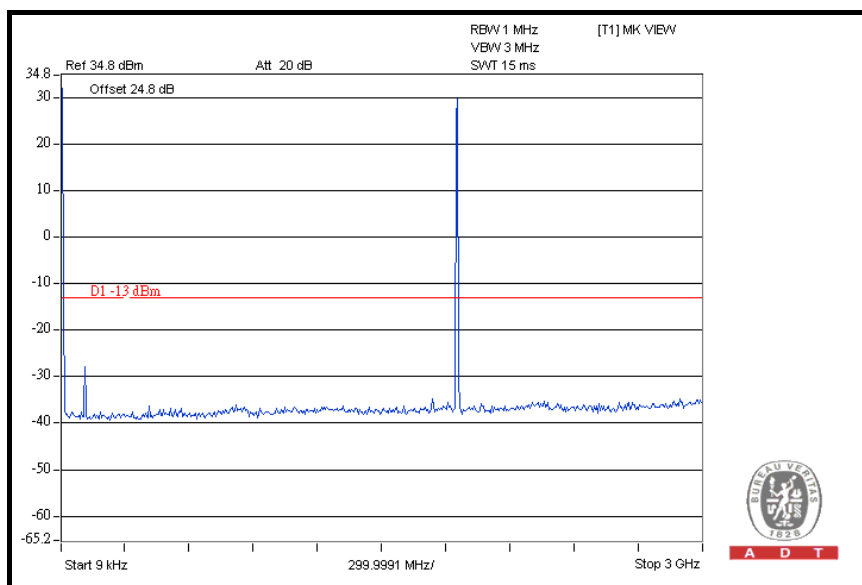


3GHz ~ 10GHz

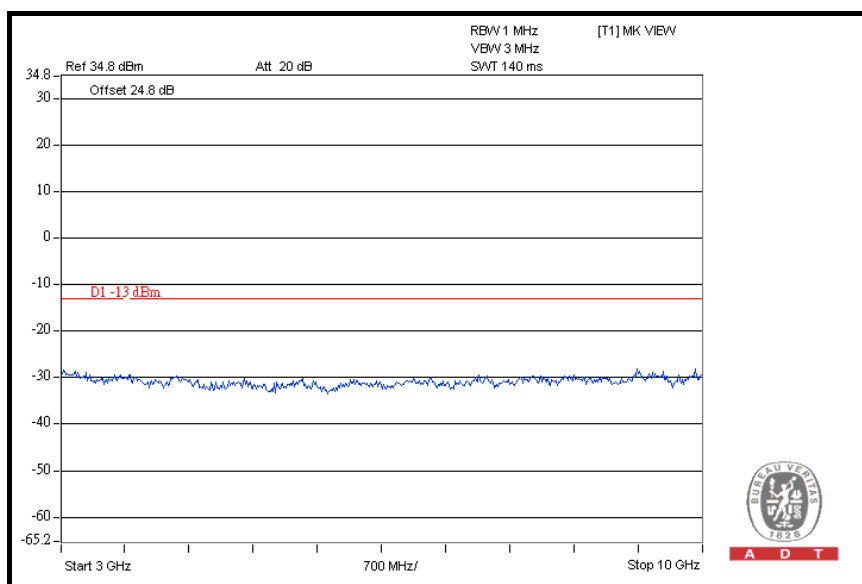


10GHz ~ 20GHz

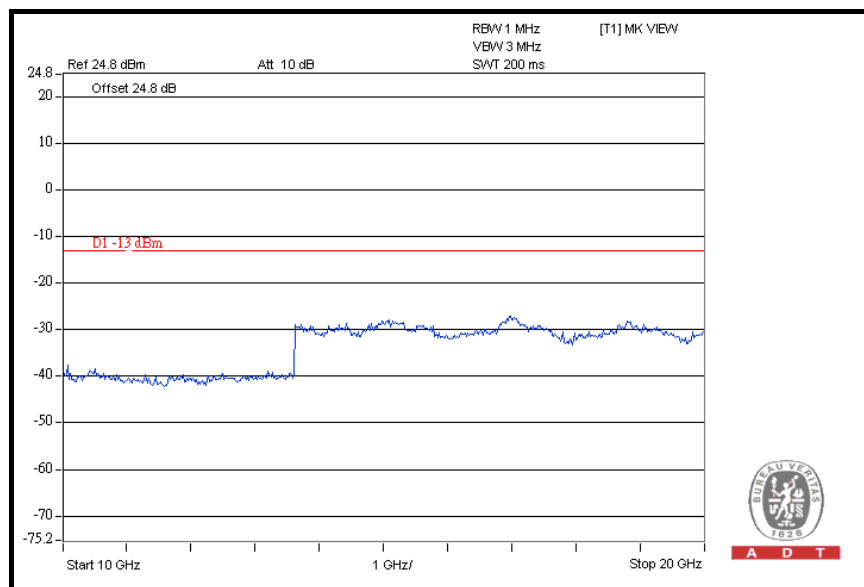


CH 661: 9kHz ~ 3GHz

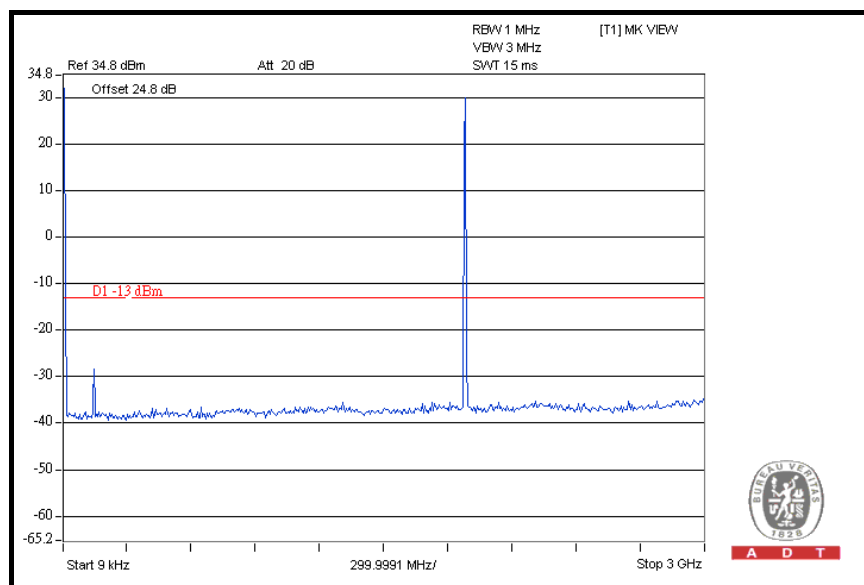


3GHz ~ 10GHz

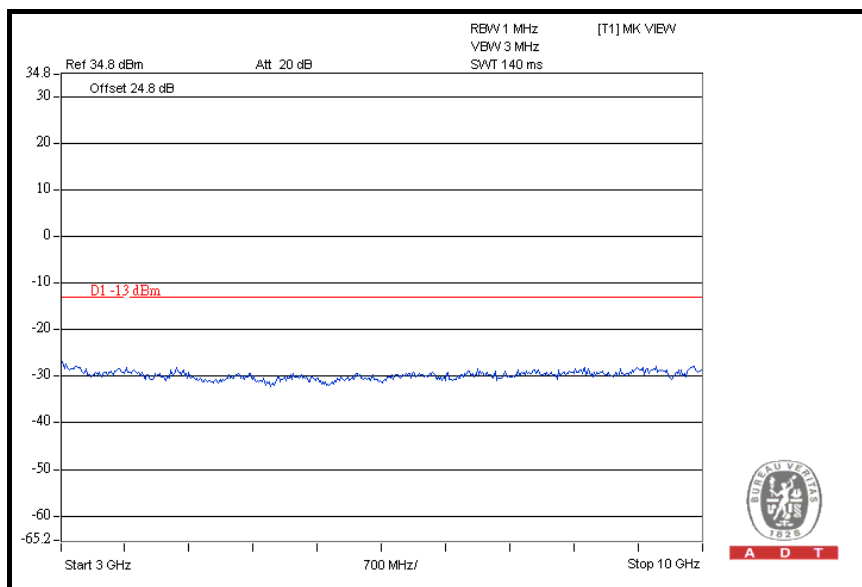


10GHz ~ 20GHz

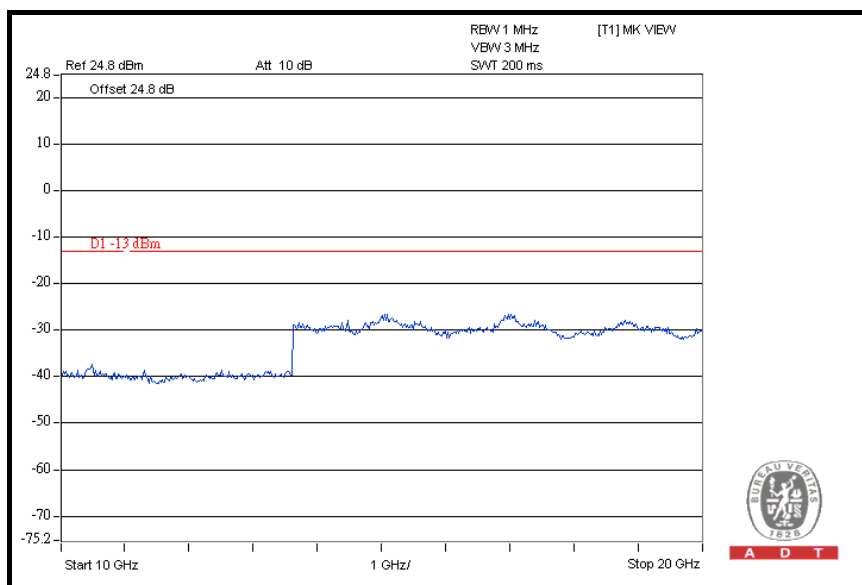


CH 810: 9kHz ~ 3GHz

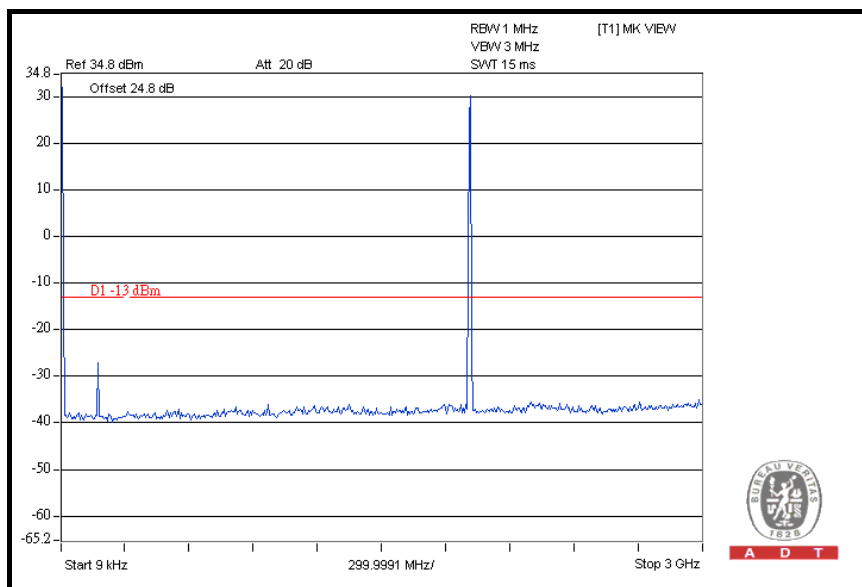

3GHz ~ 10GHz

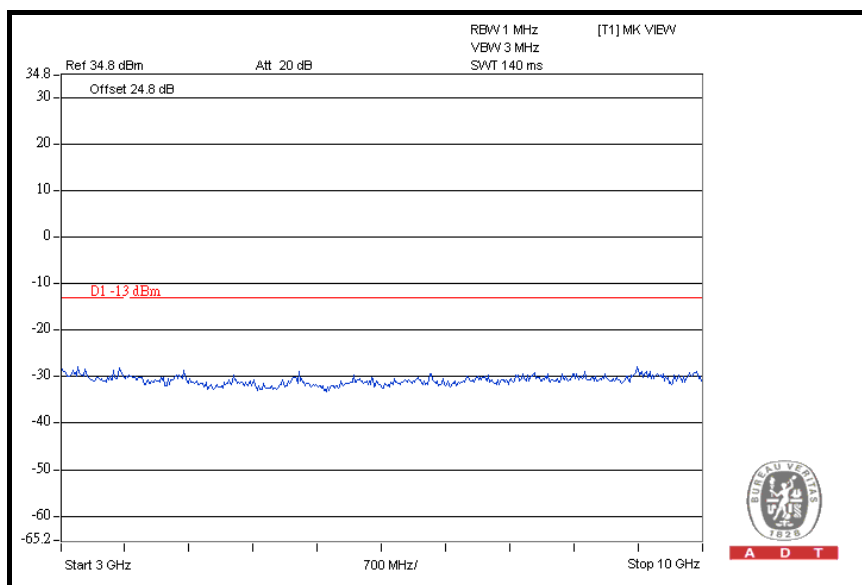


10GHz ~ 20GHz

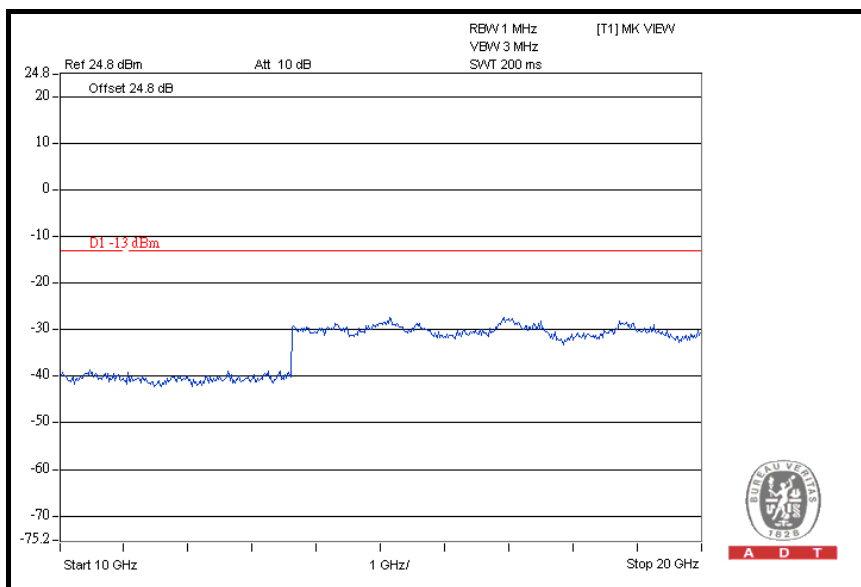


FOR CDMA:


CH 25: 9kHz ~ 3GHz

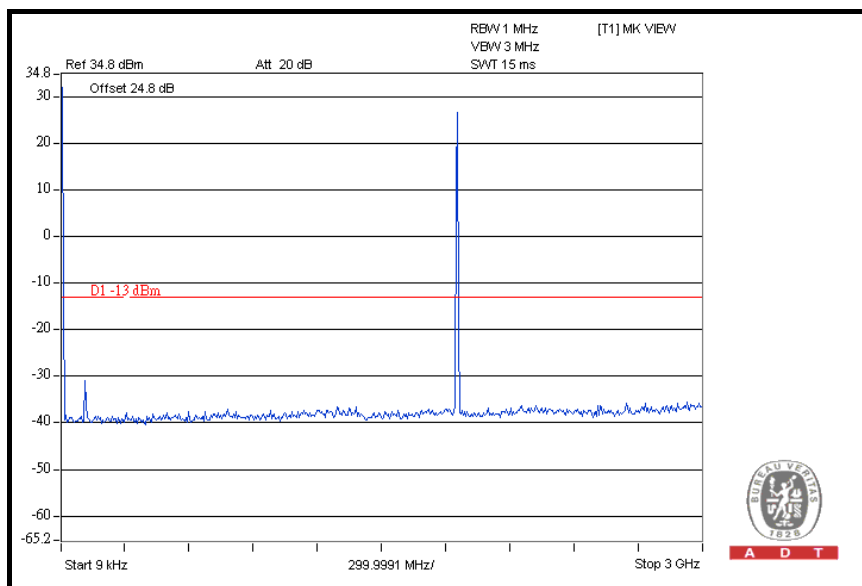


3GHz ~ 10GHz

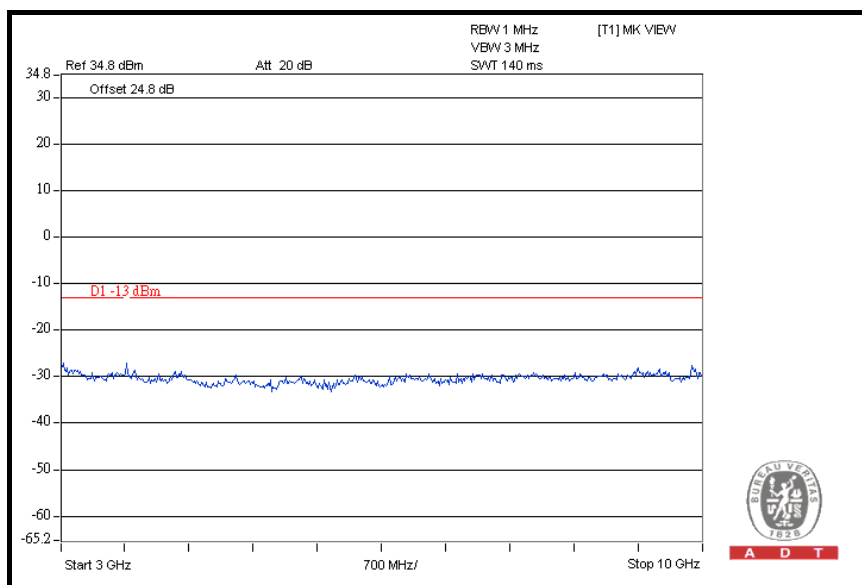

10GHz ~ 20GHz

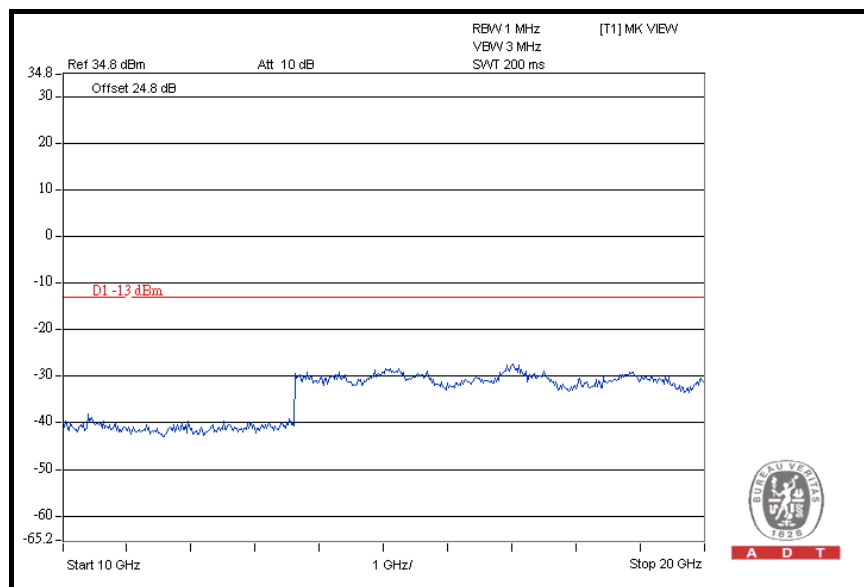


CH 600: 9kHz ~ 3GHz

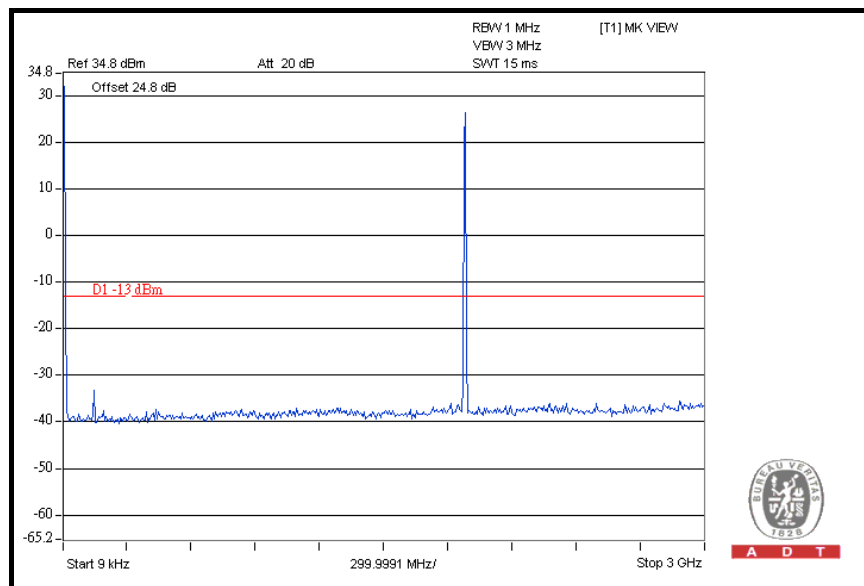




A D T

3GHz ~ 10GHz

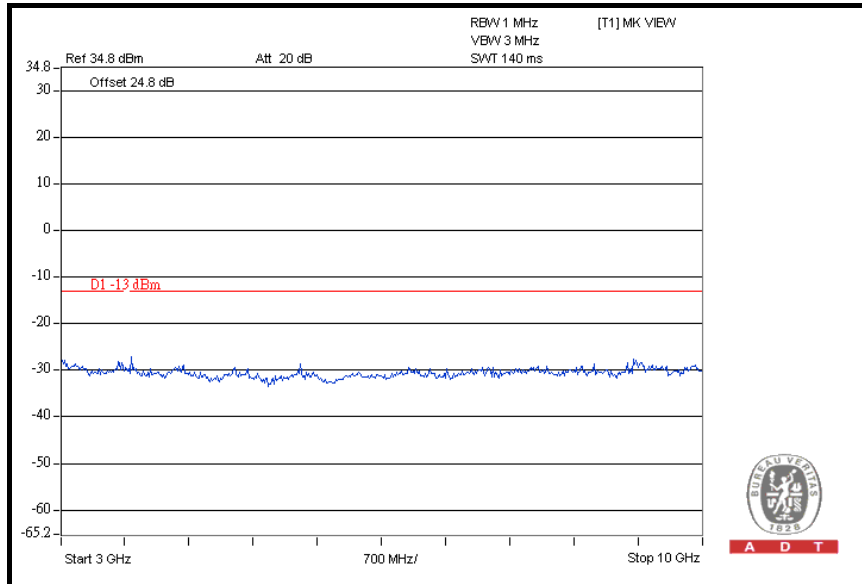


10GHz ~ 20GHz

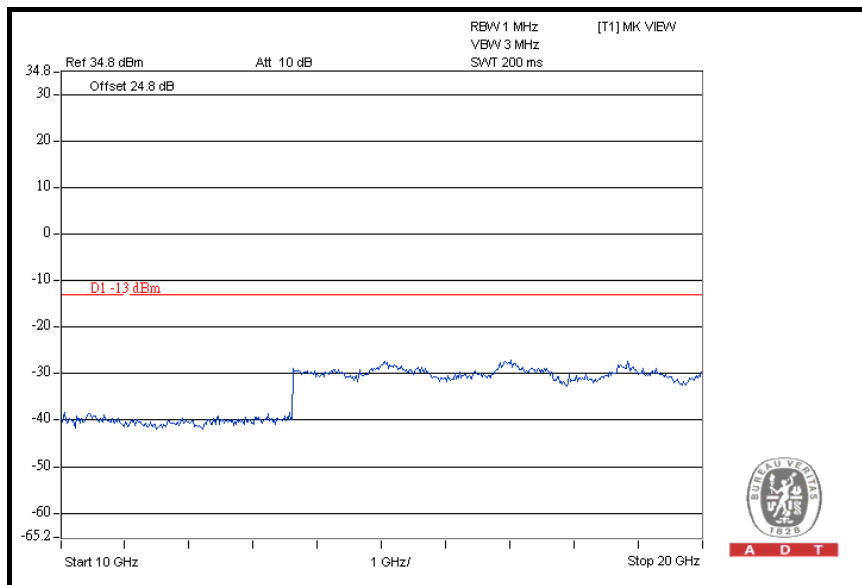




A D T


CH 1175: 9kHz ~ 3GHz

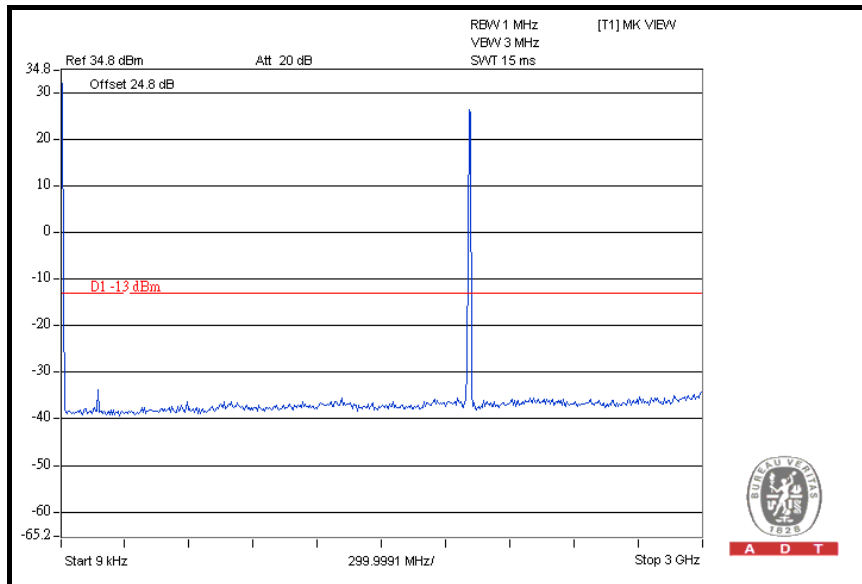

3GHz ~ 10GHz

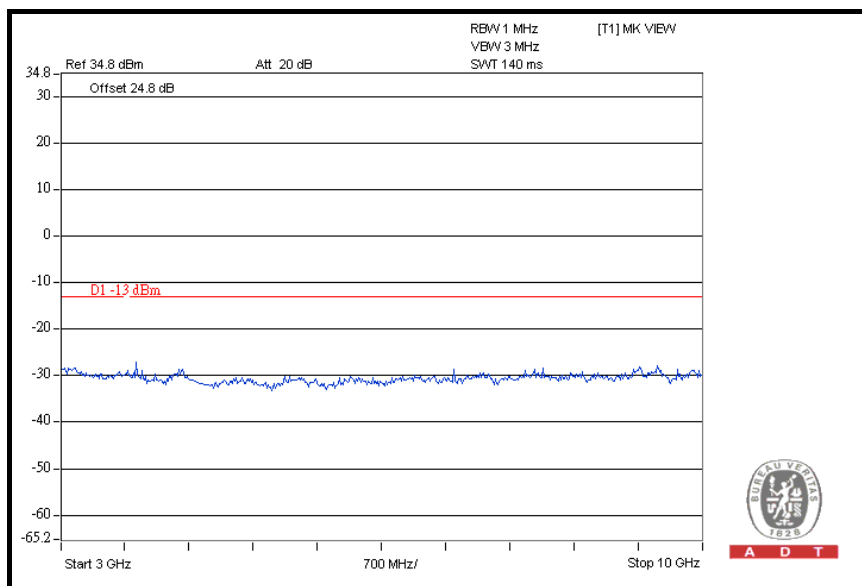


10GHz ~ 20GHz

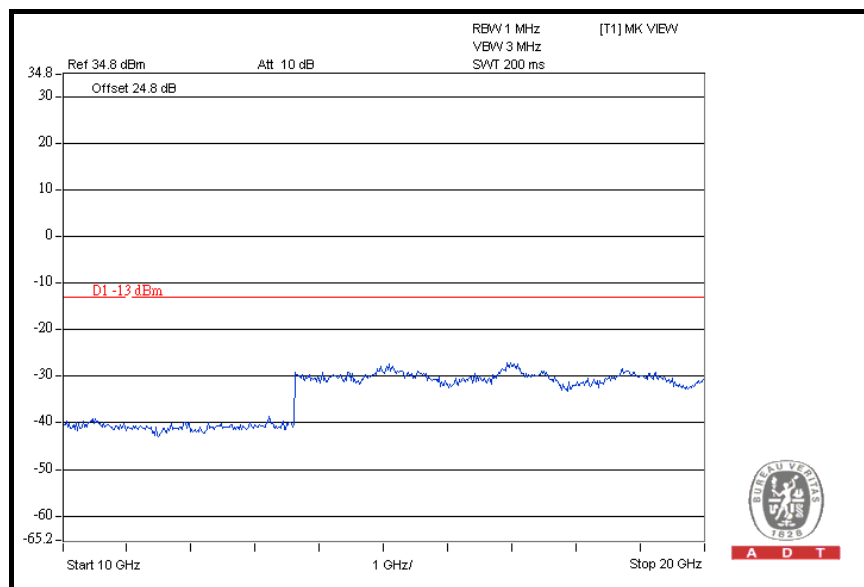


FOR WCDMA:


CH 9262: 9kHz ~ 3GHz

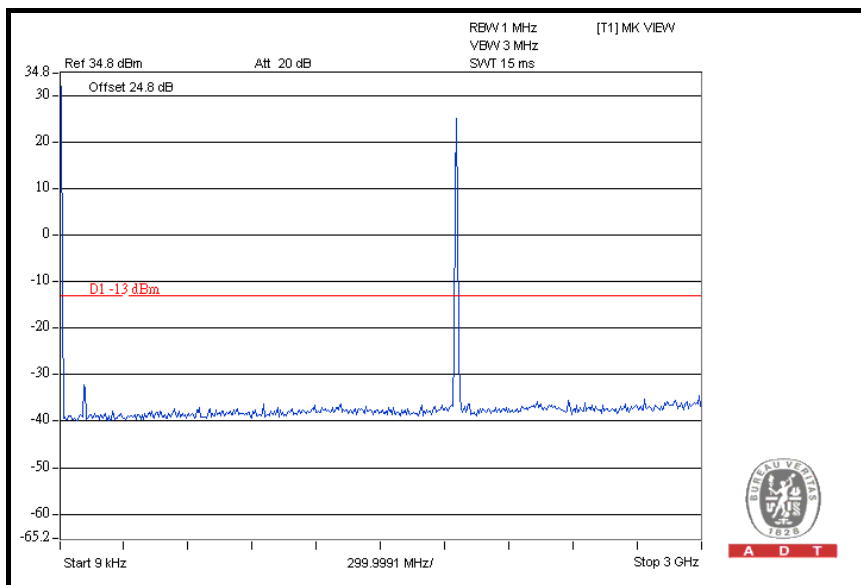


3GHz ~ 10GHz

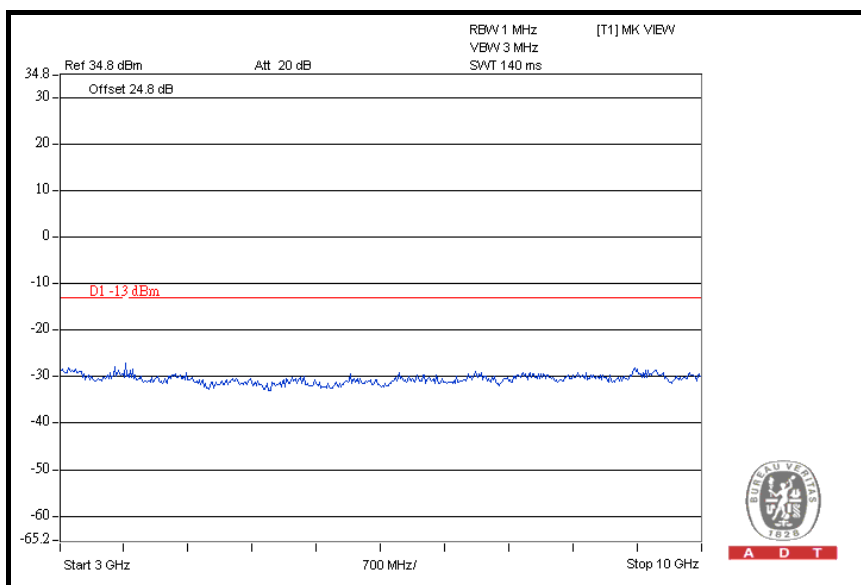


10GHz ~ 20GHz

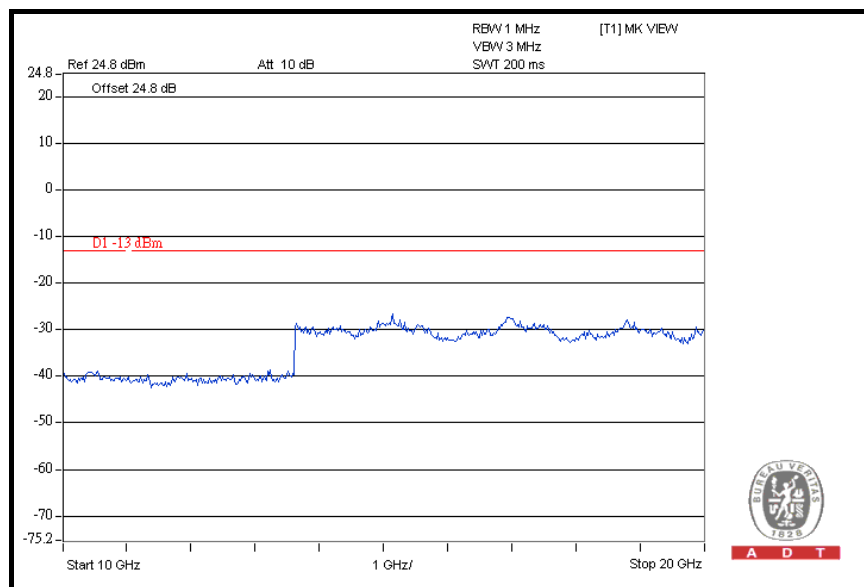


CH 9400: 9kHz ~ 3GHz

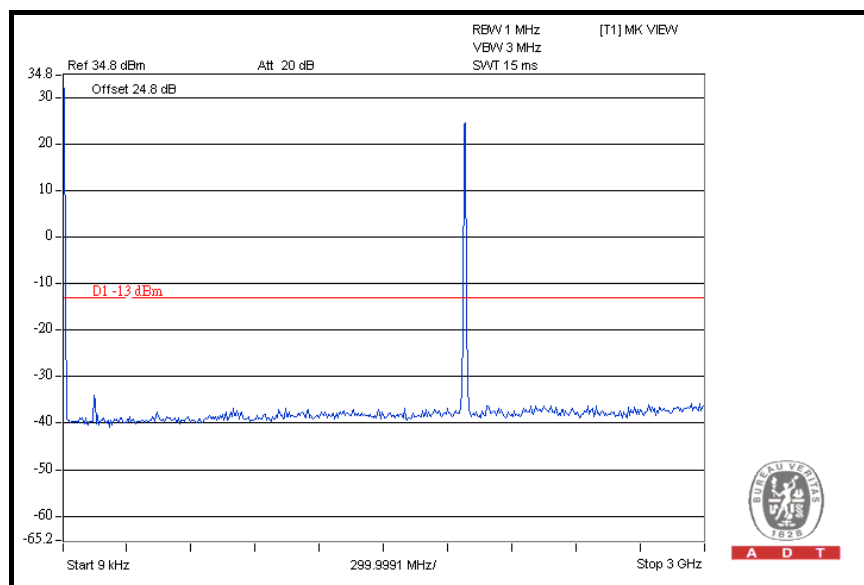


3GHz ~ 10GHz

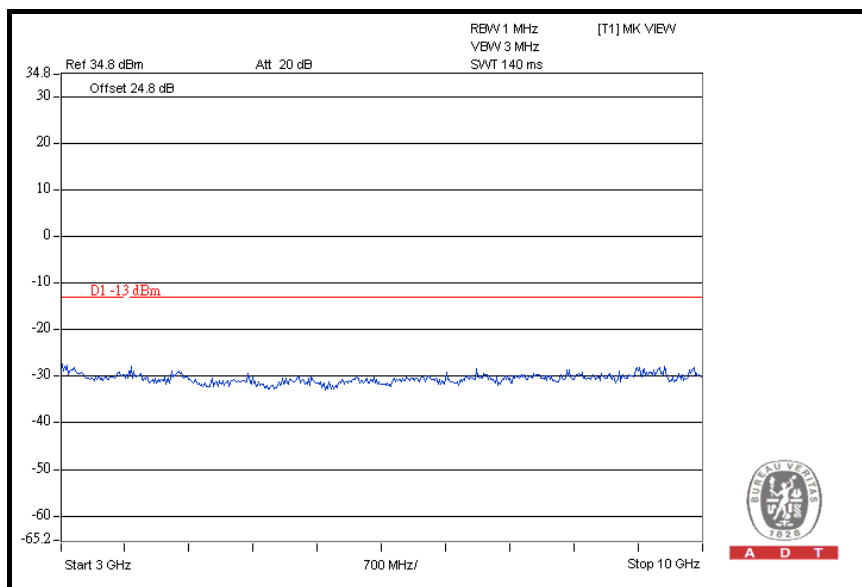


10GHz ~ 20GHz

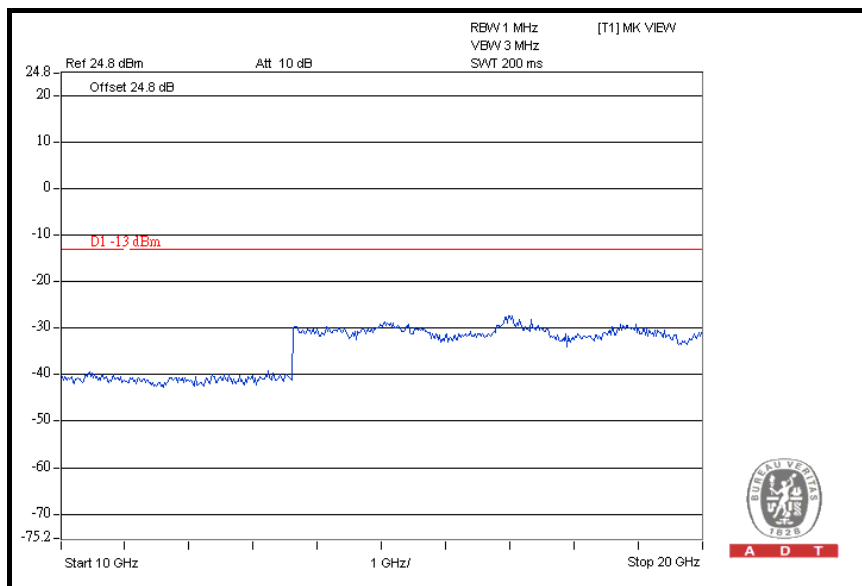


CH 9538: 9kHz ~ 3GHz

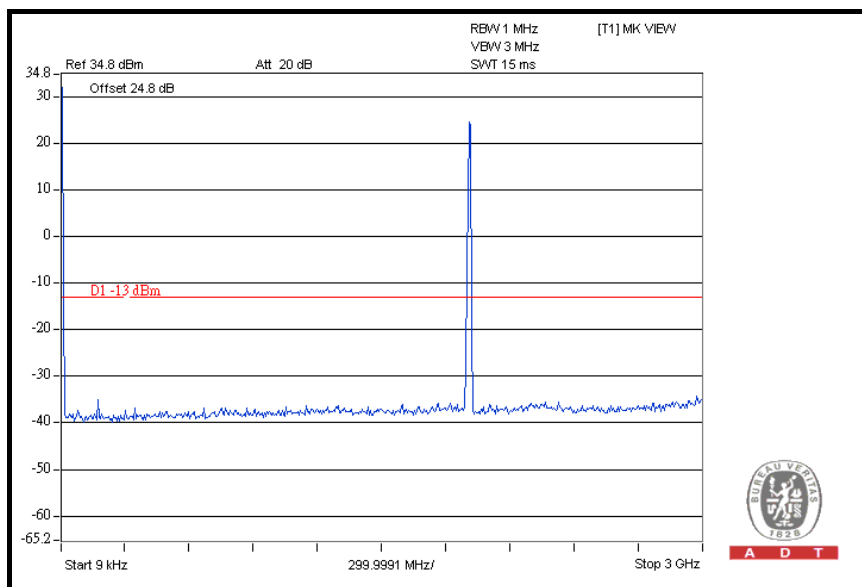

3GHz ~ 10GHz

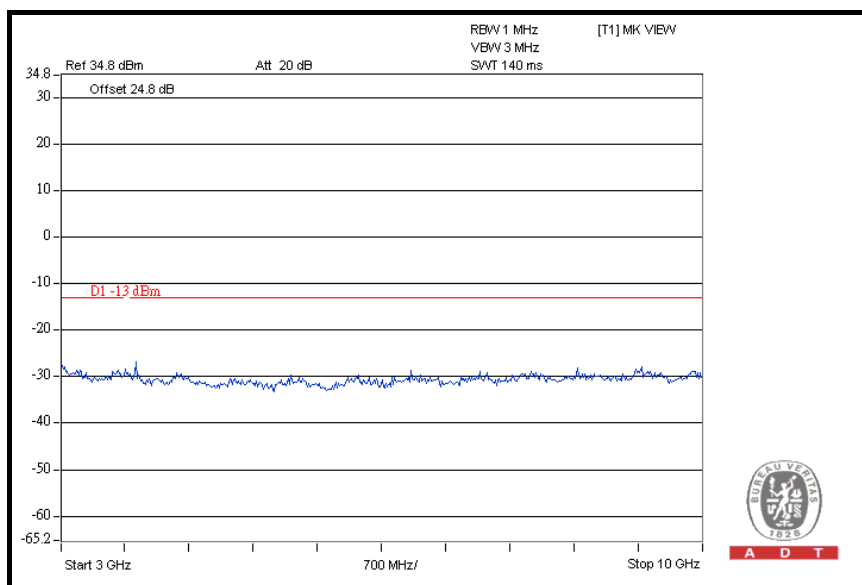

10GHz ~ 20GHz

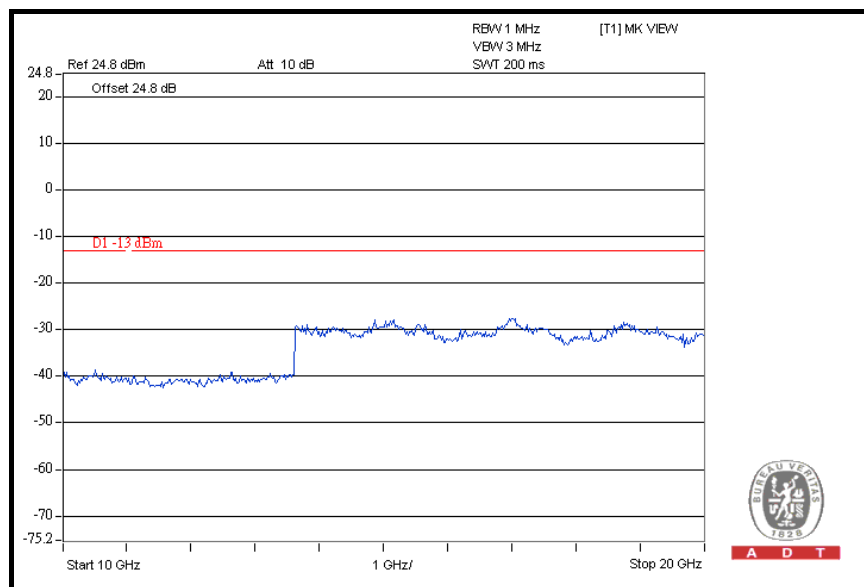

4.6 RADIATED EMISSION MEASUREMENT (BELOW 1GHz)

4.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

In the FCC 24.238(a), On any frequency outside a licensee's frequency block within USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. The emission of limit equal to -13 dBm. So the limit of emission is the same absolute specified line.

LIMIT (dBm)	EQUIVALENT FIELD STRENGTH AT 3m (dBuV/m) (NOTE)
-13	82.2

NOTE: The following formula is used to convert the equipment radiated power to field strength.

$$E = [1000000 \sqrt{(30P)}] / 3 \text{ uV/m, where P is Watts.}$$

4.6.2 TEST INSTRUMENTS

Same as 4.1.2.

4.6.3 TEST PROCEDURES


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE: The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP

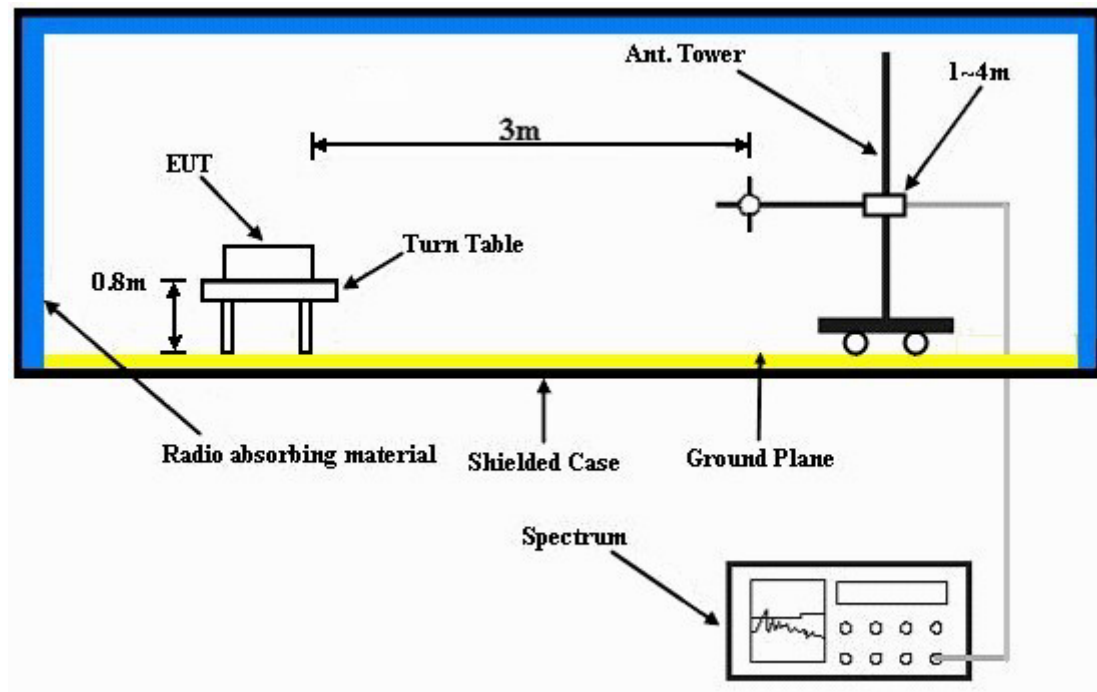

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.6.6 EUT OPERATING CONDITIONS

- The EUT makes a call to the communication simulator.
- The communication simulator station system controlled an EUT to export maximum output power under transmission mode and specific channel frequency.

4.6.7 TEST RESULTS

FOR GPRS:

MODE	TX channel 512	FREQUENCY RANGE	Below 1000 MHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa	INPUT POWER	120Vac, 60 Hz
TESTED BY	David Huang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	168.02	39.5	82.2	-42.7	2.00 H	10	25.8	13.7
2	298.26	39.1	82.2	-43.1	1.00 H	172	24.3	14.8
3	438.22	37.4	82.2	-44.8	2.00 H	127	18.9	18.5
4	665.65	40.6	82.2	-41.6	2.00 H	97	17.1	23.5
5	751.18	42.2	82.2	-40.0	1.00 H	202	17.5	24.7
6	799.78	37.3	82.2	-44.9	1.00 H	130	12.1	25.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	31.94	40.4	82.2	-41.8	1.00 V	244	27.9	12.5
2	288.54	37.6	82.2	-44.6	2.00 V	178	23.1	14.5
3	498.48	39.1	82.2	-43.1	1.00 V	349	18.9	20.2
4	650.10	39.0	82.2	-43.2	2.00 V	358	15.7	23.3
5	665.65	40.7	82.2	-41.5	1.00 V	283	17.2	23.5
6	799.78	35.1	82.2	-47.1	1.00 V	106	9.9	25.2

NOTE:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. This is valid for all 3 channels.

FOR CDMA:

MODE	TX channel 25	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa	INPUT POWER	120Vac, 60 Hz
TESTED BY	David Huang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	168.02	37.2	82.2	-45.0	2.00 H	202	23.5	13.7
2	300.20	39.8	82.2	-42.4	1.00 H	283	24.9	14.9
3	650.10	41.9	82.2	-40.3	1.00 H	85	18.6	23.3
4	665.65	44.3	82.2	-37.9	1.00 H	112	20.8	23.5
5	700.64	43.0	82.2	-39.2	1.00 H	85	18.9	24.1
6	751.18	42.8	82.2	-39.4	1.00 H	121	18.1	24.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	31.94	41.1	82.2	-41.1	1.00 V	190	28.6	12.5
2	169.96	34.1	82.2	-48.1	1.00 V	91	20.6	13.5
3	294.37	37.0	82.2	-45.2	2.00 V	178	22.3	14.7
4	500.42	38.8	82.2	-43.4	2.00 V	337	18.6	20.2
5	650.10	39.8	82.2	-42.4	1.00 V	10	16.5	23.3
6	700.64	39.8	82.2	-42.4	2.00 V	7	15.7	24.1

NOTE:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. This is valid for all 3 channels.

FOR WCDMA:

MODE	TX channel 9400	FREQUENCY RANGE	Below 1000 MHz
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa	INPUT POWER	120Vac, 60 Hz
TESTED BY	David Huang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	166.07	37.8	82.2	-44.4	2.00 H	190	23.8	14.0
2	288.54	40.7	82.2	-41.5	1.00 H	172	26.2	14.5
3	442.10	37.6	82.2	-44.6	2.00 H	250	19.0	18.6
4	665.65	44.9	82.2	-37.3	1.00 H	88	21.4	23.5
5	751.18	41.2	82.2	-41.0	1.00 H	145	16.5	24.7
6	832.83	36.3	82.2	-45.9	1.00 H	346	10.5	25.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	31.94	41.5	82.2	-40.7	1.00 V	124	29.0	12.5
2	168.02	33.9	82.2	-48.3	1.00 V	94	20.2	13.7
3	294.37	37.7	82.2	-44.5	2.00 V	172	23.0	14.7
4	434.33	37.7	82.2	-44.5	1.00 V	283	19.3	18.4
5	650.10	40.1	82.2	-42.1	1.00 V	10	16.8	23.3
6	900.86	41.1	82.2	-41.1	1.00 V	247	14.1	27.0

NOTE:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. This is valid for all 3 channels.

4.7 RADIATED EMISSION MEASUREMENT (ABOVE 1GHz)

4.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT

In the FCC 24.238(a), On any frequency outside a licensee's frequency block within USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. The specified minimum attenuation becomes 43dB and the limit of emission equal to -13dBm .

4.7.2 TEST INSTRUMENTS

Same as 4.1.2.

4.7.3 TEST PROCEDURES


- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The " Read Value " is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to " Read Value " of step a. Record the power level of S.G
- c. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}.$

NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

4.7.4 DEVIATION FROM TEST STANDARD

No deviation

4.7.5 TEST SETUP

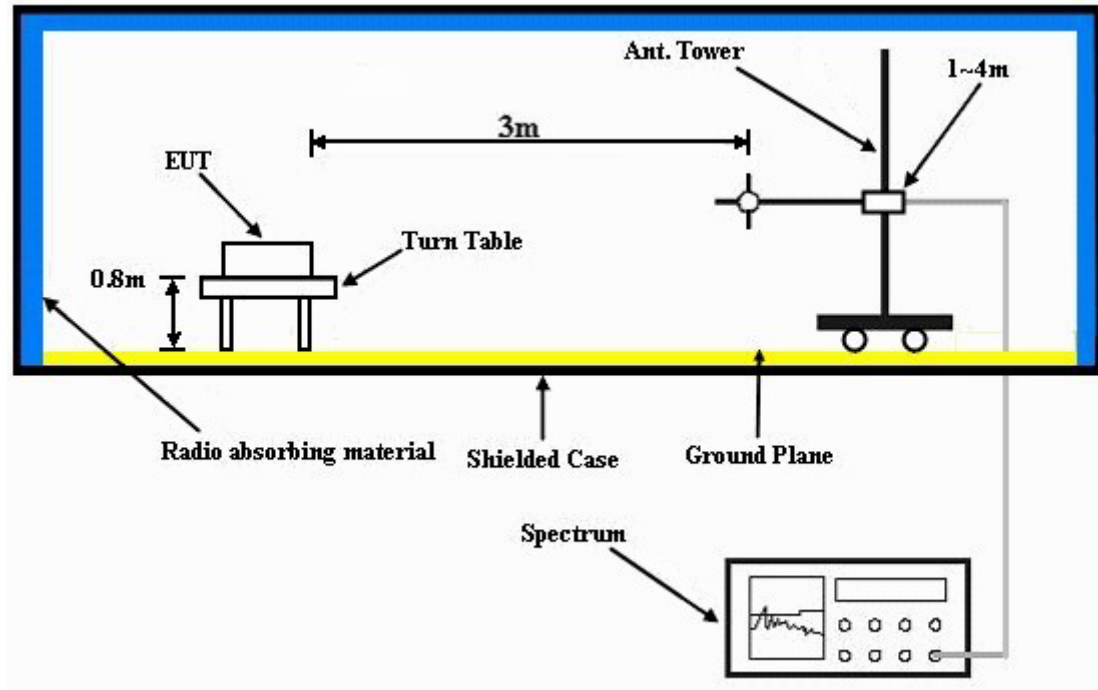

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.7.6 EUT OPERATING CONDITIONS

- a. The EUT makes a call to the communication simulator.
- b. The communication simulator station system controlled an EUT to export maximum output power under transmission mode and specific channel frequency.

4.7.7 TEST RESULTS

FOR GPRS:

MODE	TX channel 512	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	27deg. C, 65%RH, 991hPa
TESTED BY	Mark Liao		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	3700.4	44.6	-13.0	-60.0	9.9	-50.1
2	5550.6	48.2	-13.0	-56.1	9.7	-46.4
3	7400.8	52.8	-13.0	-49.8	7.9	-41.9
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	3700.4	44.5	-13.0	-60.1	9.9	-50.2
2	5550.6	48.4	-13.0	-55.9	9.7	-46.2
3	7400.8	52.3	-13.0	-50.3	7.9	-42.4

NOTE: Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE	TX channel 661	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	27deg. C, 65%RH, 991hPa
TESTED BY	Mark Liao		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	3760	44.4	-13.0	-60.3	9.9	-50.4
2	5640	48.1	-13.0	-56.1	9.6	-46.5
3	7520	53.2	-13.0	-49.1	7.8	-41.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	3760	44.8	-13.0	-59.9	9.9	-50.0
2	5640	48.2	-13.0	-56.0	9.6	-46.4
3	7520	52.5	-13.0	-49.8	7.8	-42.0

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).

MODE	TX channel 810	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	27deg. C, 65%RH, 991hPa
TESTED BY	Mark Liao		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	3819.6	45.9	-13.0	-58.7	9.9	-48.8
2	5729.4	49.3	-13.0	-54.8	9.6	-45.2
3	7639.2	55.5	-13.0	-46.8	7.8	-39.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	3819.6	47.1	-13.0	-57.5	9.9	-47.6
2	5729.4	50.1	-13.0	-54.0	9.6	-44.4
3	7639.2	54.6	-13.0	-47.7	7.8	-39.9

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).

FOR CDMA:

MODE	Channel 25	FREQUENCY RANGE	Above 1000MHz
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	27deg. C, 65%RH, 991hPa
TESTED BY	Mark Liao		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	3702.50	52.6	-13.0	-52.0	9.9	-42.1
2	5553.75	47.2	-13.0	-57.1	9.7	-47.4
3	7405.00	51.8	-13.0	-50.8	7.9	-42.9
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	3702.50	51.7	-13.0	-52.9	9.9	-43.0
2	5553.75	49.1	-13.0	-55.2	9.7	-45.5
3	7405.00	52.2	-13.0	-50.4	7.9	-42.5

NOTE: Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE	Channel 600	FREQUENCY RANGE	Above 1000MHz
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	27deg. C, 65%RH, 991hPa
TESTED BY	Mark Liao		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	3760.00	54.3	-13.0	-50.4	9.9	-40.5
2	5640.00	48.4	-13.0	-55.8	9.6	-46.2
3	7520.00	53.1	-13.0	-49.2	7.8	-41.4
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	3760.00	55.6	-13.0	-49.1	9.9	-39.2
2	5640.00	48.7	-13.0	-55.5	9.6	-45.9
3	7520.00	53.0	-13.0	-49.3	7.8	-41.5

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).

MODE	Channel 1175	FREQUENCY RANGE	Above 1000MHz
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	27deg. C, 65%RH, 991hPa
TESTED BY	Mark Liao		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	3817.50	55.5	-13.0	-49.1	9.9	-39.2
2	5726.25	47.5	-13.0	-56.6	9.6	-47.0
3	7635.00	53.1	-13.0	-49.2	7.8	-41.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV)	LIMIT (dBm)	S.G POWER VALUE (dBm)	CORRECTION FACTOR (dB)	POWER VALUE (dBm)
1	3817.50	55.7	-13.0	-48.9	9.9	-39.0
2	5726.25	47.6	-13.0	-56.5	9.6	-46.9
3	7635.00	53.7	-13.0	-48.6	7.8	-40.8

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).

FOR WCDMA:

MODE	TX channel 9262	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	27deg. C, 65%RH, 991hPa
TESTED BY	Mark Liao		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	3704.8	52.5	-13.0	-52.1	9.9	-42.2
2	5557.2	46.6	-13.0	-57.7	9.7	-48.0
3	7409.6	51.9	-13.0	-50.7	7.9	-42.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	3704.8	48.4	-13.0	-56.2	9.9	-46.3
2	5557.2	46.8	-13.0	-57.5	9.7	-47.8
3	7409.6	51.9	-13.0	-50.7	7.9	-42.8

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).

MODE	TX channel 9400	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	27deg. C, 65%RH, 991hPa
TESTED BY	Mark Liao		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	3760.0	53.7	-13.0	-51.0	9.9	-41.1
2	5640.0	47.0	-13.0	-57.2	9.6	-47.6
3	7520.0	51.6	-13.0	-50.7	7.8	-42.9
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	3760.0	52.7	-13.0	-52.0	9.9	-42.1
2	5640.0	47.0	-13.0	-57.2	9.6	-47.6
3	7520.0	51.7	-13.0	-50.6	7.8	-42.8

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).

MODE	TX channel 9538	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	27deg. C, 65%RH, 991hPa
TESTED BY	Mark Liao		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	3815.2	61.2	-13.0	-43.4	9.9	-33.5
2	5722.8	46.9	-13.0	-57.2	9.6	-47.6
3	7630.4	52.7	-13.0	-49.6	7.8	-41.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	3815.2	56.9	-13.0	-47.7	9.9	-37.8
2	5722.8	47.8	-13.0	-56.3	9.6	-46.7
3	7630.4	53.1	-13.0	-49.2	7.8	-41.4

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).



5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

6 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.
If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Email: service.adt@tw.bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

7 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---