




System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/3/2008 4:57:17 PM	DUT Battery Model/No:	
Filename:	Lap_384.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	850
Device Under Test:	Sony M2	Relative Permittivity:	54.41
Relative Humidity:	45.6%	Conductivity:	0.982
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	8.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	-36.00 mm
Antenna Configuration:	Integral	Max E Field:	7.05 V/m
Test Frequency:	836.52MHz	SAR 1g:	0.064 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	0.033 W/kg
Conversion Factors:	.486 / .486 / .486	SAR Start:	0.015 W/kg
Type of Modulation:		SAR End:	0.015 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-4.42 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	All bits up	Extrapolation:	poly4

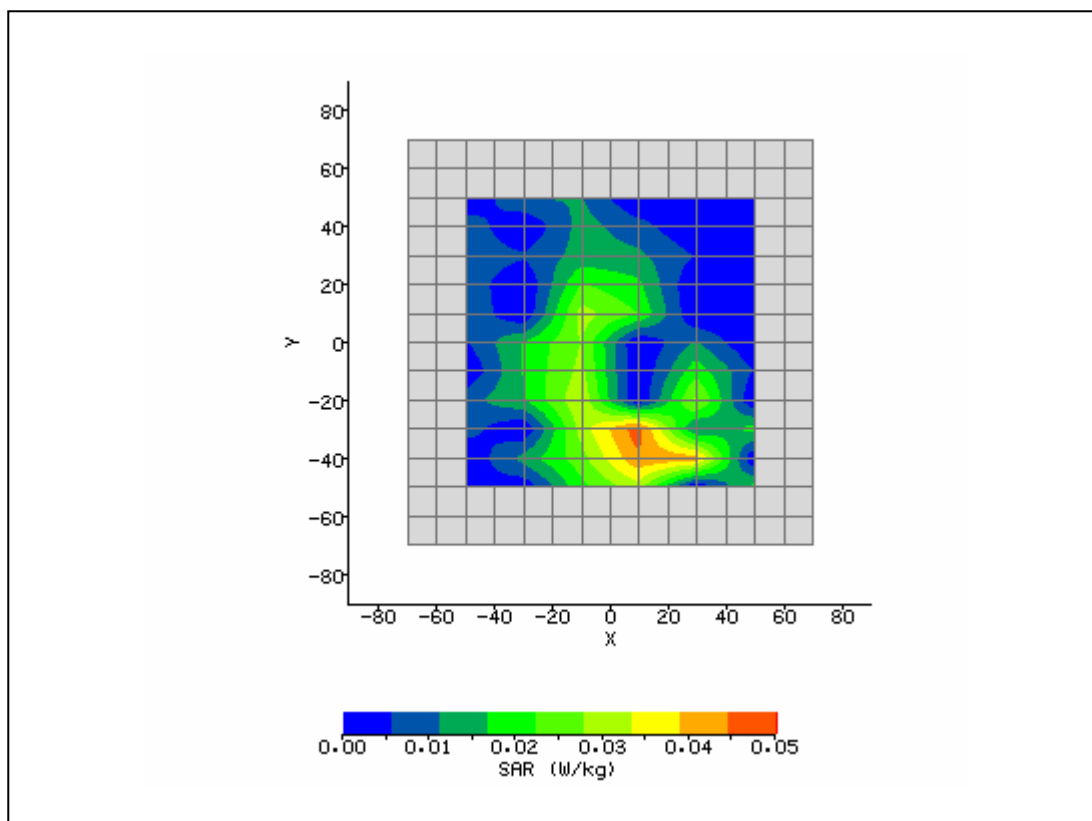


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/3/2008 4:08:33 PM	DUT Battery Model/No:	
Filename:	Lap_600.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	1900
Device Under Test:	Sony M2	Relative Permittivity:	52.96
Relative Humidity:	45.6%	Conductivity:	1.513
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	10.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	0.00 mm
Antenna Configuration:	Integral	Max E Field:	2.60 V/m
Test Frequency:	1880MHz	SAR 1g:	0.016 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	0.005 W/kg
Conversion Factors:	.610 / .610 / .610	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	All bits up	Extrapolation:	poly4

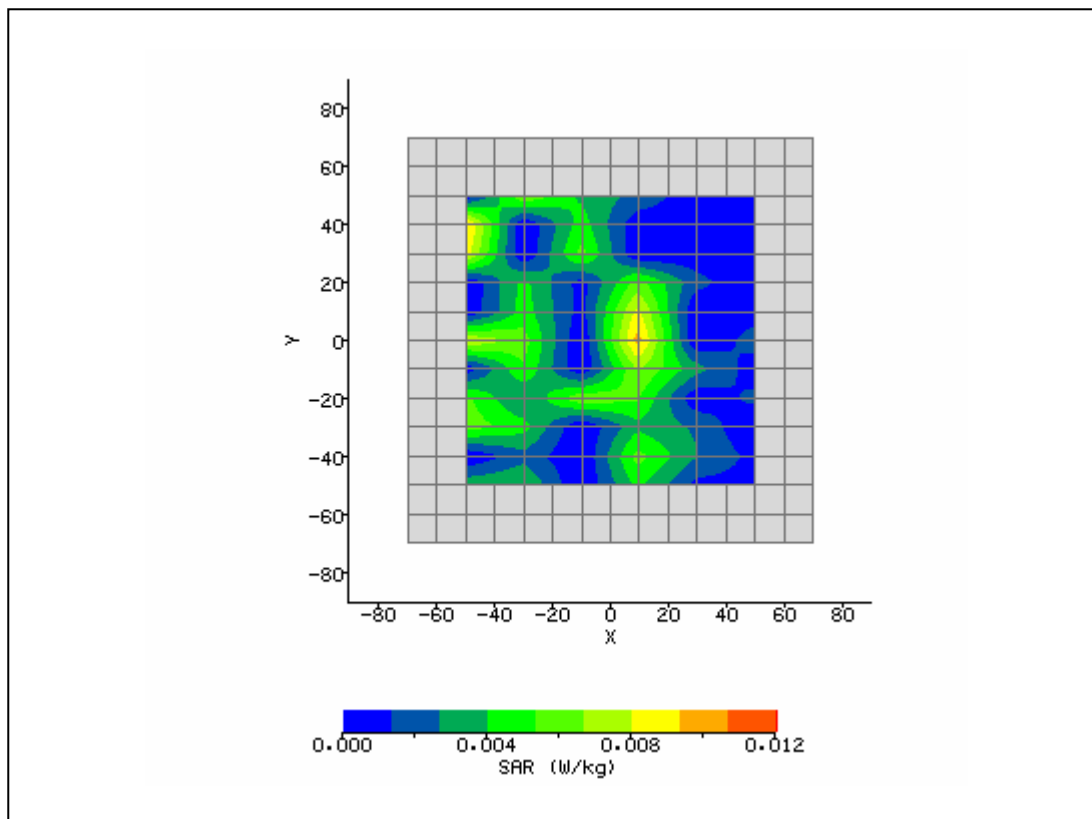


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	7/24/2008 8:51:11 AM	DUT Battery Model/No:	
Filename:	01_EVDO_384_3d.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.5°C	Liquid Simulant:	2450
Device Under Test:	Sony Laptop	Relative Permittivity:	48.16
Relative Humidity:	44.7%	Conductivity:	1.884
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.1°C
Phantom Rotation:	0°	Max SAR X-axis Location:	28.00 mm
DUT Position:	Lap 0mm	Max SAR Y-axis Location:	39.00 mm
Antenna Configuration:	Integral	Max E Field:	1.42 V/m
Test Frequency:	2437MHz	SAR 1g:	0.001 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	0.000 W/kg
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	7/24/08
Input Power Level:	Set by power table	Extrapolation:	poly4

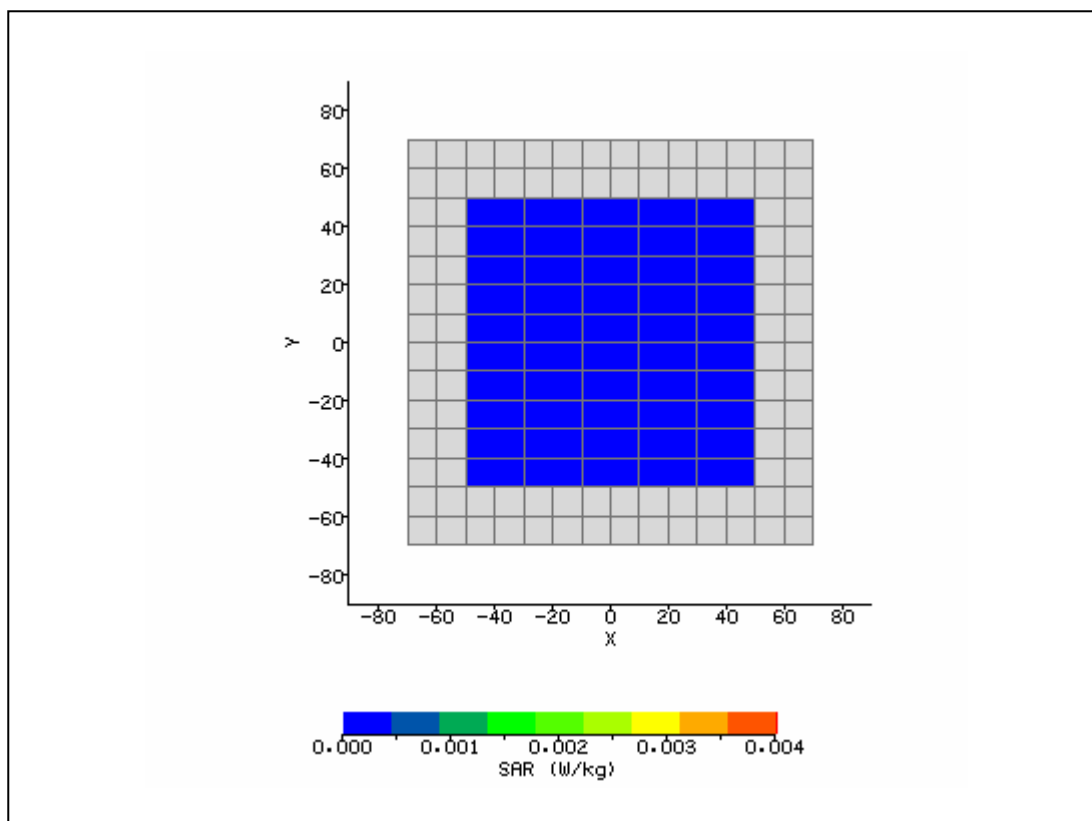


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	7/24/2008 9:18:16 AM	DUT Battery Model/No:	
Filename:	03_80211b_6_3d.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.5°C	Liquid Simulant:	2450
Device Under Test:	Sony Laptop	Relative Permittivity:	48.16
Relative Humidity:	44.7%	Conductivity:	1.884
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.1°C
Phantom Rotation:	0°	Max SAR X-axis Location:	10.00 mm
DUT Position:	Lap 0mm	Max SAR Y-axis Location:	39.00 mm
Antenna Configuration:	Integral	Max E Field:	1.85 V/m
Test Frequency:	2437MHz	SAR 1g:	0.005 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	0.001 W/kg
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	7/24/08
Input Power Level:	Set by power table	Extrapolation:	poly4

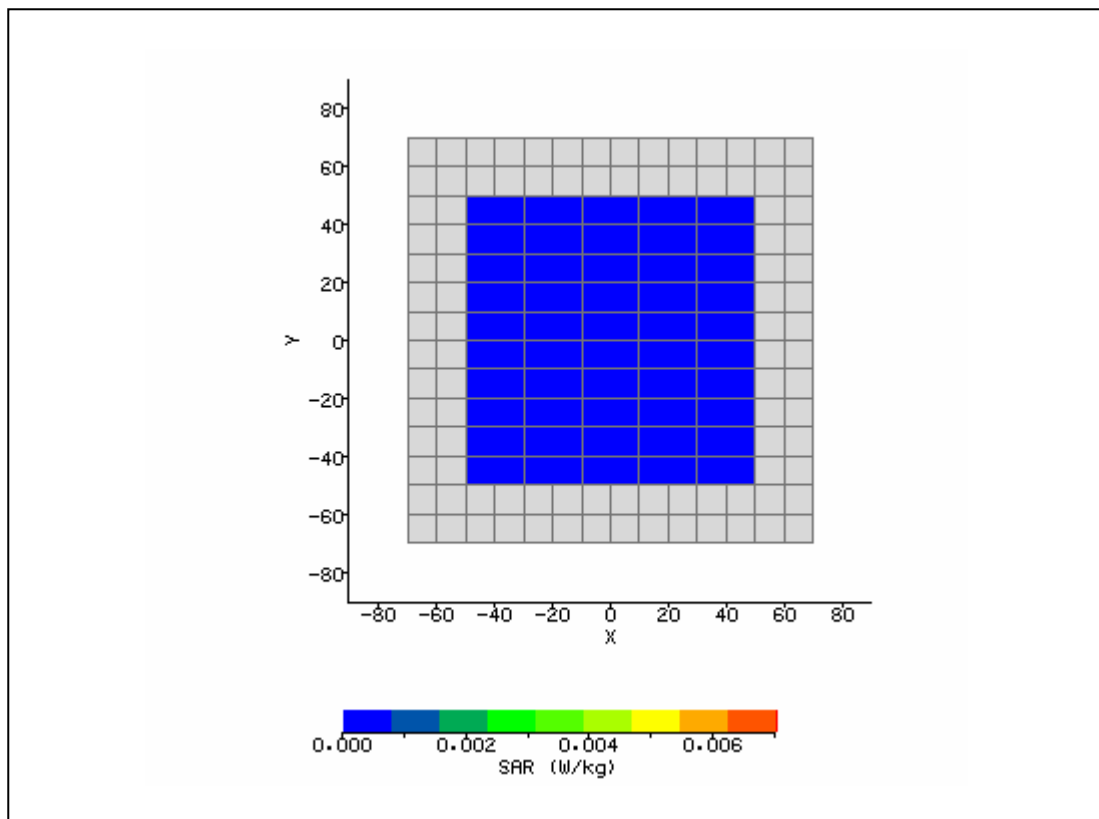


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	8/13/2008 1:13:34 PM	DUT Battery Model/No:	
Filename:	600_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.6°C	Liquid Simulant:	5200
Device Under Test:	Sony	Relative Permittivity:	49.84
Relative Humidity:	47.6%	Conductivity:	5.471
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-50.00 mm
DUT Position:	lap 0mm	Max SAR Y-axis Location:	-50.00 mm
Antenna Configuration:	Integral	Max E Field:	0.00 V/m
Test Frequency:	5240MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.46 / 3.82 / 4.87	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/13/08
Input Power Level:	Set by power table	Extrapolation:	poly4

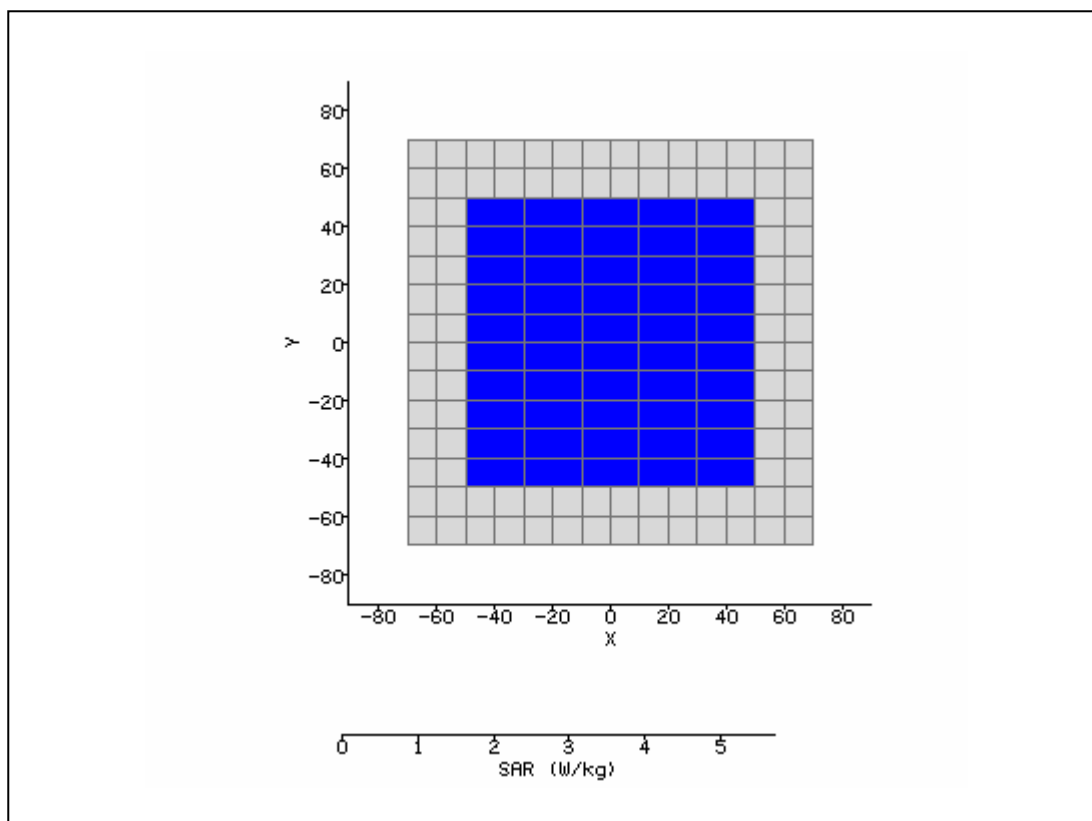


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	8/13/2008 2:03:52 PM	DUT Battery Model/No:	
Filename:	05_a_5240_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.7°C	Liquid Simulant:	5200
Device Under Test:	Sony	Relative Permittivity:	48.14
Relative Humidity:	48.8%	Conductivity:	5.496
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-50.00 mm
DUT Position:	lap 0mm	Max SAR Y-axis Location:	-50.00 mm
Antenna Configuration:	Integral	Max E Field:	0.00 V/m
Test Frequency:	5320MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.46 / 3.82 / 4.87	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/13/08
Input Power Level:	Set by power table	Extrapolation:	poly4

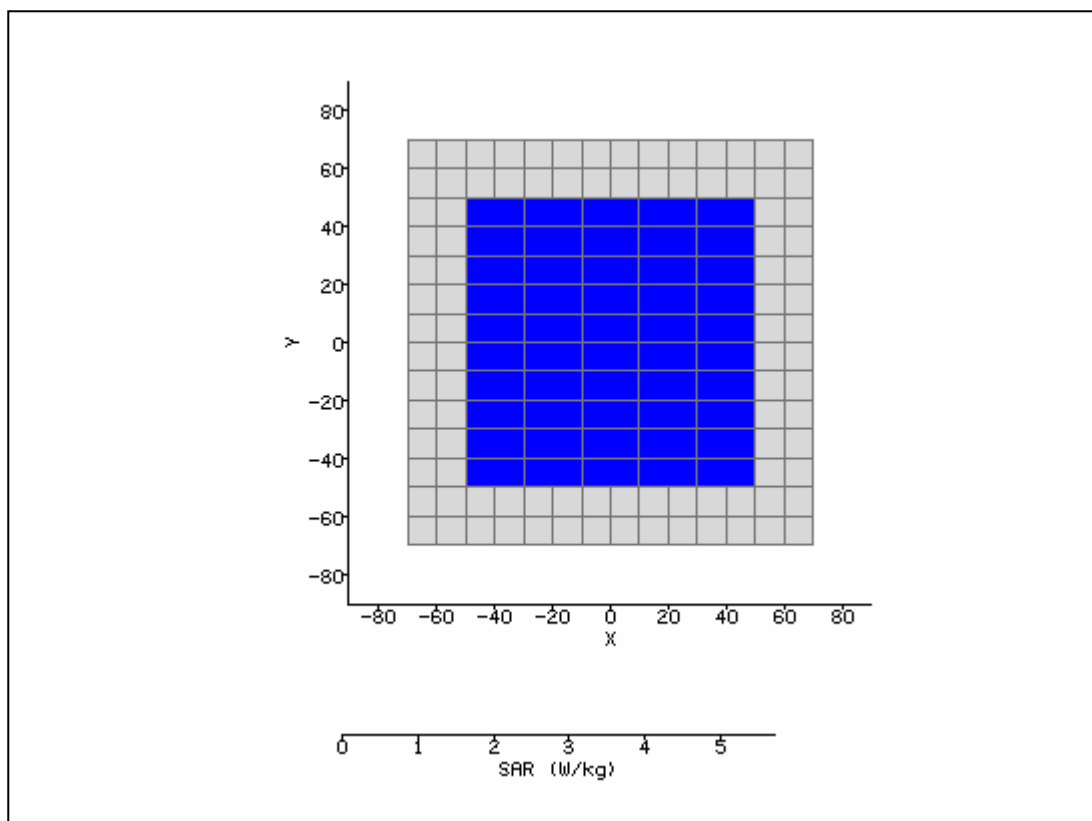


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	8/13/2008 2:22:47 PM	DUT Battery Model/No:	
Filename:	06_a_5320_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.6°C	Liquid Simulant:	5200
Device Under Test:	Sony	Relative Permittivity:	46.04
Relative Humidity:	47.8%	Conductivity:	5.522
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-50.00 mm
DUT Position:	lap 0mm	Max SAR Y-axis Location:	-50.00 mm
Antenna Configuration:	Integral	Max E Field:	0.00 V/m
Test Frequency:	5520MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.46 / 3.82 / 4.87	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/13/08
Input Power Level:	Set by power table	Extrapolation:	poly4

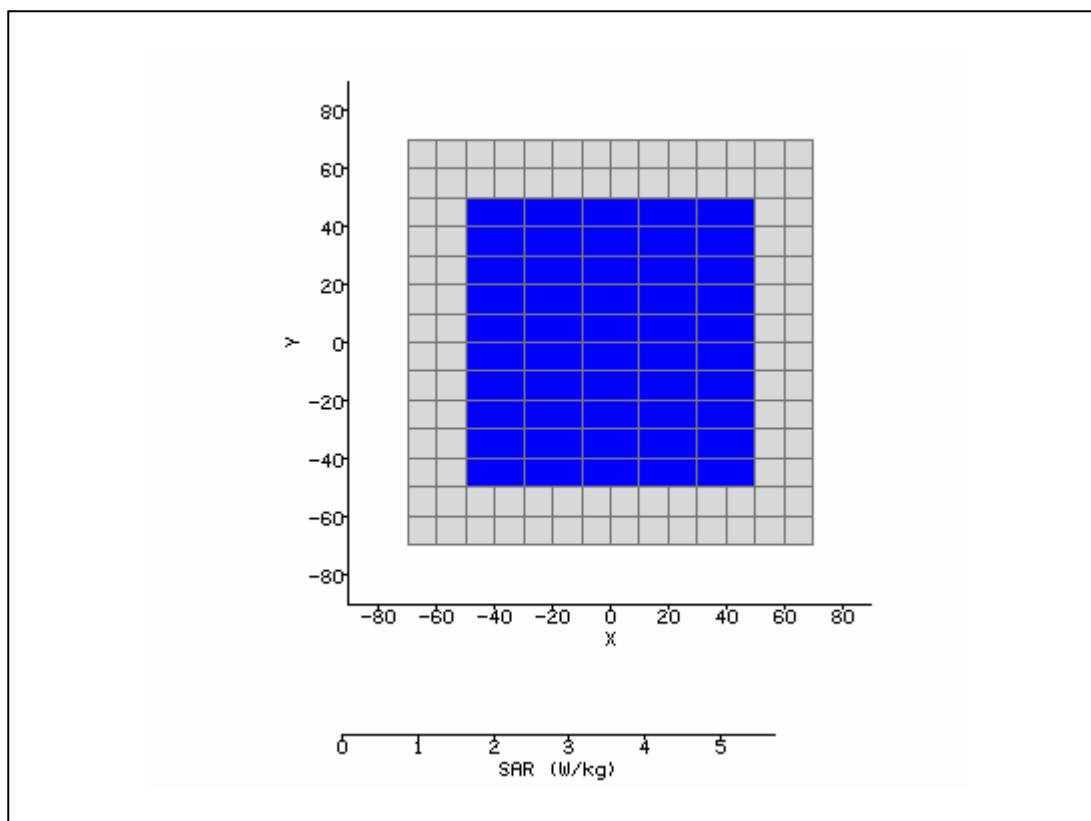


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	8/14/2008 8:53:31 AM	DUT Battery Model/No:	
Filename:	11_n_5230_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5800
Device Under Test:	Sony	Relative Permittivity:	51.40
Relative Humidity:	47.3%	Conductivity:	5.712
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.7°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-50.00 mm
DUT Position:	lap 0mm	Max SAR Y-axis Location:	-50.00 mm
Antenna Configuration:	Integral	Max E Field:	0.00 V/m
Test Frequency:	5620MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.21 / 3.56 / 4.43	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/13/08
Input Power Level:	Set by power table	Extrapolation:	poly4

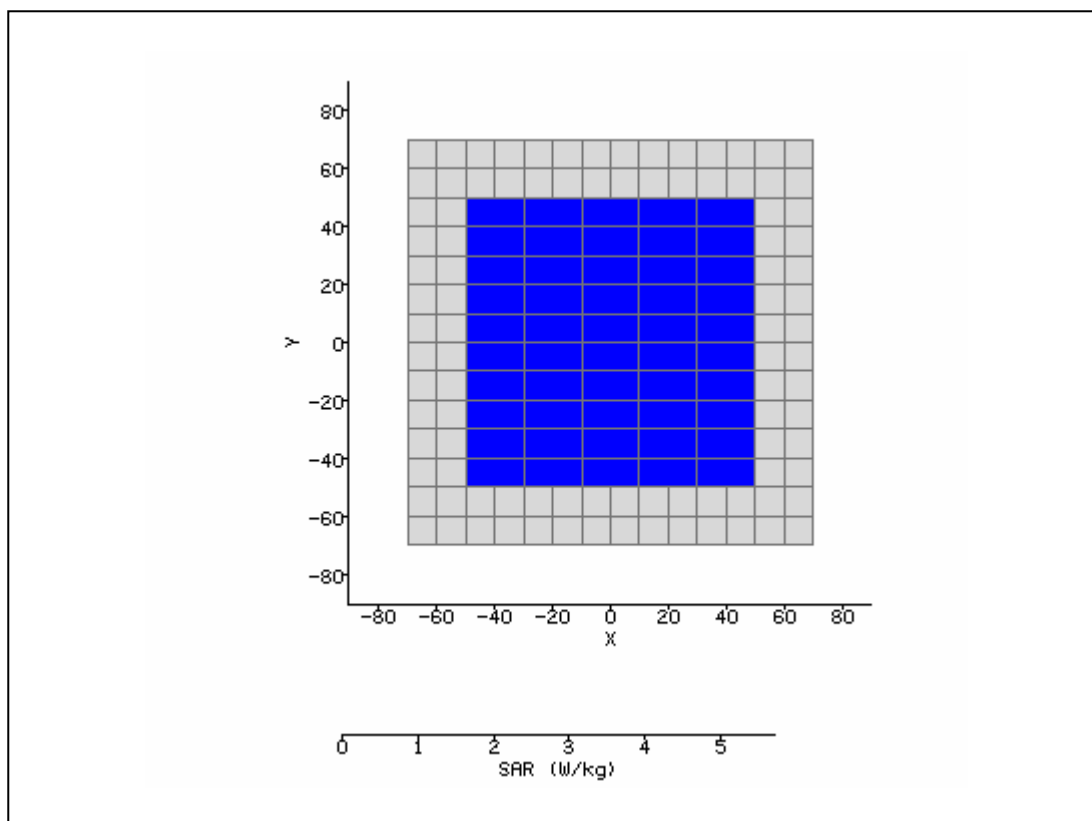


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	8/14/2008 9:36:51 AM	DUT Battery Model/No:	
Filename:	15_n_5795_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.3°C	Liquid Simulant:	5800
Device Under Test:	Sony	Relative Permittivity:	49.75
Relative Humidity:	48.7%	Conductivity:	5.723
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.1°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-50.00 mm
DUT Position:	lap 0mm	Max SAR Y-axis Location:	-50.00 mm
Antenna Configuration:	Integral	Max E Field:	0.00 V/m
Test Frequency:	5785MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.21 / 3.56 / 4.43	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/13/08
Input Power Level:	Set by power table	Extrapolation:	poly4

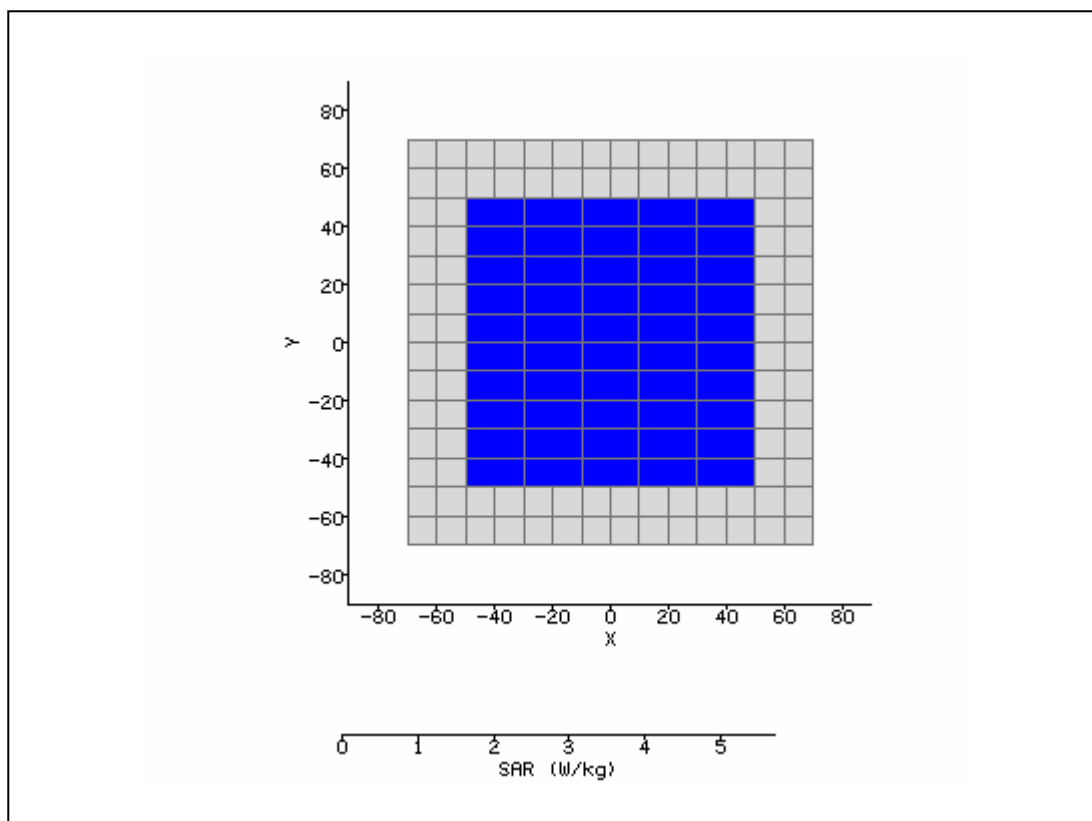


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	8/14/2008 10:10:33 AM	DUT Battery Model/No:	
Filename:	09_a_5785_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.3°C	Liquid Simulant:	5800
Device Under Test:	Sony	Relative Permittivity:	49.28
Relative Humidity:	48.7%	Conductivity:	5.759
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.1°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-50.00 mm
DUT Position:	lap 0mm	Max SAR Y-axis Location:	-50.00 mm
Antenna Configuration:	Integral	Max E Field:	0.00 V/m
Test Frequency:	5825MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.21 / 3.56 / 4.43	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/13/08
Input Power Level:	Set by power table	Extrapolation:	poly4

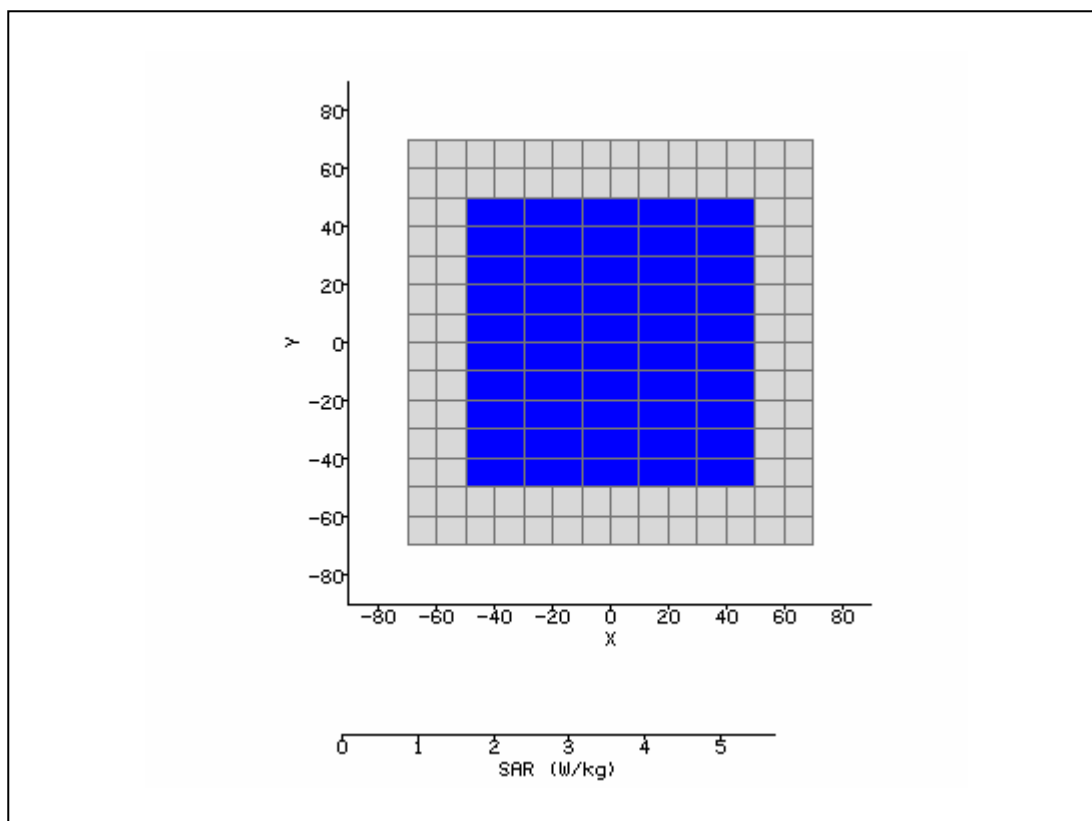


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	8/13/2008 3:35:47 PM	DUT Battery Model/No:	
Filename:	12_n_5310_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.6°C	Liquid Simulant:	5200
Device Under Test:	Sony	Relative Permittivity:	49.84
Relative Humidity:	47.8%	Conductivity:	5.471
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-50.00 mm
DUT Position:	lap 0mm	Max SAR Y-axis Location:	-50.00 mm
Antenna Configuration:	Integral	Max E Field:	0.00 V/m
Test Frequency:	5230MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.46 / 3.82 / 4.87	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/13/08
Input Power Level:	Set by power table	Extrapolation:	poly4

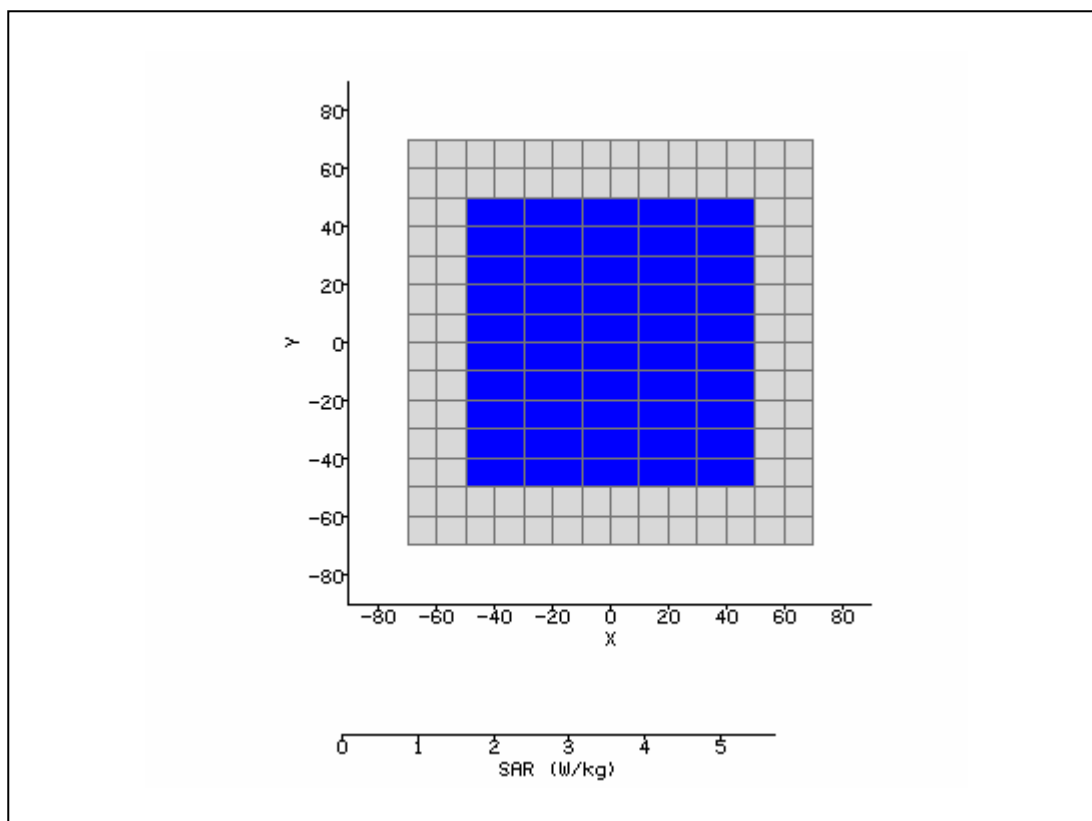


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	8/13/2008 3:10:28 PM	DUT Battery Model/No:	
Filename:	08_n_5510_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.6°C	Liquid Simulant:	5200
Device Under Test:	Sony	Relative Permittivity:	48.14
Relative Humidity:	47.8%	Conductivity:	5.496
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-50.00 mm
DUT Position:	lap 0mm	Max SAR Y-axis Location:	-50.00 mm
Antenna Configuration:	Integral	Max E Field:	0.00 V/m
Test Frequency:	5310MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.46 / 3.82 / 4.87	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/13/08
Input Power Level:	Set by power table	Extrapolation:	poly4

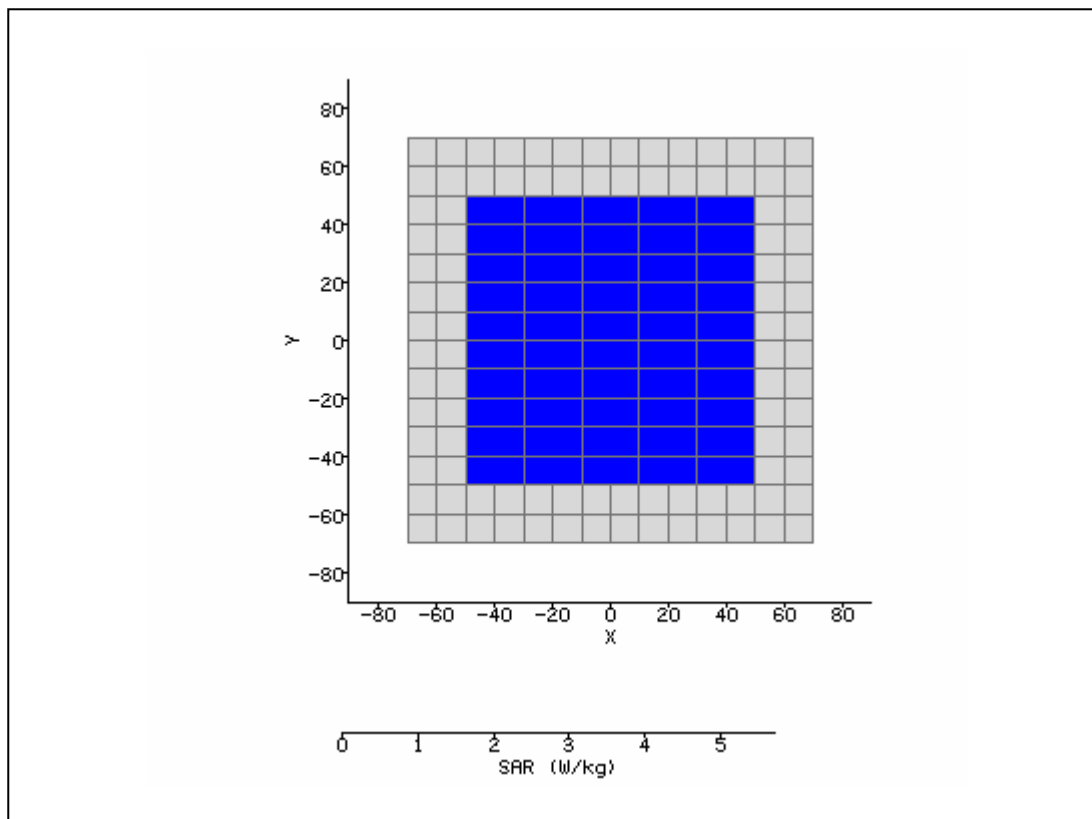


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	8/13/2008 2:45:31 PM	DUT Battery Model/No:	
Filename:	07_a_5520_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.6°C	Liquid Simulant:	5200
Device Under Test:	Sony	Relative Permittivity:	46.04
Relative Humidity:	47.8%	Conductivity:	5.522
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-50.00 mm
DUT Position:	lap 0mm	Max SAR Y-axis Location:	-50.00 mm
Antenna Configuration:	Integral	Max E Field:	0.00 V/m
Test Frequency:	5510MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.46 / 3.82 / 4.87	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/13/08
Input Power Level:	Set by power table	Extrapolation:	poly4

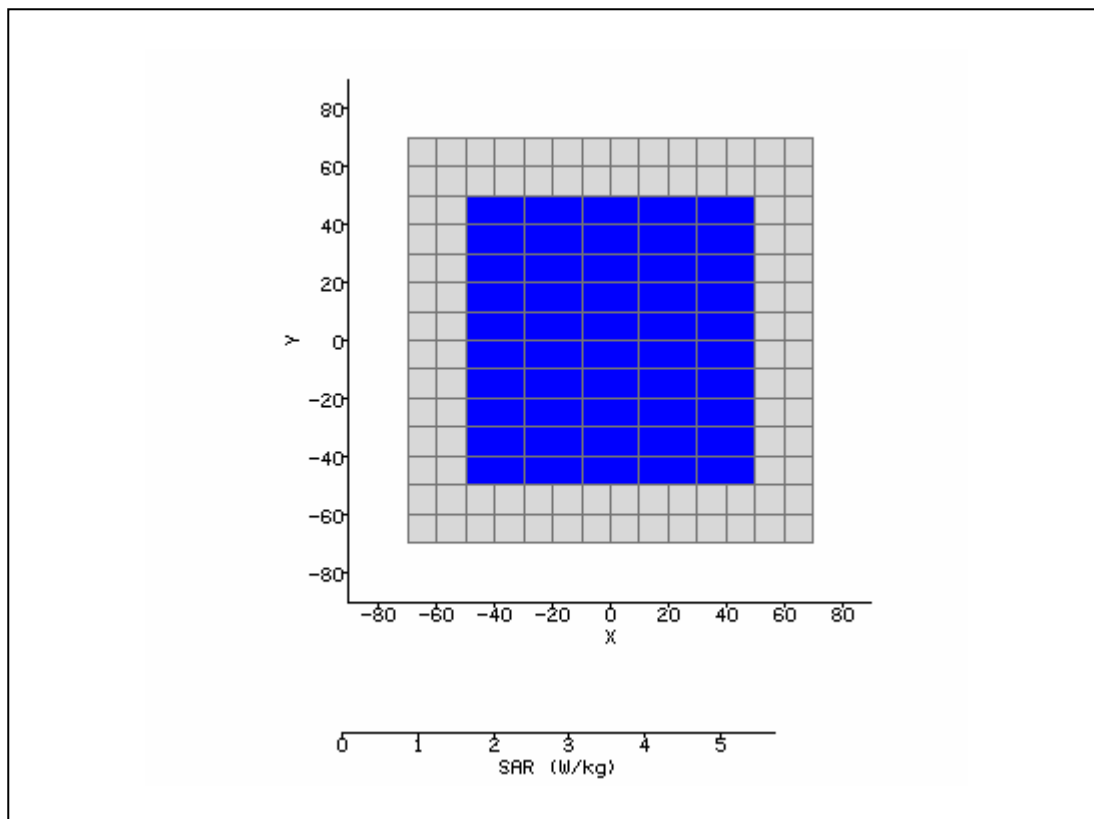


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	8/14/2008 9:07:18 AM	DUT Battery Model/No:	
Filename:	08_a_5620_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5800
Device Under Test:	Sony	Relative Permittivity:	51.40
Relative Humidity:	47.3%	Conductivity:	5.712
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.7°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-50.00 mm
DUT Position:	lap 0mm	Max SAR Y-axis Location:	-50.00 mm
Antenna Configuration:	Integral	Max E Field:	0.00 V/m
Test Frequency:	5630MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.21 / 3.56 / 4.43	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/13/08
Input Power Level:	Set by power table	Extrapolation:	poly4

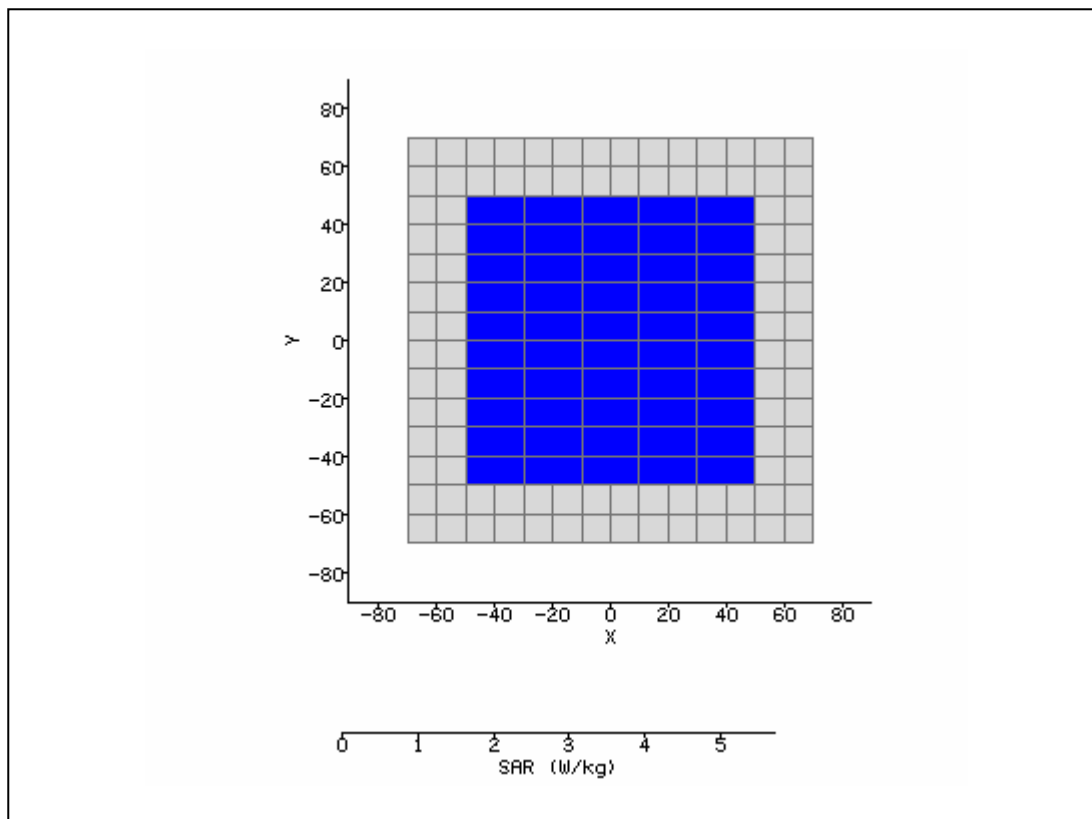


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	8/14/2008 9:22:35 AM	DUT Battery Model/No:	
Filename:	14_n_5630_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.3°C	Liquid Simulant:	5800
Device Under Test:	Sony	Relative Permittivity:	49.75
Relative Humidity:	48.7%	Conductivity:	5.723
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.1°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-50.00 mm
DUT Position:	lap 0mm	Max SAR Y-axis Location:	-50.00 mm
Antenna Configuration:	Integral	Max E Field:	0.00 V/m
Test Frequency:	5795MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.21 / 3.56 / 4.43	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/13/08
Input Power Level:	Set by power table	Extrapolation:	poly4

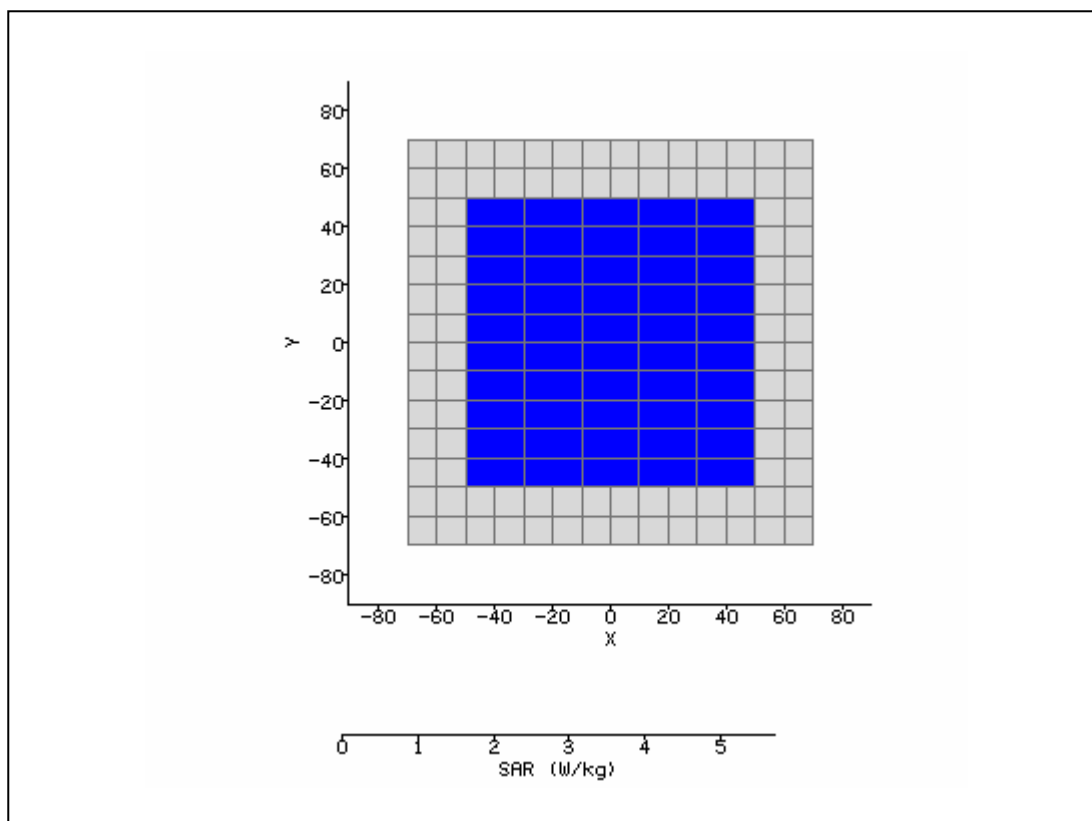


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/03/2008 1:47:59 PM	DUT Battery Model/No:	
Filename:	open_700.txt	Probe Serial Number:	L0116
Ambient Temperature:	22.6°C	Liquid Simulant:	850
Device Under Test:	System	Relative Permittivity:	40.84
Relative Humidity:	46.6%	Conductivity:	0.903
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-2.00 mm
DUT Position:	15mm	Max SAR Y-axis Location:	11.00 mm
Antenna Configuration:	Dipole	Max E Field:	90.80 V/m
Test Frequency:	835MHz	SAR 1g:	9.276 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	6.024 W/kg
Conversion Factors:	.457 / .457 / .457	SAR Start:	2.083 W/kg
Type of Modulation:		SAR End:	2.031 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-2.51 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	1W	Extrapolation:	poly4

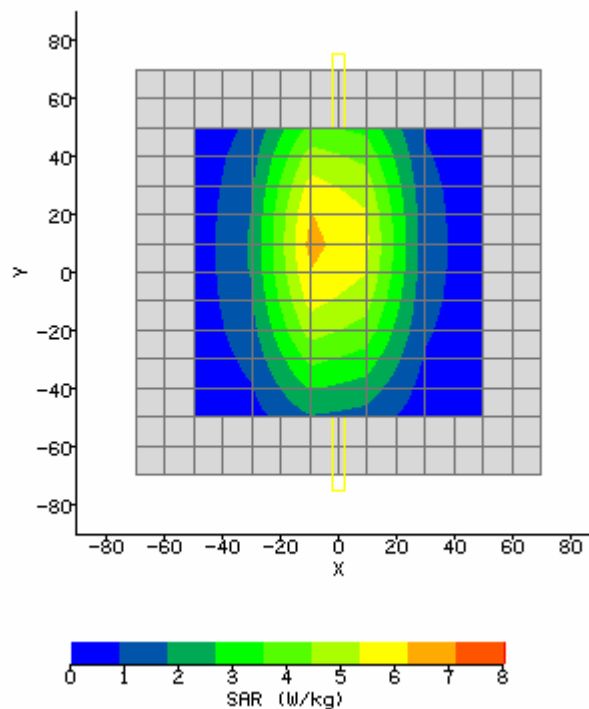


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/03/2008 9:42:55 AM	DUT Battery Model/No:	
Filename:	nl_3d.txt	Probe Serial Number:	L0116
Ambient Temperature:	23.1°C	Liquid Simulant:	1900
Device Under Test:	System	Relative Permittivity:	40.02
Relative Humidity:	36.8%	Conductivity:	1.387
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-10.00 mm
DUT Position:	10mm	Max SAR Y-axis Location:	10.00 mm
Antenna Configuration:	Dipole	Max E Field:	147.69 V/m
Test Frequency:	1900MHz	SAR 1g:	39.315 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	20.760 W/kg
Conversion Factors:	.551 / .551 / .551	SAR Start:	4.852 W/kg
Type of Modulation:		SAR End:	4.776 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.56 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	1W	Extrapolation:	poly4

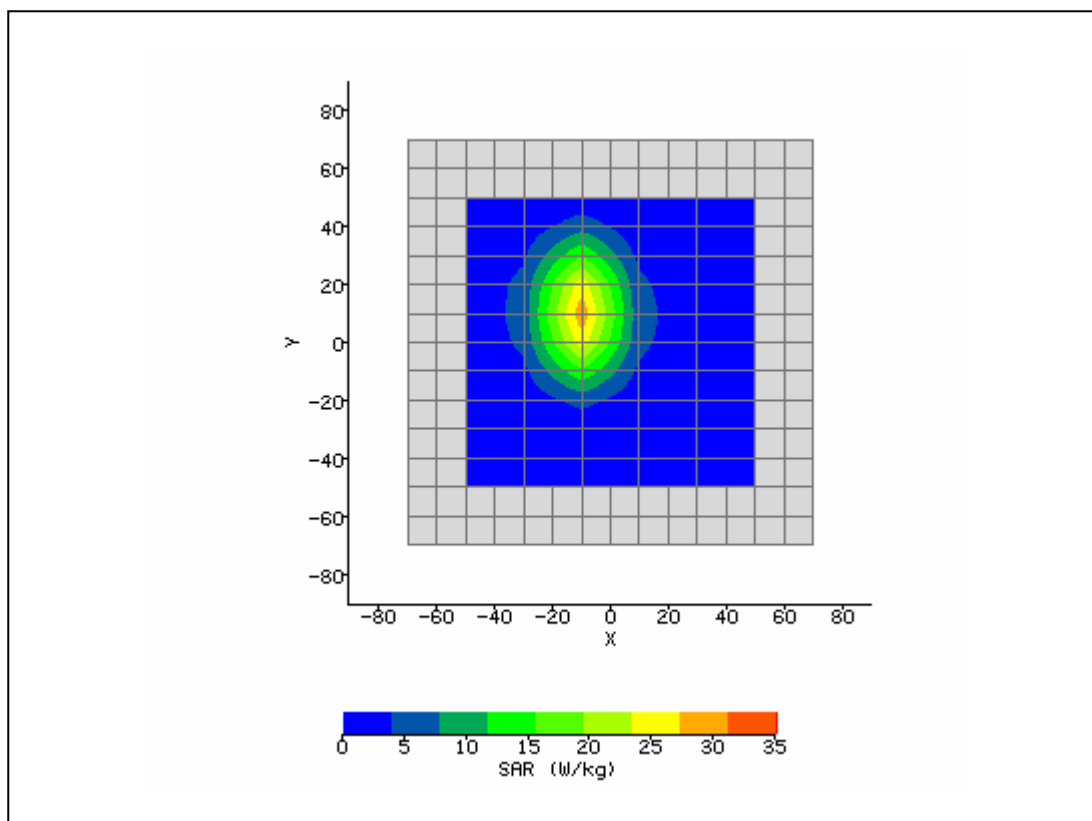

System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	7/23/2008 2:39:45 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.1°C	Liquid Simulant:	2450
Device Under Test:	System	Relative Permittivity:	39.97
Relative Humidity:	47.3%	Conductivity:	1.867
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-12.00 mm
DUT Position:	8mm	Max SAR Y-axis Location:	-6.00 mm
Antenna Configuration:	Dipole	Max E Field:	128.93 V/m
Test Frequency:	2450MHz	SAR 1g:	53.135 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	24.661 W/kg
Conversion Factors:	.550 / .550 / .550	SAR Start:	2.896 W/kg
Type of Modulation:		SAR End:	2.883 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.46 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	7/23/08
Input Power Level:	1W	Extrapolation:	poly4

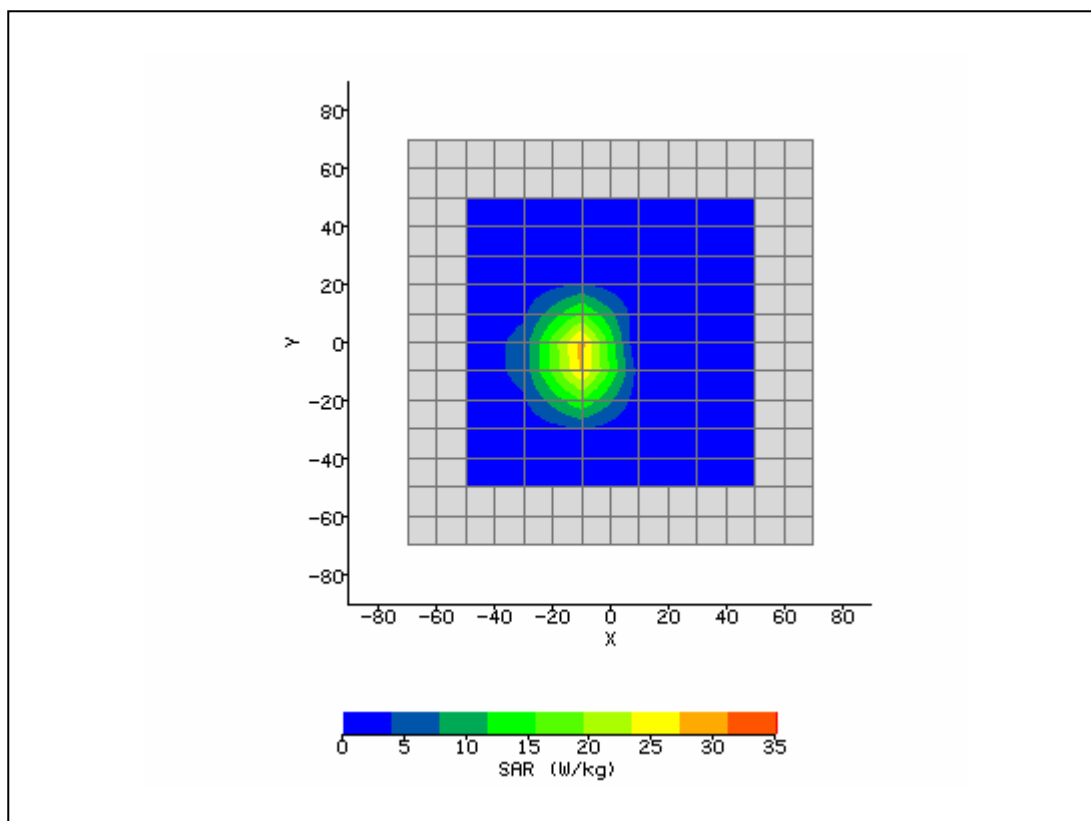

System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	8/13/2008 11:54:59 AM	DUT Battery Model/No:	
Filename:	Temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.5°C	Liquid Simulant:	5200
Device Under Test:	System	Relative Permittivity:	35.82
Relative Humidity:	47.9%	Conductivity:	4.661
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.4°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-12.00 mm
DUT Position:	10mm	Max SAR Y-axis Location:	0.00 mm
Antenna Configuration:	WG	Max E Field:	34.38 V/m
Test Frequency:	5200MHz	SAR 1g:	3.318 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	2.268 W/kg
Conversion Factors:	2.92 / 3.27 / 3.99	SAR Start:	0.814 W/kg
Type of Modulation:		SAR End:	0.821 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.91 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/13/08
Input Power Level:	100mW	Extrapolation:	poly4

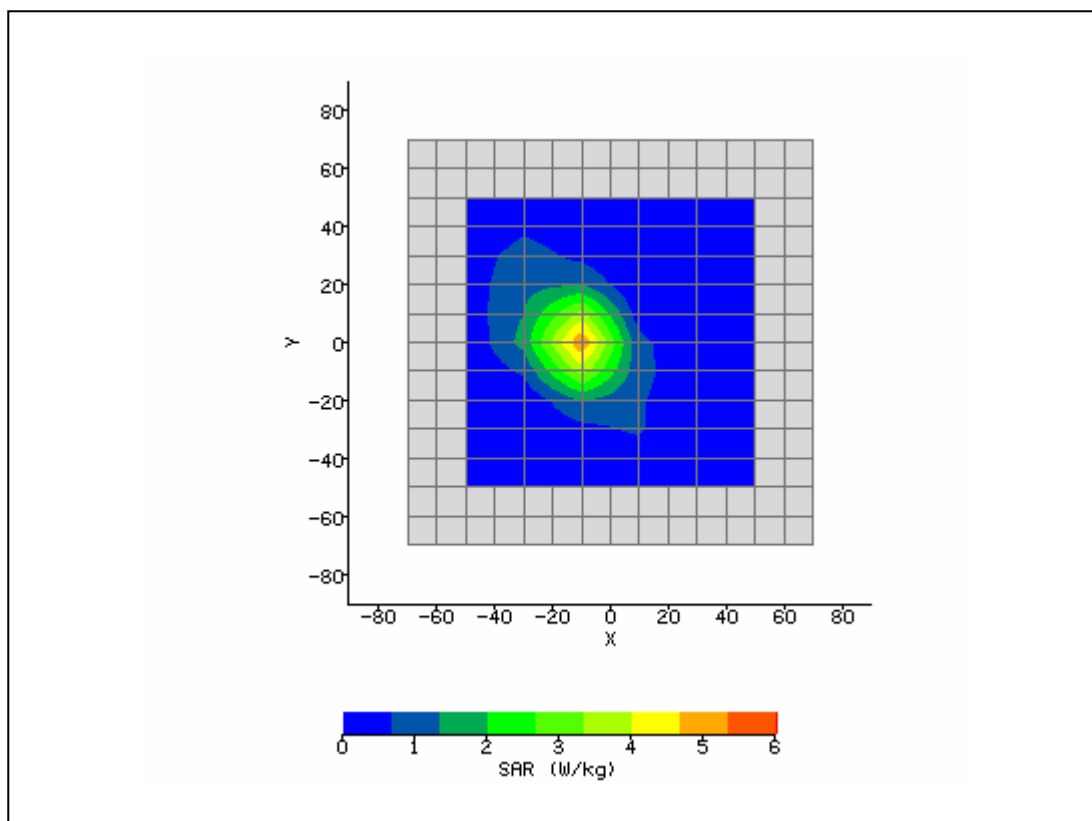

System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	8/14/2008 8:13:36 AM	DUT Battery Model/No:	
Filename:	Open_62.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.5°C	Liquid Simulant:	5800
Device Under Test:	System	Relative Permittivity:	35.64
Relative Humidity:	46.9%	Conductivity:	5.279
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.4°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-14.00 mm
DUT Position:	10mm	Max SAR Y-axis Location:	10.00 mm
Antenna Configuration:	WG	Max E Field:	39.88 V/m
Test Frequency:	5800MHz	SAR 1g:	4.119 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	2.076 W/kg
Conversion Factors:	2.95 / 3.29 / 4.17	SAR Start:	0.806 W/kg
Type of Modulation:		SAR End:	0.833 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.39 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/13/08
Input Power Level:	100mW	Extrapolation:	poly4

