

FCC Test Report

Equipment : Personal Computer
Brand Name : SONY
Model No. : SVT112A2WL
FCC ID : AK8SVT112A2WL
Standard : 47 CFR FCC Part 15.247
Operating Band : 2400 MHz – 2483.5 MHz
FCC Classification : DSS
Applicant : Sony Corporation
Manufacturer : 1-7-1 Konan, Minato-ku, Tokyo 108-0075, Japan

The product sample received on Jun. 27, 2013 and completely tested on Jul. 26, 2013. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:


Wayne Hsu / Assistant Manager

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Accessories	7
1.3	Support Equipment	7
1.4	Testing Applied Standards	8
1.5	Testing Location Information	8
1.6	Measurement Uncertainty	9
2	TEST CONFIGURATION OF EUT	10
2.1	The Worst Case Modulation Configuration	10
2.2	Test Channel Frequencies Configuration.....	10
2.3	The Worst Case Power Setting Parameter	10
2.4	The Worst Case Measurement Configuration	11
2.5	Test Setup Diagram	12
3	TRANSMITTER TEST RESULT	14
3.1	AC Power-line Conducted Emissions	14
3.2	20dB Bandwidth and Carrier Frequency Separation	19
3.3	Number of Hopping Frequencies.....	22
3.4	Time of Occupancy (Dwell Time).....	24
3.5	RF Output Power	26
3.6	Transmitter Radiated Bandedge Emissions	29
3.7	Transmitter Radiated Unwanted Emissions	33
4	TEST EQUIPMENT AND CALIBRATION DATA.....	44
APPENDIX A. TEST PHOTOS		
APPENDIX B. PHOTOGRAPHS OF EUT		

Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	[dBuV]: 0.1863950MHz 29.82 (Margin 24.38dB) - AV 49.24 (Margin 14.96dB) - QP	FCC 15.207	Complied
3.2	15.247(a)	20dB Bandwidth	EDR: 1.4718MHz	N/A	Complied
3.2	15.247(a)	Carrier Frequency Separation (ChS)	EDR: 1.0045MHz	$ChS \geq BW_{20dB} \times 2/3$	Complied
3.3	15.247(a)	Number of Hopping Frequencies (N)	Max: 79 Min: 15	$N \geq 15$	Complied
3.4	15.247(a)	Time of Occupancy (Dwell Time)	EDR: 0.310sec	0.4 s within $0.4 \times N$	Complied
3.5	15.247(b)	RF Output Power (Maximum Peak Conducted Output Power)	Power [dBm] BR: 9.06 EDR: 7.89	Power [dBm] BR: 21 EDR: 21	Complied
3.6	15.247(c)	Transmitter Radiated Bandedge Emissions	Restricted Bands [dBuV/m at 3m]: 2483.500MHz 60.96 (Margin 13.04dB) - PK 49.64 (Margin 4.36dB) - AV	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied
3.7	15.247(c)	Transmitter Radiated Unwanted Emissions	Restricted Bands [dBuV/m at 3m]: 800.180MHz 40.95 (Margin 5.05dB) - PK	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied



SPORTON INTERNATIONAL INC.
TEL : 886-3-3273456
FAX : 886-3-3270973

1 General Description

1.1 Information

1.1.1 RF General Information

RF General Information					
Frequency Range (MHz)	Bluetooth Mode	Ch. Frequency (MHz)	Channel Number	RF Output Power (dBm)	Co-location
2400-2483.5	BR / EDR	2402-2480	0-78 [79]	9.06	Yes
Note 1: Bluetooth BR uses a GFSK (1Mbps). Note 2: Bluetooth EDR uses a combination of $\pi/4$ -DQPSK (2Mbps) and 8DPSK (3Mbps). Note 3: RF output power specifies that Maximum Peak Conducted Output Power. Note 4: Co-location, Co-location is generally defined as simultaneously transmitting (co-transmitting) antennas within 20 cm of each other. (i.e., EUT has simultaneously co-transmitting that operating 2.4GHz and 5GHz.)					

1.1.2 Antenna Information

Antenna Category	
☒	Integral antenna (antenna permanently attached)
☒	Temporary RF connector provided
☐	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.

Antenna General Information			
No.	Ant. Cat.	Ant. Type	Gain (dBi)
1	Integral	PIFA	-3.71

1.1.3 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	☐ Production ; ☐ Pre-Production ; ☒ Prototype
Type of EUT	
☒	Stand-alone
☐	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.:
☐	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.:
☐	Other:

1.1.4 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle	
☒ Operated test mode for worst duty cycle	
Test Signal Duty Cycle (x)	Power Duty Factor [dB] – (10 log 1/x)
☒ 80.32% - test mode single channel-DH5	0.95
Bluetooth ACL packets can be 1, 3, or 5 time slots. The DH1 packet can cover a single time slot. The DH3 packet can cover up to 3 time slots. The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle.	

1.1.5 EUT Operational Condition

Supply Voltage	☒ AC mains	☒ DC	
Type of DC Source	☐ Internal DC supply	☒ External DC adapter	☒ Li-on Battery

1.2 Accessories

Accessories Information				
AC Adapter	Brand Name	SONY	Model Name	VGP-AC19V74
	Power Rating	INPUT: 100-240Vac, 1.0 A OUTPUT 1: 19.5Vdc, 2.0 A ; OUTPUT 2: 5.0Vdc, 1.0 A		
Li-ion Battery	Brand Name	SONY	Model Name	VGP-BPS39
	Power Rating	7.5Vdc, 3800mAh		
2.4G RF receiver	Brand Name	SONY	Model Name	VGP-WRC9

Reminder: Regarding to more detail and other information, please refer to user manual.

1.3 Support Equipment

Support Equipment- AC Line Conducted Emission Test				
No.	Equipment	Brand Name	Model Name	Serial No.
1	Keyboard (Client Provide)	SONY	VGP-WKB16	DoC
2	Headset	INTOPIC	JAZZ-368	DoC
3	iPod Nano	Apple	A1199	DoC
4	Identity Badge	-	-	-
5	Wireless AP (Remote Workstation)	ZO TECH	WR110B	DoC
6	Bluetooth Headset (Remote Workstation)	SONY	Z354	DoC

Support Equipment- Radiated Emission Test				
No.	Equipment	Brand Name	Model Name	Serial No.
1	Keyboard (Client Provide)	SONY	VGP-WKB16	DoC
2	Headset	INTOPIC	JAZZ-368	DoC
3	iPod Nano	Apple	A1199	DoC
4	Identity Badge	-	-	-

1.4 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ ANSI C63.10-2009
- ◆ FCC Public Notice DA 00-705
- ◆ FCC KDB 412172

1.5 Testing Location Information

Testing Location			
☒	HWA YA	ADD : No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-327-0973	
Test Condition	Test Site No.	Test Engineer	Test Environment
AC Conduction	CO04-HY	Zeus	24°C / 46%
RF Conducted	TH01-HY	Ian	24.8°C / 61%
Radiated Emission	03CH02-HY	Daniel	24.8°C / 53%

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty			
Test Item		Uncertainty	Limit
AC power-line conducted emissions		±2.26 dB	N/A
Emission bandwidth, 6dB bandwidth		±1.42 %	N/A
RF output power, conducted		±0.63 dB	N/A
Power density, conducted		±0.81 dB	N/A
Unwanted emissions, conducted	30 – 1000 MHz	±0.51 dB	N/A
	1 – 18 GHz	±0.67 dB	N/A
	18 – 40 GHz	±0.83 dB	N/A
	40 – 200 GHz	N/A	N/A
All emissions, radiated	30 – 1000 MHz	±2.56 dB	N/A
	1 – 18 GHz	±3.59 dB	N/A
	18 – 40 GHz	±3.82 dB	N/A
	40 – 200 GHz	N/A	N/A
Temperature		±0.8 °C	N/A
Humidity		±3 %	N/A
DC and low frequency voltages		±3 %	N/A
Time		±1.42 %	N/A
Duty Cycle		±1.42 %	N/A

2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing					
Bluetooth Mode	Transmit Chains (N _{TX})	Data Rate	Modulation Mode	RF Output Power (dBm)	Worst Mode
BR	1	1 Mbps	BR-1Mbps	9.06	BR-1Mbps
EDR	1	2 Mbps	EDR-2Mbps	7.94	
EDR	1	3 Mbps	EDR-3Mbps	7.89	
Note 1: Bluetooth BR uses a combination of GFSK (1Mbps).					
Note 2: Bluetooth EDR uses a combination of π/4-DQPSK (2Mbps) and 8DPSK (3Mbps).					
Note 3: Modulation modes consist below configuration: FHSS BR-1Mbps: GFSK (1Mbps), EDR-2Mbps: π/4-DQPSK (2Mbps), EDR-3Mbps: 8DPSK(3Mbps)					
Note 4: RF output power specifies that Maximum Peak Conducted Output Power.					

2.2 Test Channel Frequencies Configuration

Test Channel Frequencies Configuration	
Bluetooth Mode	Test Channel Frequencies (MHz) – FX (Frequencies Abbreviations)
BR / EDR	2402-(F1), 2440-(F2), 2480-(F3)

2.3 The Worst Case Power Setting Parameter

The Worst Case Power Setting Parameter			
Test Software Version	DRTU		
Modulation Mode	2402 MHz	2440 MHz	2480 MHz
BR,1Mbps	10	10	10
EDR,2Mbps	10	10	10
EDR,3Mbps	10	10	10


2.4 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Operating Mode Description
1	AC Power & Radio link

The Worst Case Mode for Following Conformance Tests	
Tests Item	RF Output Power, 20dB Bandwidth, Carrier Frequency Separation (ChS) Number of Hopping Frequencies (N), Time of Occupancy (Dwell Time)
Test Condition	Conducted measurement at transmit chains
Modulation Mode	BR-1Mbps, EDR-3Mbps


The Worst Case Mode for Following Conformance Tests			
Tests Item	Transmitter Radiated Unwanted Emissions Transmitter Radiated Bandedge Emissions		
Test Condition	Radiated measurement		
User Position	☒ EUT will be placed in fixed position. The worst planes is Z.		
	☐ EUT will be placed in mobile position and operating multiple positions. EUT shall be performed two orthogonal planes.		
	☐ EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed two or three orthogonal planes.		
Operating Mode	☒ 1. AC Power & Radio link		
Modulation Mode	BR-1Mbps, EDR-3Mbps		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			

2.5 Test Setup Diagram

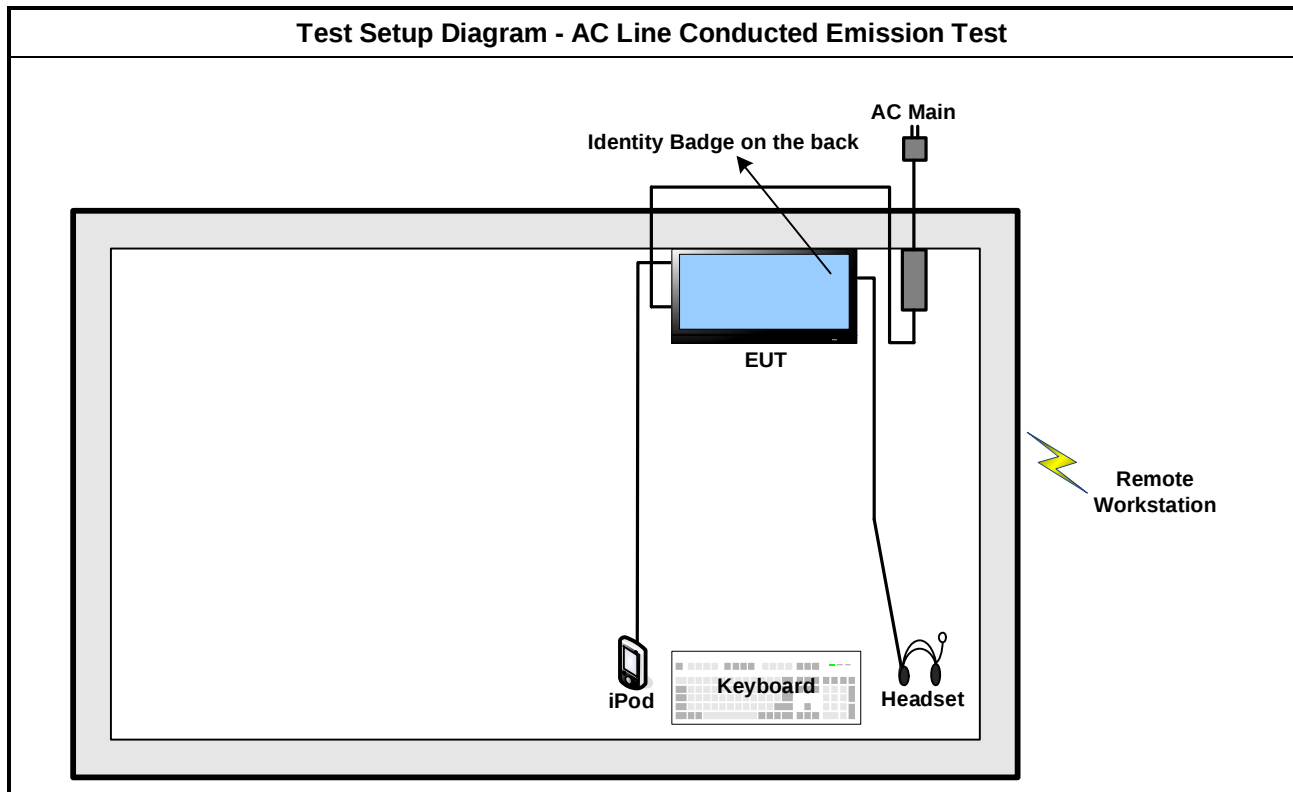


Test Setup Diagram - Radiated Below 1GHz Test

Operating Mode 1 AC Power & Radio link

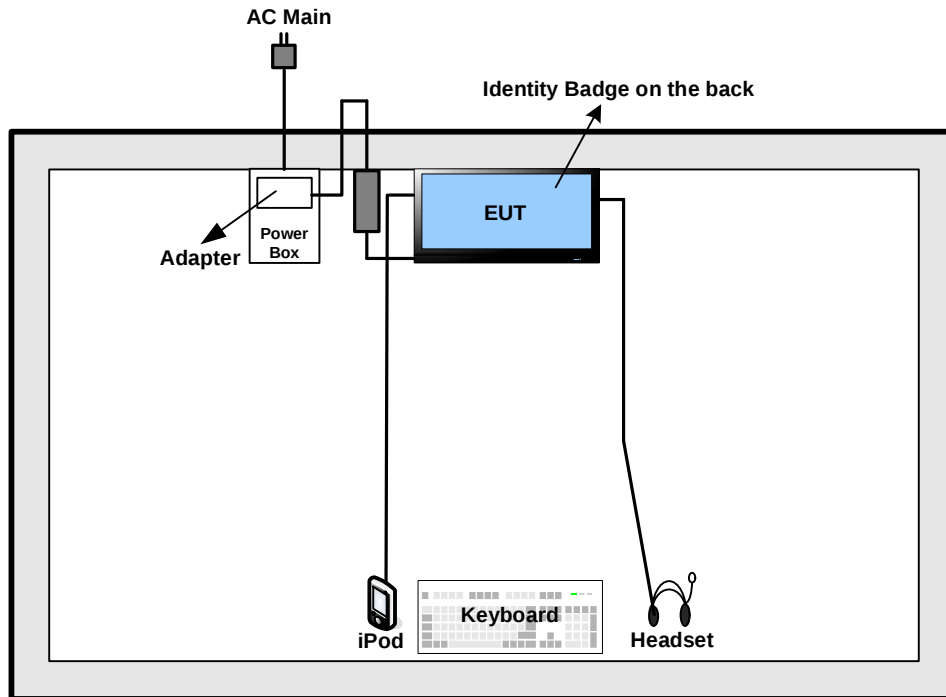

Test Setup Diagram - Radiated Above 1GHz Test

Operating Mode 1 AC Power & Radio link

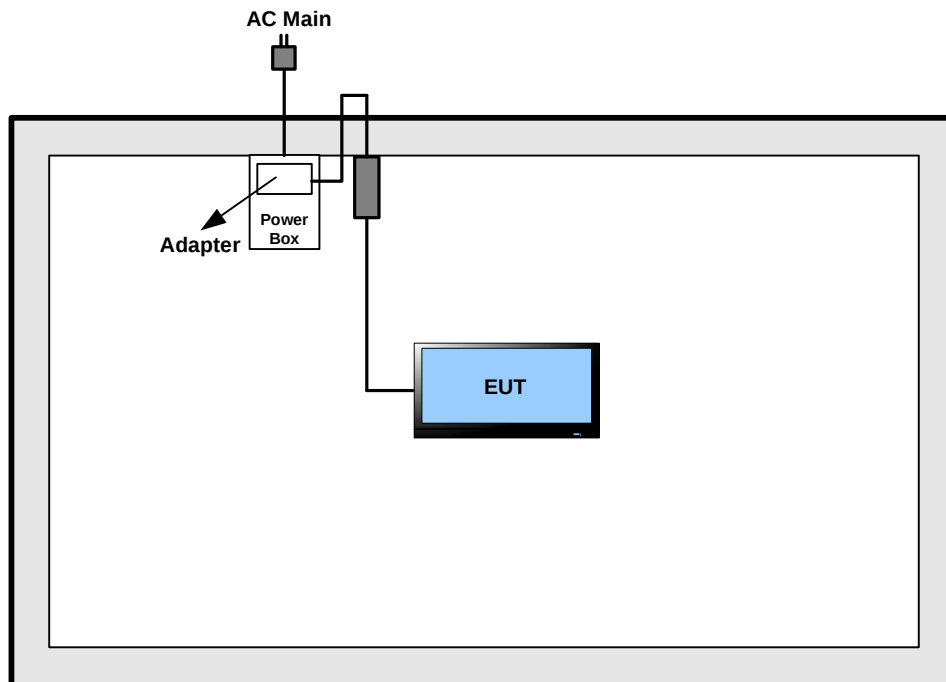

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

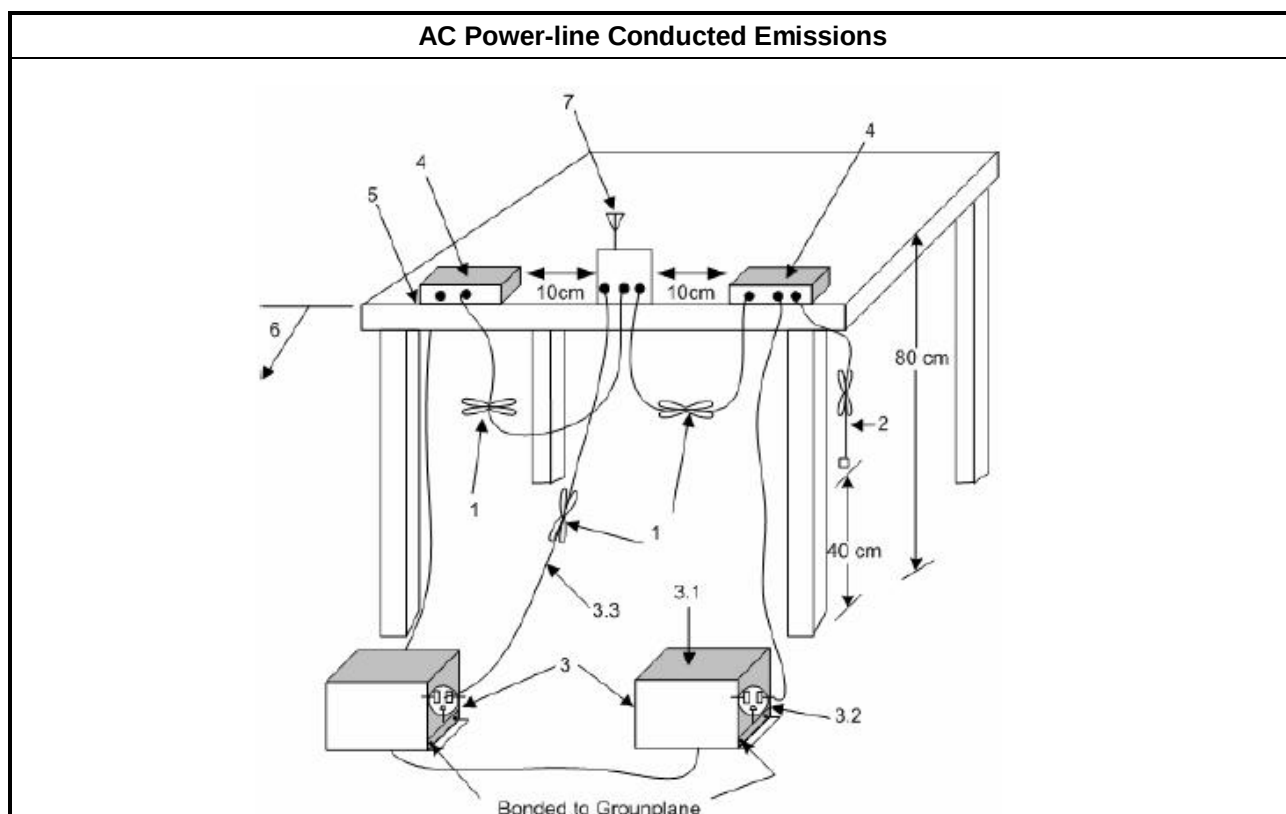


3.1.5 Test Result of AC Power-line Conducted Emissions

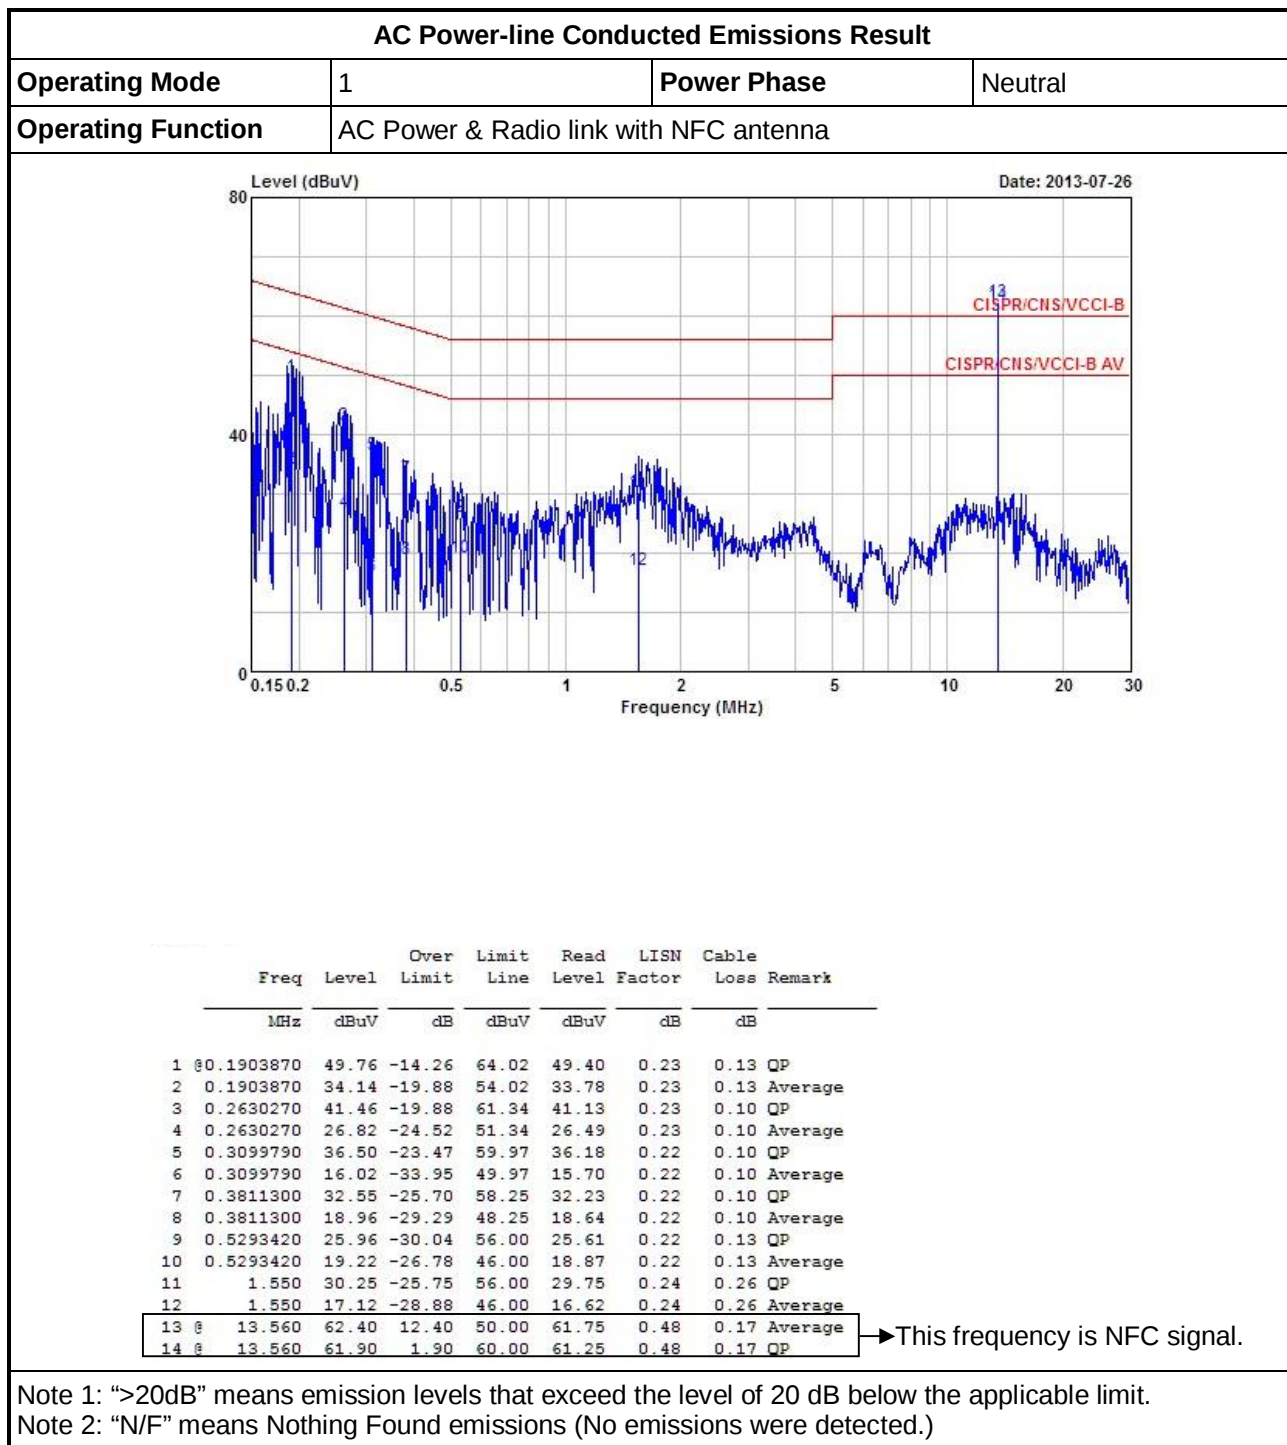

AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
Operating Function	AC Power & Radio link with NFC antenna		

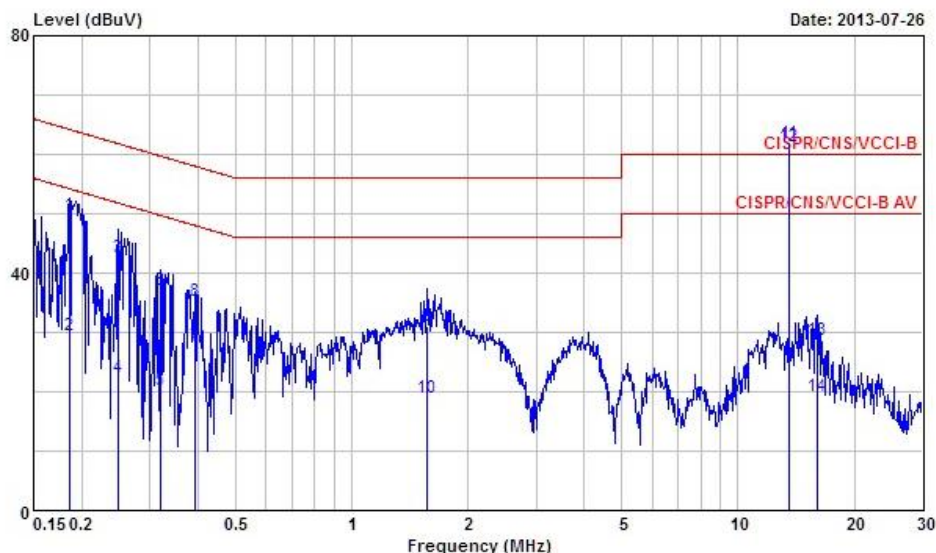


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1854100	49.67	-14.57	64.24	49.42	0.11	0.14	QP
2	0.1854100	29.44	-24.80	54.24	29.19	0.11	0.14	Average
3	0.2481360	42.74	-19.08	61.82	42.53	0.11	0.10	QP
4	0.2481360	22.45	-29.37	51.82	22.24	0.11	0.10	Average
5	0.3183010	20.33	-29.42	49.75	20.13	0.10	0.10	Average
6	0.3183010	37.23	-22.52	59.75	37.03	0.10	0.10	QP
7	0.3934400	27.71	-20.28	47.99	27.51	0.10	0.10	Average
8	0.3934400	35.39	-22.60	57.99	35.19	0.10	0.10	QP
9	1.560	31.09	-24.91	56.00	30.71	0.12	0.26	QP
10	1.560	19.04	-26.96	46.00	18.66	0.12	0.26	Average
11	13.560	61.89	11.89	50.00	61.45	0.27	0.17	Average
12	13.560	61.33	1.33	60.00	60.89	0.27	0.17	QP
13	16.050	28.61	-31.39	60.00	28.12	0.29	0.20	QP
14	16.050	19.20	-30.80	50.00	18.71	0.29	0.20	Average

→ This frequency is NFC signal.

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Neutral
Operating Function	AC Power & Radio link with NFC dummy load		

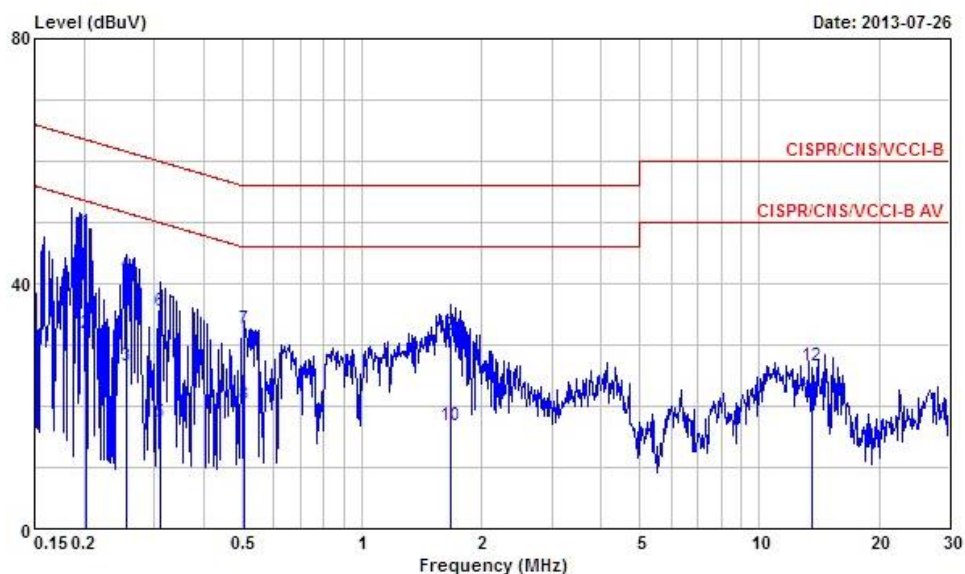


	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.2018130	48.53	-15.01	63.54	48.20	0.23	0.10	QP
2	0.2018130	31.83	-21.71	53.54	31.50	0.23	0.10	Average
3	0.2547970	26.56	-25.04	51.60	26.23	0.23	0.10	Average
4	0.2547970	41.53	-20.07	61.60	41.20	0.23	0.10	QP
5	0.3116260	17.44	-32.49	49.93	17.12	0.22	0.10	Average
6	0.3116260	35.42	-24.51	59.93	35.10	0.22	0.10	QP
7	0.5046930	32.52	-23.48	56.00	32.18	0.22	0.12	QP
8	0.5046930	20.39	-25.61	46.00	20.05	0.22	0.12	Average
9	1.670	31.61	-24.39	56.00	31.10	0.24	0.27	QP
10	1.670	16.93	-29.07	46.00	16.42	0.24	0.27	Average
11	13.560	21.27	-28.73	50.00	20.62	0.48	0.17	Average
12	13.560	26.53	-33.47	60.00	25.88	0.48	0.17	QP

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
Operating Function	AC Power & Radio link with NFC dummy load		

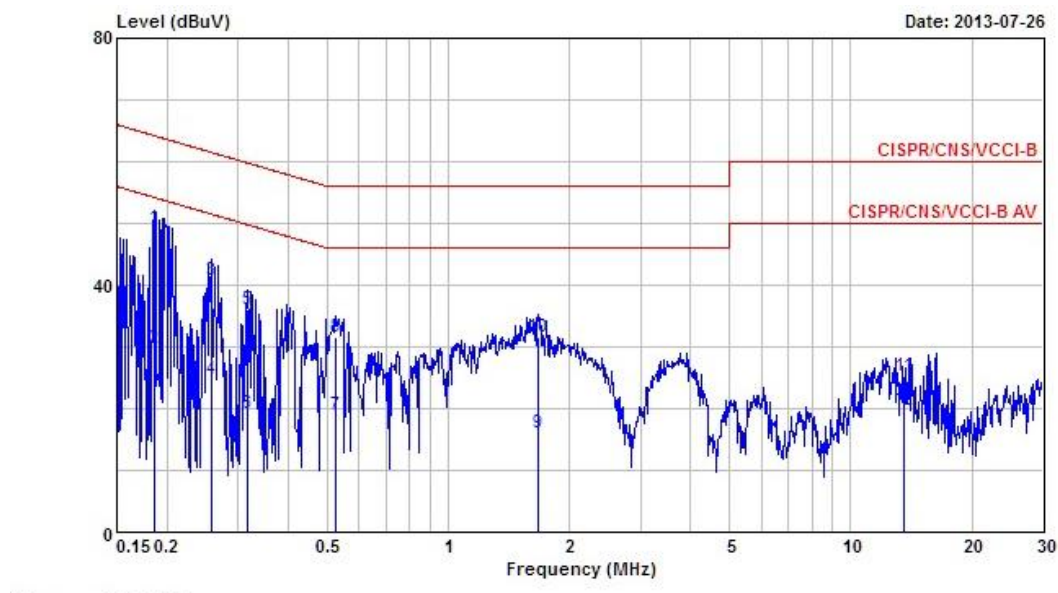

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1863950	49.24	-14.96	64.20	48.99	0.11	0.14	QP
2	0.1863950	29.82	-24.38	54.20	29.57	0.11	0.14	Average
3	0.2588790	40.76	-20.71	61.47	40.55	0.11	0.10	QP
4	0.2588790	24.80	-26.67	51.47	24.59	0.11	0.10	Average
5	0.3166190	35.95	-23.85	59.80	35.75	0.10	0.10	QP
6	0.3166190	19.30	-30.50	49.80	19.10	0.10	0.10	Average
7	0.5237620	18.99	-27.01	46.00	18.76	0.10	0.13	Average
8	0.5237620	31.46	-24.54	56.00	31.23	0.10	0.13	QP
9	1.670	15.93	-30.07	46.00	15.54	0.12	0.27	Average
10	1.670	31.56	-24.44	56.00	31.17	0.12	0.27	QP
11	13.560	25.35	-34.65	60.00	24.91	0.27	0.17	QP
12	13.560	19.73	-30.27	50.00	19.29	0.27	0.17	Average

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

3.2 20dB Bandwidth and Carrier Frequency Separation

3.2.1 20dB Bandwidth and Carrier Frequency Separation Limit

20dB Bandwidth and Carrier Frequency Separation Limit for Frequency Hopping Systems	
☒	2400-2483.5 MHz Band:
☐	$N \geq 75$ and ChS $\geq$ MAX (20 dB bandwidth, 25 kHz).
☒	$N \geq 15$ and ChS $\geq$ MAX (20 dB bandwidth x 2/3, 25 kHz).
N: Number of Hopping Frequencies; ChS: Hopping Channel Separation	


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
☒	Refer as ANSI C63.10, clause 6.9.1 for 20 dB bandwidth measurement.
☒	Refer as ANSI C63.10, clause 7.7.2 for carrier frequency separation measurement.
☒	For conducted measurement.
☒	The EUT supports single transmit chain and measurements performed on this transmit chain.
☐	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.

3.2.4 Test Setup

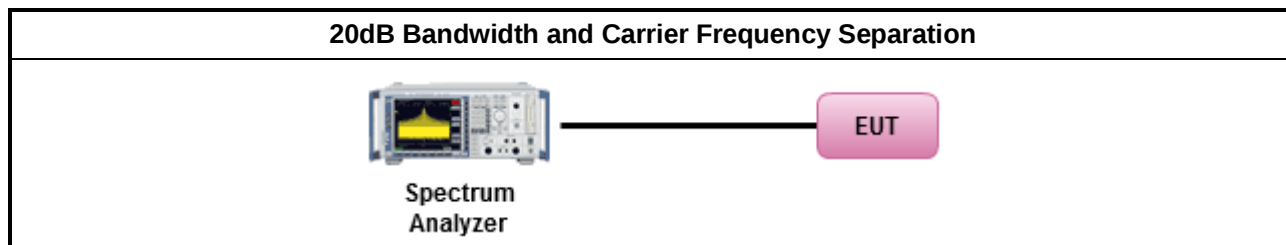


3.2.5 Test Result of 20dB Bandwidth and Carrier Frequency Separation

20dB Bandwidth and Carrier Frequency Separation Result			
Modulation Mode	Freq. (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
BR,1Mbps	2402	0.9465	0.8726
BR,1Mbps	2440	0.9508	0.8856
BR,1Mbps	2480	0.9508	0.8769
Result		Complied	

20dB Bandwidth and Carrier Frequency Separation Result					
Modulation Mode	Freq. (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)	Channel Separation (MHz)	Channel Separation Limits (MHz)
EDR-3Mbps	2402	1.4327	1.3545	1.0000	0.955
EDR-3Mbps	2440	1.4718	1.3458	1.0000	0.981
EDR-3Mbps	2480	1.4631	1.3545	1.0045	0.975
Result		Complied			

Worst 20dB Bandwidth Plots


EDR-3Mbps

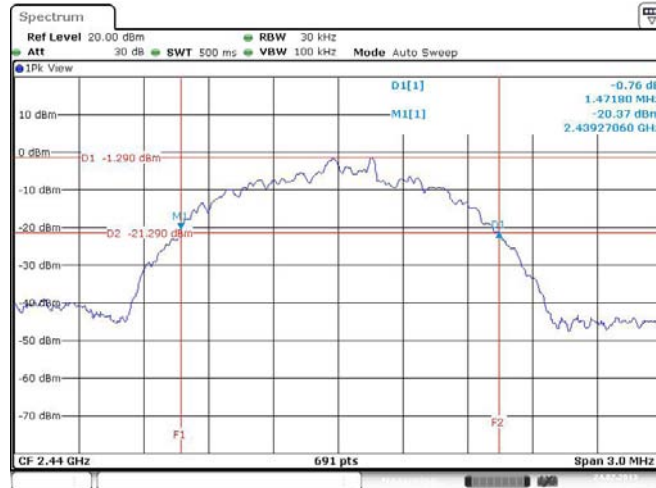

Date: 24.JUL.2013 07:52:52

Worst Carrier Frequency Separation Plots

EDR-3Mbps

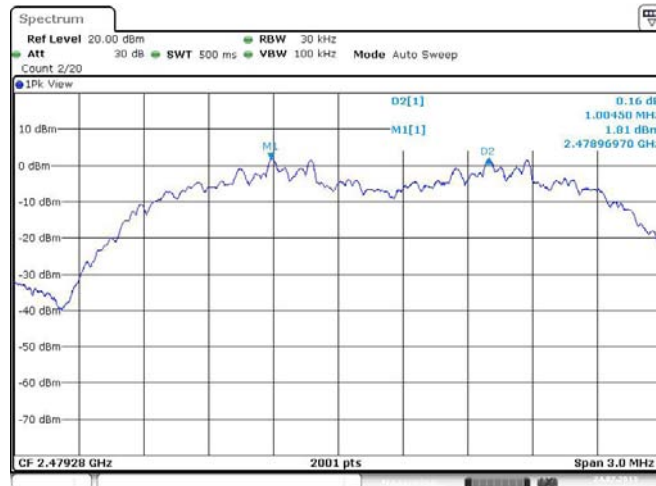

Date: 24.JUL.2013 23:04:07

3.3 Number of Hopping Frequencies

3.3.1 Number of Hopping Frequencies Limit

Number of Hopping Frequencies Limit for Frequency Hopping Systems	
☒	2400-2483.5 MHz Band:
☐	$N \geq 75$ and ChS $\geq$ MAX (20 dB bandwidth, 25 kHz).
☒	$N \geq 15$ and ChS $\geq$ MAX (20 dB bandwidth x 2/3, 25 kHz).
N: Number of Hopping Frequencies; ChS: Hopping Channel Separation	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures


Test Method	
☒	Refer as ANSI C63.10, clause 7.7.3 for number of hopping frequencies measurement.
☒	For conducted measurement.
☒	The EUT supports single transmit chain and measurements performed on this transmit chain.
☐	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.

3.3.4 Test Setup

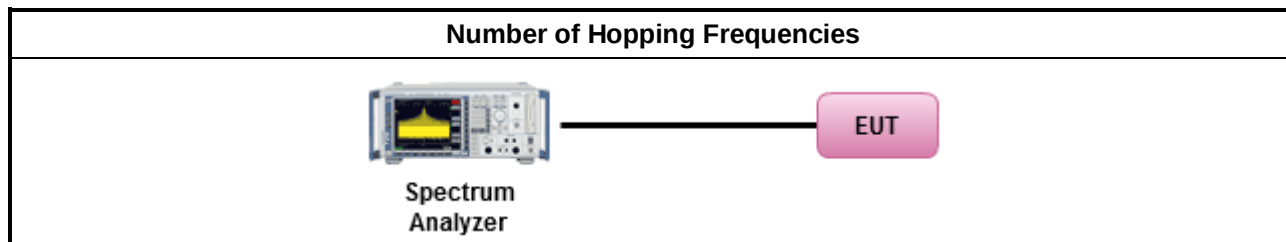

3.3.5 Test Result of Number of Hopping Frequencies

Number of Hopping Frequencies Result			
Modulation Mode	Freq. (MHz)	Hopping Channel Number (N)	Hopping Channel Number Limits
EDR-3Mbps	2402-2480	79	15
Result	Complied		

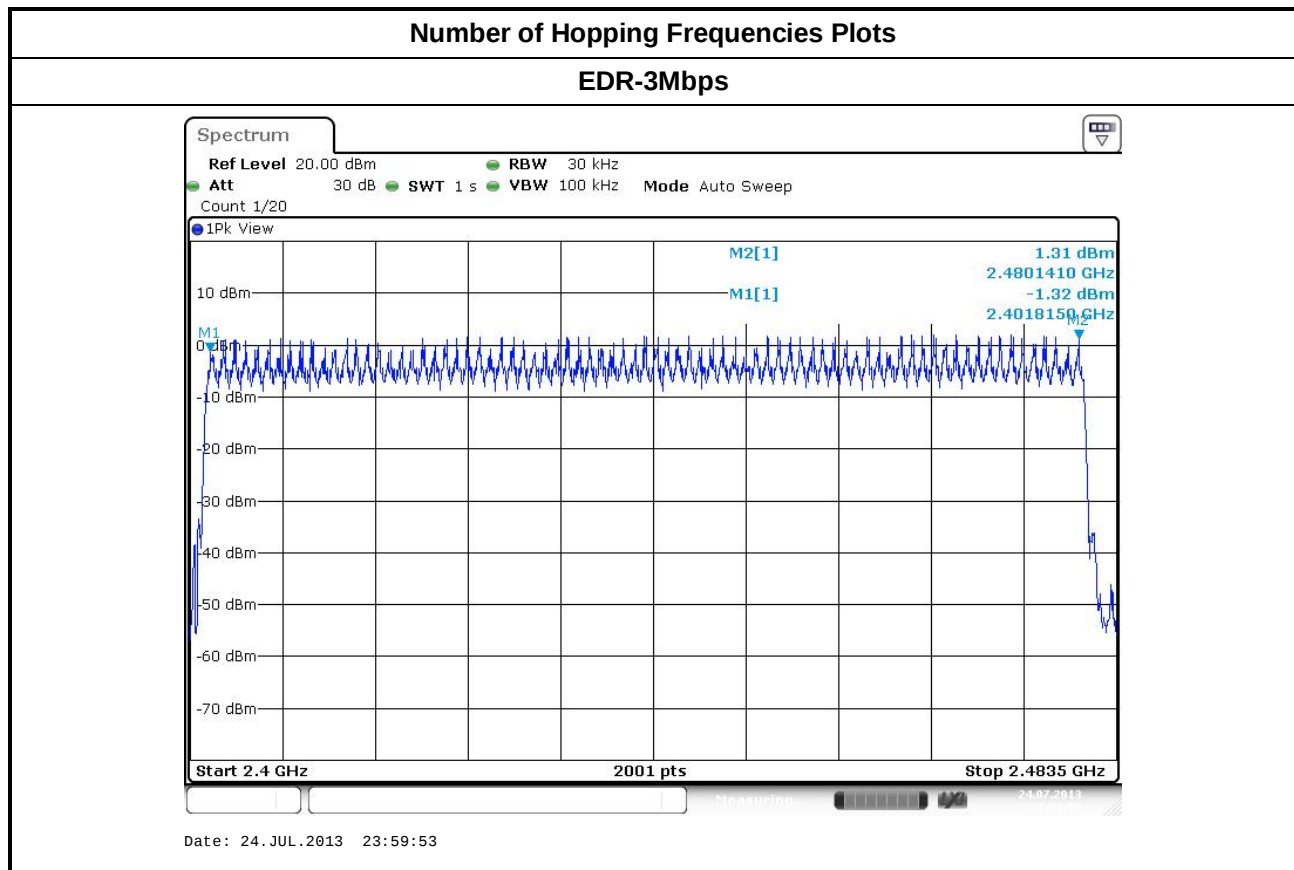

3.4 Time of Occupancy (Dwell Time)

3.4.1 Time of Occupancy (Dwell Time) Limit

Time of Occupancy (Dwell Time) Limit for Frequency Hopping Systems	
☒	2400-2483.5 MHz Band: Dwell time ≤ 0.4 second within $0.4 \times N$
N: Number of Hopping Frequencies	


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures


Test Method	
☒	Refer as ANSI C63.10, clause 7.7.4 for dwell time measurement.
☒	Bluetooth ACL packets can be 1, 3, or 5 time slots. Following as dwell time. Operate DH5 at maximum dwell time and maximum duty cycle.
☒	The DH1 packet can cover a single time slot. A maximum length packet has duration of 1 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is $1/1600$ seconds, or 0.625ms. DH1 Packet permit maximum $1600 / 79 / 2 = 10.12$ hops per second in each channel (1 time slot RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $10.12 \times 31.6 = 320$ within 31.6 seconds.
☒	The DH3 packet can cover up to 3 time slots. A maximum length packet has duration of 3 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is $3/1600$ seconds, or 1.875ms. DH3 Packet permit maximum $1600 / 79 / 4 = 5.06$ hops per second in each channel (3 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $5.06 \times 31.6 = 160$ within 31.6 seconds.
☒	The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle. A maximum length packet has duration of 5 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is $5/1600$ seconds, or 3.125ms. DH5 Packet permit maximum $1600 / 79 / 6 = 3.37$ hops per second in each channel (5 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $3.37 \times 31.6 = 106.6$ within 31.6 seconds
☒	For conducted measurement.
☒	The EUT supports single transmit chain and measurements performed on this transmit chain.
☐	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.

3.4.4 Test Setup

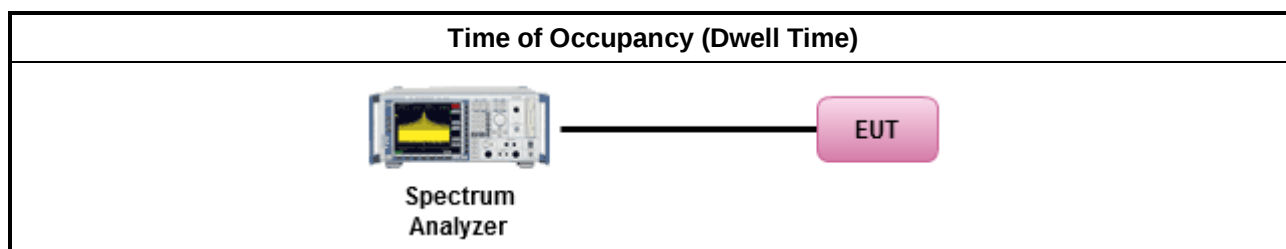

3.4.5 Test Result of Time of Occupancy (Dwell Time)

Time of Occupancy (Dwell Time) Result					
Modulation Mode	Freq. (MHz)	Pulse Time per Hop (ms)	Number of Pulse in [0.4 x N sec]	Dwell Time in [0.4 x N sec] (s)	Dwell Time Limits (s)
EDR-3Mbps	2402	2.91	106.7	0.310	0.4
Result		Complied			
Bluetooth ACL packets can be 1, 3, or 5 time slots. The DH1 packet can cover a single time slot. The DH3 packet can cover up to 3 time slots. The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle. A maximum length packet has duration of 5 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is 5/1600 seconds, or 3.125ms.					

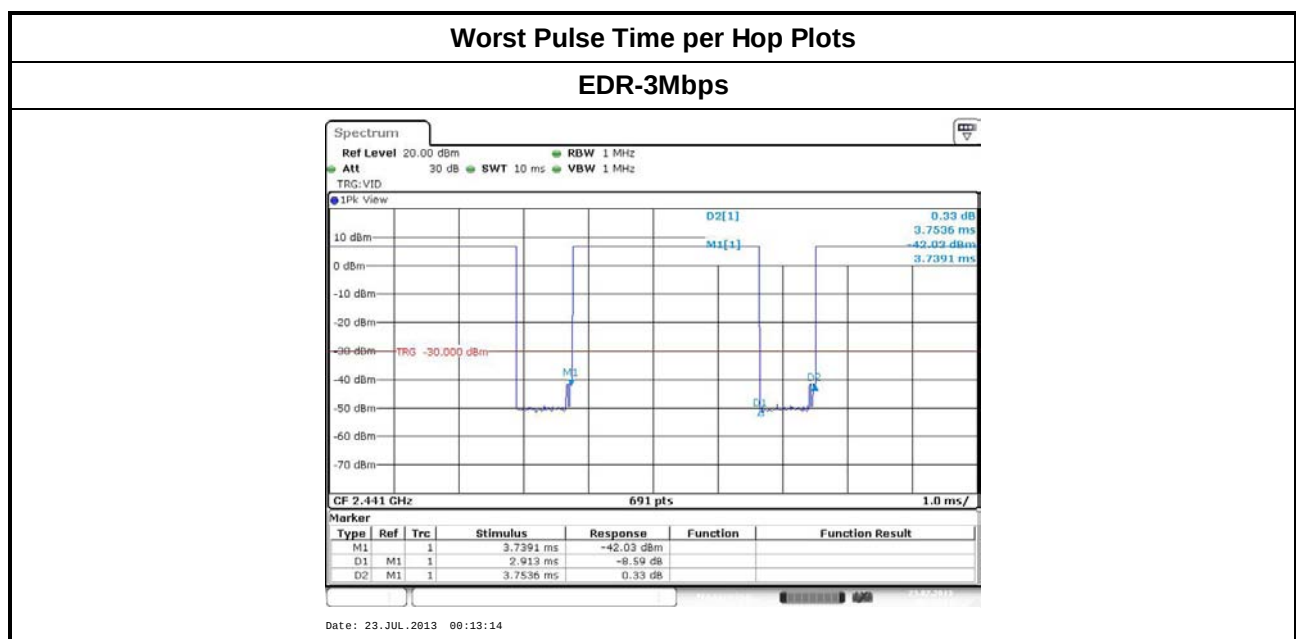

3.5 RF Output Power

3.5.1 RF Output Power Limit

RF Output Power Limit for Frequency Hopping Systems	
Maximum Peak Conducted Output Power Limit	
☒ 2400-2483.5 MHz Band:	
	☐ For Hopping Channel: $N \geq 75$
	☐ If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
	☐ If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
	☒ For Hopping Channel: $N \geq 15$
	☒ If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 21$ dBm (0.125 W)
	☐ If $G_{TX} > 6$ dBi, then $P_{Out} = 21 - (G_{TX} - 6)$ dBm
e.i.r.p. Power Limit:	
☒ 2400-2483.5 MHz Band:	
	☐ For Hopping Channel: $N \geq 75 - P_{eirp} \leq 36$ dBm (4 W)
	☒ For Hopping Channel: $N \geq 15 - P_{eirp} \leq 27$ dBm (0.5 W)
G_{TX} = the maximum transmitting antenna directional gain in dBi. P_{eirp} = e.i.r.p. Power in dBm. N: Number of Hopping Frequencies ChS: Hopping Channel Separation	


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method	
☒ Maximum Peak Conducted Output Power	
	☐ Refer as FCC DA 00-0705, spectrum analyzer for peak power.
	☒ Refer as FCC DA 00-0705, peak power meter for peak power.
	☐ Refer as ANSI C63.10, clause 6.10.2.1 a) for peak power meter.
	☐ Refer as ANSI C63.10, clause 6.10.2.1 a) for spectrum analyzer - (RBW $\geq$ EBW).
☒ For conducted measurement.	
	☒ The EUT supports single transmit chain and measurements performed on this transmit chain.
	☐ The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.

3.5.4 Test Setup

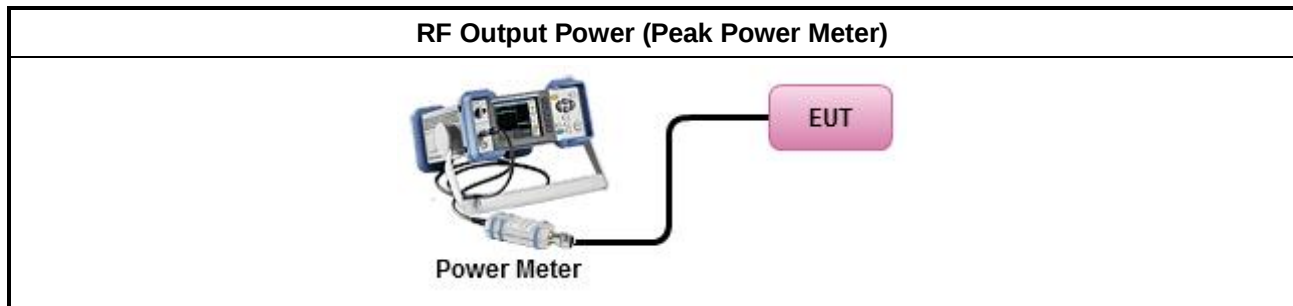

3.5.5 Test Result of Maximum Peak Conducted Output Power


Maximum Peak Conducted Output Power Result						
Condition		RF Output Power (dBm)				
Modulation Mode	Freq. (MHz)	RF Output Power	Power Limit	Antenna Gain (dBi)	EIRP Power	EIRP Limit
BR-1Mbps	2402	8.57	21	-3.71	4.86	27
BR-1Mbps	2440	8.98	21	-3.71	5.27	27
BR-1Mbps	2480	9.06	21	-3.71	5.35	27
EDR-3Mbps	2402	7.41	21	-3.71	3.70	27
EDR-3Mbps	2440	7.85	21	-3.71	4.14	27
EDR-3Mbps	2480	7.89	21	-3.71	4.18	27
Result		Complied				

3.5.6 Test Result of Maximum Average Conducted Output Power

Maximum Average Conducted Output Power Result						
Condition		RF Output Power (dBm)				
Modulation Mode	Freq. (MHz)	Average Power	Duty Factor (dB)	RF Output Power	Antenna Gain (dBi)	EIRP Power
BR-1Mbps	2402	7.39	1.10	8.49	-3.71	4.78
BR-1Mbps	2440	7.82	1.10	8.92	-3.71	5.21
BR-1Mbps	2480	7.91	1.10	9.01	-3.71	5.30
EDR-3Mbps	2402	3.76	1.10	4.86	-3.71	1.15
EDR-3Mbps	2440	4.45	1.10	5.55	-3.71	1.84
EDR-3Mbps	2480	4.49	1.10	5.59	-3.71	1.88
Result		Complied				

3.6 Transmitter Radiated Bandedge Emissions

3.6.1 Transmitter Radiated Bandedge Emissions Limit

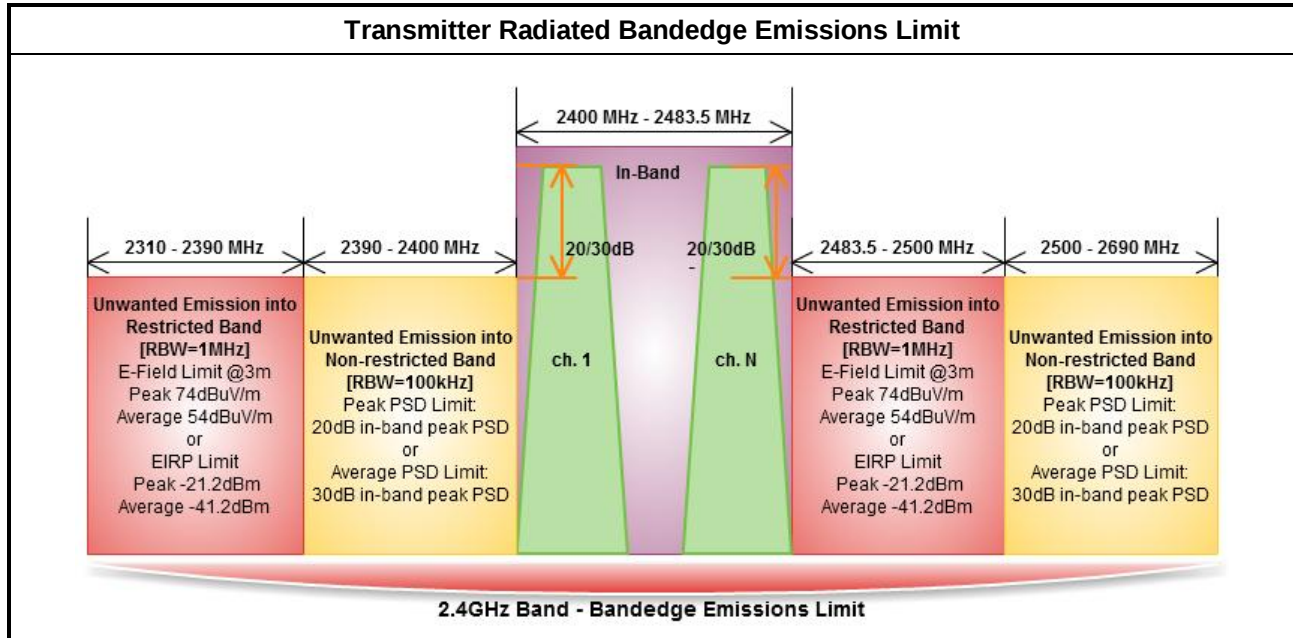


3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

Test Method – General Information	
☒	The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].
☒	Refer as ANSI C63.10, clause 6.9.2.2 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
☒	For the transmitter unwanted emissions shall be measured using following options below:
☒	For unwanted emissions into non-restricted bands. Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.
☒	For unwanted emissions into restricted bands.
☒	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.
☐	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
☒	Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
☒	For the transmitter bandedge emissions shall be measured using following options below:
☒	Refer as ANSI C63.10, clause 6.9.2 for band-edge testing.
☐	Refer as ANSI C63.10, clause 6.9.3 for marker-delta method for band-edge measurements.
☒	Refer as ANSI C63.10, clause 7.7.9 for band-edge testing into non-restricted bands.
☒	For radiated measurement, refer as ANSI C63.10, clause 6.6 for radiated emissions from above 1 GHz.

3.6.4 Test Setup

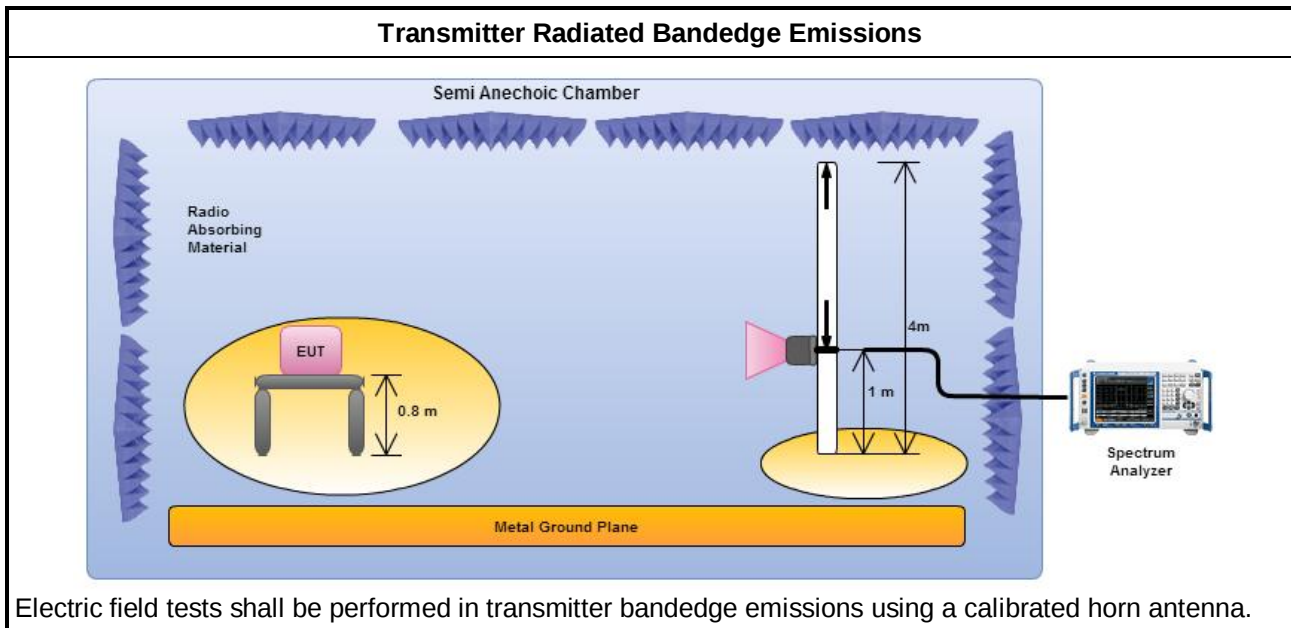

3.6.5 Test Result of Transmitter Radiated Bandedge Emissions


Transmitter Radiated Bandedge Emissions (Non-restricted Band)								
Modulation	N _{TX}	Test Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] – [o] (dB)	Limit (dB)	Pol.
EDR-3Mbps	1	2402	99.50	2391.910	62.90	36.60	20	V
EDR-3Mbps	1	2480	103.38	2537.160	64.53	38.85	20	V
Note 1: Measurement worst emissions of receive antenna polarization								

Transmitter Radiated Bandedge Emissions (Restricted Band)										
Modulation Mode	N _{TX}	Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Freq. (MHz) AV	Level (dBuV/m) AV	Limit (dBuV/m) AV	Pol.
EDR-3Mbps	1	2402	3	2380.380	59.23	74	2310.000	46.97	54	V
EDR-3Mbps	1	2480	3	2483.610	60.96	74	2483.500	49.64	54	V
Note 1: Measurement worst emissions of receive antenna polarization.										
Note 2: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., DH5 VBW≥1/3.125ms, VBW=1kHz										


Transmitter Radiated Bandedge Emissions Plots

EDR-3Mbps-(Lowest Ch.)

2402 MHz

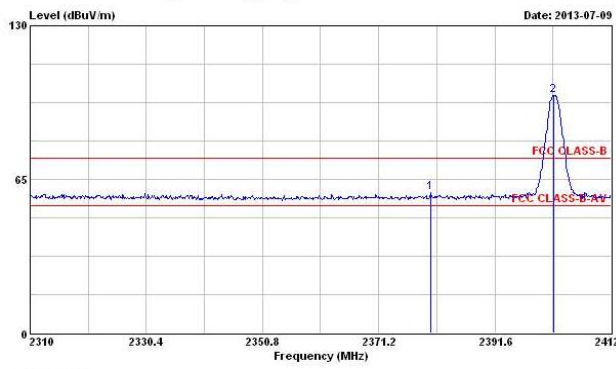


2402 MHz

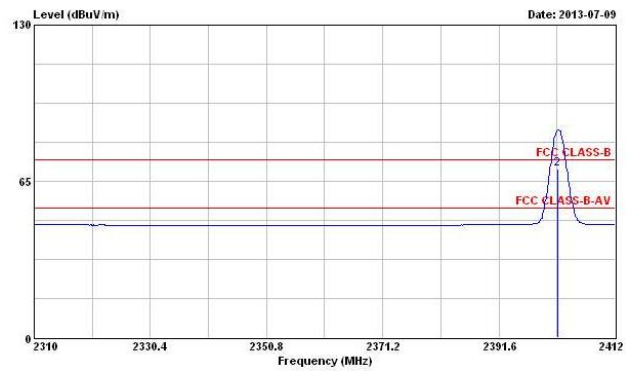


EDR-3Mbps-(Highest Ch.)

2480 MHz

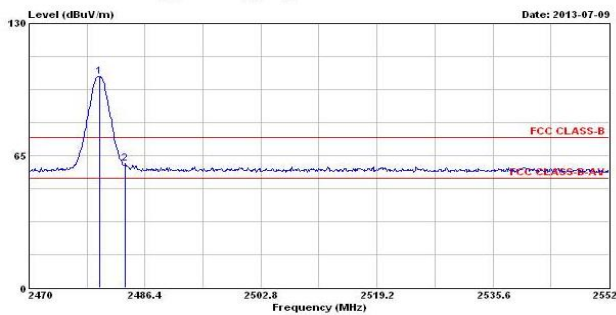

2480 MHz

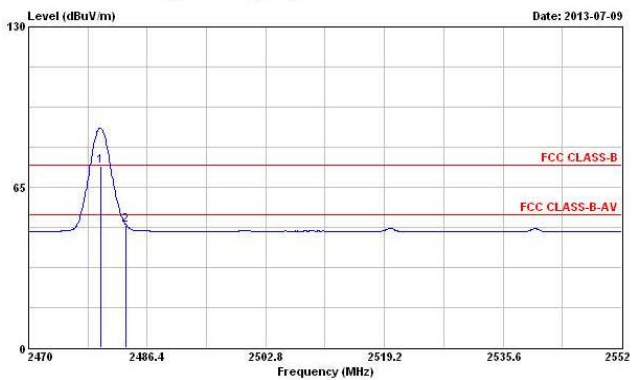

3.7 Transmitter Radiated Unwanted Emissions

3.7.1 Transmitter Radiated Unwanted Emissions Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.


3.7.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.7.3 Test Procedures


Test Method – General Information	
☒	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
☒	Measurements in the frequency range 10 GHz - 18GHz are typically made at a closer distance 1m, because the instrumentation noise floor is typically close to the radiated emission limit.
☒	Measurements in the frequency range above 18 GHz - 25GHz are typically made at a closer distance 0.5m, because the instrumentation noise floor is typically close to the radiated emission limit.
☒	The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].
☒	For the transmitter unwanted emissions shall be measured using following options below:
☒	Refer as FCC DA 00-0705, for spurious radiated emissions. The dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”, derived from $20\log(\text{dwell time}/100 \text{ ms})$
☒	For unwanted emissions into non-restricted bands. Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.
☒	For unwanted emissions into restricted bands.
☒	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). $\text{VBW} \geq 1/T$, where T is pulse time.
☐	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
☒	Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
☒	For radiated measurement.
☒	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz.
☒	Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1000 MHz.
☒	Refer as ANSI C63.10, clause 6.6 for radiated emissions from above 1 GHz.

3.7.4 Test Setup

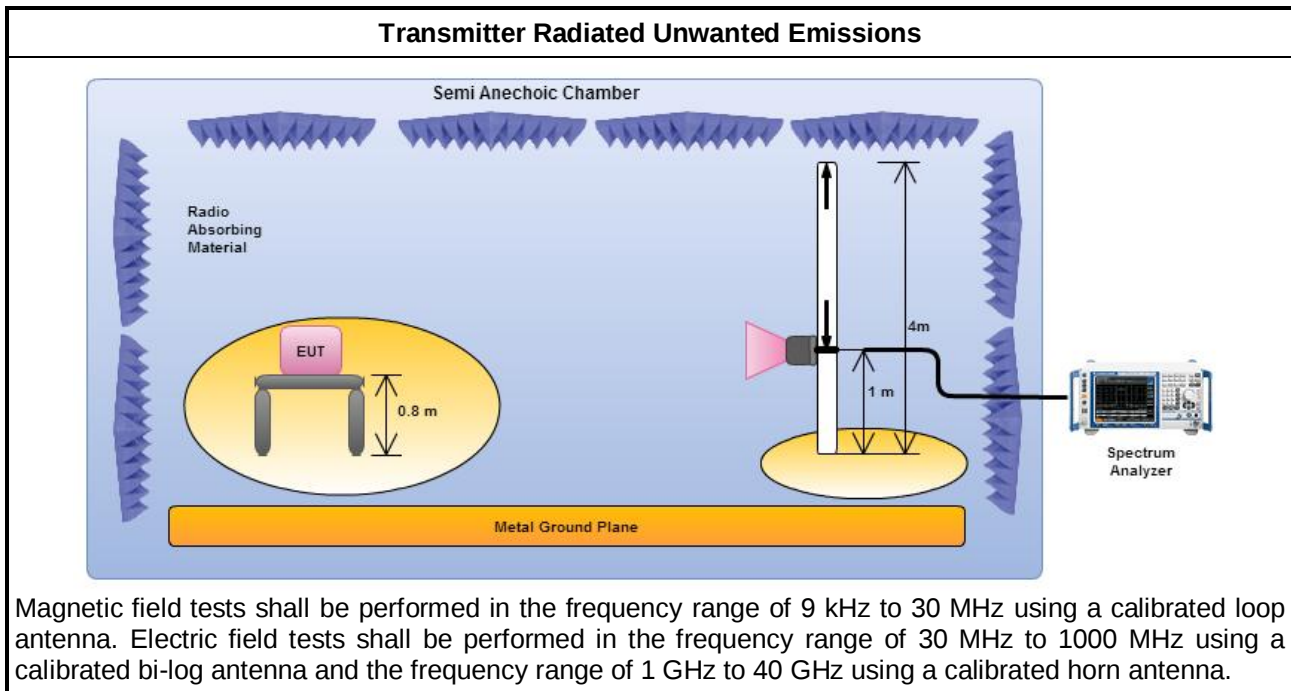


3.7.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

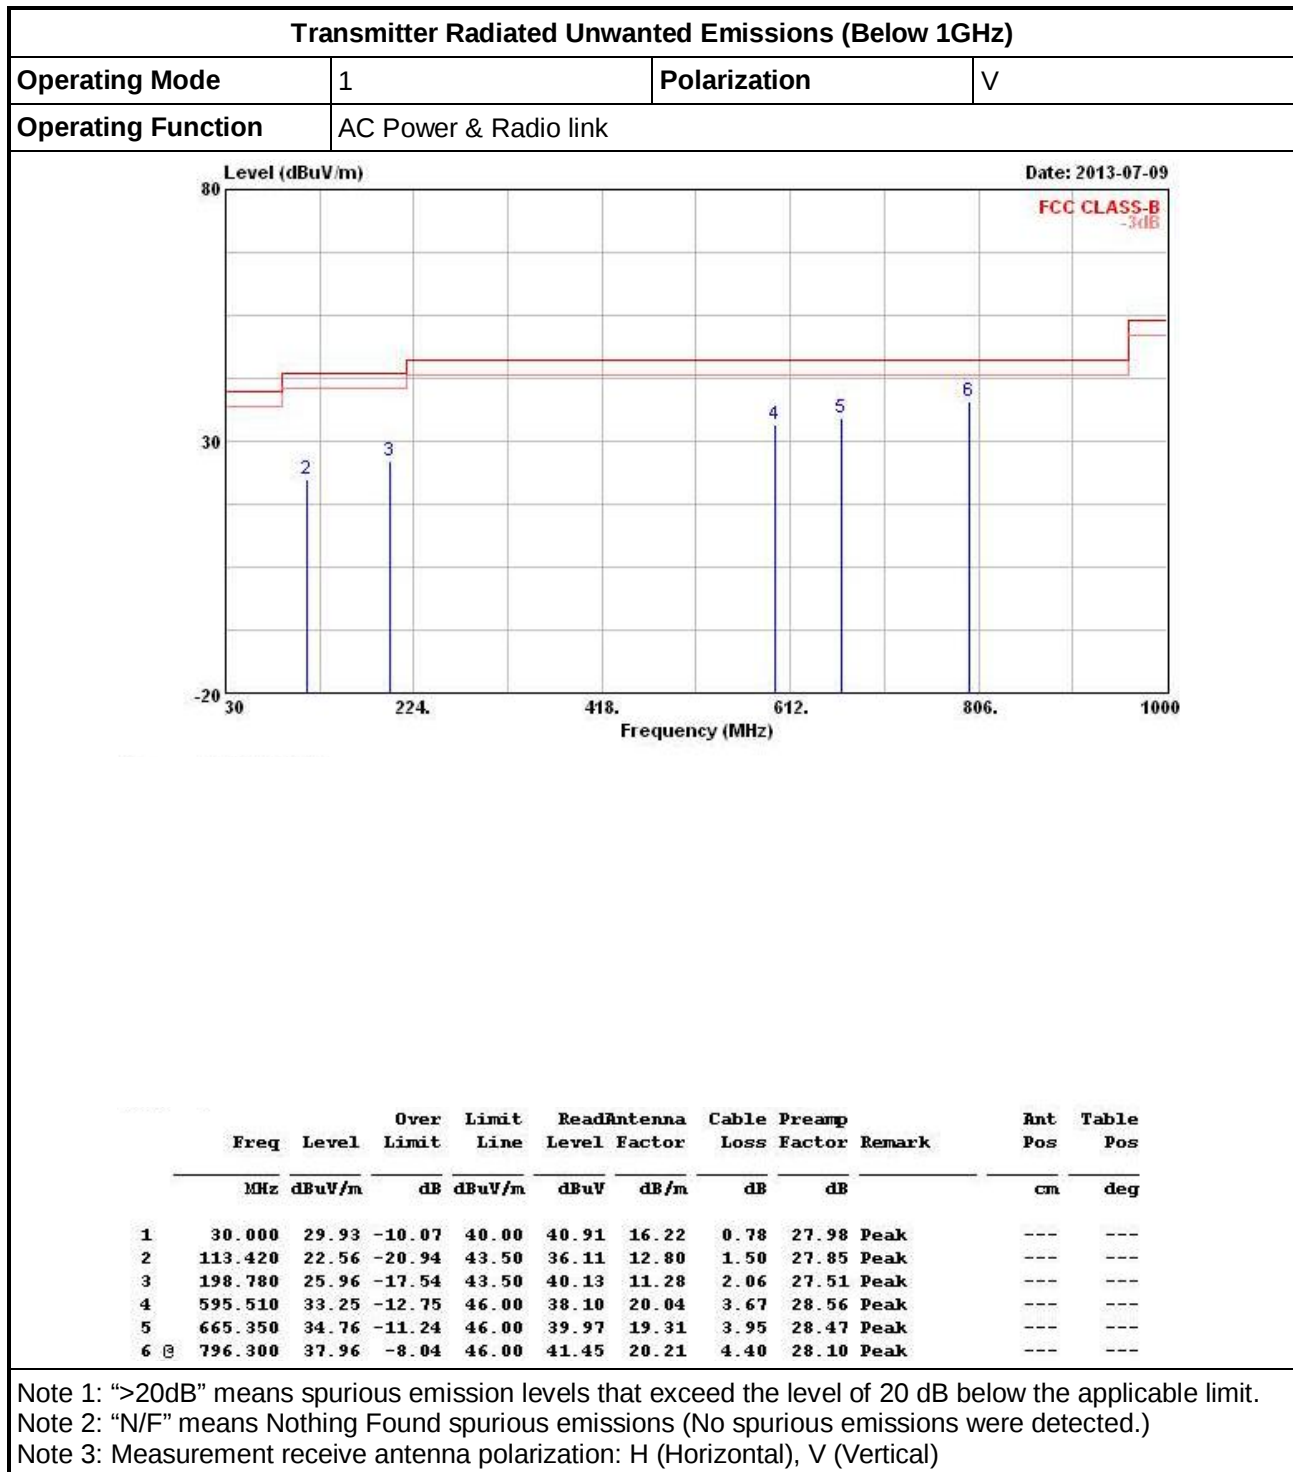3.7.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)


Transmitter Radiated Unwanted Emissions (Below 1GHz)

Operating Mode	1	Polarization	H
Operating Function	AC Power & Radio link		

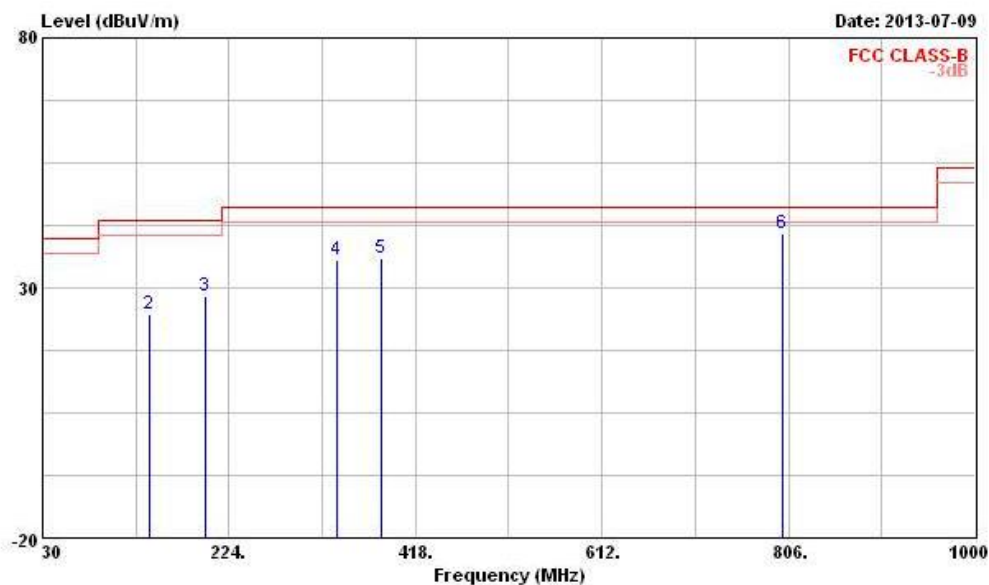


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamplifier Loss	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	30.000	31.31	-8.69	40.00	42.29	16.22	0.78	27.98 Peak	---	---
2	141.550	24.73	-18.77	43.50	38.97	11.78	1.71	27.73 Peak	---	---
3	198.780	28.47	-15.03	43.50	42.64	11.28	2.06	27.51 Peak	---	---
4	335.550	35.56	-10.44	46.00	46.02	14.26	2.75	27.47 Peak	---	---
5	382.110	35.88	-10.12	46.00	45.80	14.98	2.92	27.82 Peak	---	---
6	800.180	40.95	-5.05	46.00	44.35	20.27	4.42	28.09 Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

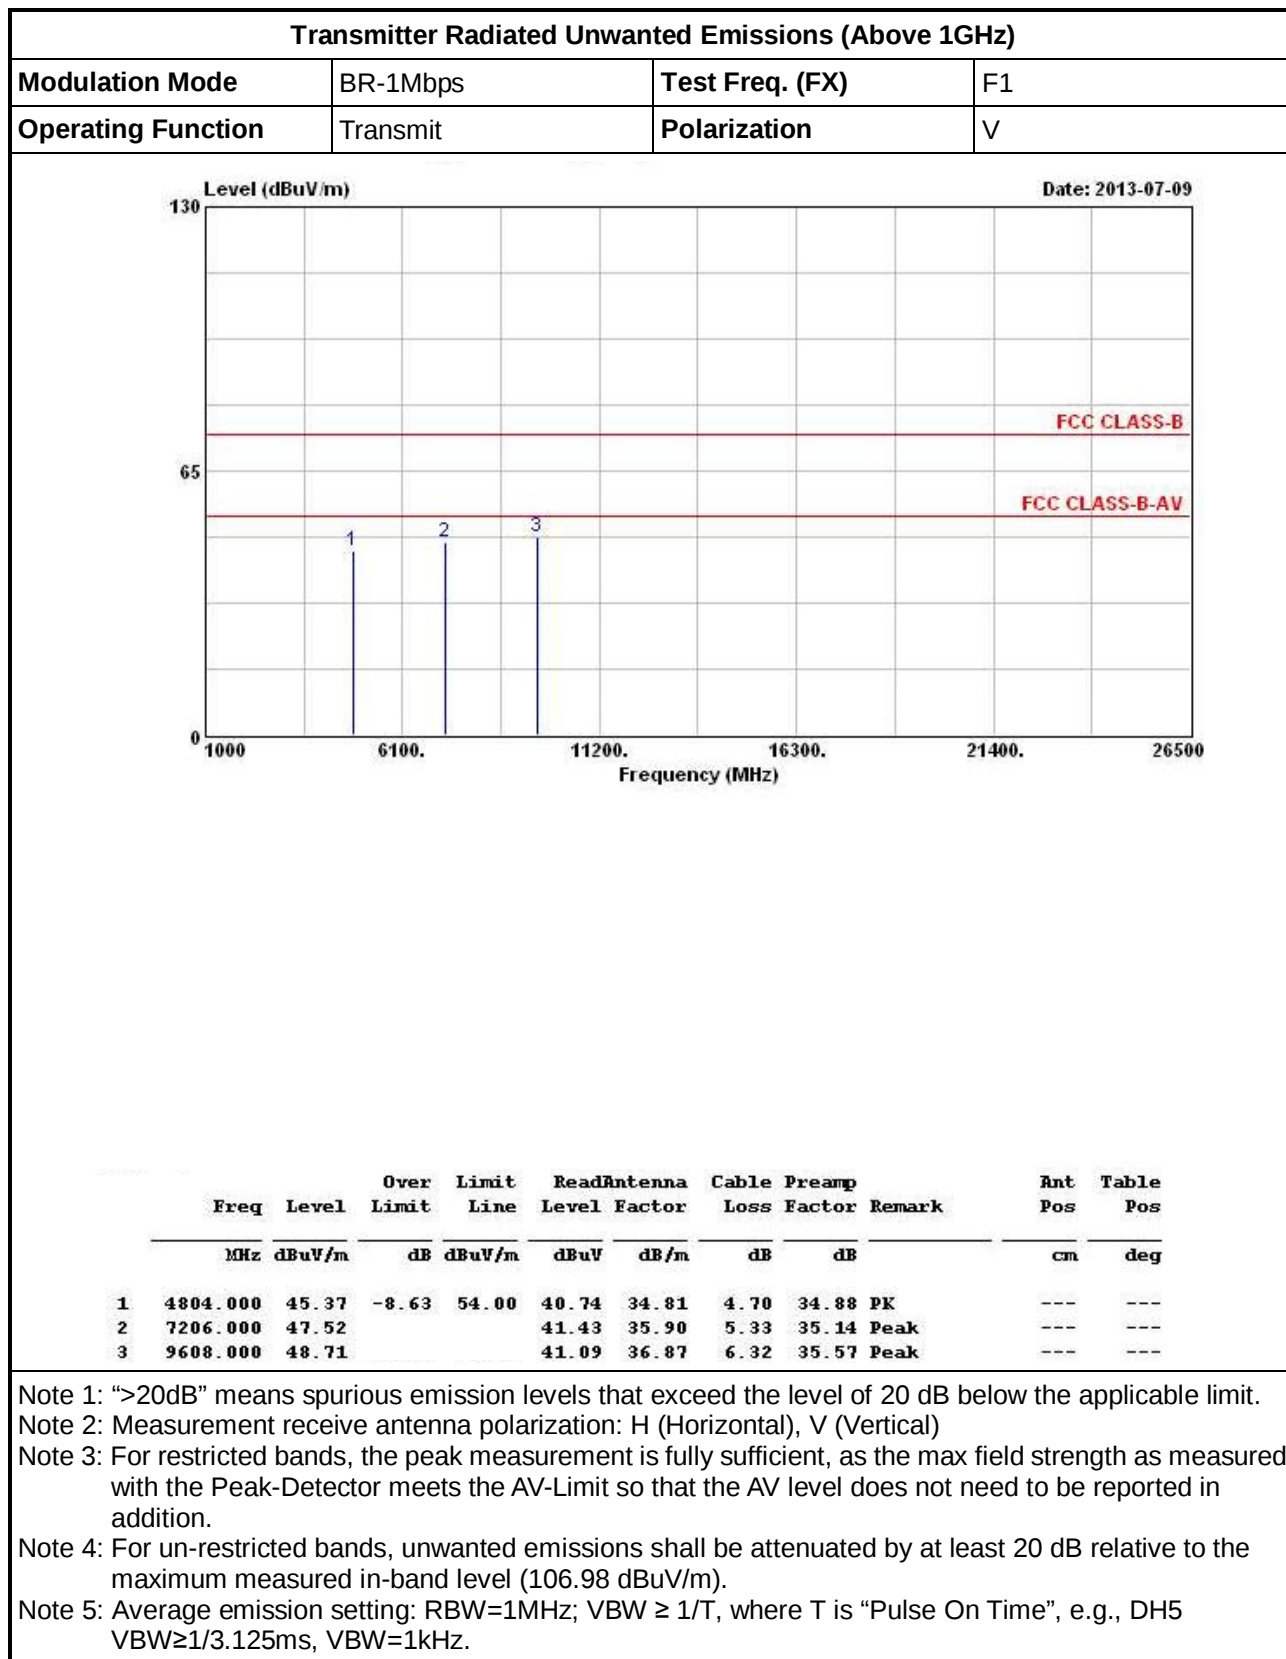3.7.7 Transmitter Radiated Unwanted Emissions (Above 1GHz)


Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	BR-1Mbps	Test Freq. (FX)	F1
Operating Function	Transmit	Polarization	H

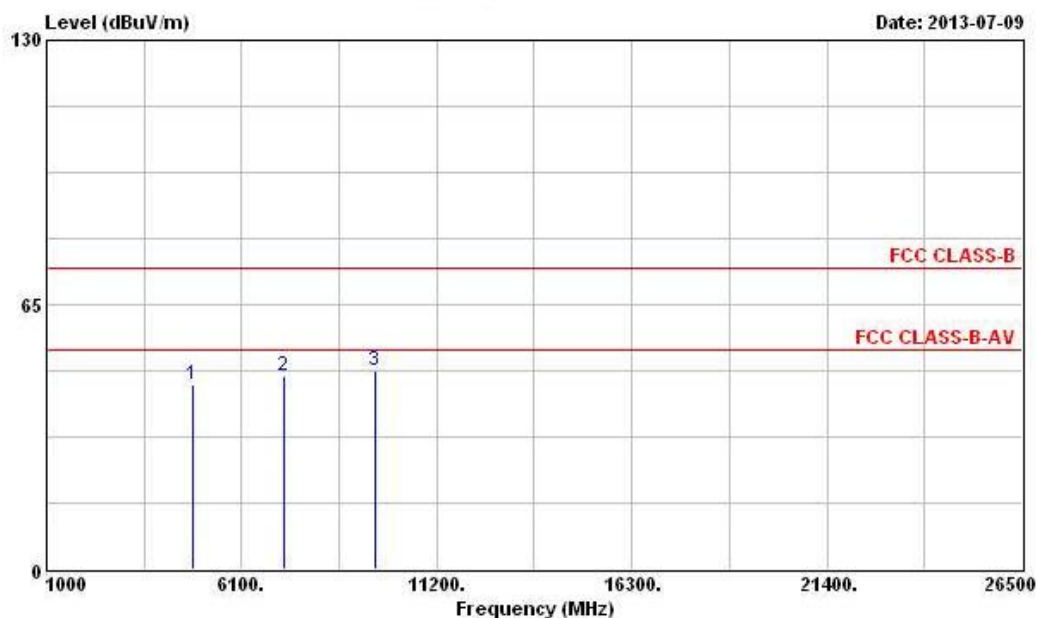

	Freq	Level	Over Limit	Limit Line	Read Antenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4804.000	45.23	-8.77	54.00	40.60	34.81	4.70	34.88	PK	---	---
2	7206.000	47.28			41.19	35.90	5.33	35.14	Peak	---	---
3	9608.000	48.74			41.12	36.87	6.32	35.57	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (106.98 dBuV/m).

Note 5: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., DH5 VBW≥1/3.125ms, VBW=1kHz.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	BR-1Mbps	Test Freq. (FX)	F2
Operating Function	Transmit	Polarization	V

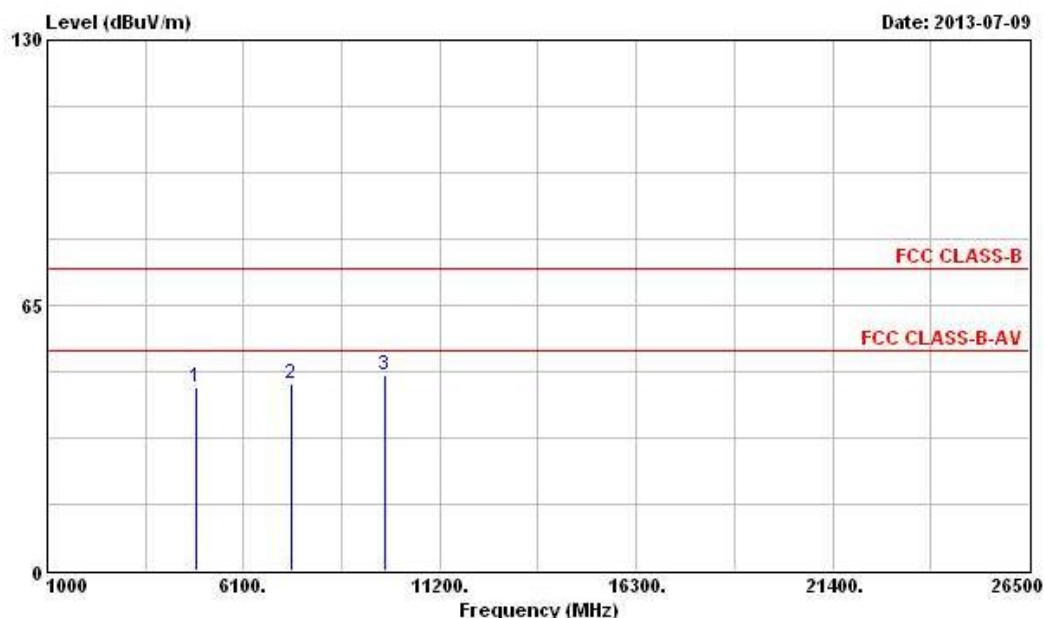

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4880.000	45.07	-8.93	54.00	40.43	34.77	4.73	34.86	PK	---	---
2	7320.000	45.90	-8.10	54.00	39.70	35.90	5.47	35.17	PK	---	---
3	9760.000	48.07			40.10	37.11	6.44	35.58	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (106.98 dBuV/m).

Note 5: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., DH5 VBW≥1/3.125ms, VBW=1kHz.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	BR-1Mbps	Test Freq. (FX)	F2
Operating Function	Transmit	Polarization	H

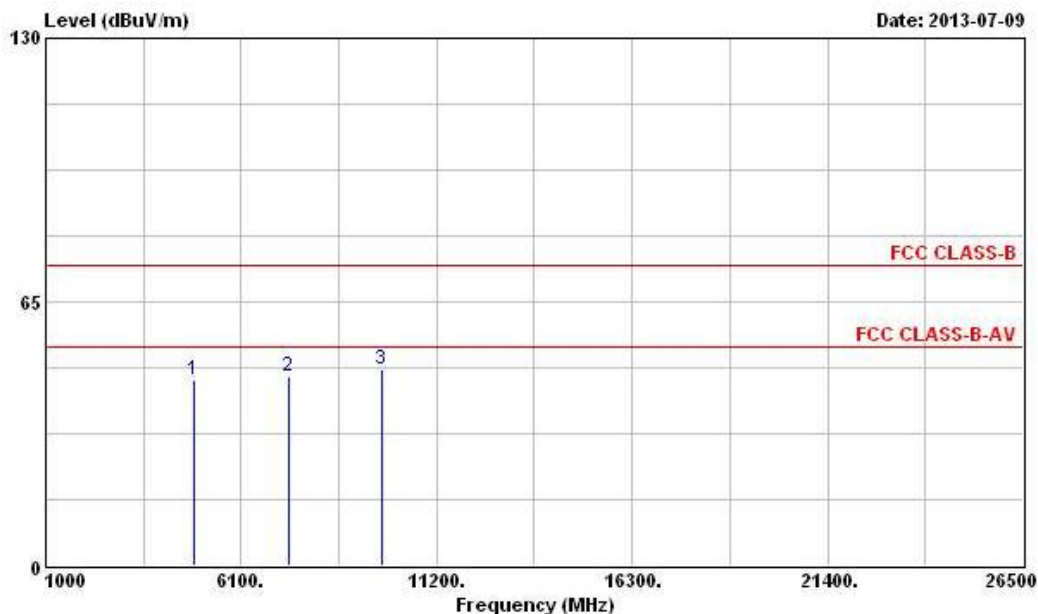

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4880.000	45.70	-8.30	54.00	41.06	34.77	4.73	34.86	PK	---	---
2	7320.000	46.52	-7.48	54.00	40.32	35.90	5.47	35.17	PK	---	---
3	9760.000	48.31			40.34	37.11	6.44	35.58	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (106.98 dBuV/m).

Note 5: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., DH5 VBW≥1/3.125ms, VBW=1kHz.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	BR-1Mbps	Test Freq. (FX)	F3
Operating Function	Transmit	Polarization	V

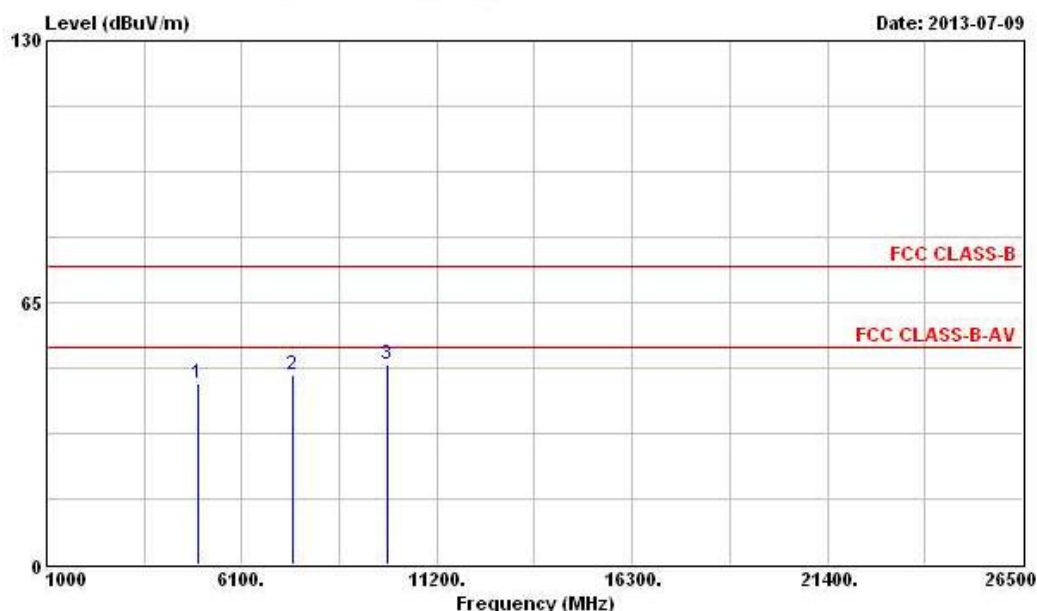

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4960.000	44.73	-9.27	54.00	40.03	34.72	4.82	34.84	PK	---	---
2	7440.000	46.95	-7.05	54.00	40.65	35.90	5.61	35.21	PK	---	---
3	9920.000	49.50			41.14	37.39	6.56	35.59	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (106.98 dBuV/m).

Note 5: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., DH5 VBW≥1/3.125ms, VBW=1kHz.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	BR-1Mbps	Test Freq. (FX)	F3
Operating Function	Transmit	Polarization	H

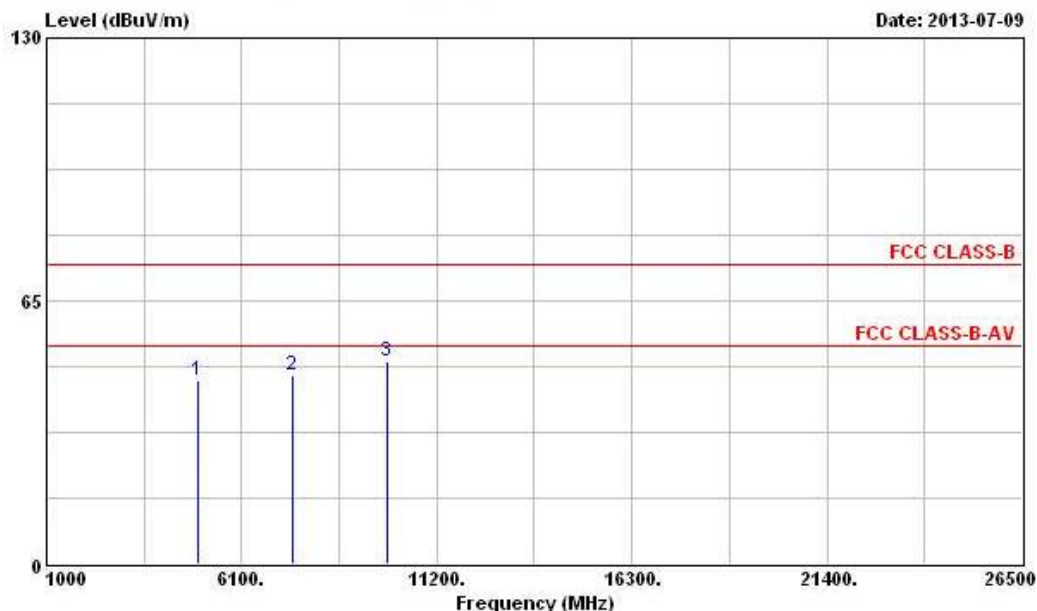

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4960.000	45.31	-8.69	54.00	40.61	34.72	4.82	34.84	PK	---	---
2	7440.000	46.80	-7.20	54.00	40.50	35.90	5.61	35.21	PK	---	---
3	9920.000	50.00			41.64	37.39	6.56	35.59	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (106.98 dBuV/m).

Note 5: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., DH5 VBW≥1/3.125ms, VBW=1kHz.

4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz ~ 2.75GHz	Mar. 26, 2013	Conduction (CO04-HY)
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz ~ 30MHz	Jan. 21, 2013	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz ~ 30MHz	Apr. 18, 2013	Conduction (CO04-HY)
RF Cable-CON	HUBER+SUHNER	RG213/U	7.61183201e+012	9kHz ~ 30MHz	Nov. 09, 2012	Conduction (CO04-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP 40	100305	9KHz~40GHz	Mar. 20, 2013	Conducted (TH01-HY)
AC Power Source	G.W	APS-9102	EL920581	AC 0V ~ 300V	Jul. 16, 2013	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-SP-SD	MAA1112-007	-20 ~ 100℃	Nov. 21, 2012	Conducted (TH01-HY)
Power Sensor	Anritsu	MA2411B	0917017	300MHz ~ 40GHz	Feb. 02, 2013	Conducted (TH01-HY)
Power Meter	Anritsu	ML2495A	0949003	300MHz ~ 40GHz	Feb. 02, 2013	Conducted (TH01-HY)
RF Cable-2m	HUBER+SUHNER	SUCOFLEX_104	SN 345675/4	1GHz ~ 26.5GHz	Dec. 04, 2012	Conducted (TH01-HY)
RF Cable-0.2m	HUBER+SUHNER	SUCOFLEX_103	10712/4	1GHz ~ 33GHz	Dec. 04, 2012	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP40	100593	9kHz ~ 40GHz	Sep. 14, 2012	Radiation (03CH02-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30MHz ~ 1GHz 3m	May 11, 2013	Radiation (03CH02-HY)
Amplifier	Agilent	8447D	2944A11146	100kHz ~ 1.3GHz	Jul. 23, 2012	Radiation (03CH02-HY)
Amplifier	Agilent	8449B	3008A02364	1GHz ~ 26.5GHz	May. 06, 2013	Radiation (03CH02-HY)
Horn Antenna	ETS-LINDGREN	3117	00091920	1GHz ~ 18GHz	Nov. 16, 2012	Radiation (03CH02-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz ~ 40GHz	Jan. 08, 2013	Radiation (03CH02-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	Nov. 10, 2012	Radiation (03CH02-HY)
RF Cable-high	SUHNER	SUCOFLEX106	03CH02-HY	1GHz ~ 40GHz	Mar. 05, 2013	Radiation (03CH02-HY)
Bilog Antenna	SCHAFFNER	CBL61128	2723	30MHz ~ 2GHz	Oct. 22, 2012	Radiation (03CH02-HY)
Turn Table	Chaintek Instruments	3000	MF7802058	0~ 360 degree	N/A	Radiation (03CH02-HY)
Antenna Mast	MF	MF7802	MF780208205	1 ~ 4 m	N/A	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna	TESEQ	HLA 6120	31244	9 kHz - 30 MHz	Dec. 02, 2012	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is two year.