




FCC RADIO TEST REPORT

FCC ID : AL8-RIG700
Equipment : Wireless Gaming headset
Brand Name : plantronics
Model Name : RIG 700
Applicant : Plantronics, Inc.
345 Encinal Street, Santa Cruz, CA 95060, USA.
Manufacturer : Plantronics, Inc.
345 Encinal Street, Santa Cruz, CA 95060, USA.
Standard : 47 CFR FCC Part 15.247

The product was received on Jan. 23, 2019, and testing was started from Feb. 15, 2019 and completed on Feb. 20, 2019. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

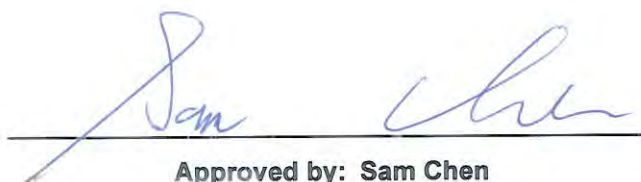
Approved by: Sam Chen

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Testing Applied Standards	7
1.3 Testing Location Information	7
1.4 Measurement Uncertainty	7
2 Test Configuration of EUT	8
2.1 Test Channel Mode	8
2.2 The Worst Case Measurement Configuration.....	9
2.3 EUT Operation during Test	10
2.4 Accessories	10
2.5 Support Equipment.....	11
2.6 Test Setup Diagram	12
3 Transmitter Test Result	15
3.1 AC Power-line Conducted Emissions	15
3.2 DTS Bandwidth	17
3.3 Maximum Conducted Output Power	18
3.4 Power Spectral Density	21
3.5 Emissions in Non-restricted Frequency Bands	23
3.6 Emissions in Restricted Frequency Bands.....	24
4 Test Equipment and Calibration Data	28
Appendix A. Test Results of AC Power-line Conducted Emissions	
Appendix B. Test Results of DTS Bandwidth	
Appendix C. Test Results of Maximum Conducted Output Power	
Appendix D. Test Results of Power Spectral Density	
Appendix E. Test Results of Emissions in Non-restricted Frequency Bands	
Appendix F. Test Results of Emissions in Restricted Frequency Bands	
Appendix G. Test Photos	
Photographs of EUT v01	



TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB Ver1.0



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.247(a)	DTS Bandwidth	PASS	-
3.3	15.247(b)	Maximum Conducted Output Power	PASS	-
3.4	15.247(e)	Power Spectral Density	PASS	-
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	PASS	-
3.6	15.247(d)	Emissions in Restricted Frequency Bands	PASS	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Sam Chen

Report Producer: Viola Huang



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	Ch. Frequency (MHz)	Channel Number
2400-2483.5	2403.35-2479.35	1-39 [39]

Band	Mode	Nant
2.4-2.4835GHz	Pi/4 DQPSK	1TX

Note:

- ♦ using Pi/4 DQPSK modulation type.
- ♦ BWch is the nominal channel bandwidth.
- ♦ Nss-Min is the minimum number of spatial streams.
- ♦ Nant is the number of outputs. e.g., 2(2,3) means have 2 outputs for port 2 and port 3. 2 means have 2 outputs for port 1 and port 2.

**1.1.2 Antenna Information**

Ant.	Brand	P/N	Antenna Type	Connector	Gain (dBi)
1	Sage	DESIGN00002	PIFA PCB Antenna	N/A	2.74
2	Sage	DESIGN00002	PIFA PCB Antenna	N/A	2.78

Note1: The above information was declared by manufacturer.

Note2: The EUT has two antennas.

For Pi/4 DQPSK (1TX/1RX) :

The EUT supports the antenna with TX and RX diversity functions.

Both ant. 1 and ant. 2 support transmit and receive functions, but only one of them will be used at one time.

The ant. 1 generated the worst case, so it was selected to test and record in the report.

1.1.3 Mode Test Duty Cycle

Mode	DC	DCF(dB)	T(s)	VBW(Hz) $\geq 1/T$
Pi/4 DQPSK	1	0	n/a (DC $\geq$ 0.98)	n/a (DC $\geq$ 0.98)

Note:

- ♦ DC is Duty Cycle.
- ♦ DCF is Duty Cycle Factor.

1.1.4 EUT Operational Condition

EUT Power Type	From Host System or battery 3.7V			
Beamforming Function	☐	With beamforming	☒	Without beamforming
Function	☒	Point-to-multipoint	☐	Point-to-point
Test Software Version	VMIttest V1.1.6.48			

Note: The above information was declared by manufacturer.

1.1.5 Table for Carrier Frequencies

Channel No.	Frequency
1	2403.35 MHz
2	2405.35 MHz
:	:
19	2439.35 MHz
20	2441.35 MHz
21	2443.35 MHz
:	:
38	2477.35 MHz
39	2479.35 MHz



1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013
- ♦ FCC KDB 558074 D01 v05r01

1.3 Testing Location Information

Testing Location		
☐	HWA YA	ADD : No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL : 886-3-327-3456 FAX : 886-3-327-0973
☒	JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH01-CB	Owen Hsu	21~23°C / 52~54%	Feb. 18, 2019 ~ Feb. 19, 2019
Radiated	03CH01-CB	RJ Huang	22~24°C / 54~56%	Feb. 15, 2019 ~ Feb. 18, 2019
AC Conduction	CO01-CB	Howard Liu	23.5~23.7°C / 58.1~58.2%	Feb. 20, 2019

Test site Designation No. TW0006 with FCC.

Test site registered number IC 4086B with Industry Canada.

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.0 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%
Output Power Measurement	1.33 dB	Confidence levels of 95%
Power Density Measurement	1.27 dB	Confidence levels of 95%
Bandwidth Measurement	9.74 x10 ⁻⁸	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Mode	PowerSetting
Pi/4 DQPSK	-
2403.35MHz	Default
2441.35MHz	Default
2479.35MHz	Default

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral
Operating Mode	Normal Link
1	EUT (Charge mode) + Wireless Adaptor 1 (PS4 mode)
2	EUT (Charge mode) + Wireless Adaptor 2 (Xbox mode)
3	EUT (Charge mode) + Wireless Adaptor 2 (PC mode)
For operating mode 2 is the worst case and it was record in this test report.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	DTS Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in Non-restricted Frequency Bands
Test Condition	Conducted measurement at transmit chains
1	EUT

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emissions in Restricted Frequency Bands
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	Normal Link
1	EUT (Charge mode) + Wireless Adaptor 1 (PS4 mode)
2	EUT (Battery mode) + Wireless Adaptor 1 (PS4 mode)
Mode 1 has been evaluated to be the worst case between Mode 1~2, thus measurement for Mode 3~4 will follow this same test mode.	
3	EUT (Charge mode) + Wireless Adaptor 2 (Xbox mode)
4	EUT (Charge mode) + Wireless Adaptor 2 (PC mode)
For operating mode 4 is the worst case and it was record in this test report.	
Operating Mode > 1GHz	CTX - EUT

Note: The EUT can only use Y axis position.



2.3 EUT Operation during Test

For CTX Mode:

The EUT was programmed to be in continuously transmitting mode.

For Normal Link:

During the test, the EUT operation to normal function.

2.4 Accessories

Accessories			
Name	Brand	Model	Remark
Lithium-ion Polymer Battery Pack	Lishen	SP563138SA-1S1P-PCM	Nominal Voltage: 3.7V Rated Capacity: 800mAh/2.96Wh Limited Charge Voltage: 4.2V
USB cable	Wen Te	4021XW01682ZAU	Shielded, 0.66m



2.5 Support Equipment

For Test Site No: CO01-CB

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Xbox	Microsoft Corporation	1540	N/A
B	TV	Sony	KLV-32U300A	N/A
C	WIRELESS CONTROLLER	Microsoft Corporation	N/A	N/A
D	AP Router	ASUS	RP-N53	N/A
E	LAN NB	DELL	E6430	N/A
F	Wireless Adaptor 2	plantronics	RIG WX1	AL8-RHX1


For Test Site No: 03CH01-CB (below 1GHz)


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E4300	N/A
B	WLAN AP	NETGEAR	WNDR3300v2	N/A
C	NB	DELL	E4300	N/A
D	Mouse	Logitech	M-U0026	N/A
E	Earphone	SHYARO CHI	MIC-04	N/A
F	Wireless Adaptor 2	plantronics	RIG WX1	AL8-RHX1

For Test Site No: 03CH01-CB (above 1GHz) and TH01-CB


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E4300	N/A

2.6 Test Setup Diagram

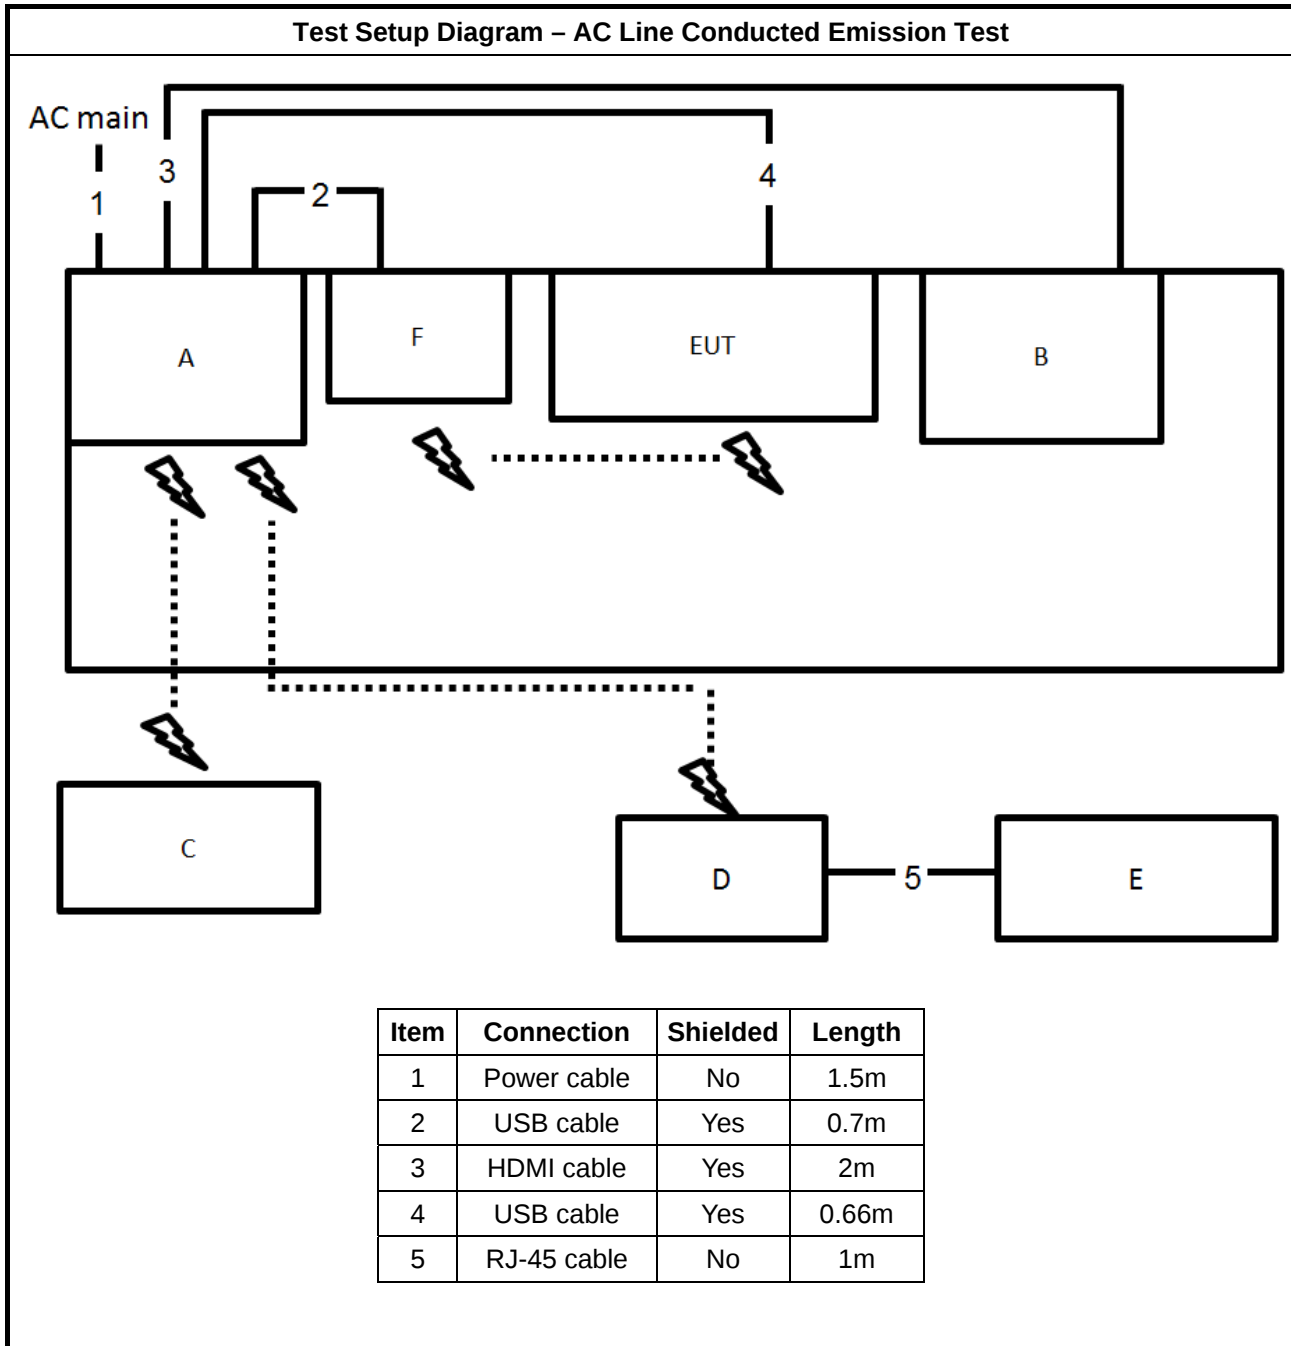

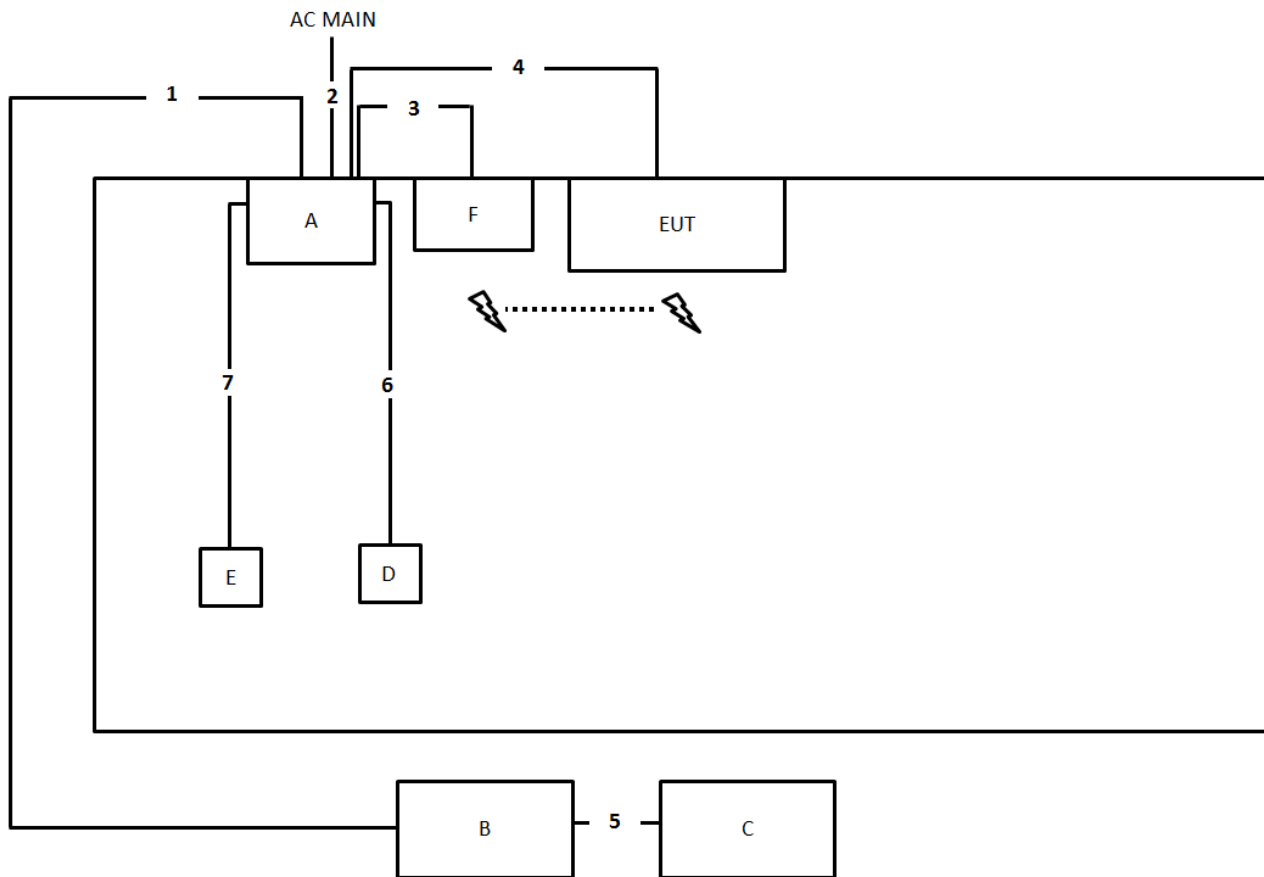Test Setup Diagram - Radiated Test < 1GHz


Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	Power cable	No	1.5m
3	USB cable	Yes	0.7m
4	USB cable	Yes	0.66m
5	RJ-45 cable	No	10m
6	USB cable	Yes	1.8m
7	Audio cable	No	1.1m

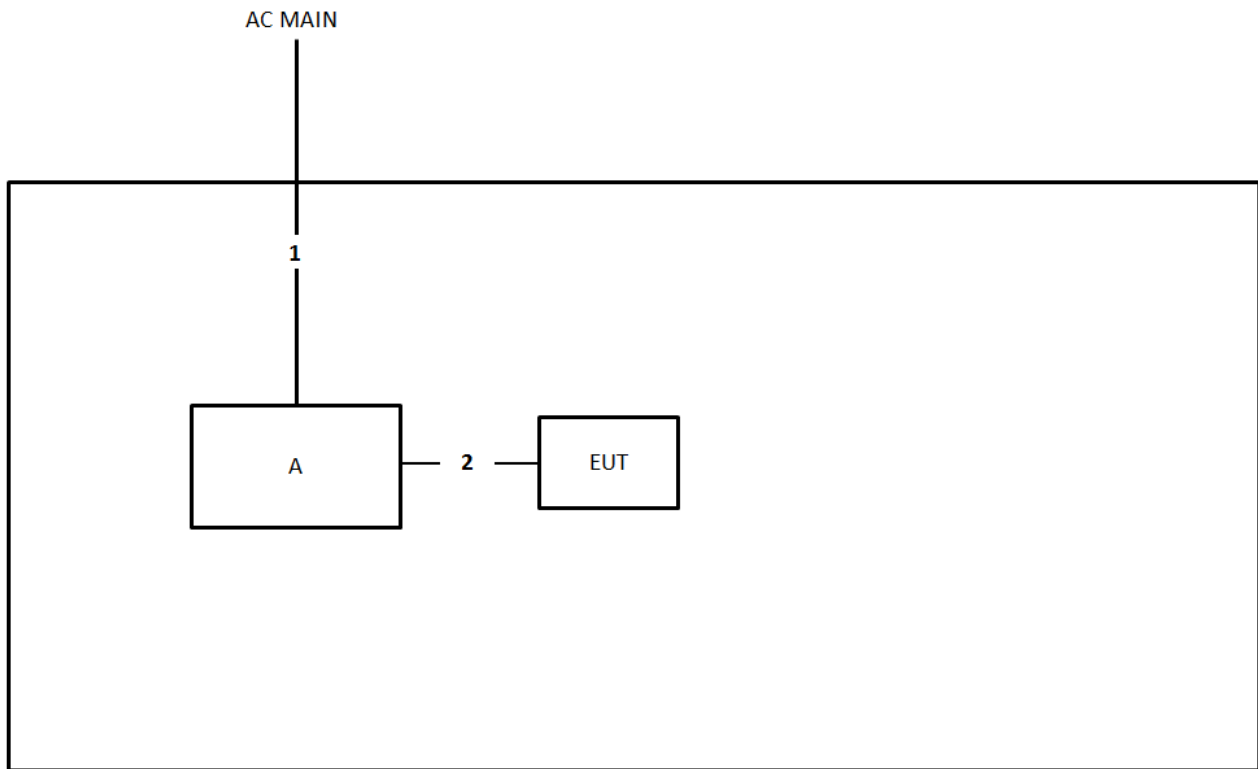Test Setup Diagram - Radiated Test > 1GHz


Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	USB cable	Yes	0.66m



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

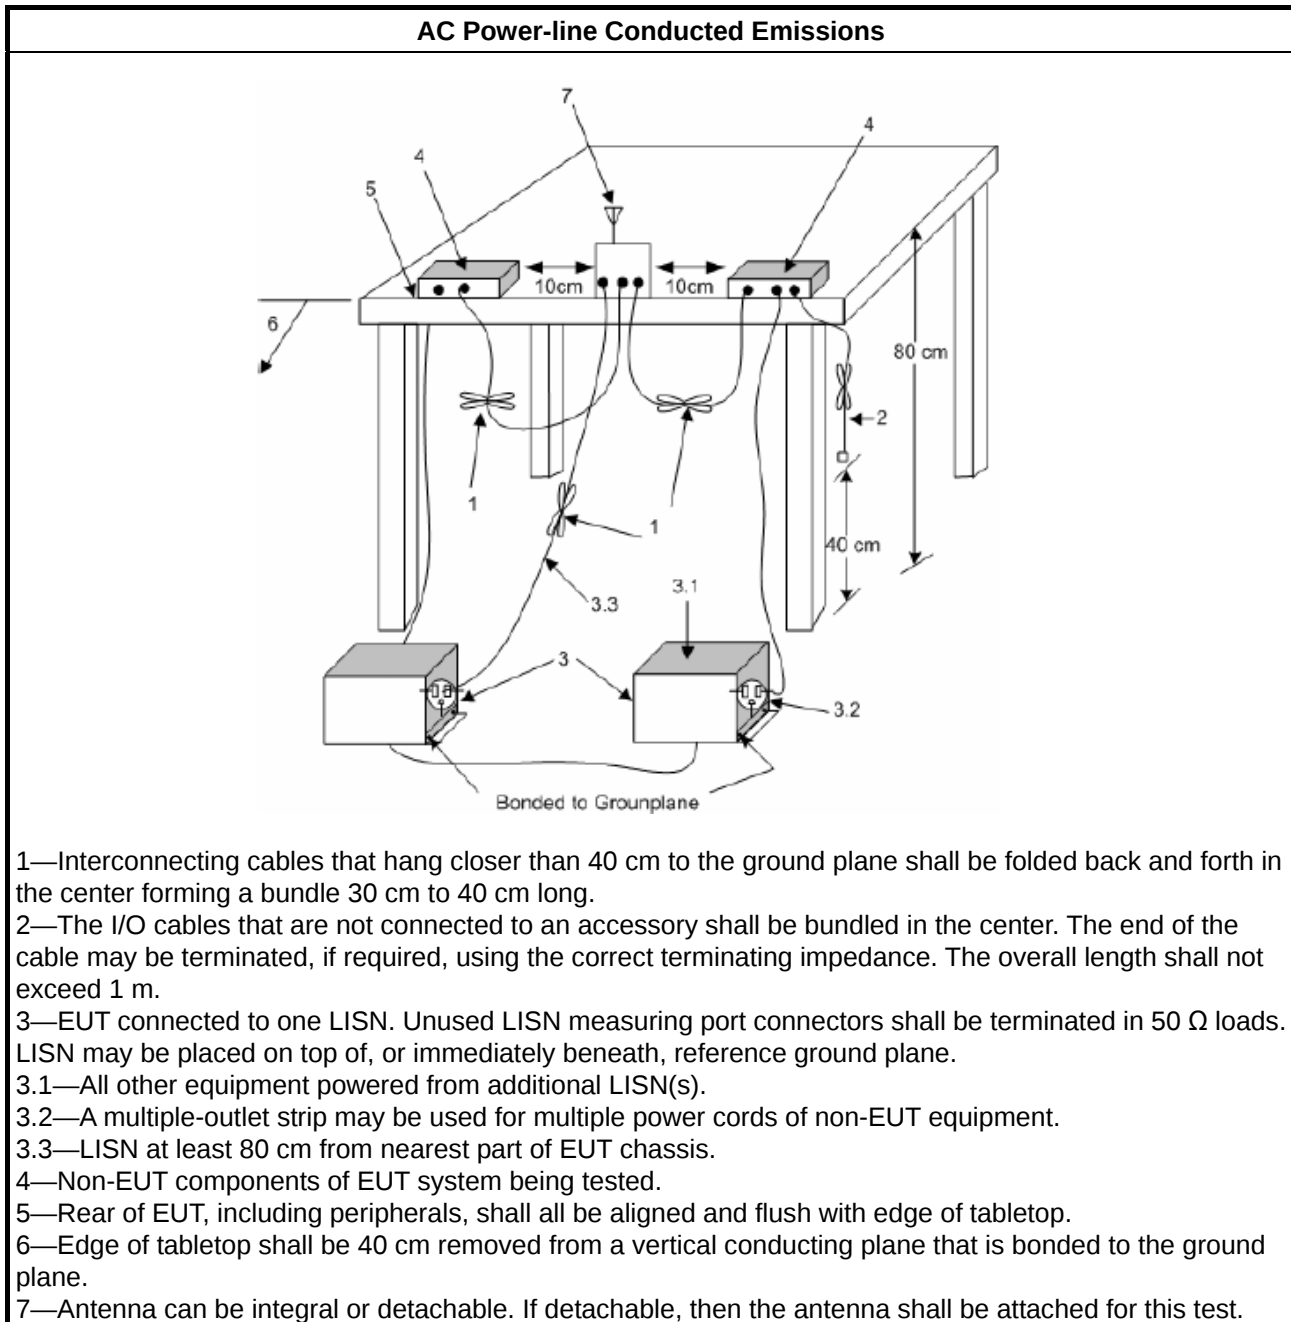

3.1.5 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 DTS Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit	
Systems using digital modulation techniques:	
▪	6 dB bandwidth $\geq$ 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
▪ For the emission bandwidth shall be measured using one of the options below:	
☒	Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.1 Option 1 for 6 dB bandwidth measurement.
☐	Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.2 Option 2 for 6 dB bandwidth measurement.
☐	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.

3.2.4 Test Setup

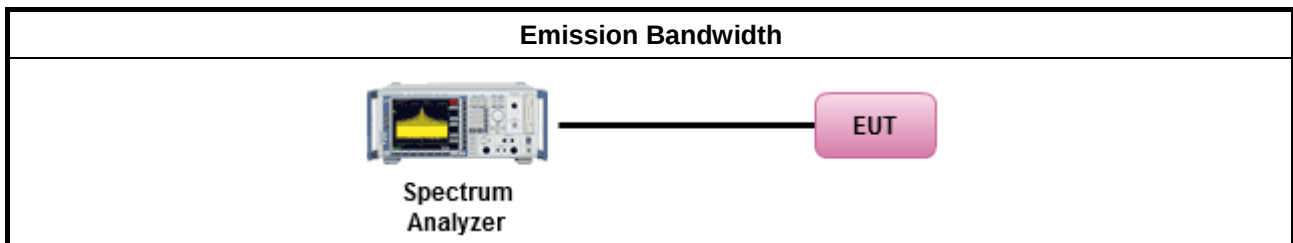

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
	▪ If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
	▪ Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
	▪ Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	▪ Smart antenna system (SAS):
	- Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
Maximum Peak Conducted Output Power	
☐	Refer as FCC KDB 558074, clause 8.3.1.1 & C63.10 clause 11.9.1.1 (RBW ≥ EBW method).
☐	Refer as FCC KDB 558074, clause 8.3.1.3 & C63.10 clause 11.9.1.3 (peak power meter).
Maximum Conducted Output Power	
[duty cycle ≥ 98% or external video / power trigger]	
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.2 Method AVGSA-1.
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.3 Method AVGSA-1A. (alternative)
duty cycle < 98% and average over on/off periods with duty factor	
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.4 Method AVGSA-2.
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.5 Method AVGSA-2A (alternative)
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.6 Method AVGSA-3
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.7 Method AVGSA-3A (alternative)
Measurement using a power meter (PM)	
☒	Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.1 Method AVGPM (using an RF average power meter).
☐	Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.2 Method AVGPM-G (using an gate RF average power meter).
For conducted measurement.	
If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.	
If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$	

3.3.4 Test Setup

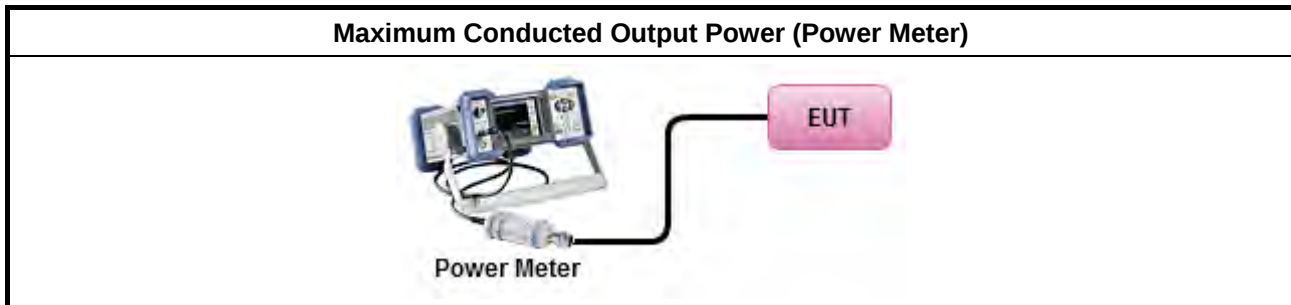

3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C



3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
▪ Power Spectral Density (PSD) ≤ 8 dBm/3kHz

3.4.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
▪ Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).	
☒	Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10.2 Method PKPSD. [duty cycle $\geq 98\%$ or external video / power trigger]
☐	Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10.3 Method AVGPS-1.
☐	Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10.5 Method AVGPS-2.
☐	Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10.7 Method AVGPS-3.
duty cycle $< 98\%$ and average over on/off periods with duty factor	
☐	Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10.4 Method AVGPS-1A. (alternative).
☐	Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10.6 Method AVGPS-2A. (alternative)
☐	Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10.8 Method AVGPS-3A. (alternative)
▪ For conducted measurement.	
▪ If The EUT supports multiple transmit chains using options given below:	
☒	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,

- | | |
|--|--|
| | ☐ Option 3: Measure and add $10 \log(N)$ dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with $10 \log(N)$. Or each transmit chains shall be add $10 \log(N)$ to compared with the limit. |
|--|--|

3.4.4 Test Setup

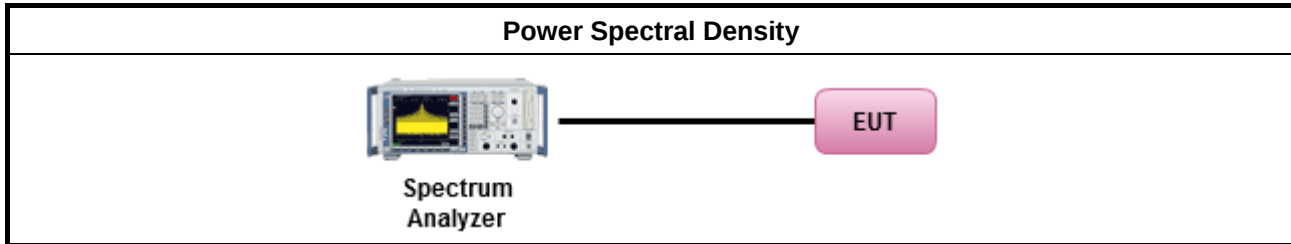

3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

3.5 Emissions in Non-restricted Frequency Bands

3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dBc)
Peak output power procedure	20
Average output power procedure	30
Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level. Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.	


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method
Refer as FCC KDB 558074, clause 8.5 for unwanted emissions into non-restricted bands.

3.5.4 Test Setup

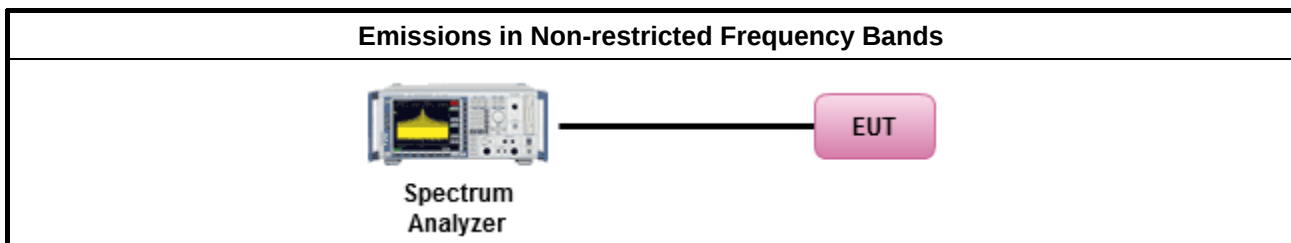

3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E

3.6 Emissions in Restricted Frequency Bands

3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.


3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

**3.6.3 Test Procedures**

Test Method	
▪ The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].	
▪ Refer as ANSI C63.10, clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.	
▪ For the transmitter unwanted emissions shall be measured using following options below:	
	▪ Refer as FCC KDB 558074, clause 8.6 for unwanted emissions into restricted bands.
	☐ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.1(trace averaging for duty cycle $\geq 98\%$).
	☐ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.2(trace averaging + duty factor).
	☒ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.3(Reduced VBW $\geq 1/T$).
	☐ Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq 1/T$, where T is pulse time.
	☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	☒ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.4 measurement procedure peak limit.
▪ For the transmitter band-edge emissions shall be measured using following options below:	
	▪ Refer as FCC KDB 558074 clause 8.7 & c63.10 clause 11.13.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.
	▪ Refer as FCC KDB 558074, clause 8.7 (ANSI C63.10, clause 6.10.6) for marker-delta method for band-edge measurements.
	▪ Refer as FCC KDB 558074, clause 8.7 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
	▪ For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB
	▪ For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.

3.6.4 Test Setup

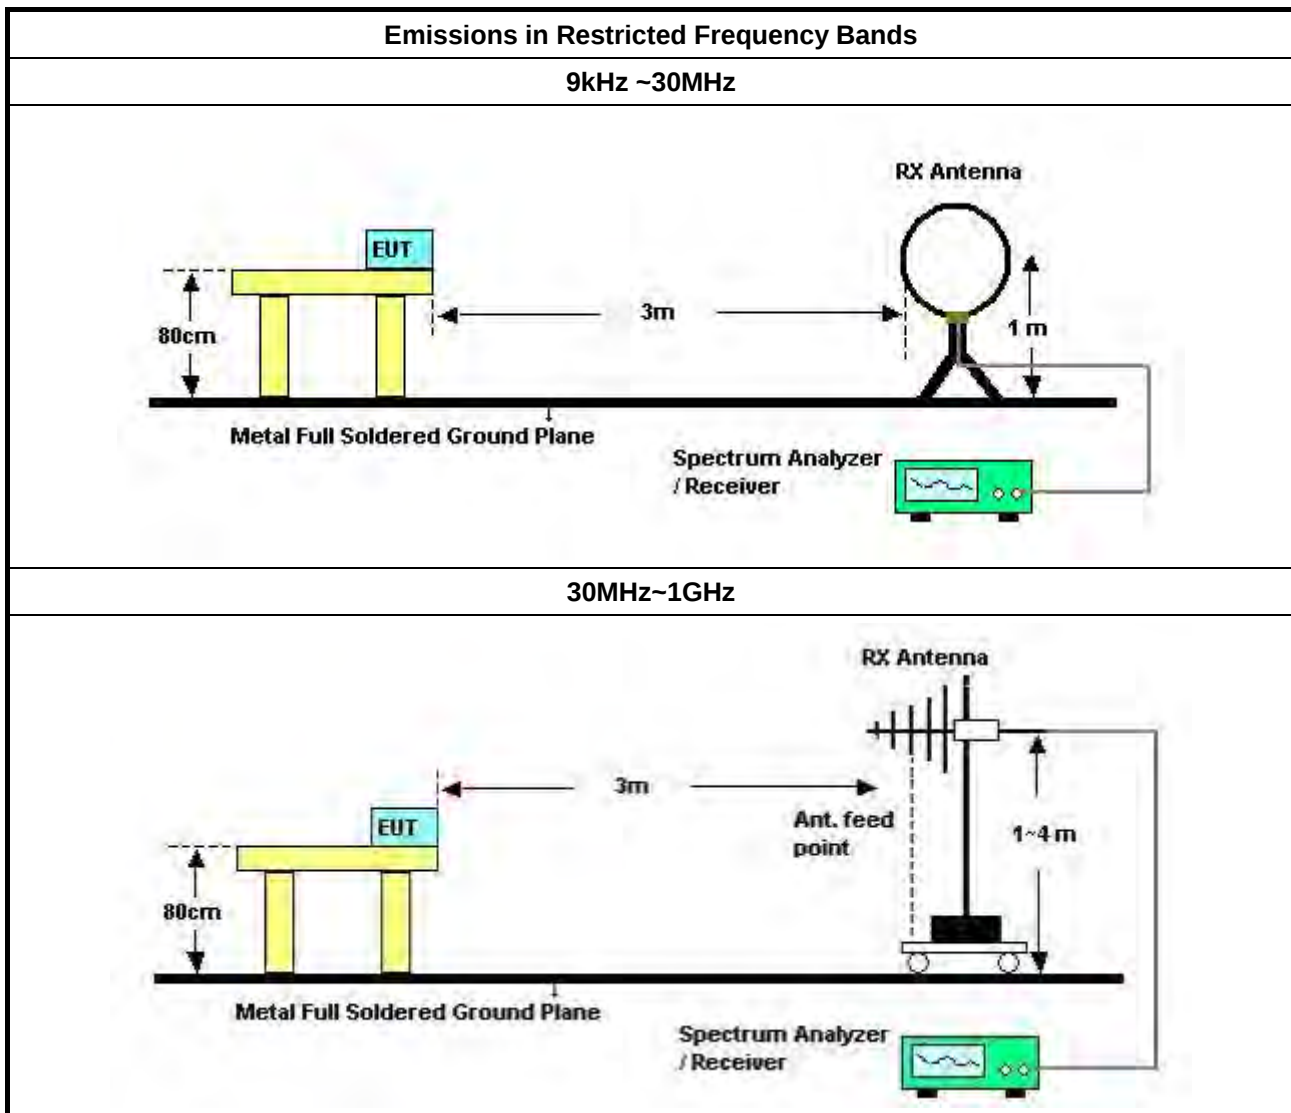

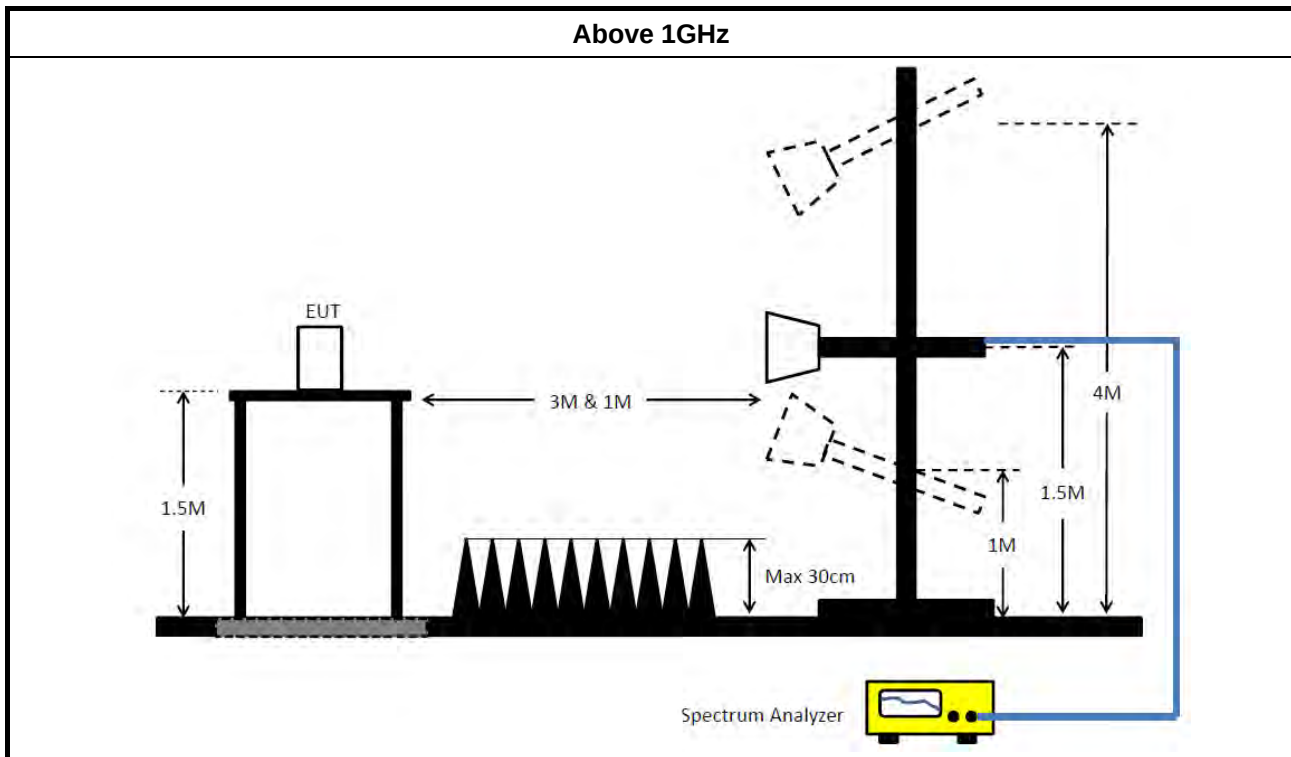

3.6.5 Emissions in Restricted Frequency Bands (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10 harmonic or 40 GHz, whichever is appropriate.

3.6.6 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix F



4 Test Equipment and Calibration Data


Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.45GHz	Jan. 28, 2019	Jan. 29, 2020	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 24, 2018	Dec. 23, 2019	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Jan. 11, 2019	Jan. 10, 2020	Conduction (CO01-CB)
COND Cable	Woken	Cable	Low cable-CO01	150kHz ~ 30MHz	May 22, 2018	May 21, 2019	Conduction (CO01-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA with 6dB Attenuator	TESEQ & EMCI	CBL6112D & N-6-06	37880 & AT-N0609	20MHz ~ 2GHz	Aug. 27, 2018	Aug. 26, 2019	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 16, 2018	Mar. 15, 2019	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Nov. 13, 2018	Nov. 12, 2019	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jun. 28, 2018	Jun. 27, 2019	Radiation (03CH01-CB)
Pre-Amplifier	EMCI	EMC330N	980332	20MHz ~ 3GHz	May 02, 2018	May 01, 2019	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 08, 2019	Jan. 07, 2020	Radiation (03CH01-CB)
Pre-Amplifier	MITEQ	TTA1840-35-HG	1864479	18GHz ~ 40GHz	Jul. 04, 2018	Jul. 03, 2019	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Jan. 31, 2019	Jan. 30, 2020	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS	100359	9kHz ~ 2.75GHz	Jul. 03, 2018	Jul. 02, 2019	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-16+17	N/A	30 MHz ~ 1 GHz	Oct. 08, 2018	Oct. 07, 2019	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Oct. 08, 2018	Oct. 07, 2019	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16+17	N/A	1 GHz ~ 18 GHz	Oct. 08, 2018	Oct. 07, 2019	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G#1	N/A	18GHz ~ 40 GHz	Jul. 27, 2018	Jul. 26, 2019	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G#2	N/A	18GHz ~ 40 GHz	Jul. 27, 2018	Jul. 26, 2019	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	101027	9kHz~40GHz	Jun. 22, 2018	Jun. 21, 2019	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-06	1 GHz ~ 26.5 GHz	Oct. 08, 2018	Oct. 07, 2019	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-07	1 GHz ~ 26.5 GHz	Oct. 08, 2018	Oct. 07, 2019	Conducted (TH01-CB)




Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
RF Cable-high	Woken	RG402	High Cable-08	1 GHz –26.5 GHz	Oct. 08, 2018	Oct. 07, 2019	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-09	1 GHz –26.5 GHz	Oct. 08, 2018	Oct. 07, 2019	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz –26.5 GHz	Oct. 08, 2018	Oct. 07, 2019	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-28	1 GHz –26.5 GHz	Nov. 19, 2018	Nov. 18, 2019	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 05, 2018	Nov. 04, 2019	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

N.C.R. means Non-Calibration required.

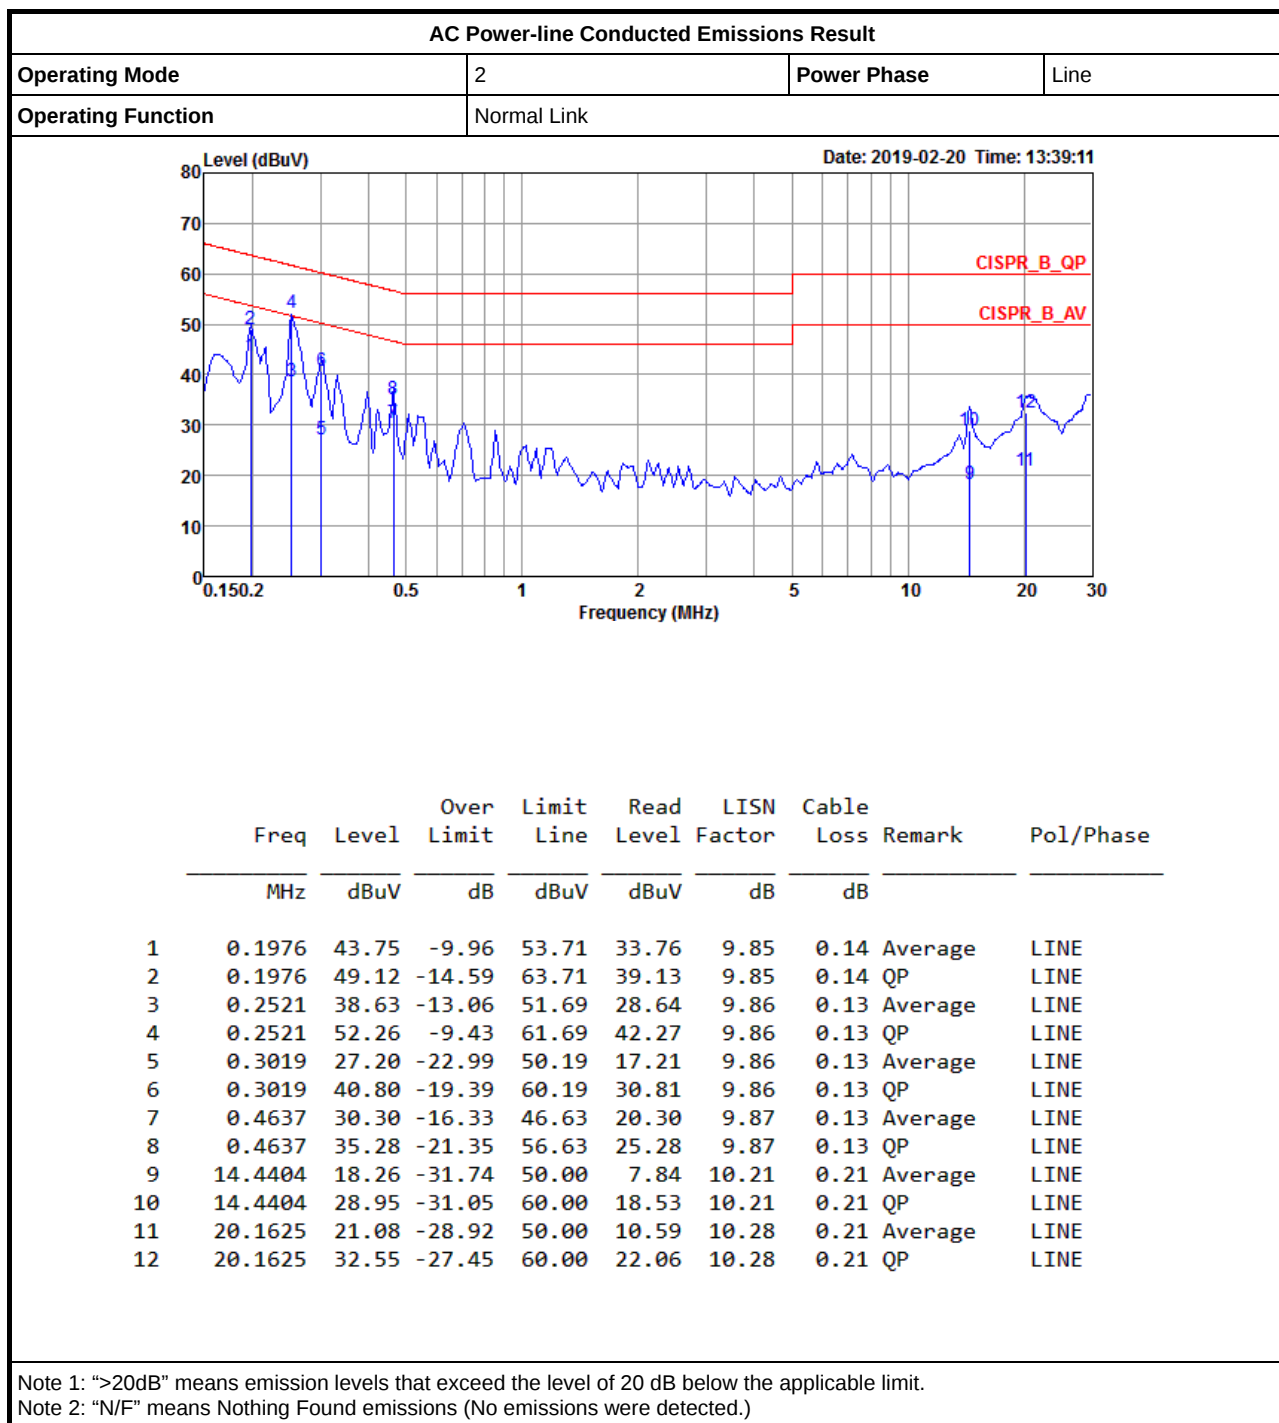

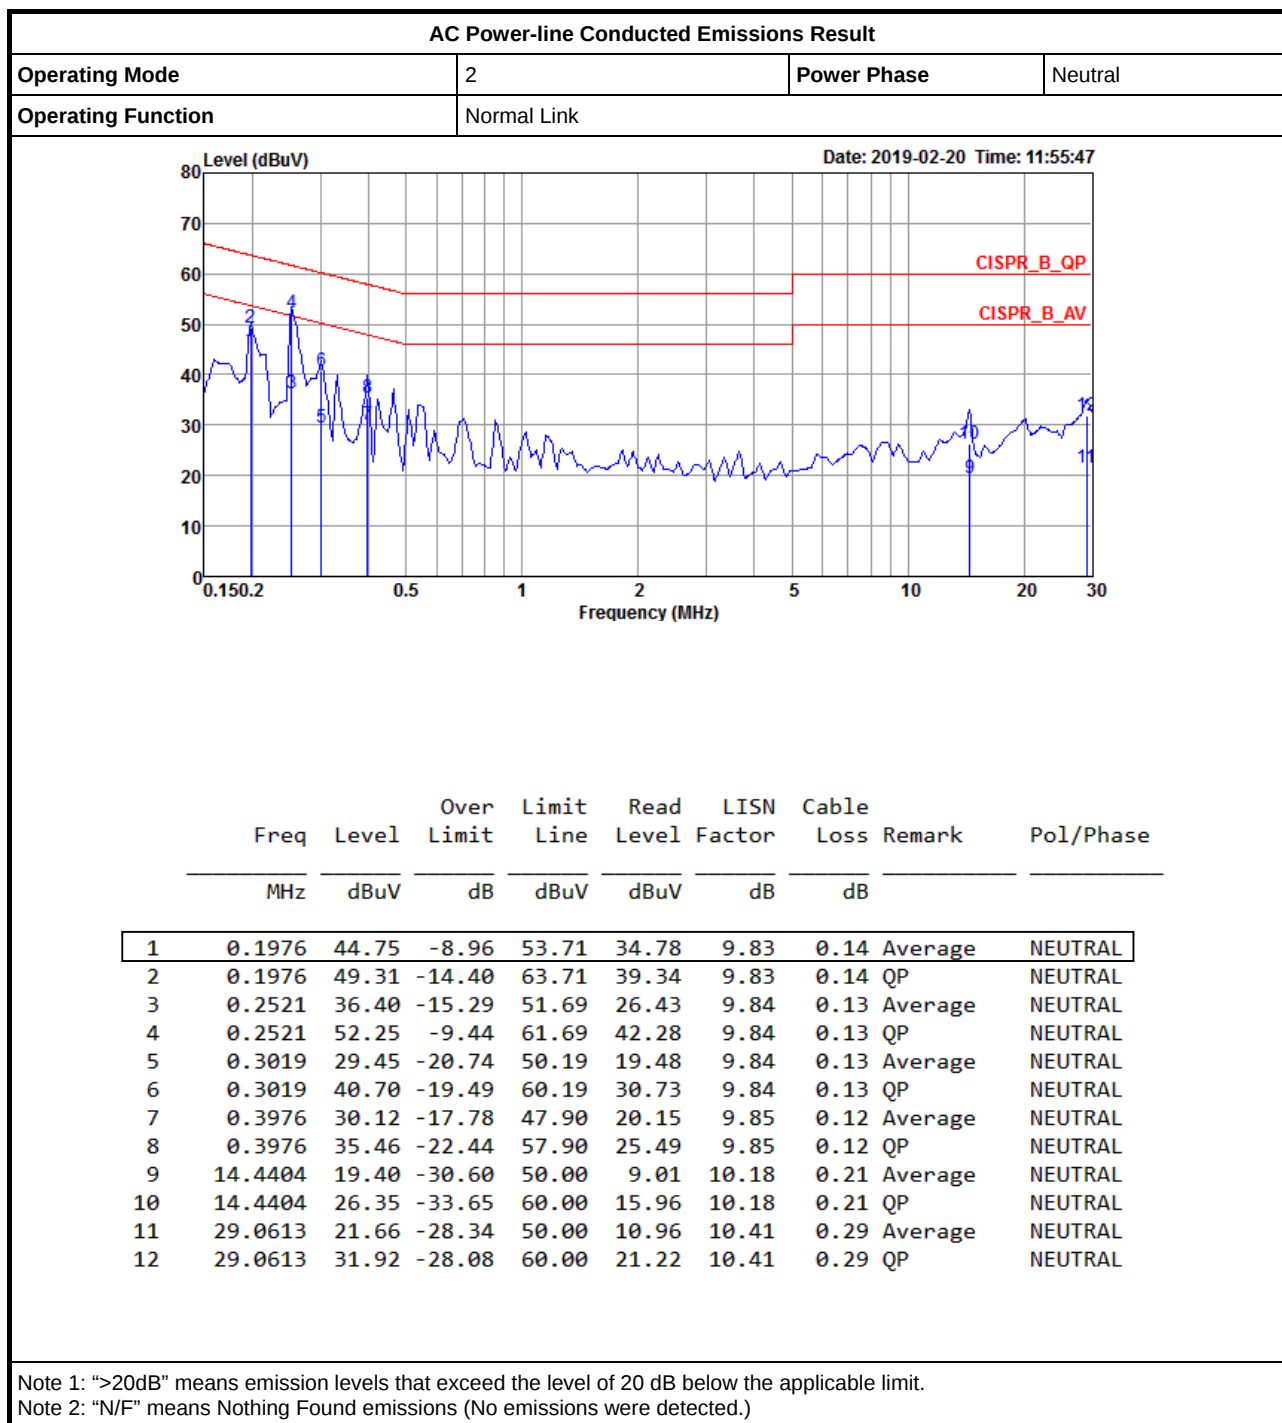

**Summary**

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
DQPSK	1.686M	1.903M	1M90G7D	1.594M	1.897M

Max-N dB = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;


Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
DQPSK	-	-	-	-
2403.35MHz	Pass	500k	1.594M	1.898M
2441.35MHz	Pass	500k	1.634M	1.903M
2479.35MHz	Pass	500k	1.686M	1.897M


Port X-N dB = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;

DQPSK
2403.35MHz
EBW


18/02/2019

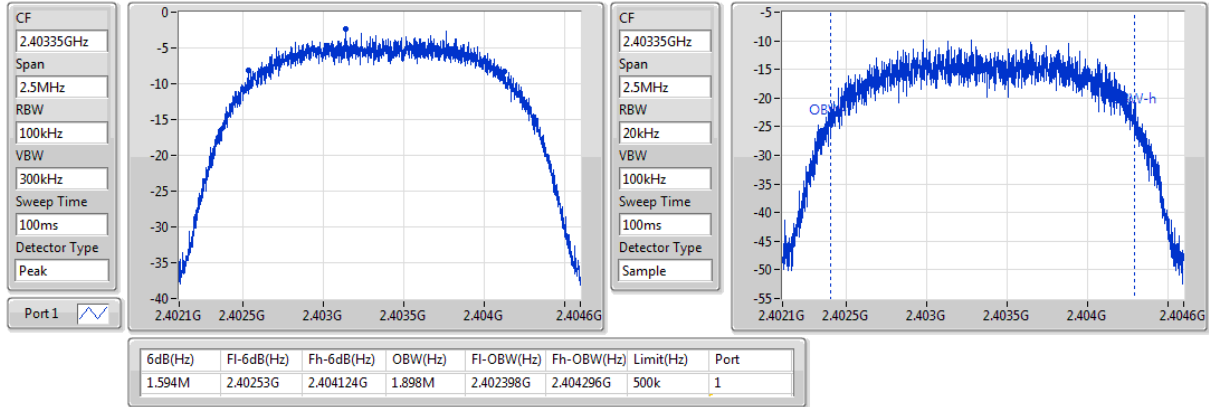
DQPSK
2441.35MHz
EBW

18/02/2019

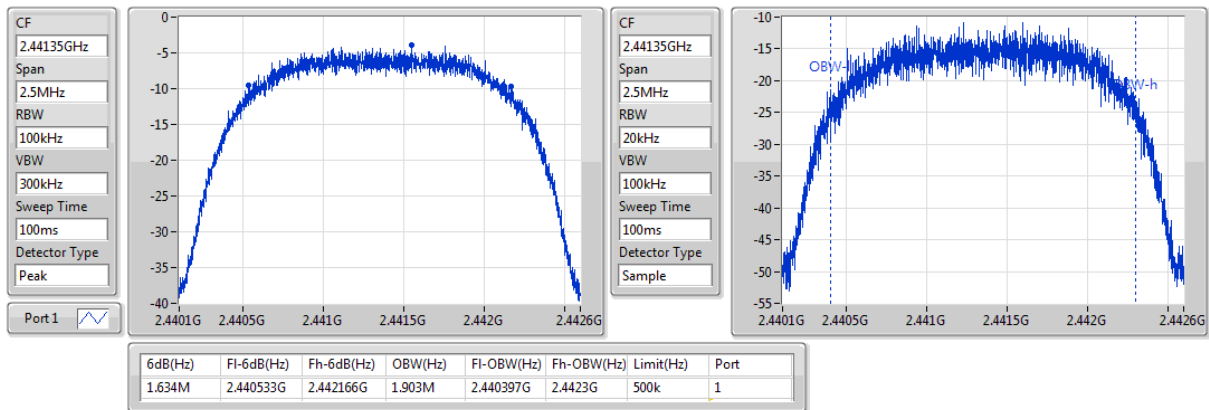
DQPSK
2479.35MHz
EBW

18/02/2019

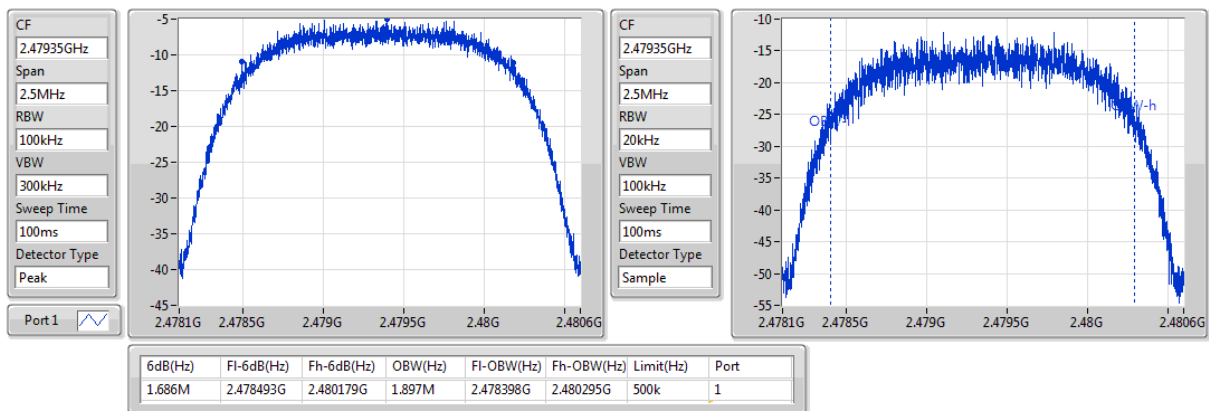

Summary

Mode	Power	Power
	(dBm)	(W)
2.4-2.4835GHz	-	-
DQPSK	1.84	0.00153

Result

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
DQPSK	-	-	-	-
2403.35MHz	Pass	2.74	1.84	30.00
2441.35MHz	Pass	2.74	1.14	30.00
2479.35MHz	Pass	2.74	0.13	30.00

**Summary**

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
DQPSK	-17.15

RBW=3kHz.

Result


Mode	Result	Gain (dBi)	PD (dBm/RBW)	PD Limit (dBm/RBW)
DQPSK	-	-	-	-
2403.35MHz	Pass	2.74	-17.15	8.00
2441.35MHz	Pass	2.74	-19.21	8.00
2479.35MHz	Pass	2.74	-21.21	8.00

RBW=3kHz.

DQPSK

2403.35MHz

CF
2.40335GHz
Span
1.5MHz
RBW
3kHz
VBW
10kHz
Sweep Time
32.1ms
Detector Type
Peak

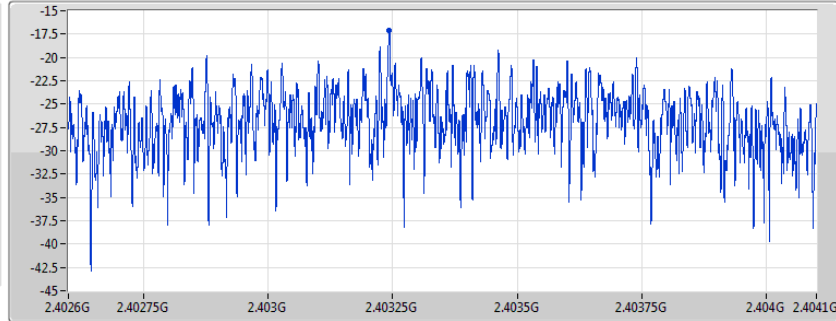

PSD

18/02/2019


Port 1

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-17.15	-17.15	-17.15

DQPSK

2441.35MHz

CF
2.44135GHz
Span
1.5MHz
RBW
3kHz
VBW
10kHz
Sweep Time
32.1ms
Detector Type
Peak

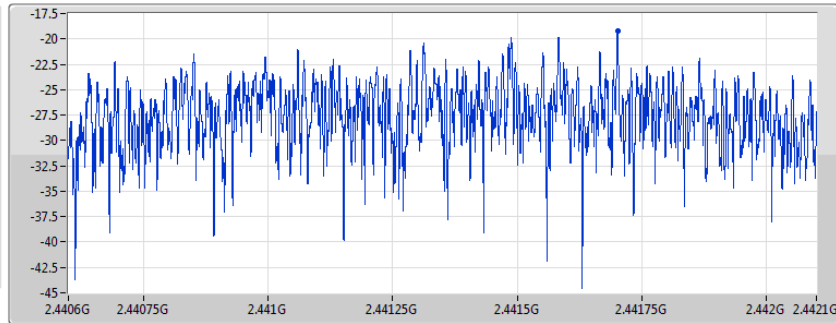

PSD

18/02/2019


Port 1

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-19.21	-19.21	-19.21

DQPSK

2479.35MHz

CF
2.47935GHz
Span
1.5MHz
RBW
3kHz
VBW
10kHz
Sweep Time
32.1ms
Detector Type
Peak

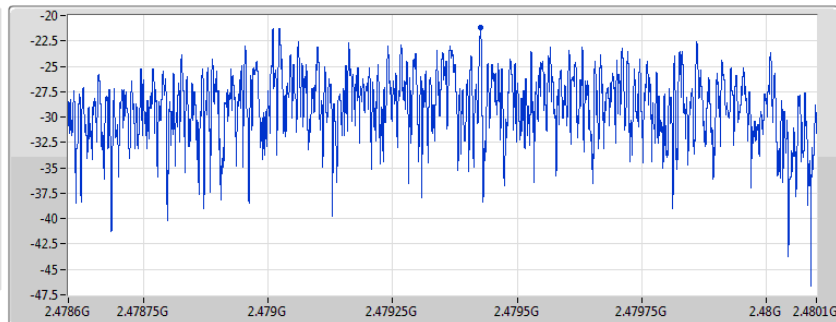

PSD

18/02/2019

Port 1

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-21.21	-21.21	-21.21

Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-
DQPSK	Pass	2.40309G	-4.20	-34.20	2.398G	-47.12	2.3999G	-39.89	2.48363G	-56.14	15.27936G	-47.85	1

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
DQPSK	-	-	-	-	-	-	-	-	-	-	-	-	-
2403.35MHz	Pass	2.40309G	-4.20	-34.20	2.398G	-47.12	2.3999G	-39.89	2.48363G	-56.14	15.27936G	-47.85	1
2441.35MHz	Pass	2.40309G	-4.20	-34.20	890.47M	-56.81	2.39977G	-56.26	2.48438G	-55.47	15.28218G	-47.99	1
2479.35MHz	Pass	2.40309G	-4.20	-34.20	844.3M	-56.35	2.39981G	-56.48	2.48474G	-46.25	16.93418G	-48.18	1


DQPSK

2403.35MHz

CSE NdB

18.02.2019

Port 1

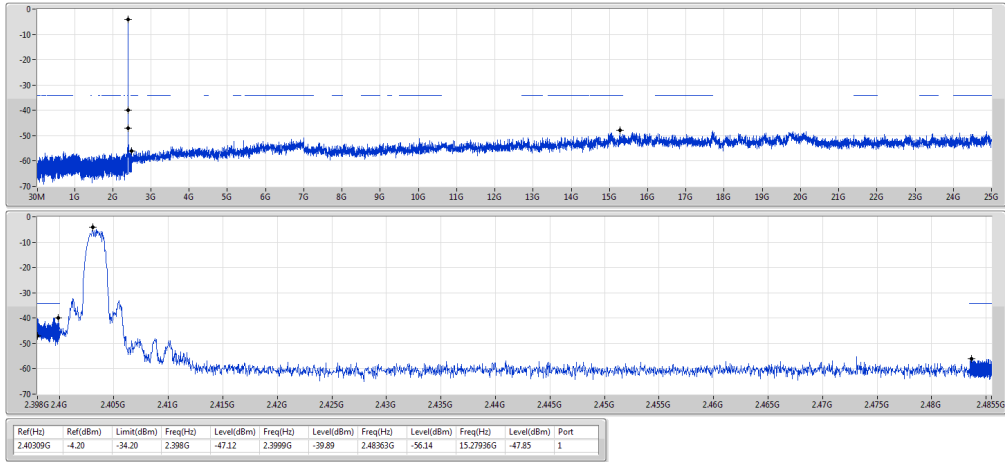


DQPSK

2441.35MHz

CSE NdB

18.02.2019

Port 1

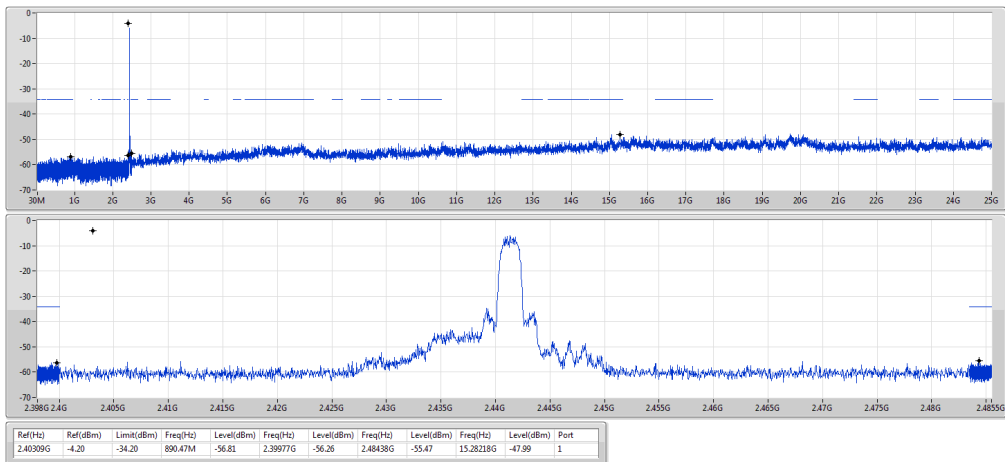


DQPSK

2479.35MHz

CSE NdB

18.02.2019


Port 1

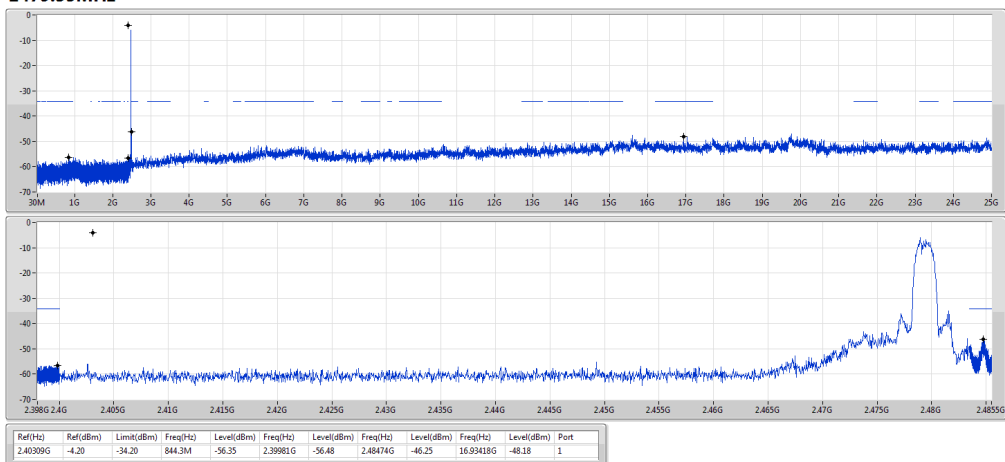




RSE below 1GHz Result

Appendix F.1

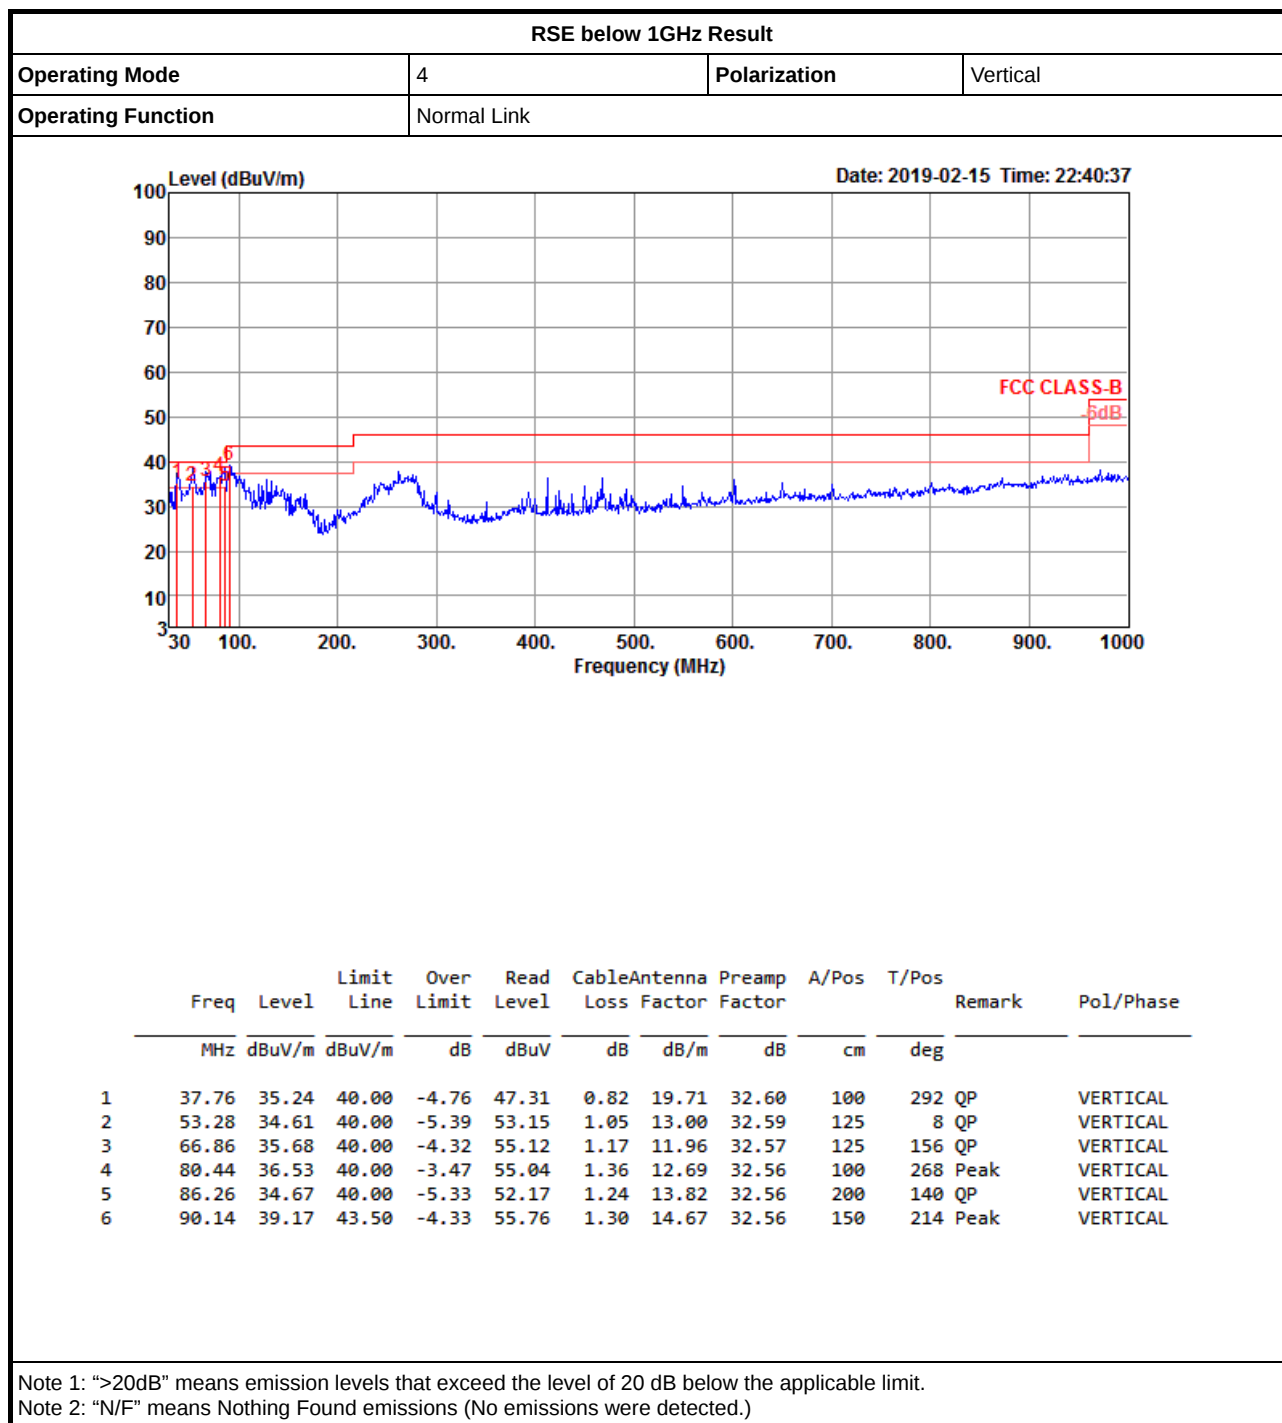

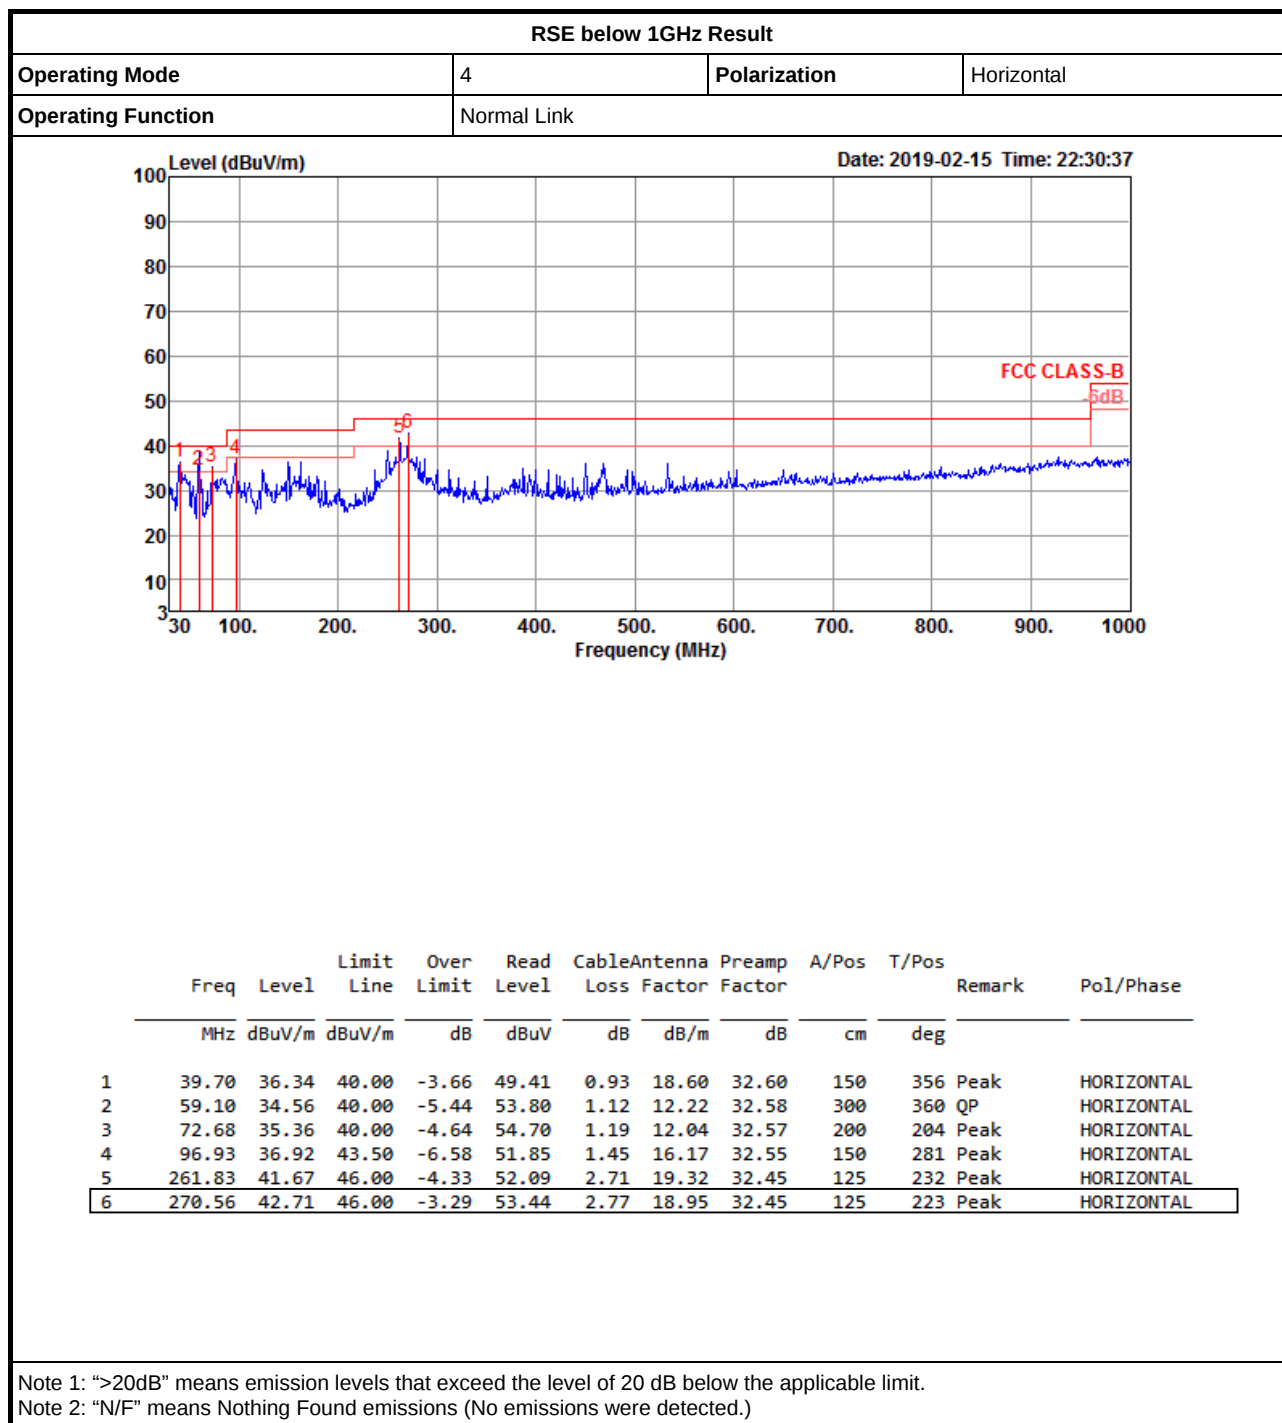



RSE TX above 1GHz Result

Appendix F.2


Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-
DQPSK	Pass	AV	2.4835G	48.44	54.00	-5.56	33.36	3	Horizontal	292	2.07	-

DQPSK

2403.35MHz_TX

18/02/2019

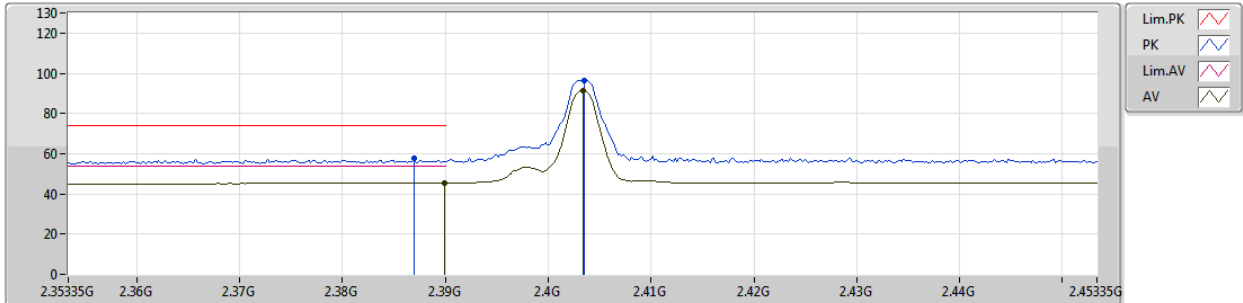


EUT Y_1TX
Setting Default
04-R-5
FSP(100019)

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments								
PK	2.38695G	57.66	74.00	-16.34	33.07	3	Vertical	157	2.58	-								
AV	2.38995G	45.48	54.00	-8.52	33.08	3	Vertical	157	2.58	-								
PK	2.40355G	96.56	Inf	-Inf	33.10	3	Vertical	157	2.58	-								
AV	2.40335G	91.49	Inf	-Inf	33.10	3	Vertical	157	2.58	-								

DQPSK

2403.35MHz_TX

18/02/2019

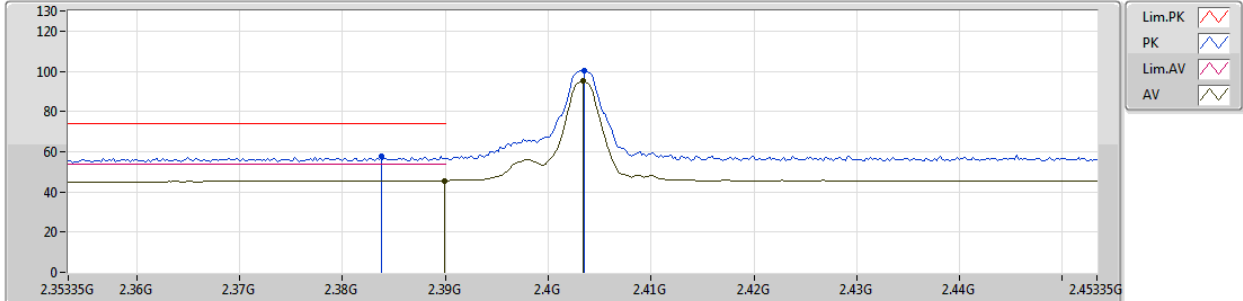


EUT Y_1TX
Setting Default
04-R-5
FSP(100019)

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.38375G	57.57	74.00	-16.43	33.08	3	Horizontal	298	1.50	-
AV	2.38995G	45.60	54.00	-8.40	33.08	3	Horizontal	298	1.50	-
PK	2.40355G	100.15	Inf	-Inf	33.10	3	Horizontal	298	1.50	-
AV	2.40335G	95.01	Inf	-Inf	33.10	3	Horizontal	298	1.50	-

DQPSK

2403.35MHz_TX

18/02/2019

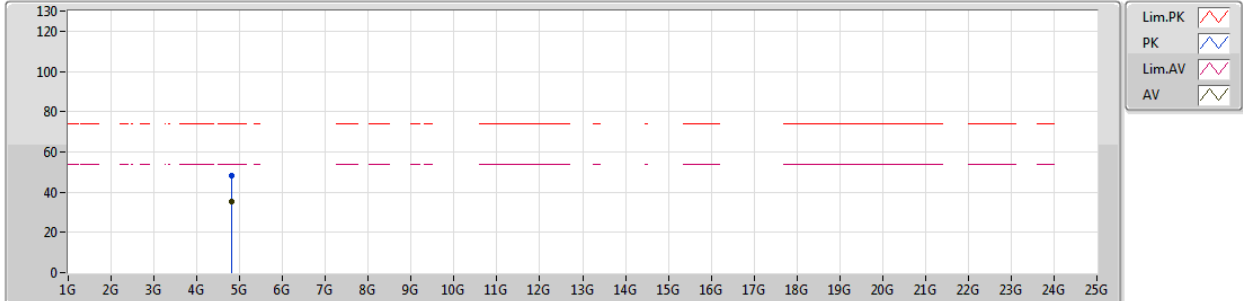


EUT Y_1TX
Setting Default
04-R-5
FSP(100019)

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)	
PK	4.81738G	48.06	74.00	-25.94	7.13	3	Vertical	26	1.30	-
AV	4.80394G	35.40	54.00	-18.60	7.06	3	Vertical	26	1.30	-

DQPSK

2403.35MHz_TX

18/02/2019

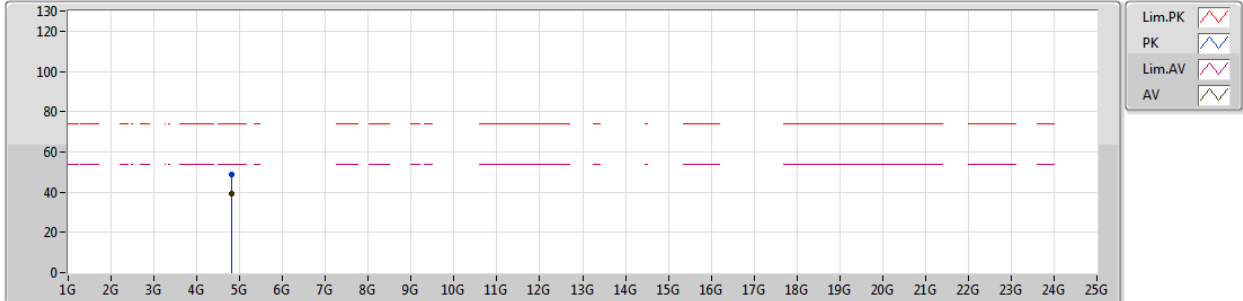


EUT Y_1TX
Setting Default
04-R-5
FSP(100019)

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comments
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)	
PK	4.80388G	48.74	74.00	-25.26	7.06	3	Horizontal	98	1.01	-
AV	4.804G	39.15	54.00	-14.85	7.06	3	Horizontal	98	1.01	-

DQPSK

2441.35MHz_TX

18/02/2019

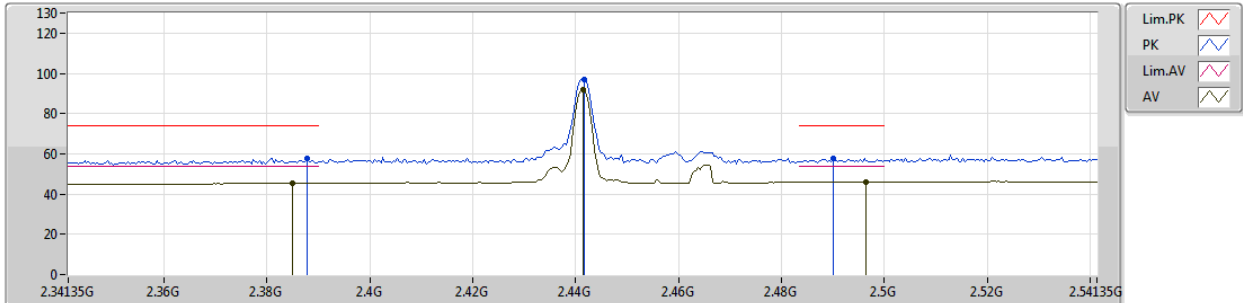


EUT Y_1TX
Setting Default
04-R-5
FSP(100019)

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments							
PK	2.38775G	57.94	74.00	-16.06	33.08	3	Vertical	138	2.44	-							
AV	2.38495G	45.43	54.00	-8.57	33.08	3	Vertical	138	2.44	-							
PK	2.44175G	96.84	Inf	-Inf	33.22	3	Vertical	138	2.44	-							
AV	2.44135G	91.71	Inf	-Inf	33.22	3	Vertical	138	2.44	-							
PK	2.49015G	57.85	74.00	-16.15	33.38	3	Vertical	138	2.44	-							
AV	2.49655G	45.98	54.00	-8.02	33.40	3	Vertical	138	2.44	-							

DQPSK

2441.35MHz_TX

18/02/2019

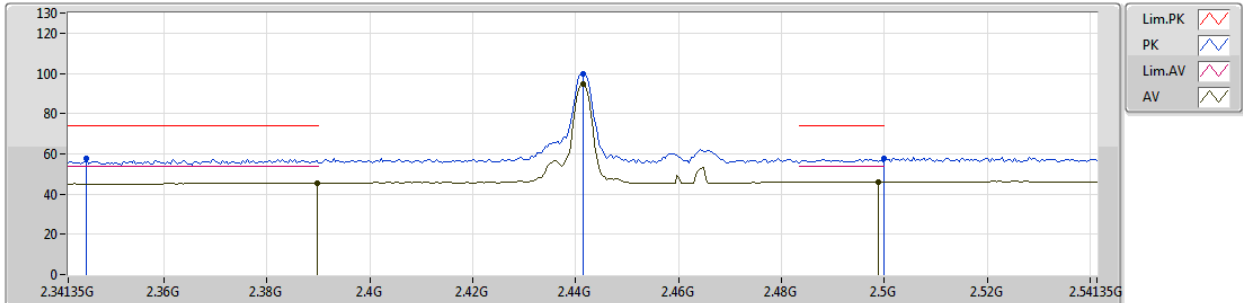


EUT Y_1TX
Setting Default
04-R-5
FSP(100019)

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.34495G	57.60	74.00	-16.40	33.04	3	Horizontal	298	2.41	-
AV	2.38975G	45.50	54.00	-8.50	33.08	3	Horizontal	298	2.41	-
PK	2.44135G	99.99	Inf	-Inf	33.22	3	Horizontal	298	2.41	-
AV	2.44135G	94.97	Inf	-Inf	33.22	3	Horizontal	298	2.41	-
PK	2.5G	57.56	74.00	-16.44	33.41	3	Horizontal	298	2.41	-
AV	2.49895G	46.03	54.00	-7.97	33.41	3	Horizontal	298	2.41	-

DQPSK

2441.35MHz_TX

18/02/2019

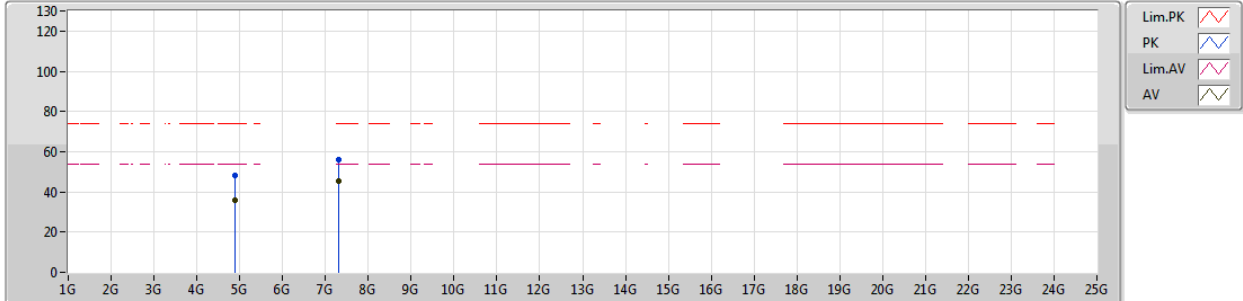


EUT Y_1TX
Setting Default
04-R-5
FSP(100019)

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	4.89122G	48.34	74.00	-25.66	7.45	3	Vertical	12	1.26	-
AV	4.88G	35.85	54.00	-18.15	7.40	3	Vertical	12	1.26	-
PK	7.31829G	56.13	74.00	-17.87	12.51	3	Vertical	28	1.80	-
AV	7.31865G	45.22	54.00	-8.78	12.51	3	Vertical	28	1.80	-

DQPSK

2441.35MHz_TX

18/02/2019

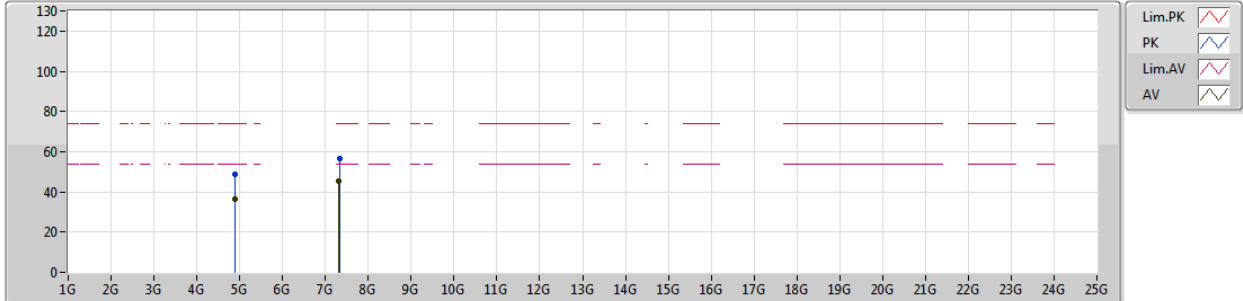


EUT Y_1TX
Setting Default
04-R-5
FSP(100019)

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	4.88252G	48.81	74.00	-25.19	7.41	3	Horizontal	56	1.33	-
AV	4.88G	36.17	54.00	-17.83	7.40	3	Horizontal	56	1.33	-
PK	7.32465G	56.37	74.00	-17.63	12.51	3	Horizontal	87	1.57	-
AV	7.31865G	45.29	54.00	-8.71	12.51	3	Horizontal	87	1.57	-

DQPSK

2479.35MHz_TX

18/02/2019

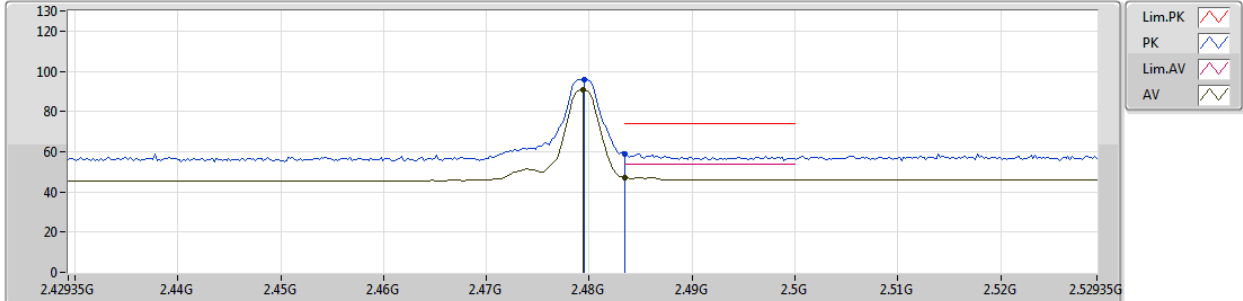


EUT Y_1TX
Setting Default
04-R-5
FSP(100019)

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.47955G	96.08	Inf	-Inf	33.35	3	Vertical	137	2.96	-
AV	2.47935G	91.00	Inf	-Inf	33.35	3	Vertical	137	2.96	-
PK	2.4835G	58.83	74.00	-15.17	33.36	3	Vertical	137	2.96	-
AV	2.4835G	47.31	54.00	-6.69	33.36	3	Vertical	137	2.96	-

DQPSK

2479.35MHz_TX

18/02/2019

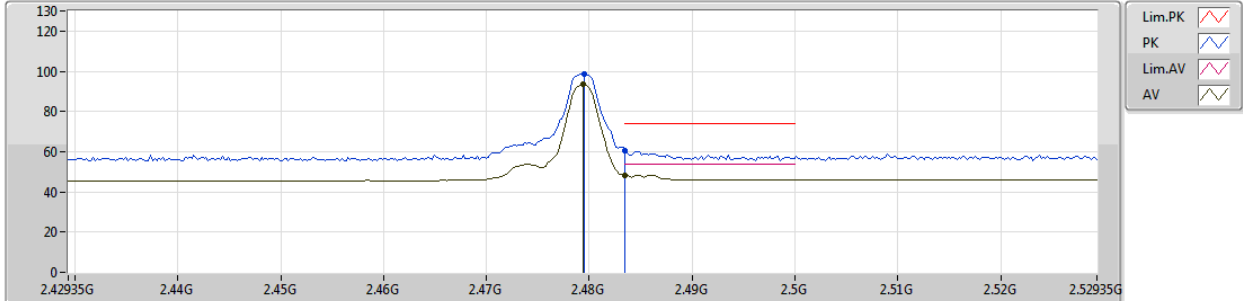


EUT Y_1TX
Setting Default
04-R-5
FSP(100019)

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	2.47955G	98.56	Inf	-Inf	33.35	3	Horizontal	292	2.07	-
AV	2.47935G	93.38	Inf	-Inf	33.35	3	Horizontal	292	2.07	-
PK	2.4835G	60.52	74.00	-13.48	33.36	3	Horizontal	292	2.07	-
AV	2.4835G	48.44	54.00	-5.56	33.36	3	Horizontal	292	2.07	-

DQPSK

2479.35MHz_TX

18/02/2019

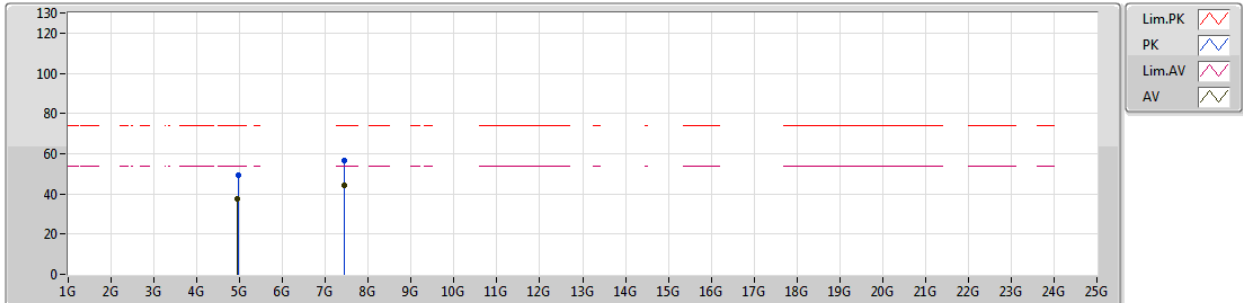


EUT Y_1TX
Setting Default
04-R-5
FSP(100019)

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	4.95972G	49.53	74.00	-24.47	7.70	3	Vertical	0	2.04	-
AV	4.956G	37.46	54.00	-16.54	7.68	3	Vertical	0	2.04	-
PK	7.43769G	56.67	74.00	-17.33	12.53	3	Vertical	31	1.81	-
AV	7.43799G	44.17	54.00	-9.83	12.53	3	Vertical	31	1.81	-

DQPSK

2479.35MHz_TX

18/02/2019

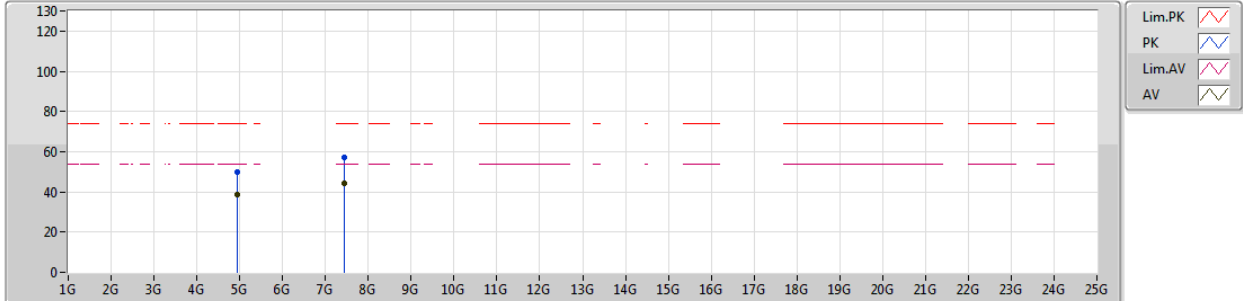

EUT Y_1TX
Setting Default
04-R-5
FSP(100019)

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	4.95618G	50.09	74.00	-23.91	7.68	3	Horizontal	55	1.00	-
AV	4.95594G	38.84	54.00	-15.16	7.68	3	Horizontal	55	1.00	-
PK	7.43907G	56.98	74.00	-17.02	12.53	3	Horizontal	286	1.89	-
AV	7.43811G	44.36	54.00	-9.64	12.53	3	Horizontal	286	1.89	-