

**Test Mode:** TX/ IEEE 802.11n HT40 MHz (CH High)**Tested by:** Eve Wang**Ambient temperature:** 24°C    **Relative humidity:** 52% RH**Date:** August 8, 2015

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
2485.000	44.39	-2.34	42.05	74.00	-31.95	V	Peak
3538.000	43.04	-0.36	42.68	74.00	-31.32	V	Peak
4906.000	44.86	4.67	49.53	74.00	-24.47	V	Peak
5536.000	40.56	5.89	46.45	74.00	-27.55	V	Peak
6481.000	39.05	6.86	45.91	74.00	-28.09	V	Peak
7210.000	38.96	8.11	47.07	74.00	-26.93	V	Peak
2566.000	45.02	-2.14	42.88	74.00	-31.12	H	Peak
3538.000	42.37	-0.36	42.01	74.00	-31.99	H	Peak
4906.000	43.14	4.67	47.81	74.00	-26.19	H	Peak
5851.000	39.54	6.02	45.56	74.00	-28.44	H	Peak
6715.000	39.95	7.24	47.19	74.00	-26.81	H	Peak
7237.000	39.37	8.16	47.53	74.00	-26.47	H	Peak

**REMARKS:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



## 7.3. 6dB BANDWIDTH MEASUREMENT

### 7.3.1. LIMITS

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 7.3.2. TEST INSTRUMENTS


Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Spectrum Analyzer	Agilent	N9010A	MY52221469	10/25/2014	10/24/2015

### 7.3.3. TEST PROCEDURES (please refer to measurement standard)

#### 8.1 Option 1:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 7.3.4. TEST SETUP





### 7.3.5. TEST RESULTS

No non-compliance noted

#### Test Data

##### Test mode: IEEE 802.11b

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2412	10100	>500	PASS
Mid	2437	10100		PASS
High	2462	10100		PASS

##### Test mode: IEEE 802.11g

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2412	16600	>500	PASS
Mid	2437	16600		PASS
High	2462	16600		PASS

##### Test mode: IEEE 802.11n HT20 MHz


Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2412	17820	>500	PASS
Mid	2437	17820		PASS
High	2462	17840		PASS


##### Test mode: IEEE 802.11n HT40 MHz



Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2422	36400	>500	PASS
Mid	2437	36380		PASS
High	2452	36400		PASS



## Test Plot

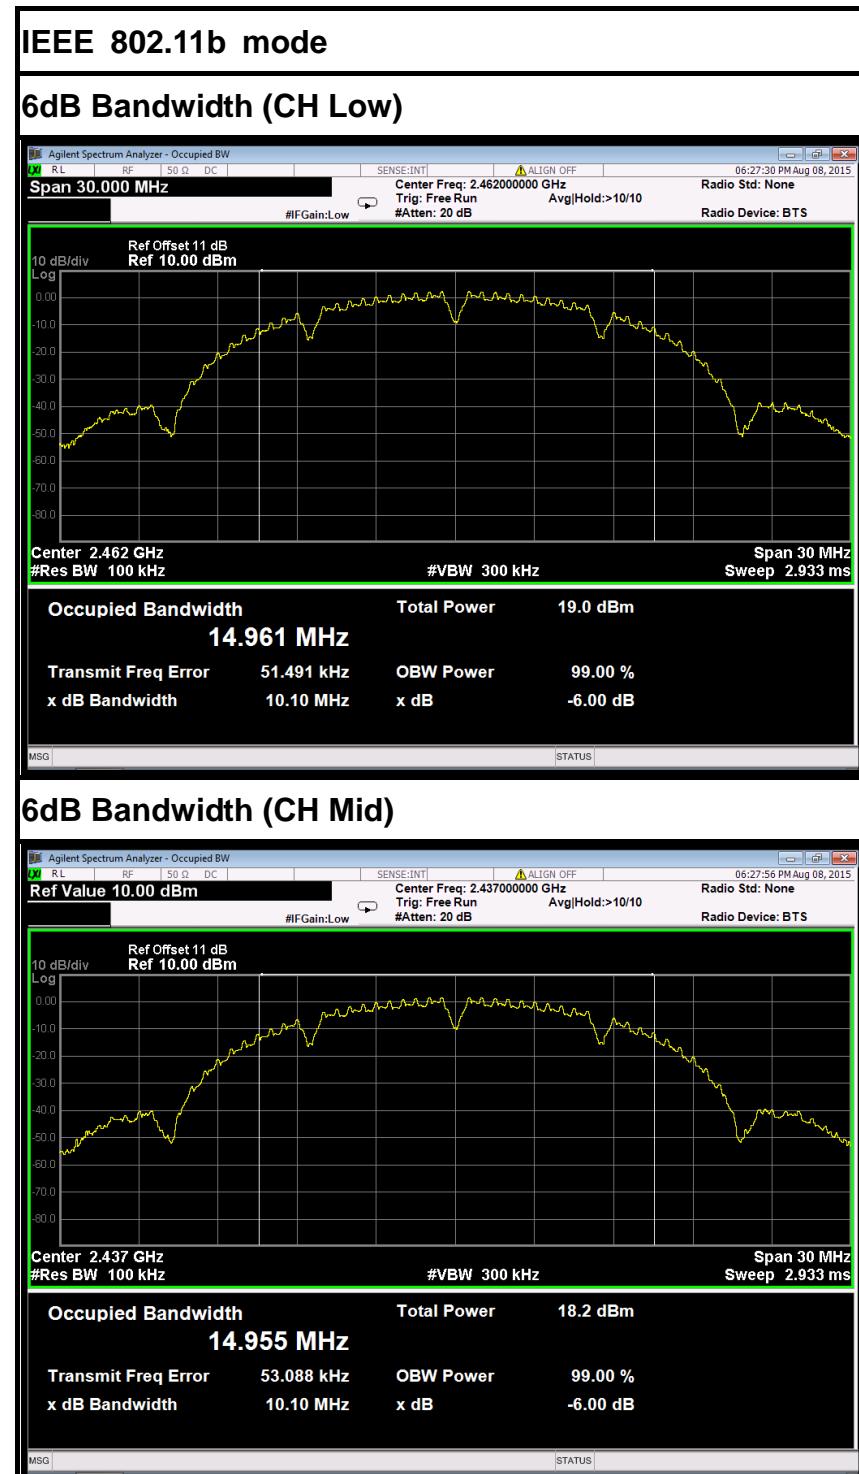



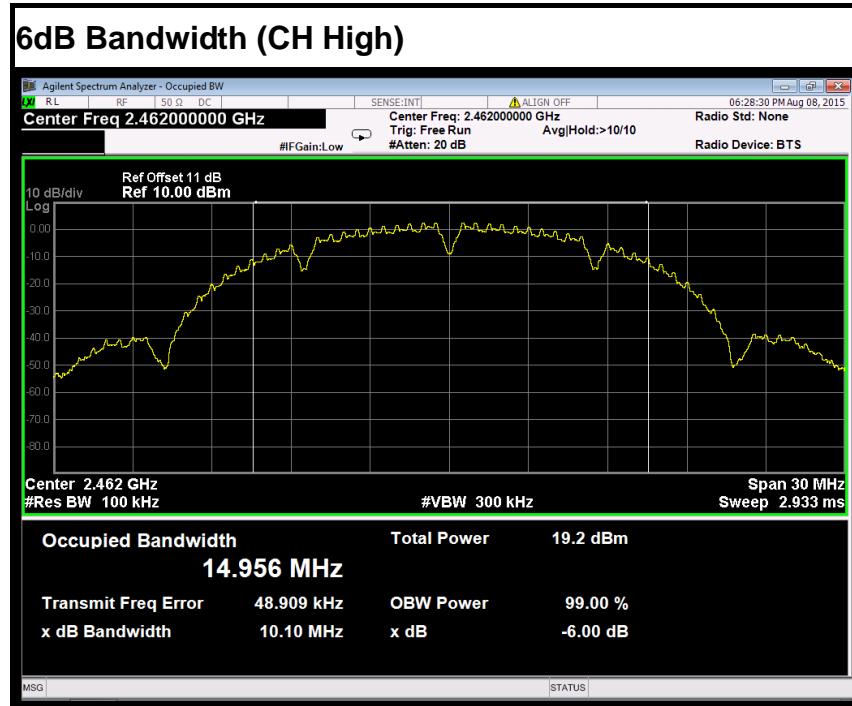


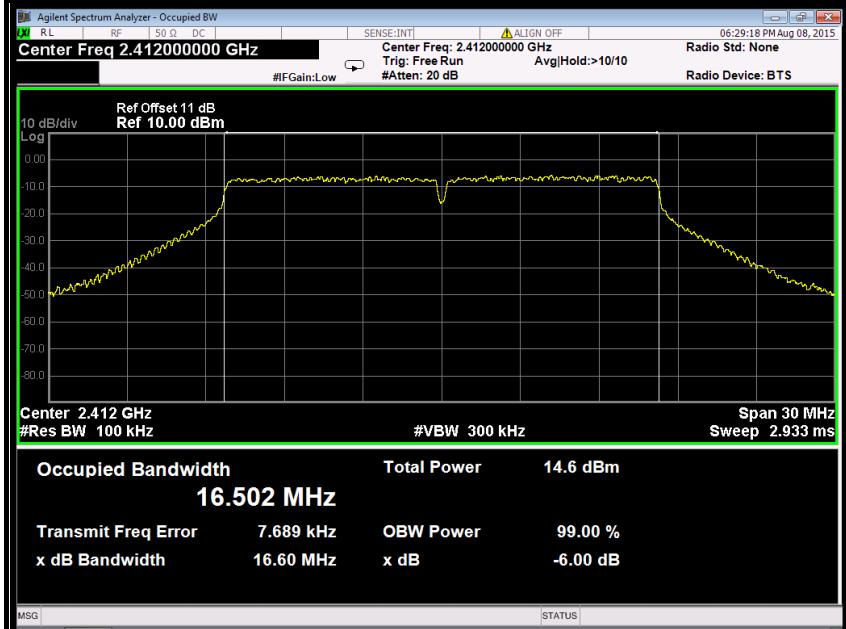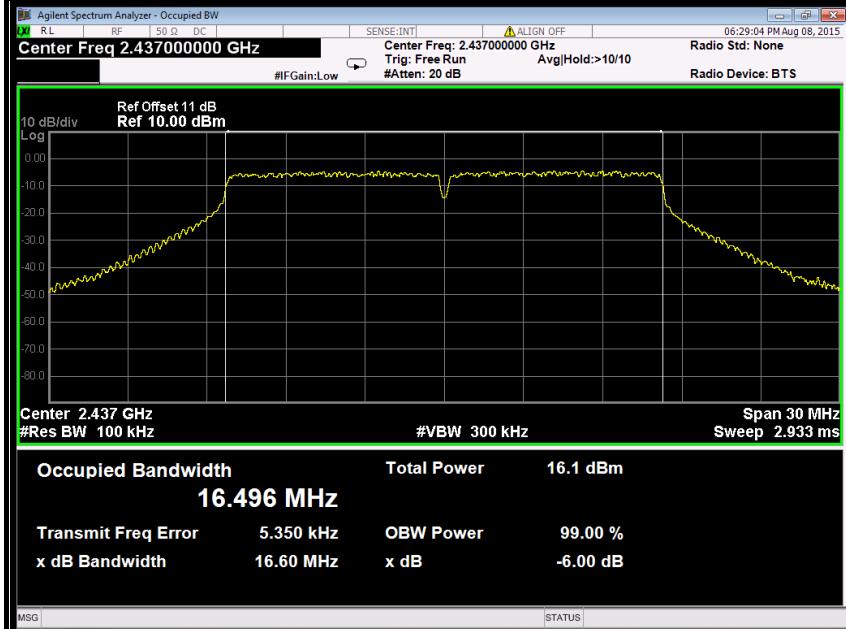**IEEE 802.11g mode****6dB Bandwidth (CH Low)****6dB Bandwidth (CH Mid)**




### 6dB Bandwidth (CH High)


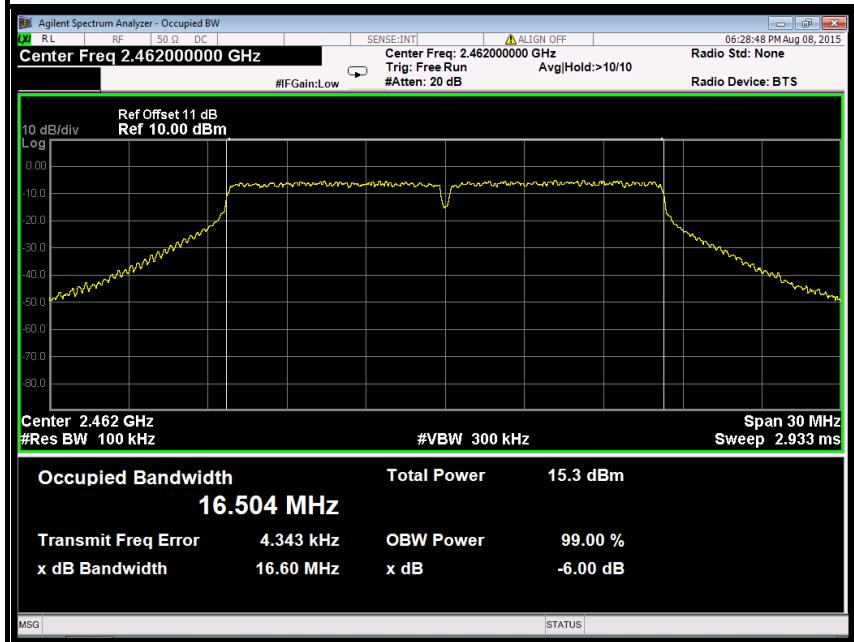


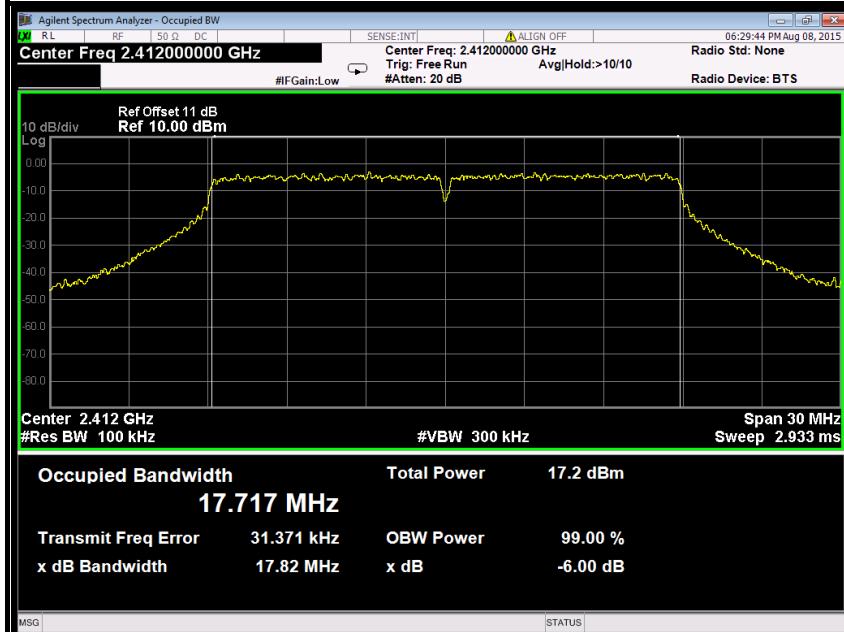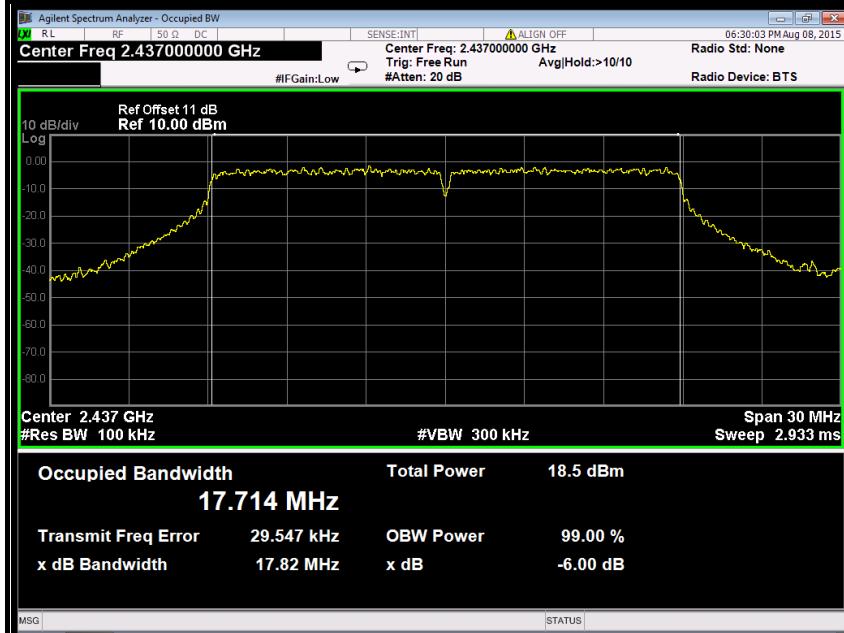**IEEE 802.11n HT20 MHz mode****6dB Bandwidth (CH Low)****6dB Bandwidth (CH Mid)**




### 6dB Bandwidth (CH High)

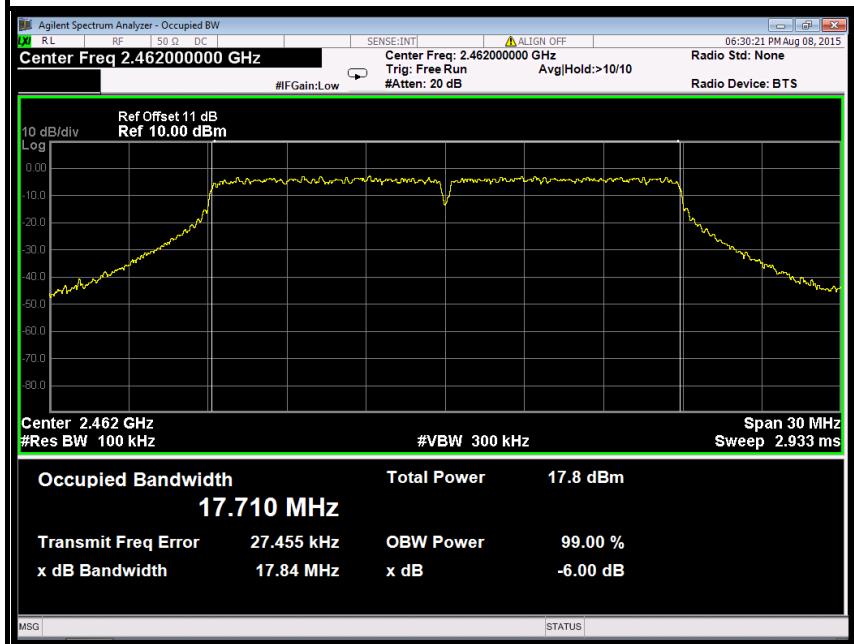

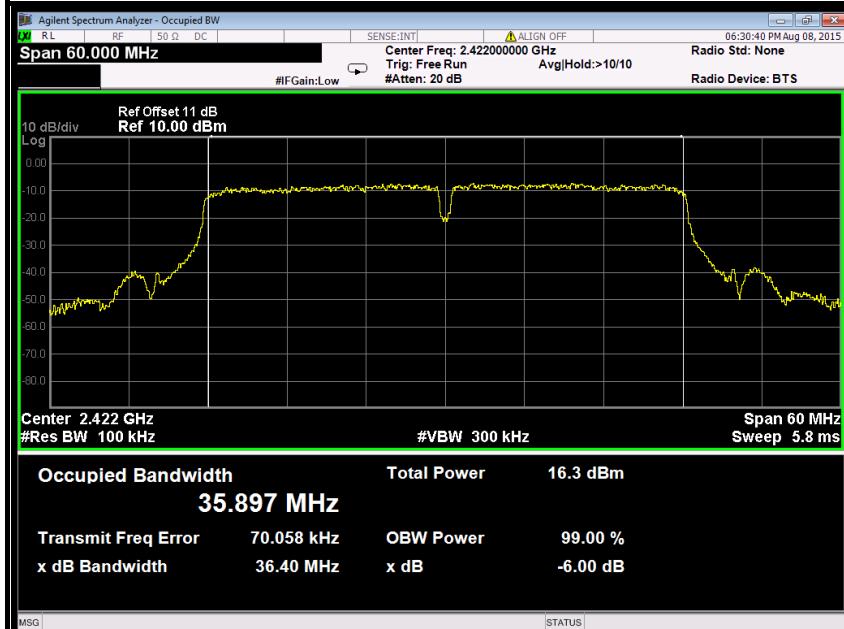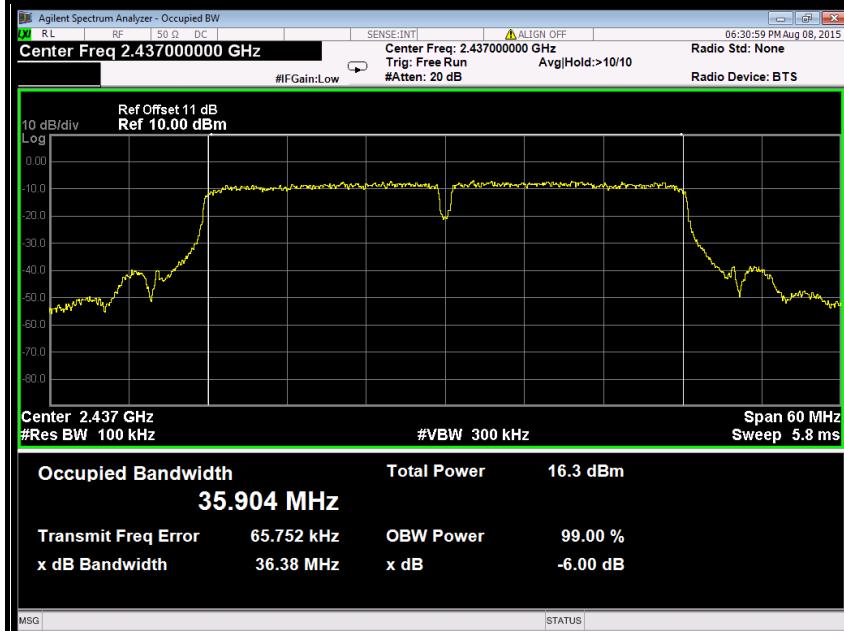**IEEE 802.11n HT40 MHz mode****6dB Bandwidth (CH Low)****6dB Bandwidth (CH Mid)**



### 6dB Bandwidth (CH High)

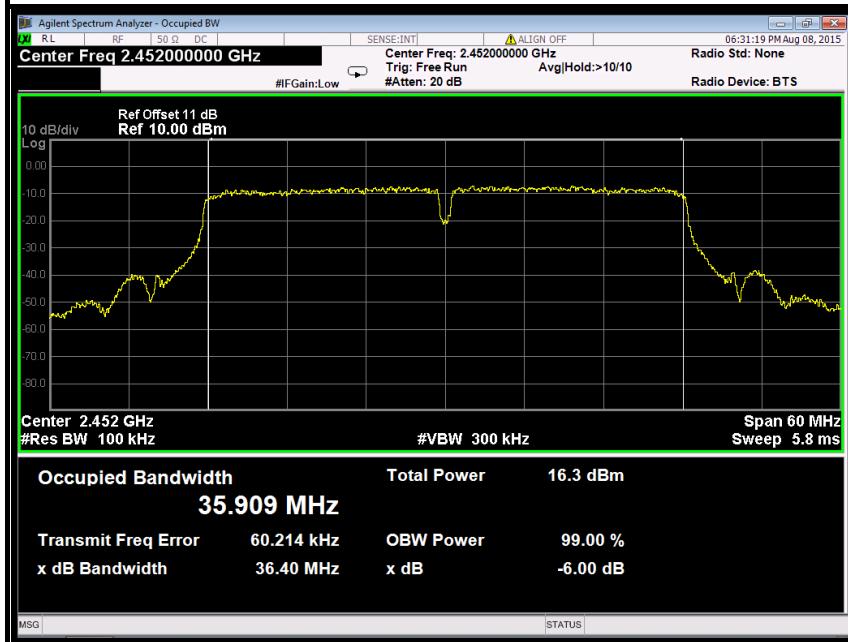



## 7.4. ANTENNA GAIN

### MEASUREMENT

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal WLAN devices, the DSSS mode is used.

### MEASUREMENT PARAMETERS

Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	3 MHz
Video bandwidth	3 MHz
Trace-Mode	Max hold

### LIMITS

FCC	IC
Antenna Gain	
6 dBi	



## TEST RESULTS

### IEEE 802.11b mode

T <sub>nom</sub>	V <sub>nom</sub>	Lowest channel 2412MHz	Middle channel 2437MHz	Highest channel 2462MHz
Conducted power [dBm/MHz] Measured with DSSS modulation		3.12	3.82	3.51
Radiated power [dBm/MHz] Measured with DSSS modulation		3.97	4.06	4.64
Gain [dBi] Calculated		0.85	0.24	1.13
Measurement uncertainty	$\pm 1.5$ dB (cond.) / $\pm 3$ dB (rad.)			



## 7.5. PEAK OUTPUT POWER

### 7.5.1. LIMITS

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 7.5.2. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Power Meter	Anritsu	ML2495A	1204003	02/28/2015	02/27/2016
Power Sensor	Anritsu	MA2411B	1126150	02/28/2015	02/27/2016

### 7.5.3. TEST PROCEDURES (please refer to measurement standard)

#### 9.1.1 RBW $\geq$ DTS bandwidth

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the *DTS bandwidth*.

- a) Set the RBW  $\geq$  *DTS bandwidth*.
- b) Set VBW  $\geq$  3 RBW.
- c) Set span  $\geq$  3 x RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.



### 9.1.2 Integrated band power method


This procedure may be used when the maximum available RBW of the measurement instrument is less than the *DTS bandwidth*.

- a) Set the RBW = 1 MHz.
- b) Set the VBW  $\geq$  3 RBW
- c) Set the span  $\geq$  1.5 x DTS bandwidth.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select peak detector). If the instrument does not have a band power function, sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS bandwidth.

### 9.1.3 PKPM1 Peak power meter method

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

#### 7.5.4. TEST SETUP

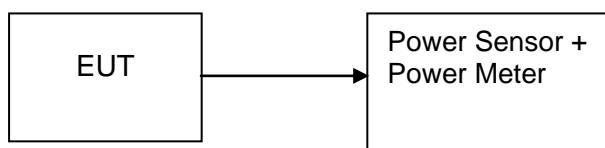



### 7.5.5. TEST RESULTS

No non-compliance noted

#### Test Data

##### Test mode: IEEE 802.11b

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	14.87	0.03069	1	PASS
Mid	2437	14.17	0.02612		PASS
High	2462	14.82	0.03034		PASS

##### Test mode: IEEE 802.11g

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	18.56	0.07178	1	PASS
Mid	2437	19.94	0.09863		PASS
High	2462	18.91	0.07780		PASS

##### Test mode: IEEE 802.11n HT20 MHz

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	20.97	0.12503	1	PASS
Mid	2437	22.45	0.17579		PASS
High	2462	21.50	0.14125		PASS

##### Test mode: IEEE 802.11n HT40 MHz

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2422	19.72	0.09376	1	PASS
Mid	2437	19.35	0.08610		PASS
High	2452	19.58	0.09078		PASS



## 7.6. BAND EDGES MEASUREMENT

### 7.6.1. LIMITS

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

### 7.6.2. TEST INSTRUMENTS


Radiated Emission Test Site 966 (2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI TEST RECEIVER	Agilent	N9038A	US44300399	02/28/2015	02/27/2016
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	02/28/2015	02/27/2016
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2015	03/18/2016
High Noise Amplifier	Agilent	8449B	3008A01838	02/28/2015	02/27/2016
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	02/28/2015	02/27/2016
Bilog Antenna	SCHAFFNER	CBL6143	5082	02/28/2015	02/27/2016
Horn Antenna	SCHWARZBECK	BBHA9120	D286	02/28/2015	02/27/2016
Loop Antenna	COM-POWER	AL-130	121044	09/25/2014	09/24/2015
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/28/2015	02/27/2016
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Test S/W	FARAD		LZ-RF / CCS-SZ-3A2		

**NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
2. The FCC Site Registration number is 101879.  
3. N.C.R = No Calibration Required.

### 7.6.3. TEST PROCEDURES (please refer to measurement standard)

1. The EUT is placed on a turntable, which is 1.5m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - (a) PEAK: RBW=1MHz / VBW=3MHz / Sweep=AUTO
  - (b) AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO / Detector=RMS
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are

### 7.6.4. TEST SETUP

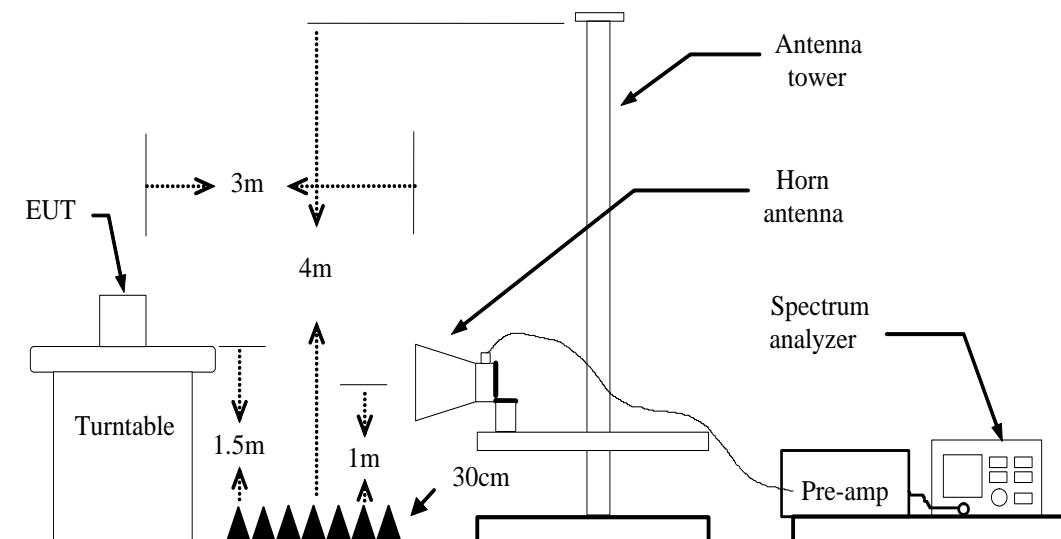




### 7.6.5. TEST RESULTS


#### Test Plot

##### IEEE 802.11b mode

###### Band Edges (CH Low)

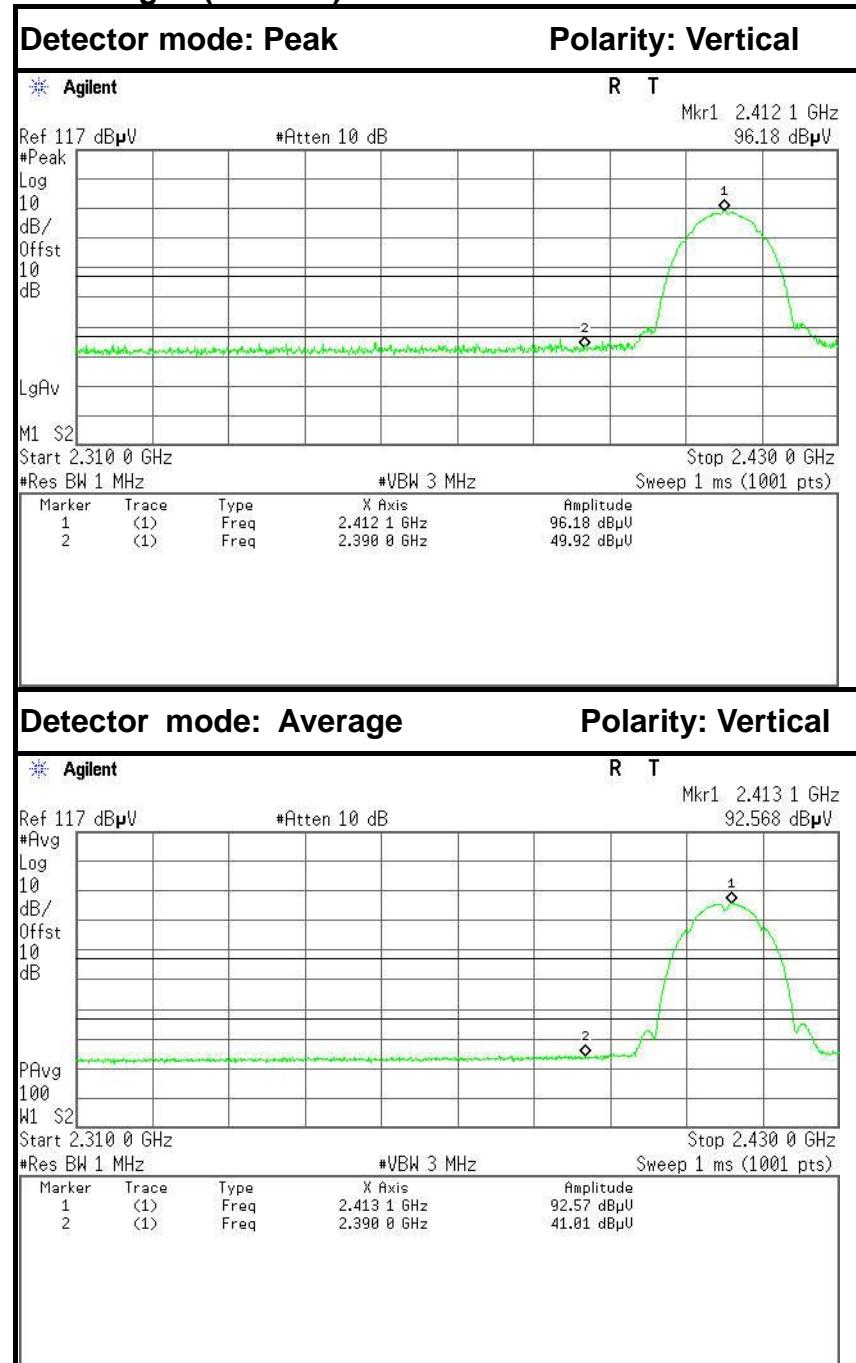

No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	43.32	-6.60	49.92	74.00	-24.08	Peak	Vertical
2	2390.0000	34.41	-6.60	41.01	54.00	-12.99	Average	Vertical

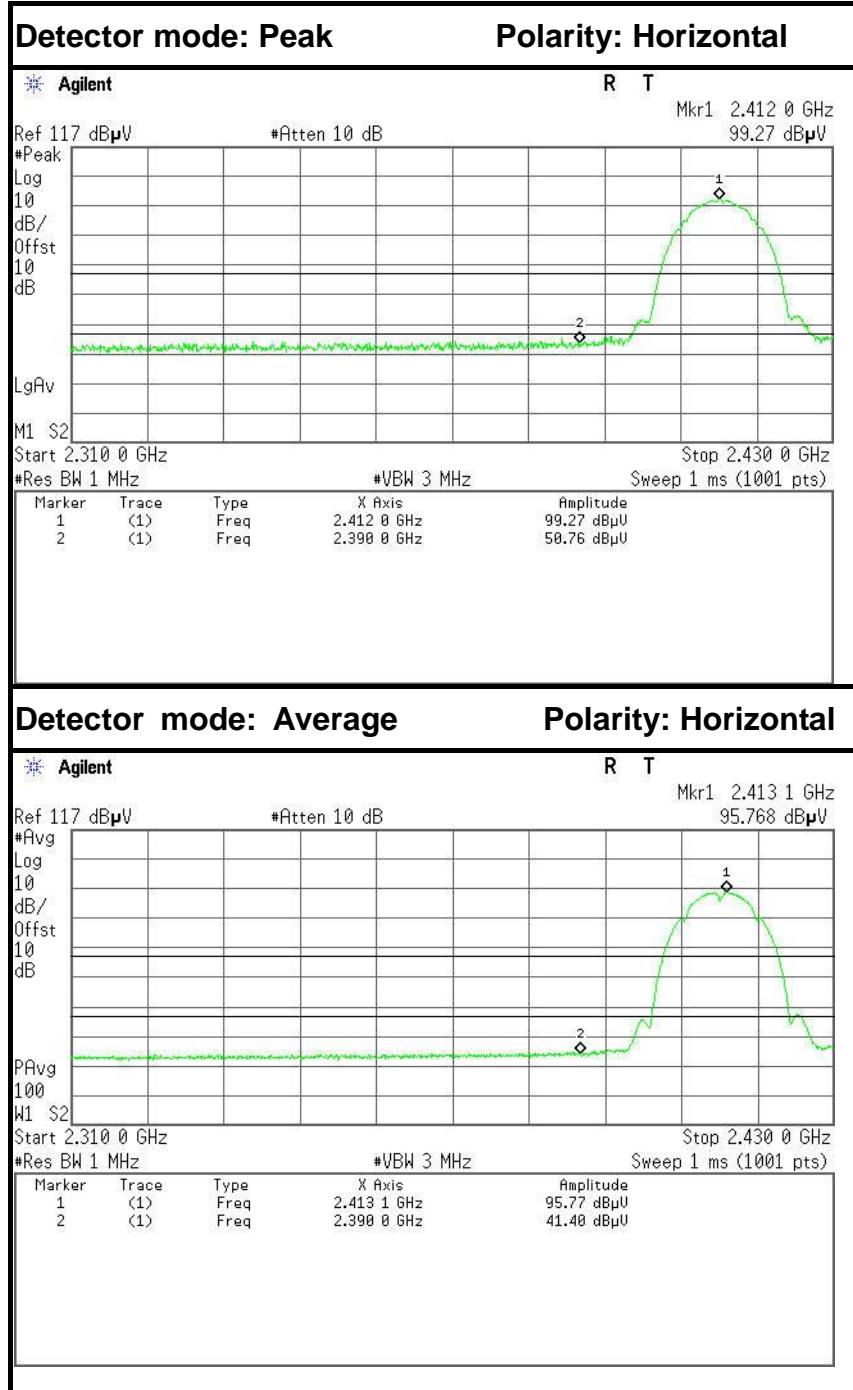


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Corrected (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	44.16	-6.60	50.76	74.00	-23.24	Peak	Horizontal
2	2390.0000	34.80	-6.60	41.40	54.00	-12.60	Average	Horizontal



## Band Edges (CH High)


Detector mode: Peak

Polarity: Vertical

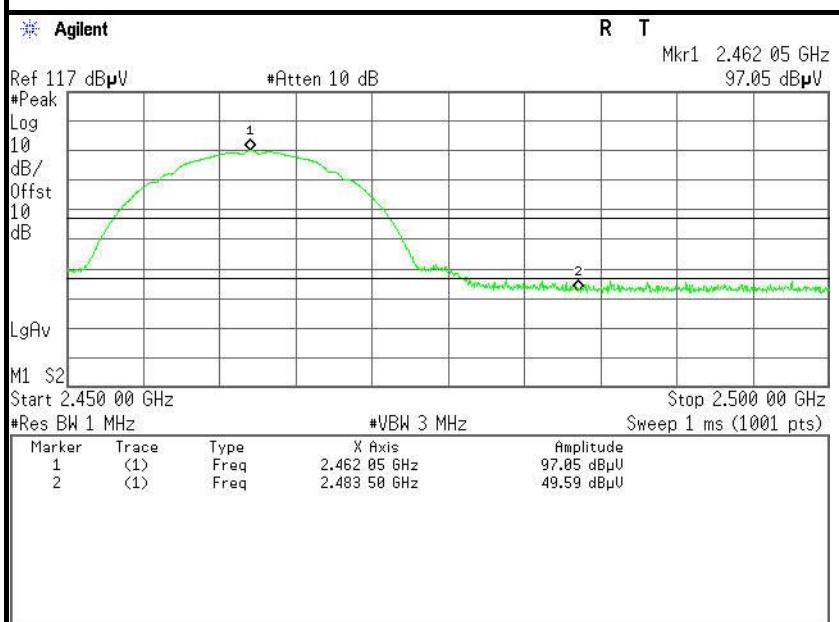


Detector mode: Average


Polarity: Vertical

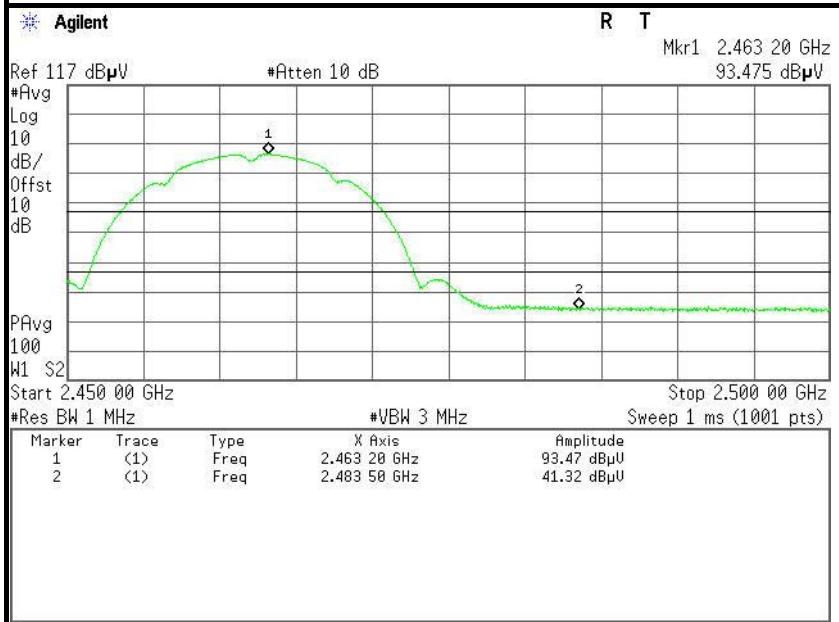

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Corrected (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	43.35	-6.24	49.59	74.00	-24.41	Peak	Vertical
2	2483.5000	35.08	-6.24	41.32	54.00	-12.68	Average	Vertical

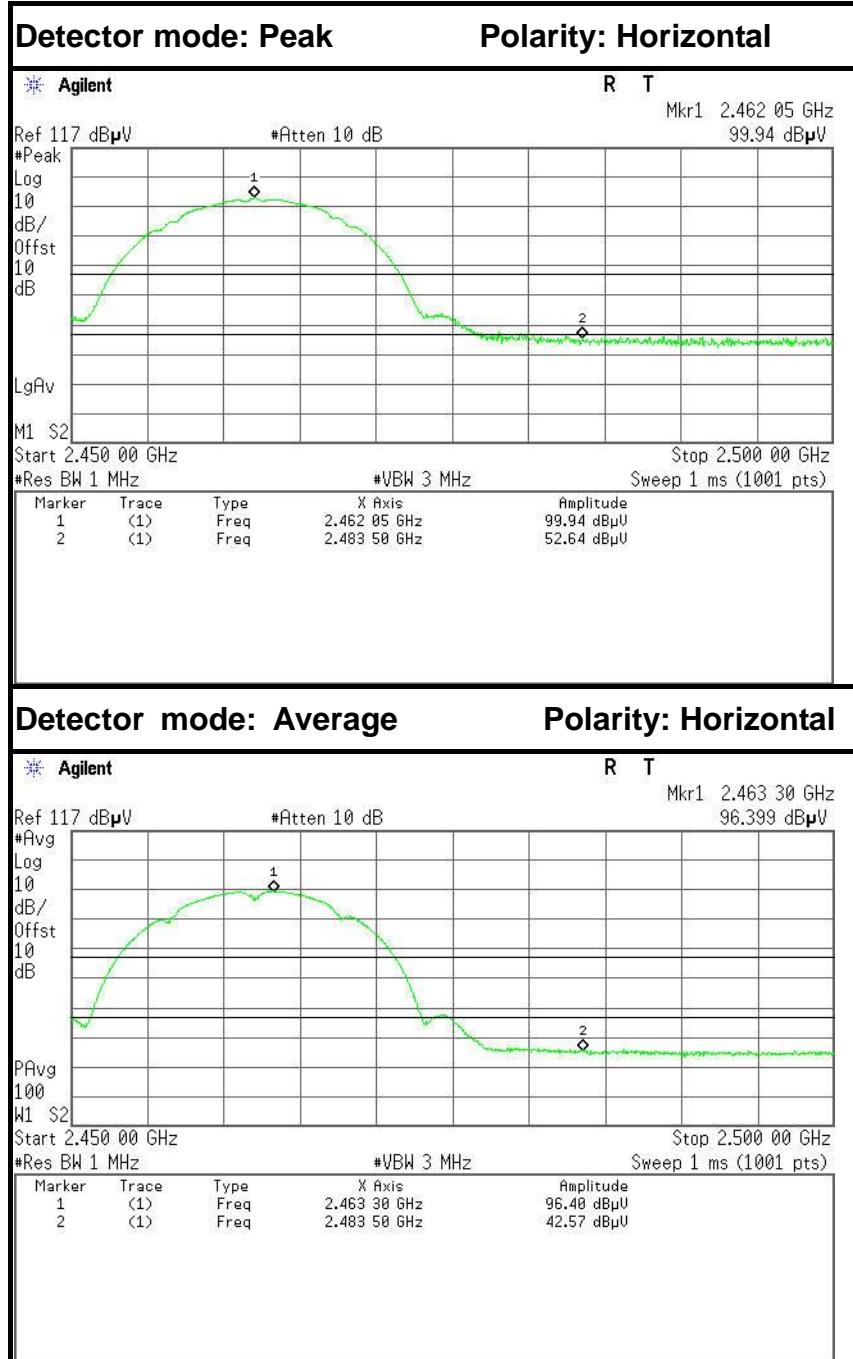

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Corrected (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	46.40	-6.24	52.64	74.00	-21.36	Peak	Horizontal
2	2483.5000	36.33	-6.24	42.57	54.00	-11.43	Average	Horizontal

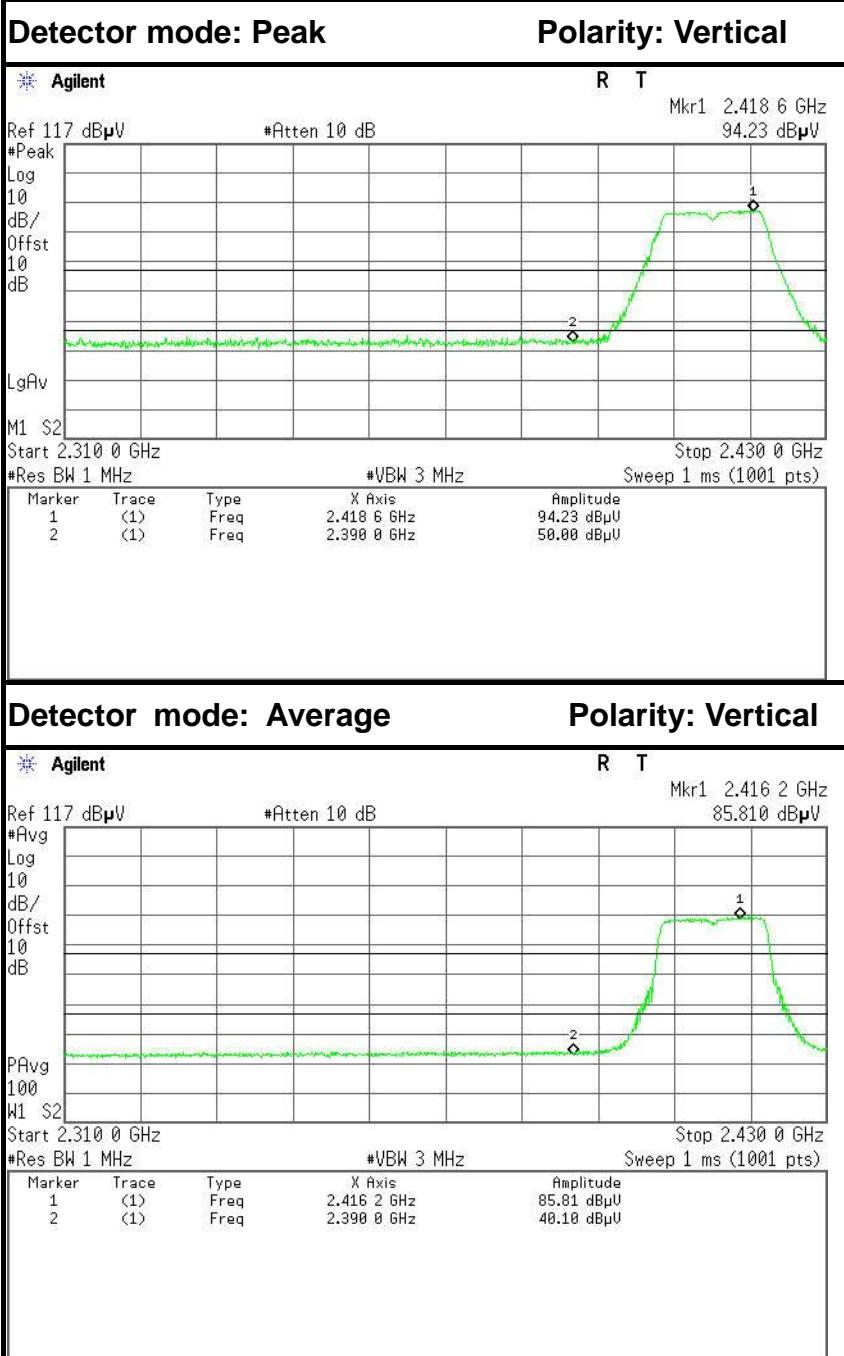
**IEEE 802.11g mode****Band Edges (CH Low)**

No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	43.40	-6.60	50.00	74.00	-24.00	Peak	Vertical
2	2390.0000	33.50	-6.60	40.10	54.00	-13.90	Average	Vertical




## Detector mode: Peak

## Polarity: Horizontal

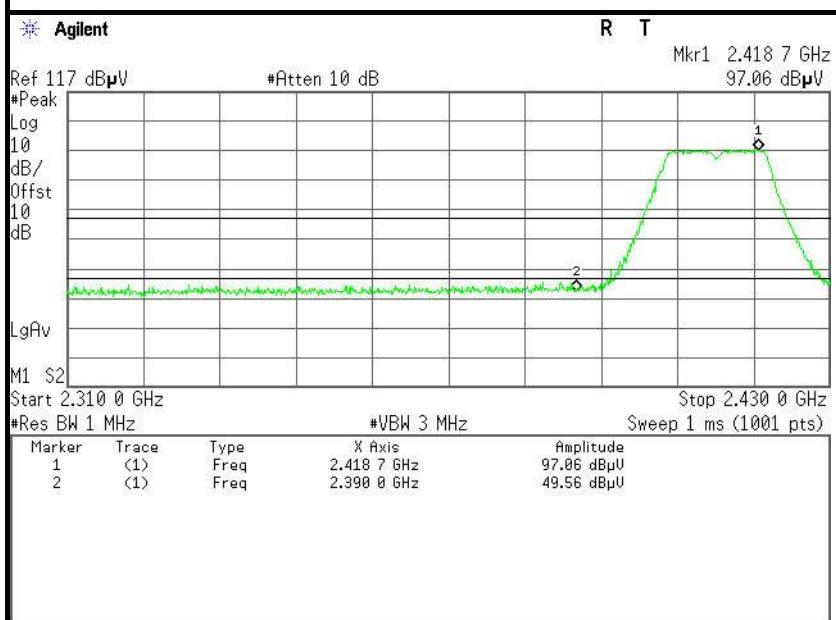

## Detector mode: Average


## Polarity: Horizontal

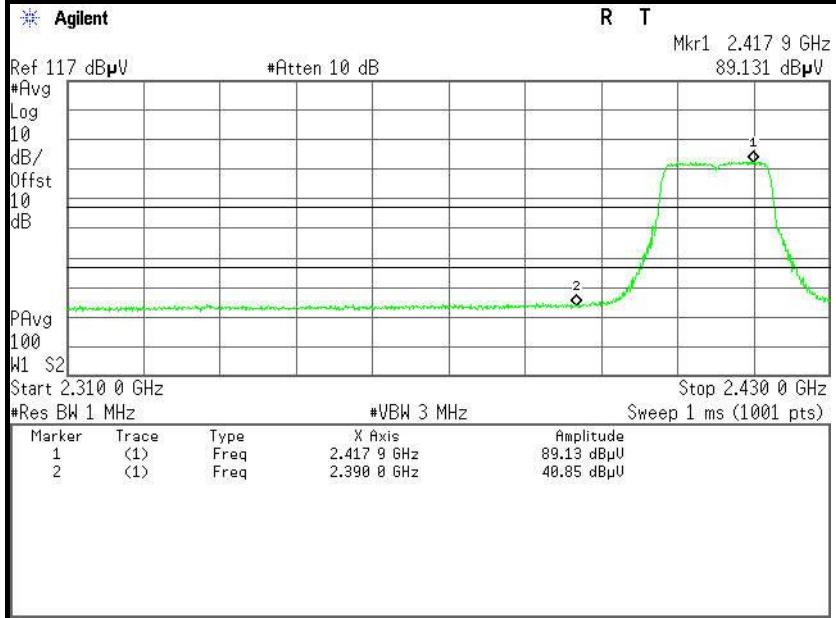


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Corrected (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	42.96	-6.60	49.56	74.00	-24.44	Peak	Horizontal
2	2390.0000	34.25	-6.60	40.85	54.00	-13.15	Average	Horizontal



## Band Edges (CH High)

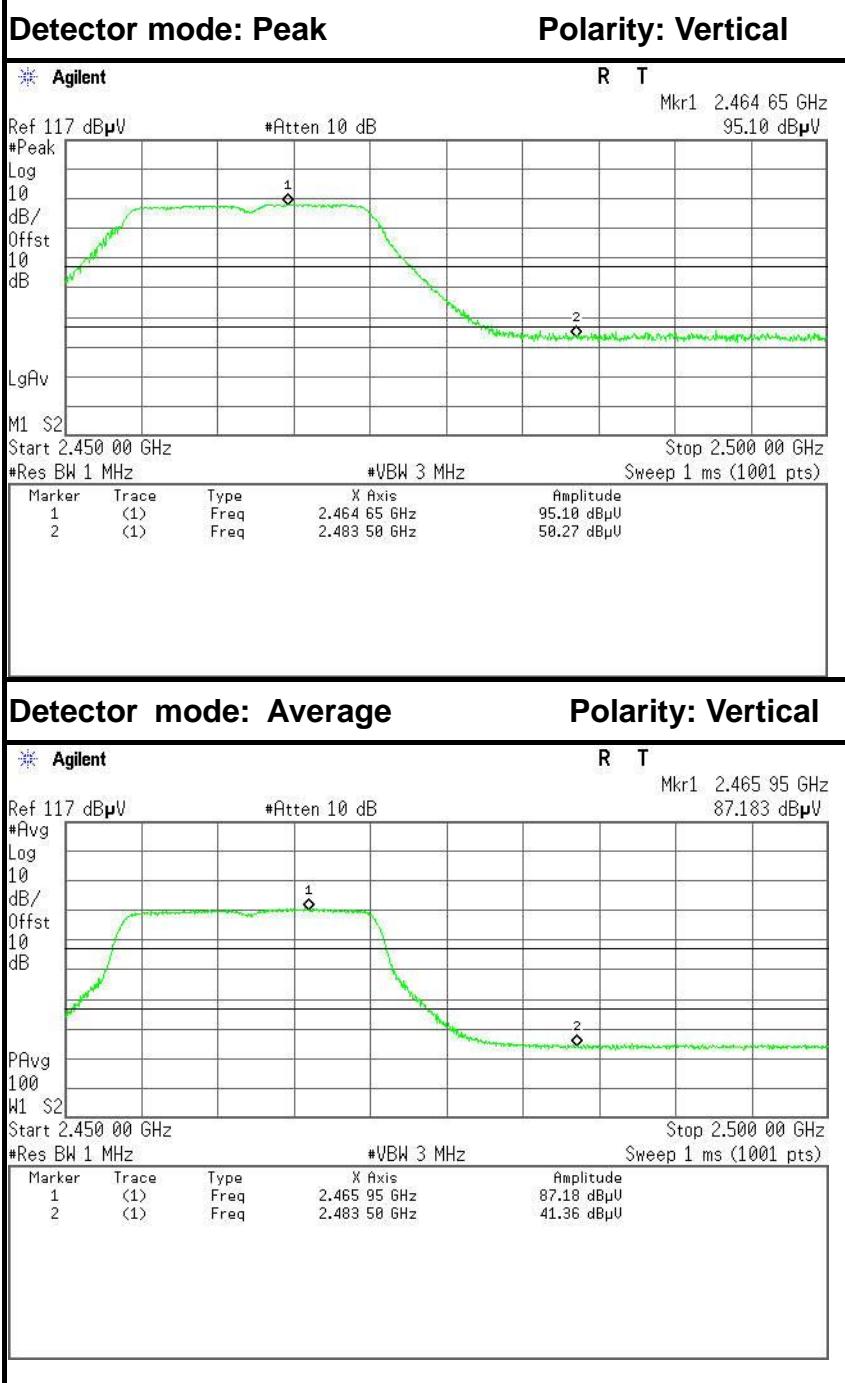

No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	44.03	-6.24	50.27	74.00	-23.73	Peak	Vertical
2	2483.5000	35.12	-6.24	41.36	54.00	-12.64	Average	Vertical

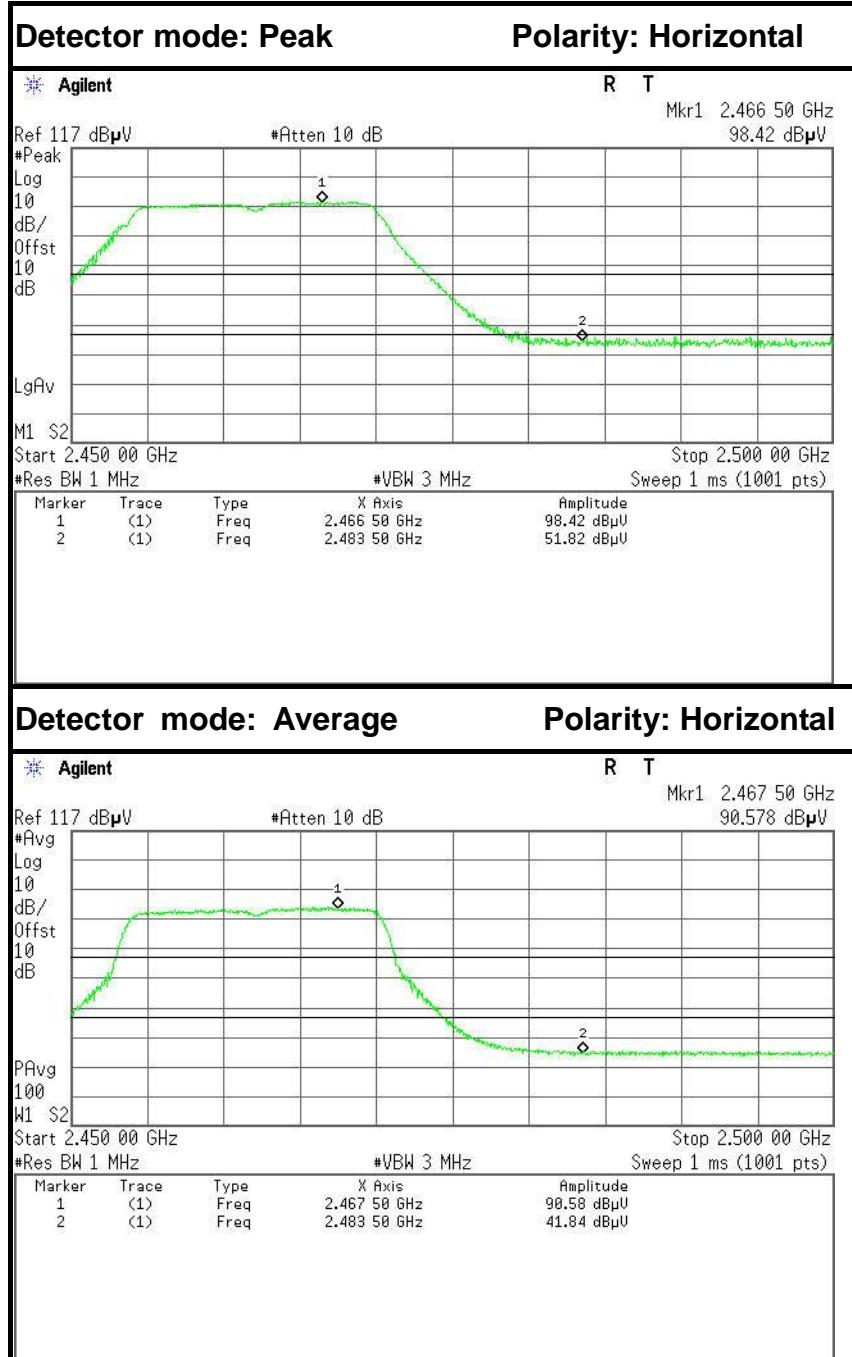


No.	Frequency (MHz)	Reading (dB $\mu$ V)	Corrected (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	45.58	-6.24	51.82	74.00	-22.18	Peak	Horizontal
2	2483.5000	35.60	-6.24	41.84	54.00	-12.16	Average	Horizontal



## IEEE 802.11n HT20 MHz mode

## Band Edges (CH Low)

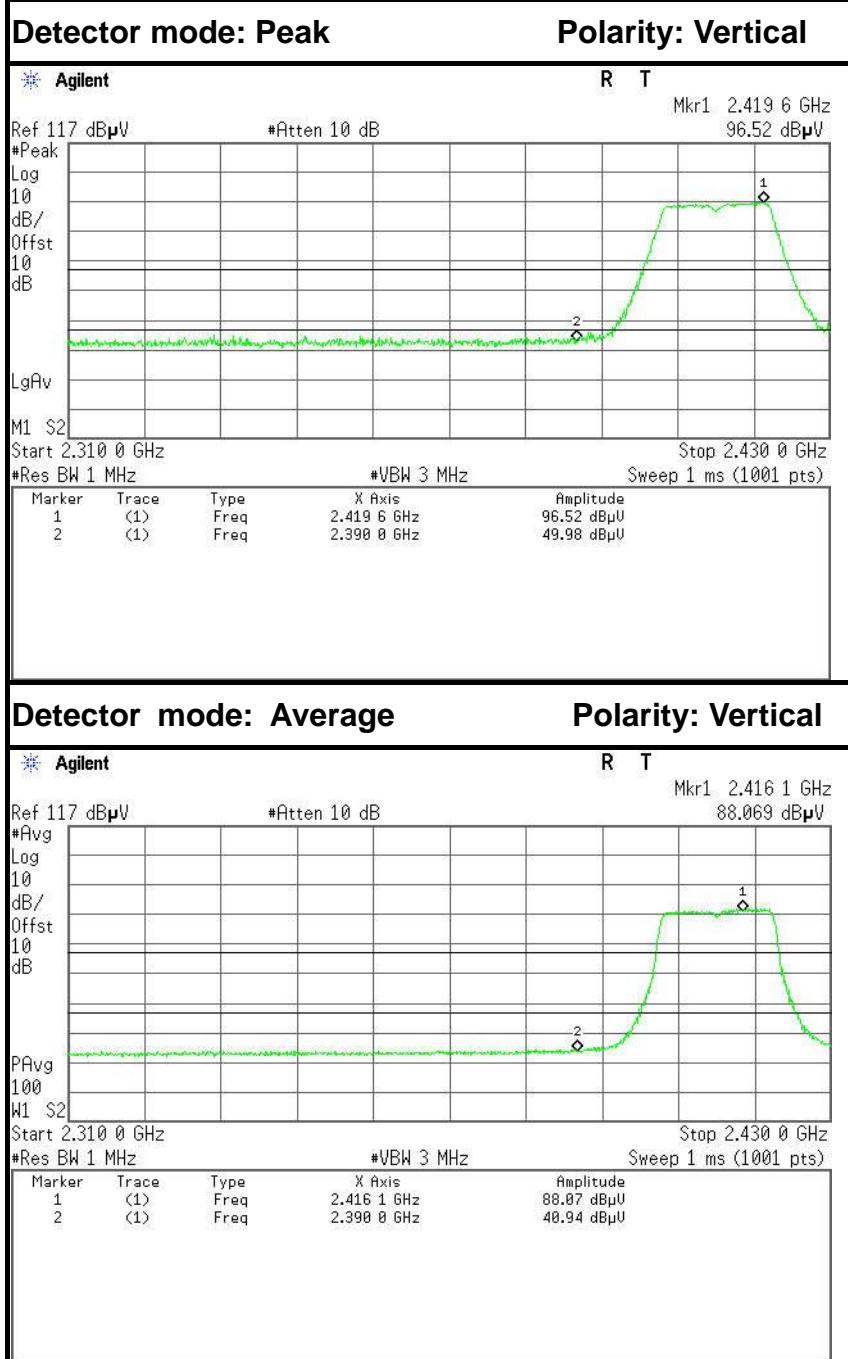


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	43.38	-6.60	49.98	74.00	-24.02	Peak	Vertical
2	2390.0000	34.34	-6.60	40.94	54.00	-13.06	Average	Vertical




## Detector mode: Peak

## Polarity: Horizontal


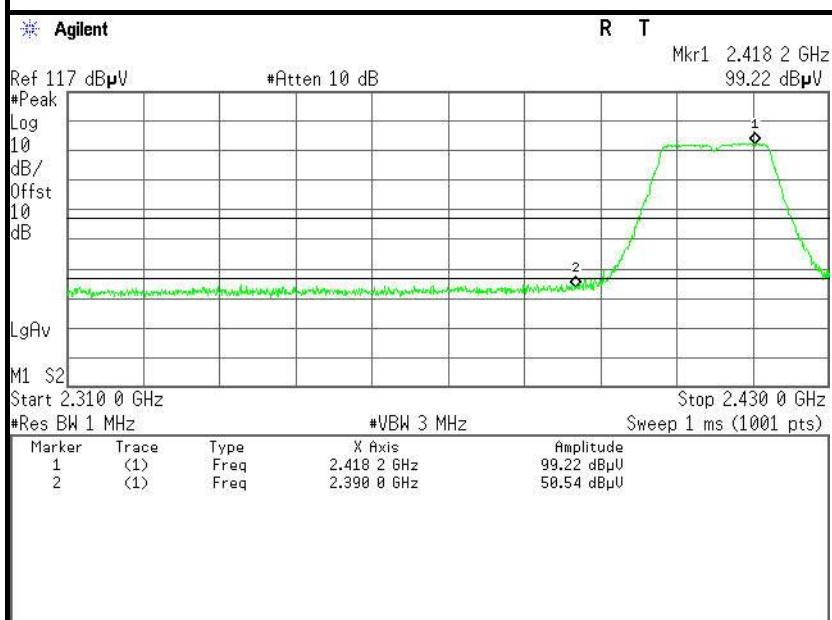


## Detector mode: Average


## Polarity: Horizontal

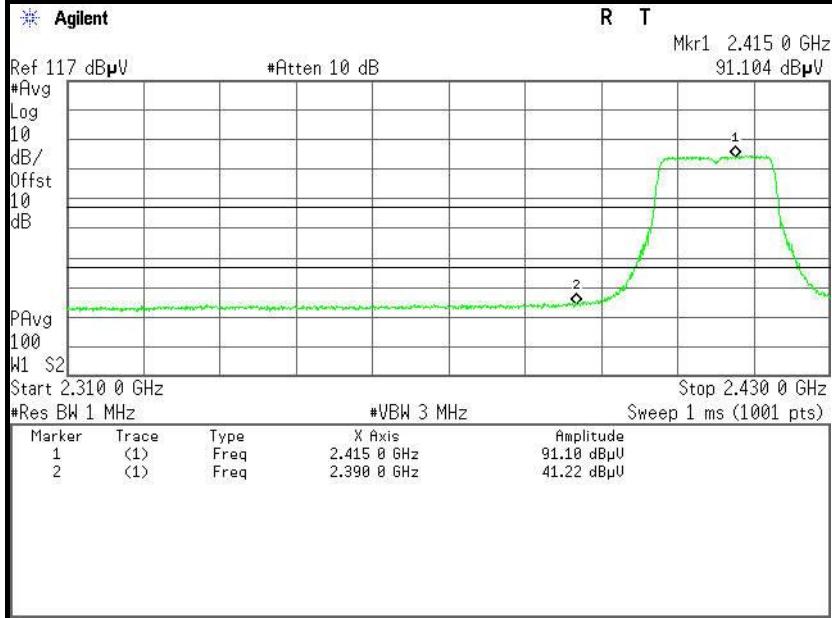

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Corrected (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	43.94	-6.60	50.54	74.00	-23.46	Peak	Horizontal
2	2390.0000	34.62	-6.60	41.22	54.00	-12.78	Average	Horizontal

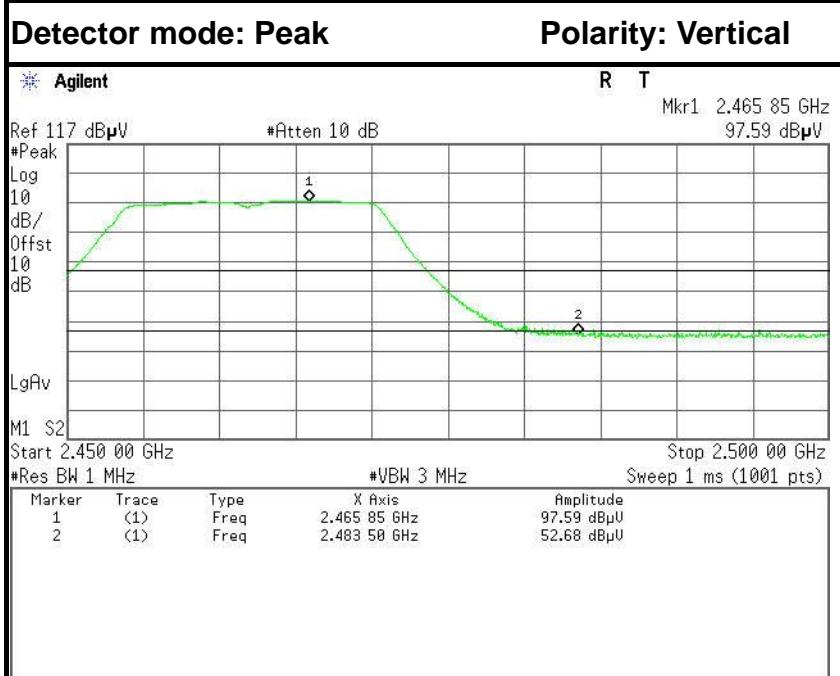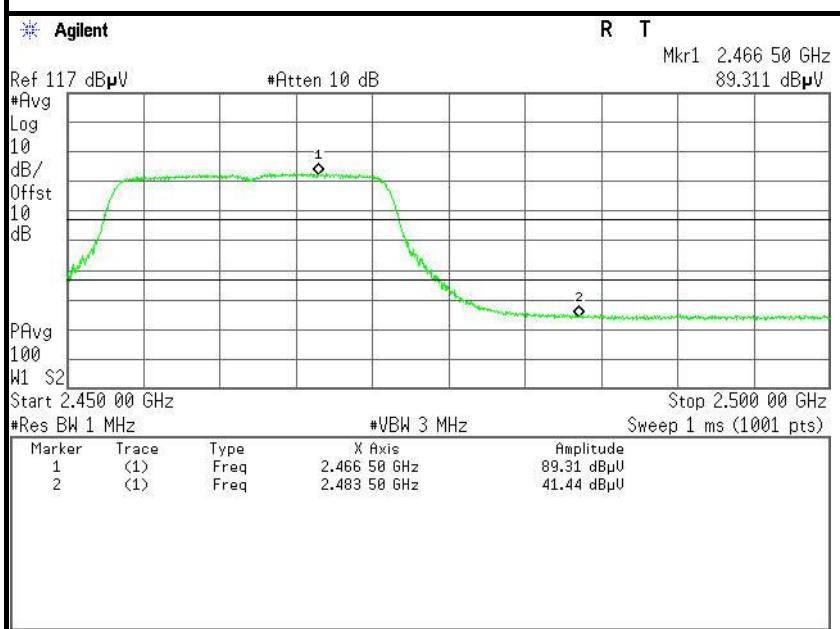**Band Edges (CH High)****Detector mode: Average** **Polarity: Vertical**

No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	46.44	-6.24	52.68	74.00	-21.32	Peak	Vertical
2	2483.5000	35.20	-6.24	41.44	54.00	-12.56	Average	Vertical

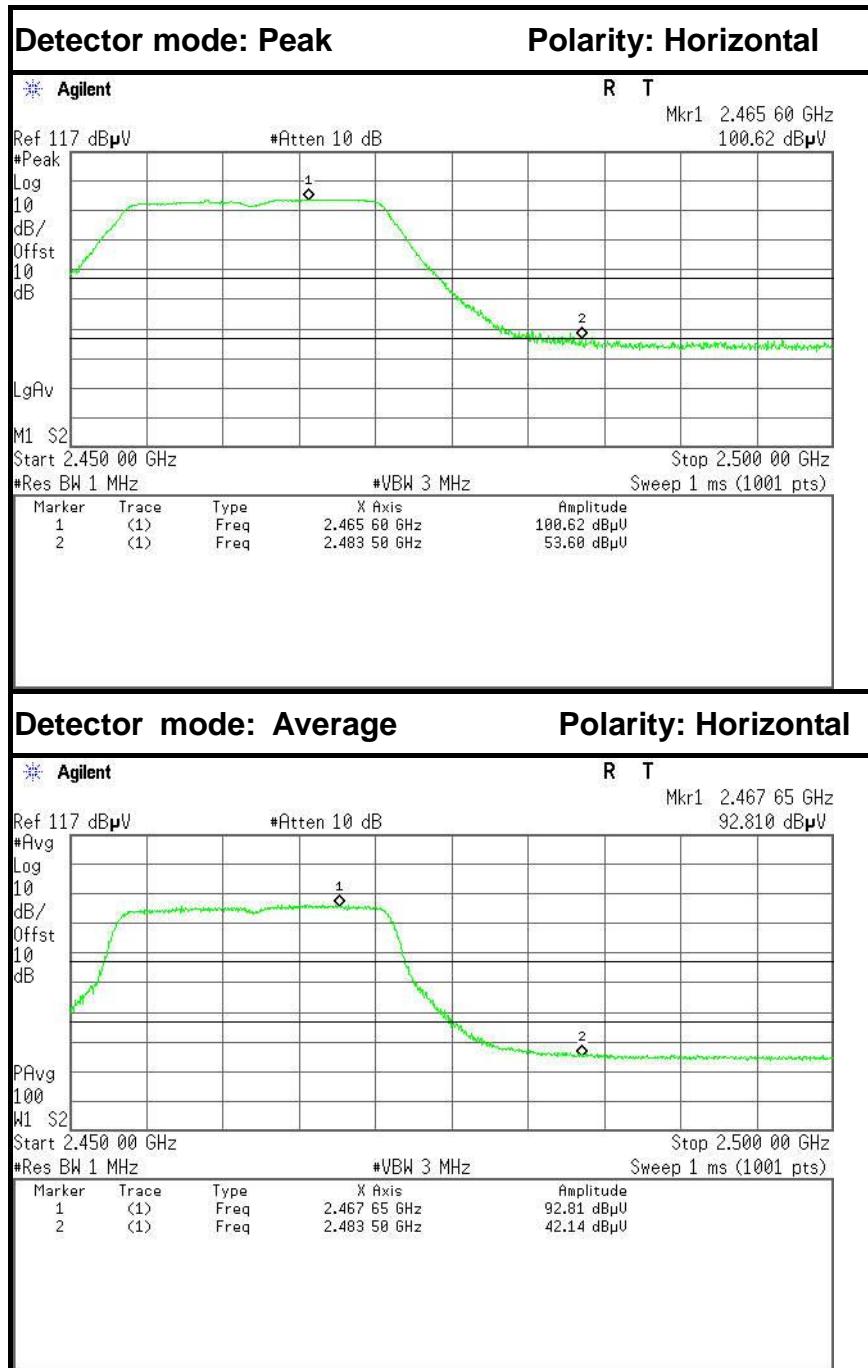


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	47.36	-6.24	53.60	74.00	-20.40	Peak	Horizontal
2	2483.5000	35.90	-6.24	42.14	54.00	-11.86	Average	Horizontal




## IEEE 802.11n HT40 MHz mode

## Band Edges (CH Low)

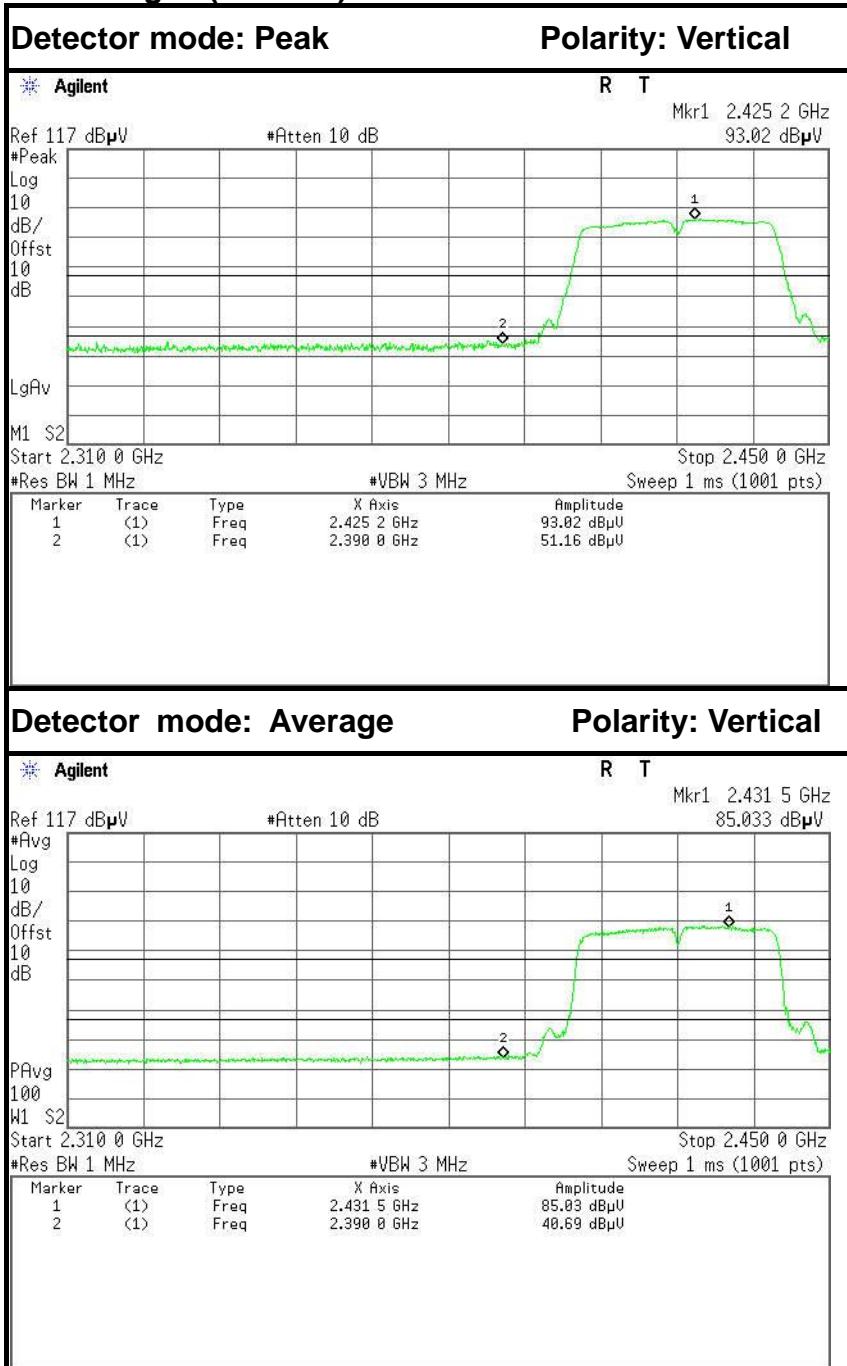



No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	44.56	-6.60	51.16	74.00	-22.84	Peak	Vertical
2	2390.0000	34.09	-6.60	40.69	54.00	-13.31	Average	Vertical

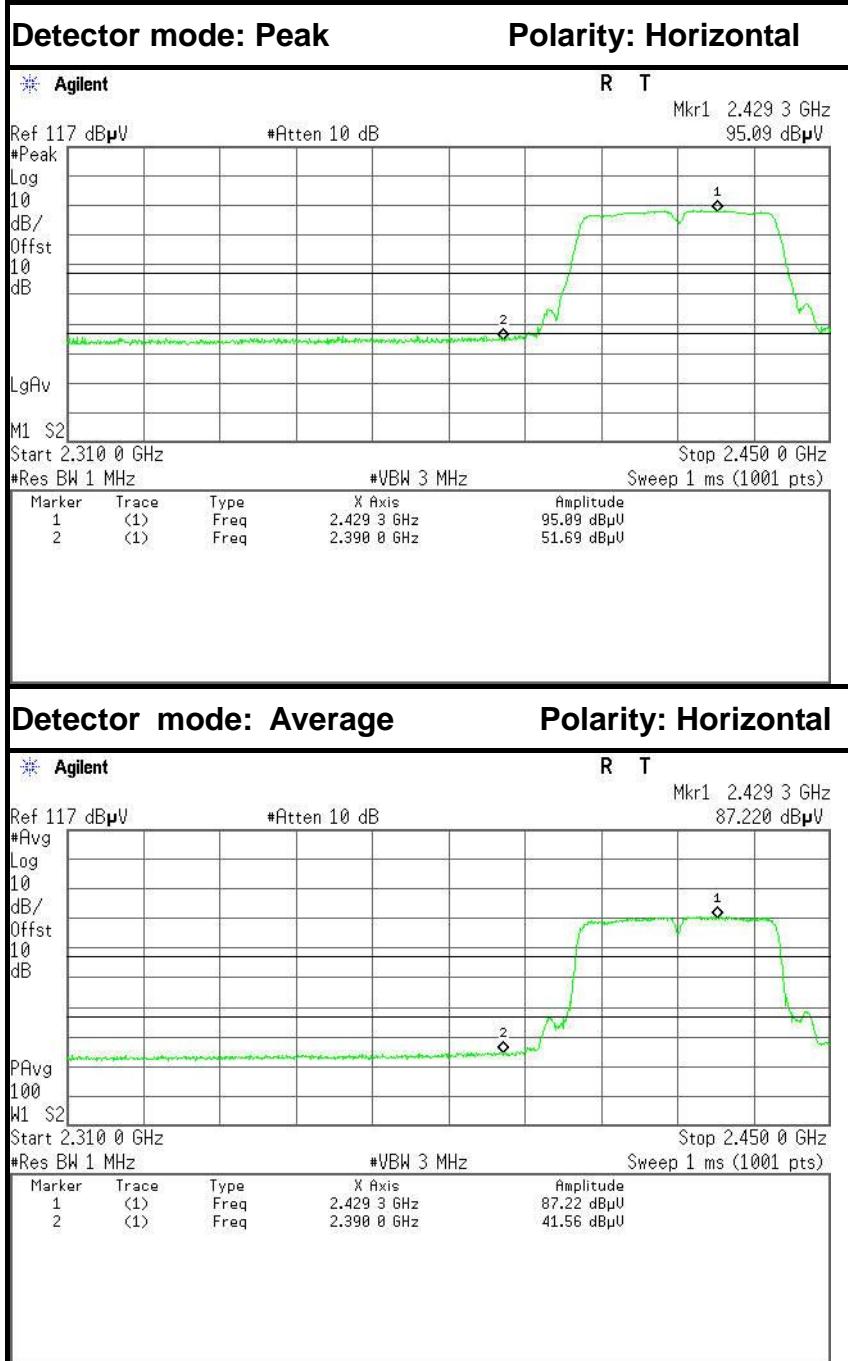

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Corrected (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	45.09	-6.60	51.69	74.00	-22.31	Peak	Horizontal
2	2390.0000	34.96	-6.60	41.56	54.00	-12.44	Average	Horizontal



## Band Edges (CH High)

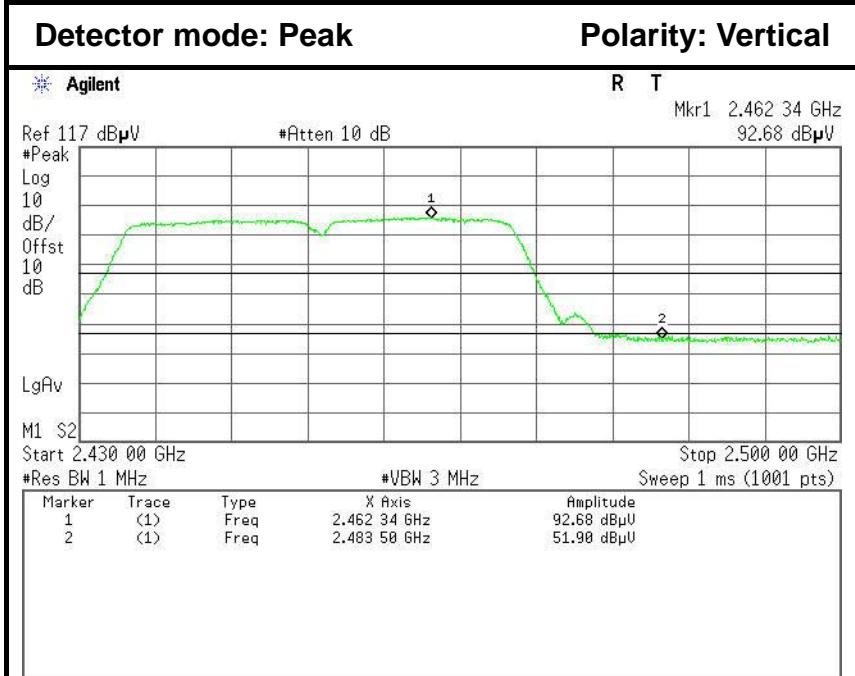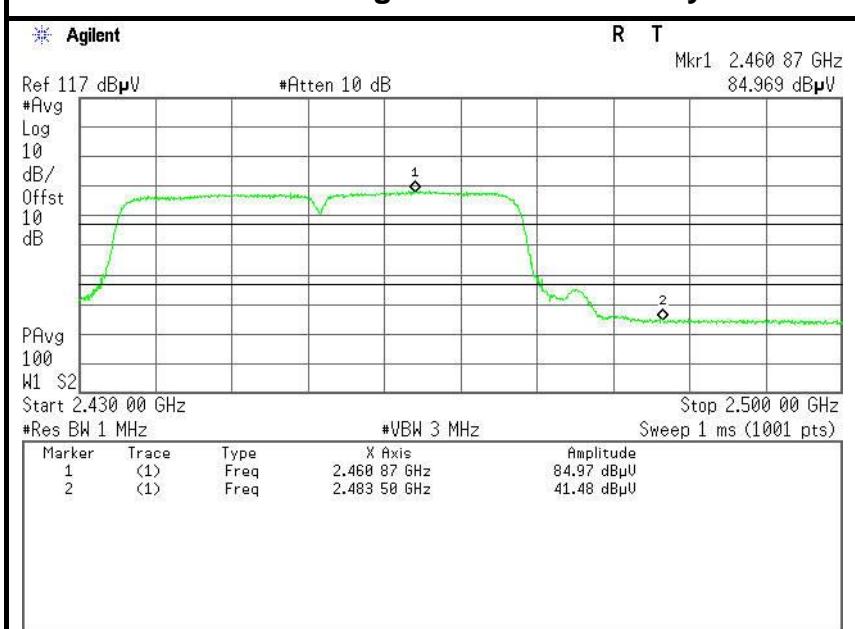
Detector mode: Average      **Polarity: Vertical**

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Corrected (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	45.66	-6.24	51.90	74.00	-22.10	Peak	Vertical
2	2483.5000	35.24	-6.24	41.48	54.00	-12.52	Average	Vertical




## Detector mode: Peak

## Polarity: Horizontal

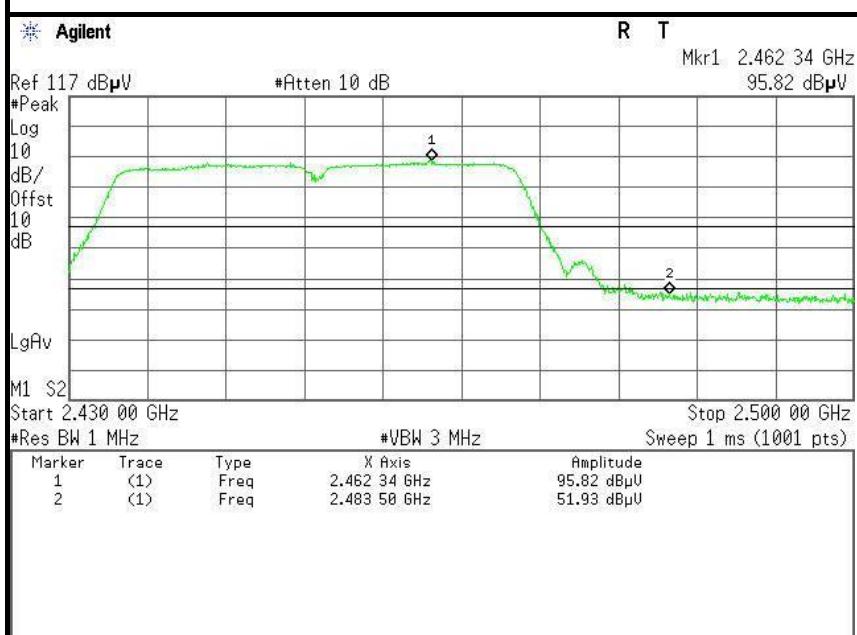

## Detector mode: Average

## Polarity: Horizontal

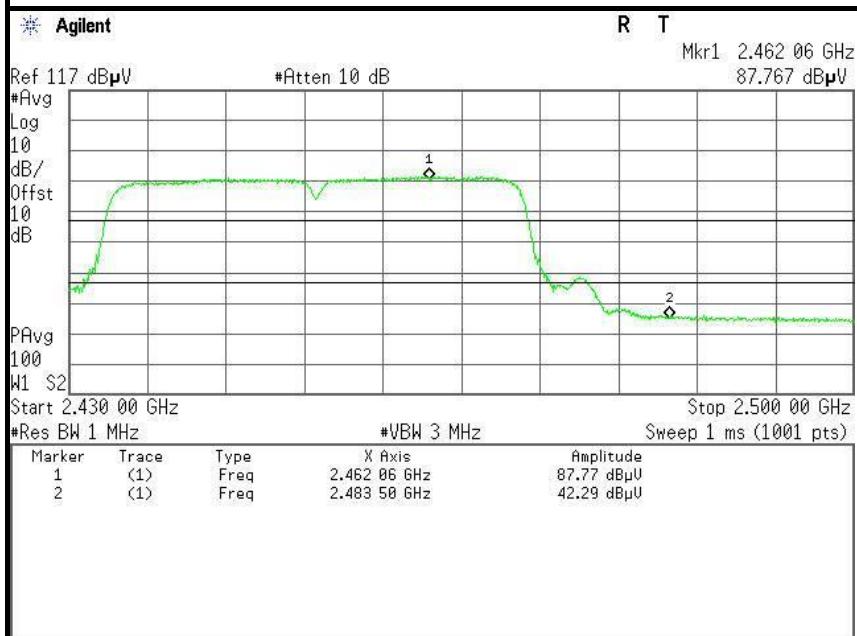

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Corrected (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	45.69	-6.24	51.93	74.00	-22.07	Peak	Horizontal
2	2483.5000	36.05	-6.24	42.29	54.00	-11.71	Average	Horizontal



## 7.7. PEAK POWER SPECTRAL DENSITY MEASUREMENT

### 7.7.1. LIMITS

According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

### 7.7.2. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Spectrum Analyzer	Agilent	N9010A	MY52221469	10/25/2014	10/24/2015


### 7.7.3. TEST PROCEDURES (please refer to measurement standard)

§15.247(e) specifies a conducted power spectral density (PSD) limit of 8 dBm in any 3 kHz band segment within the fundamental EBW during any time interval of continuous transmission. The same method as used to determine the conducted output power shall be used to determine the power spectral density (i.e., if peak-detected fundamental power was measured then use the peak PSD procedure and if average fundamental power was measured then use the average PSD procedure).

#### 10.2 Method PKPSD (peak PSD)

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 7.7.4. TEST SETUP

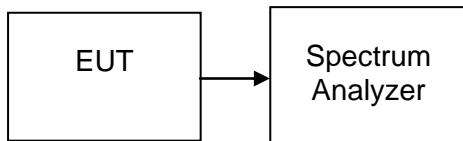



### 7.7.5. TEST RESULTS

*No non-compliance noted*

#### Test Data

##### Test mode: IEEE 802.11b

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-17.812	8	PASS
Mid	2437	-18.625		PASS
High	2462	-17.774		PASS

##### Test mode: IEEE 802.11g

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-20.590	8	PASS
Mid	2437	-19.118		PASS
High	2462	-19.684		PASS

##### Test mode: IEEE 802.11n HT20 MHz

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-17.781	8	PASS
Mid	2437	-16.444		PASS
High	2462	-17.309		PASS

##### Test mode: IEEE 802.11n HT40 MHz

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2422	-20.334	8	PASS
Mid	2437	-18.705		PASS
High	2452	-21.095		PASS



## Test Plot

### IEEE 802.11b mode

#### PPSD (CH Low)



#### PPSD (CH Mid)






### PPSD (CH High)






## IEEE 802.11g mode

## PPSD (CH Low)

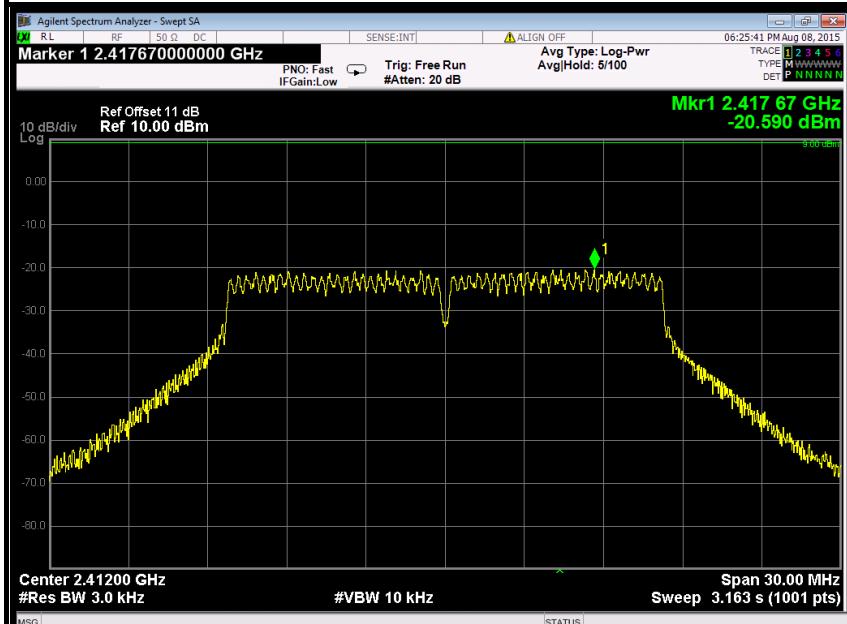


## PPSD (CH Mid)

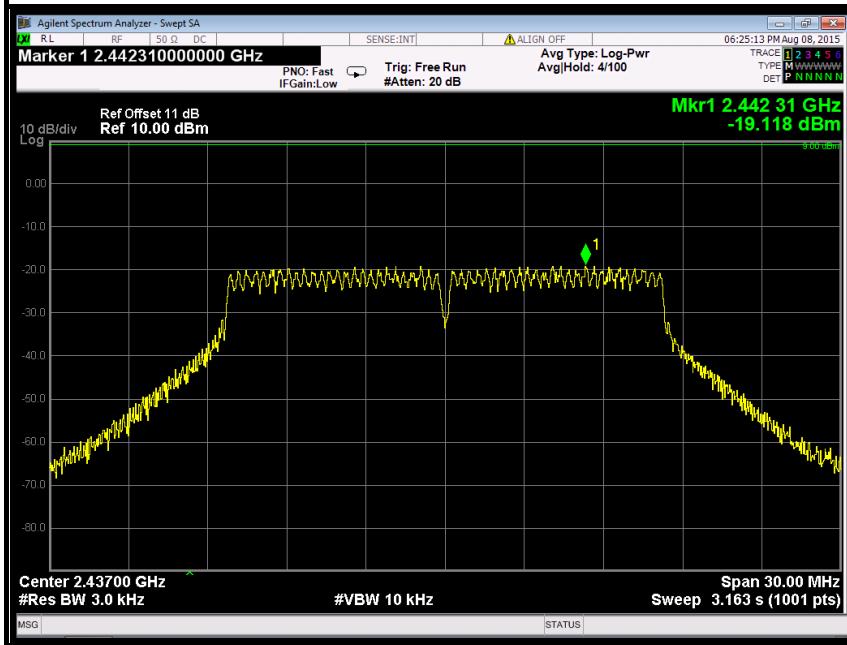




### PPSD (CH High)

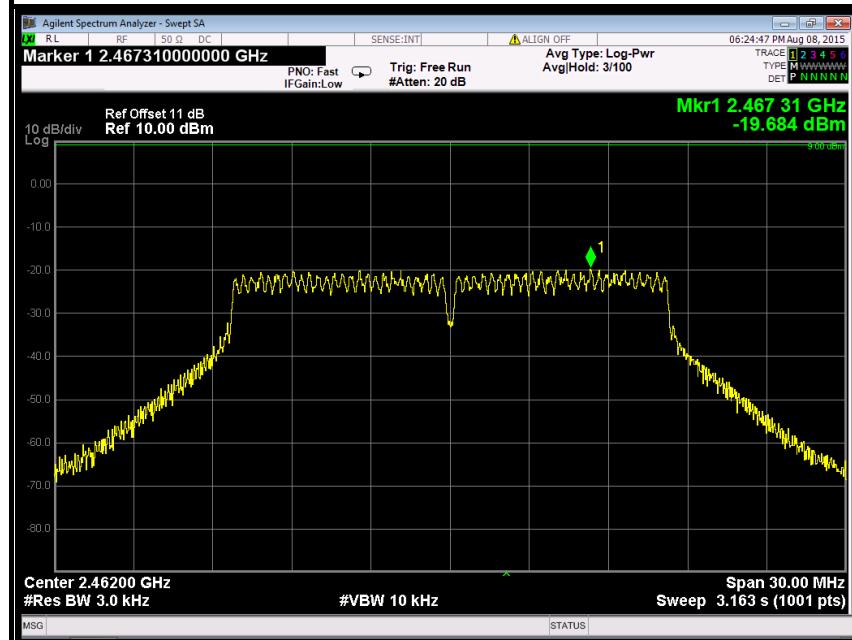




## IEEE 802.11n HT20 MHz mode

## PPSD (CH Low)

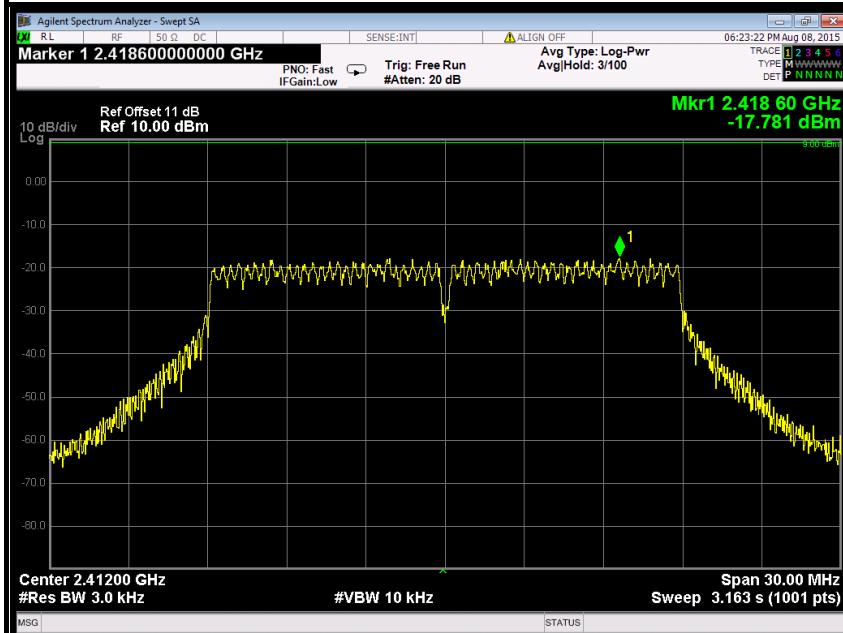


## PPSD (CH Mid)

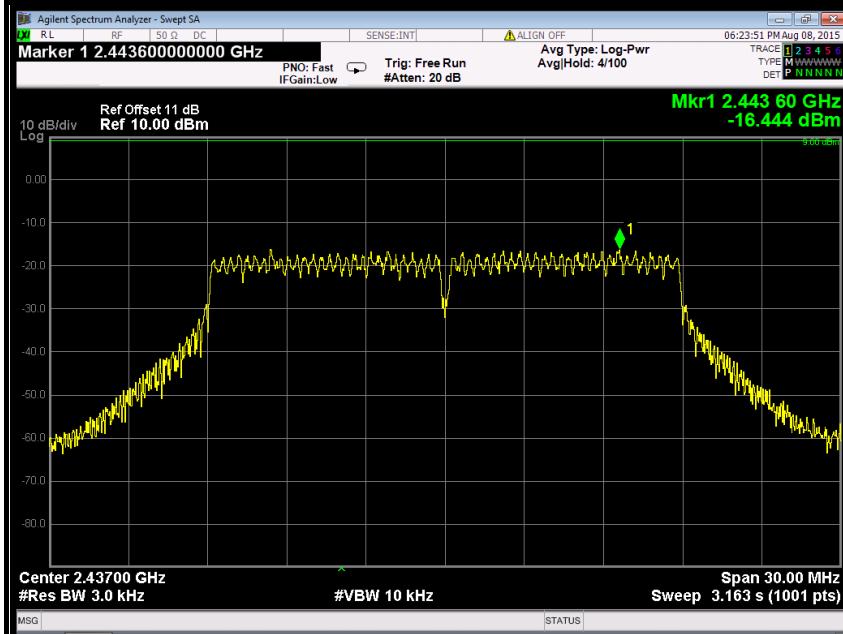




### PPSD (CH High)

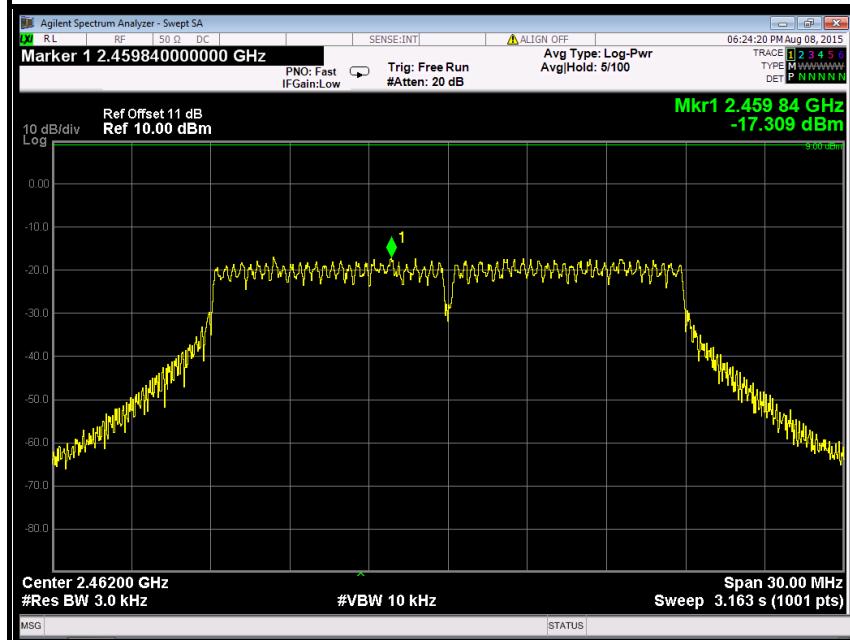




## IEEE 802.11n HT40 MHz mode

## PPSD (CH Low)

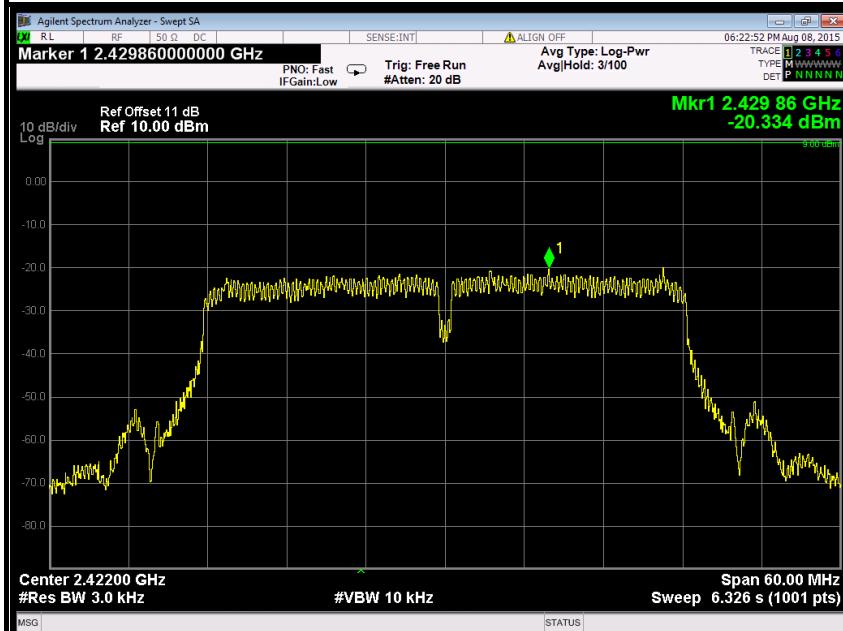

## PPSD (CH Mid)

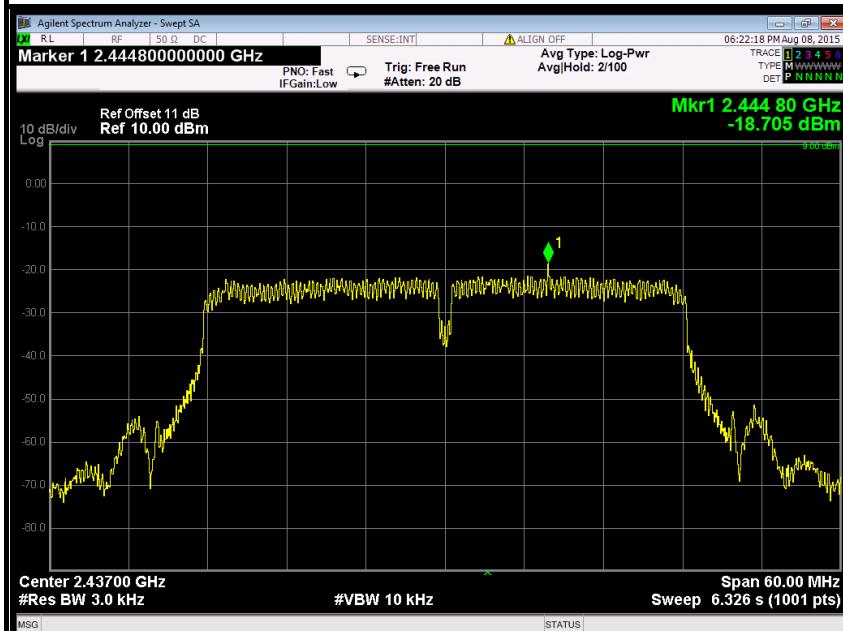



### PPSD (CH High)

