

EMC TEST REPORT



Report No.: 16020220-FCC-E

Supersede Report No.: N/A

Applicant	Beijing WatchSmart Technologies Co.LTD.	
Product Name	WatchKeyOCL MA	
Main Model	WatchKeyOCL MA	
Test Standard	FCC Part 15 Subpart B Class B:2016, ANSI C63.4: 2014	
Test Date	March 10 to March 11,2016	
Issue Date	March 24, 2016	
Test Result	☒ Pass ☐ Fail	
Equipment complied with the specification	☒	
Equipment did not comply with the specification	☐	
		
Deon Dai Test Engineer	Herve Idoko Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (Nanjing-China) Laboratories

2-1 Longcang Avenue Yuhua Economic and
Technology Development Park, Nanjing, China

Tel:+86(25)86730128/86730129 Fax:+86(25)86730127 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report No.	16020220-FCC-E
Page	3 of 29

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY.....	5
2. CUSTOMER INFORMATION	5
3. TEST SITE INFORMATION.....	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5. TEST SUMMARY	7
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	8
6.1 AC POWER LINE CONDUCTED EMISSIONS.....	8
6.2 RADIATED EMISSIONS.....	14
ANNEX A. TEST INSTRUMENT	18
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS	19
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	25
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST.....	28
ANNEX E. DECLARATION OF SIMILARITY	29

Test Report No.	16020220-FCC-E
Page	5 of 29

1. Report Revision History

Report No.	Report Version	Description	Issue Date
16020220-FCC-E	NONE	Original	March 24, 2016

2. Customer information

Applicant Name	Beijing WatchSmart Technologies Co.LTD.
Applicant Add	F7 Qi Ming International Mansion, No.101 Li Ze Zhong Yuan,Beijing,China
Manufacturer	Beijing WatchSmart Technologies Co.LTD.
Manufacturer Add	F7 Qi Ming International Mansion, No.101 Li Ze Zhong Yuan,Beijing,China

3. Test site information

Lab performing tests	SIEMIC (Nanjing-China) Laboratories
Lab Address	2-1 Longcang Avenue Yuhua Economic and Technology Development Park, Nanjing, China
FCC Test Site No.	986914
IC Test Site No.	4842B-1
Test Software	Labview of SIEMIC version 1.0

Test Report No.	16020220-FCC-E
Page	6 of 29

4. Equipment under Test (EUT) Information

Description of EUT:	WatchKeyOCL MA
Main Model:	WatchKeyOCL MA
Serial Model:	N/A
Date EUT received:	March 10, 2016
Test Date(s):	March 10 to March 11,2016
Port:	USB Port
Input Power:	DC:5V Battery:3.7V
Trade Name :	OCL
FCC ID:	AMGWATCHKEYOCLMA

Test Report No.	16020220-FCC-E
Page	7 of 29

5. Test Summary

The product was tested in accordance with the following specifications.
All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.107; ANSI C63.4: 2014	AC Power Line Conducted Emissions	Compliance
§15.109; ANSI C63.4: 2014	Radiated Emissions	Compliance

Measurement Uncertainty

Test Item	Description	Uncertainty
Radiated Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	3.952dB

6. Measurements, Examination And Derived Results

6.1 AC Power Line Conducted Emissions

Temperature	25°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	March 10, 2016
Tested By :	Deon Dai

Requirement(s):

Spec	Item	Requirement	Applicable												
47CFR§15.107	a)	1. For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu]H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.													
		Class A Limit													
		<table><tr><th rowspan="2">Frequency ranges (MHz)</th><th colspan="2">Limit (dBµV)</th></tr><tr><th>QP</th><th>Average</th></tr><tr><td>0.15 ~ 0.5</td><td>79</td><td>66</td></tr><tr><td>0.5 ~ 30</td><td>73</td><td>60</td></tr></table>		Frequency ranges (MHz)	Limit (dBµV)		QP	Average	0.15 ~ 0.5	79	66	0.5 ~ 30	73	60	
		Frequency ranges (MHz)			Limit (dBµV)										
				QP	Average										
0.15 ~ 0.5	79	66													
0.5 ~ 30	73	60													
Class B Limit															
<table><tr><th rowspan="2">Frequency ranges (MHz)</th><th colspan="2">Limit (dBµV)</th></tr><tr><th>QP</th><th>Average</th></tr><tr><td>0.15 ~ 0.5</td><td>66 – 56</td><td>56 – 46</td></tr><tr><td>0.5 ~ 5</td><td>56</td><td>46</td></tr><tr><td>5 ~ 30</td><td>60</td><td>50</td></tr></table>		Frequency ranges (MHz)	Limit (dBµV)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50
Frequency ranges (MHz)	Limit (dBµV)														
	QP	Average													
0.15 ~ 0.5	66 – 56	56 – 46													
0.5 ~ 5	56	46													
5 ~ 30	60	50													

Test Setup	Note: 1.Support units were connected to second LISN. 2.Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.
------------	--

Procedure	- The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table. - The power supply for the EUT was fed through a 50 [mu]H/50 EUT LISN, connected to filtered mains. - The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable. - All other supporting equipment were powered separately from another main supply. - The EUT was switched on and allowed to warm up to its normal operating condition. - A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over
-----------	--

	the required frequency range using an EMI test receiver.	
	8. High peaks, relative to the limit line, were then selected, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10kHz.	
	9. Steps 6-7 were repeated for the LIVE line (for AC mains) or DC line (for DC power).	
Remark		
Result	☒ Pass	☐ Fail
Test Data	☒ Yes	☐ Fail
Test Plot	☒ Yes	☐ Fail

Data sample

Frequency (MHz)	Quasi-Peak (dBμV)	Limit (dBμV)	Margin (dB)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Factors (dB)
xxx	56.21	66.00	-9.79	39.20	56.00	-16.80	12.22

Frequency (MHz) = Emission frequency in MHz

Quais-Peak/Average (dBμV)=Receiver Reading(dBμV)+ Factor(dB)

Limit(dBμV)=Limit stated in standard


Factor (dB)= cable loss+ Insertion loss of LISN+ Insertion loss of transient limiter (The transient limiter included 10dB attenuation)

Calculation Formula:

Margin (dB)=Quasi Peak / Average (dBμV) – limit (dBμV)

Test Mode: Normal Working

Peak Detector Quasi Peak Limit
Average Detector Average Limit

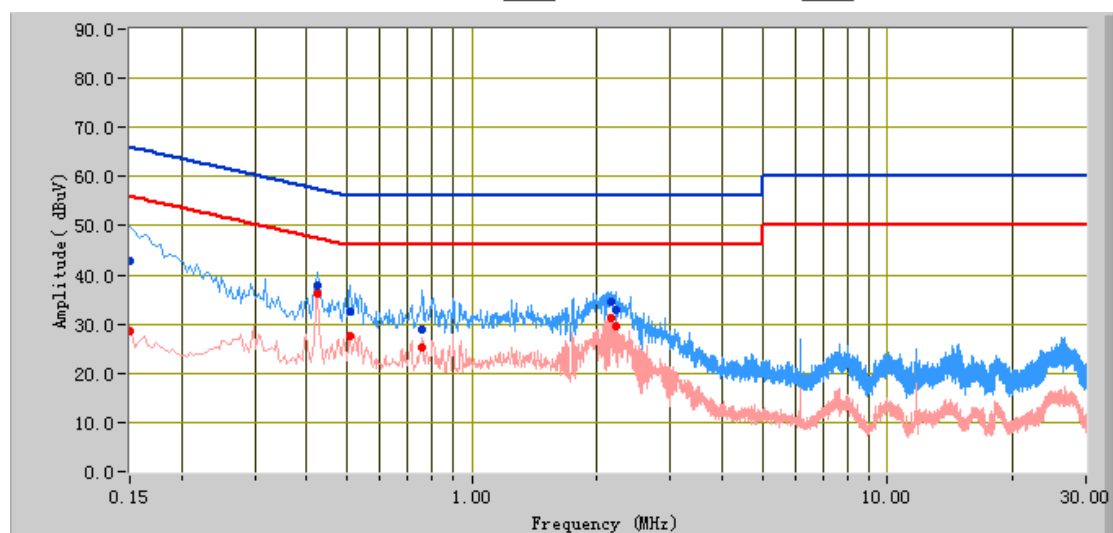


Test Data

Phase Line Plot at AC 120V 60Hz

Frequency (MHz)	Quasi Peak (dBμV)	Limit (dBμV)	Margin (dB)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Factors (dB)
0.15	42.90	66.00	-23.10	28.66	56.00	-27.34	12.22
0.43	37.72	57.33	-19.61	36.35	47.33	-10.98	11.20
0.51	32.54	56.00	-23.46	27.50	46.00	-18.50	11.08
0.76	28.80	56.00	-27.20	25.17	46.00	-20.83	10.88
2.15	34.40	56.00	-21.60	31.23	46.00	-14.77	10.88
2.21	32.92	56.00	-23.08	29.61	46.00	-16.39	10.88

Test Mode: Normal Working

Peak Detector  Quasi Peak Limit 
Average Detector  Average Limit 

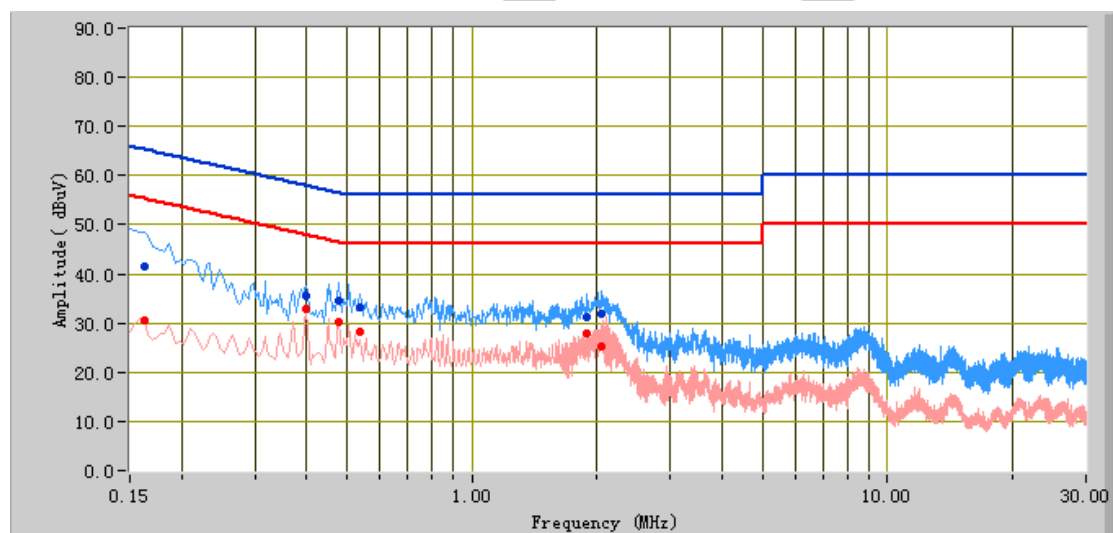


Test Data

Phase Neutral Plot at AC 120V 60Hz

Frequency (MHz)	Quasi Peak (dBμV)	Limit (dBμV)	Margin (dB)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Factors (dB)
0.16	41.35	65.36	-24.01	30.49	55.36	-24.88	12.04
0.48	34.69	56.37	-21.68	30.38	46.37	-15.99	11.09
2.05	31.91	56.00	-24.09	25.24	46.00	-20.76	10.92
1.89	31.33	56.00	-24.67	27.75	46.00	-18.25	10.89
0.54	33.23	56.00	-22.77	28.27	46.00	-17.73	11.03
0.40	35.57	57.90	-22.33	32.93	47.90	-14.97	11.22

Test Mode: Normal Working

Peak Detector  Quasi Peak Limit 
Average Detector  Average Limit 

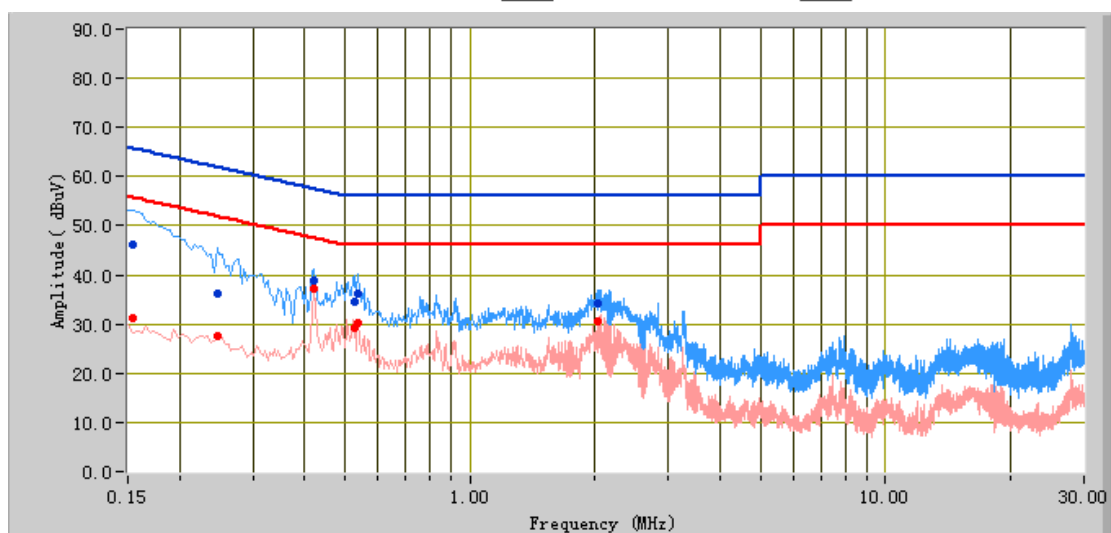


Test Data

Phase Line Plot at AC 240V 50Hz

Frequency (MHz)	Quasi Peak (dBμV)	Limit (dBμV)	Margin (dB)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Factors (dB)
0.15	46.16	65.78	-19.63	31.34	55.78	-24.44	12.16
0.54	36.08	56.00	-19.92	30.09	46.00	-15.91	11.06
0.42	38.72	57.41	-18.69	37.33	47.41	-10.08	11.20
0.53	34.62	56.00	-21.38	29.29	46.00	-16.71	11.07
0.25	36.10	61.89	-25.79	27.55	51.89	-24.34	11.46
2.03	34.30	56.00	-21.70	30.59	46.00	-15.41	10.88

Test Mode: Normal Working

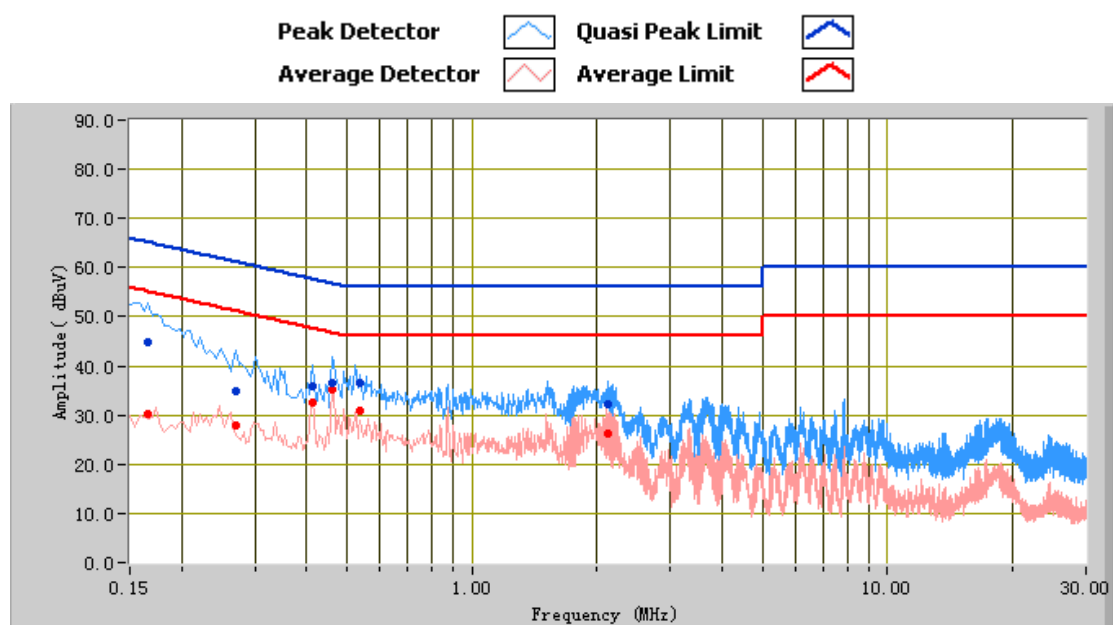

Test Data

Phase Neutral Plot at AC 240V 50Hz

Frequency (MHz)	Quasi Peak (dBμV)	Limit (dBμV)	Margin (dB)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Factors (dB)
0.17	44.70	65.16	-20.46	30.08	55.16	-25.08	11.99
0.46	36.51	56.66	-20.15	35.05	46.66	-11.61	11.12
0.41	35.84	57.57	-21.73	32.55	47.57	-15.02	11.19
0.54	36.43	56.00	-19.57	30.73	46.00	-15.27	11.03
0.27	34.75	61.12	-26.37	27.77	51.12	-23.35	11.43
2.13	32.33	56.00	-23.67	26.16	46.00	-19.84	10.92

6.2 Radiated Emissions

Temperature	25°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	March 11,2016
Tested By :	Deon Dai

Requirement(s):

Spec	Item	Requirement	Applicable	
47CFR§15.10 7(d)	a)	Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges	☒	
		Frequency range (MHz)		Field Strength (µV/m)
		30 – 88		100
		88 – 216		150
		216 960		200
		Above 960		500

Test Setup	
------------	--

Procedure	- The EUT was switched on and allowed to warm up to its normal operating condition. - The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: - Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen. - The EUT was then rotated to the direction that gave the maximum emission. - Finally, the antenna height was adjusted to the height that gave the maximum emission. - For emission frequencies measured below and above 1GHz, set the spectrum analyzer on a 100kHz and 1MHz resolution bandwidth respectively for each frequency measured. - Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.
-----------	---

Remark	
--------	--

Result	☒ Pass ☐ Fail
--------	--

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Data sample

Frequency (MHz)	Quasi Peak (dB μ V/m)	Azimuth	Polarity (H/V)	Height (cm)	Factors (dB)	Limit (dB μ V/m)	Margin (dB)
xxx	32.23	181.00	H	350.00	-38.23	40.00	-7.77

Frequency (MHz) = Emission frequency in MHz

Quais-Peak (dB μ V/m)= Receiver Reading(dB μ V/m)+ Factor(dB)

Azimuth=Position of turn table

Polarity=Polarity of Receiver antenna

Height(cm)= Height of Receiver antenna

Factor (dB)=Antenna factor + cable loss- antenna gain

Limit (dB μ V/m)=Limit stated in standard


Calculation Formula:

Margin (dB)=Quasi Peak (dB μ V/m) – limit (dB μ V/m)

Test Mode: Normal Working

(Below 1GHz)

Peak Detector 
Quasi Peak Limit 

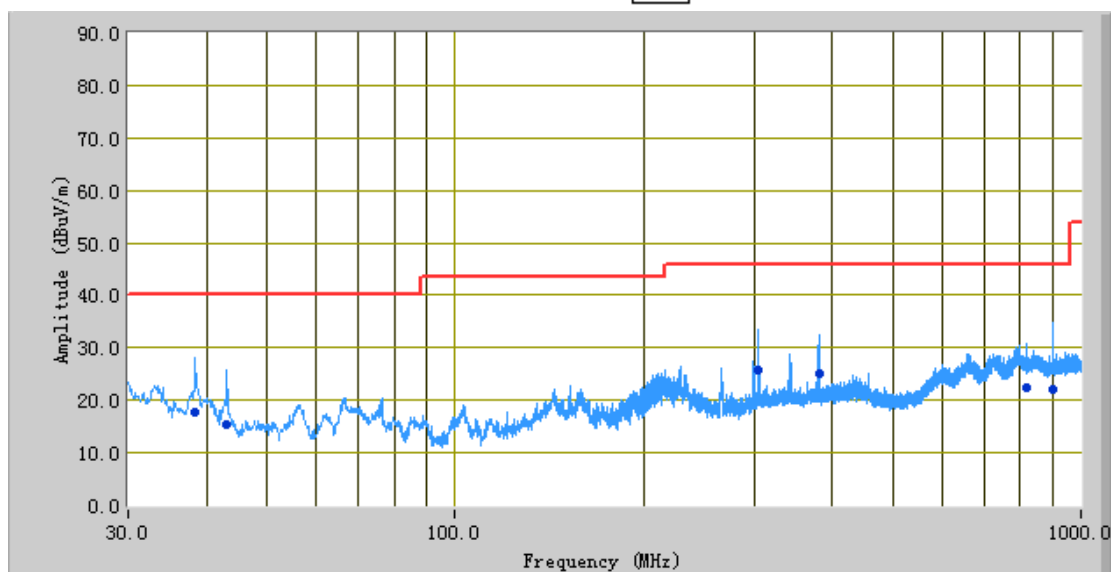

Test Data


Vertical Polarity Plot @3m

Frequency (MHz)	Peak (dBuV/m)	Azimuth	Polarity(H/V)	Height (cm)	Factors (dB)	Limit (dBuV/m)	Margin (dB)
899.63	22.05	194.00	V	331.00	-18.76	46.00	-23.95
38.25	17.65	173.00	V	125.00	-28.44	40.00	-22.35
304.44	25.85	335.00	V	203.00	-29.50	46.00	-20.15
381.96	25.11	3.00	V	146.00	-28.31	46.00	-20.89
43.05	15.54	116.00	V	110.00	-30.89	40.00	-24.46
818.27	22.47	94.00	V	120.00	-17.54	46.00	-23.53

Test Mode: Normal Working

(Below 1GHz)

Peak Detector 
Quasi Peak Limit 

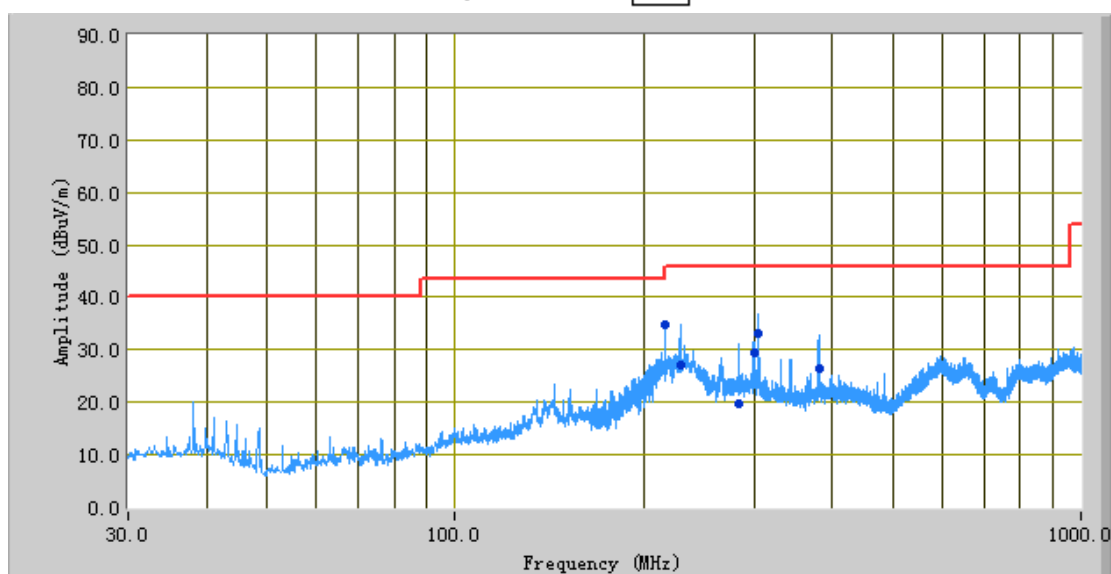

Test Data

Horizontal Polarity Plot @3m

Frequency (MHz)	Peak (dBuV/m)	Azimuth	Polarity(H/V)	Height (cm)	Factors (dB)	Limit (dBuV/m)	Margin (dB)
216.01	34.86	334.00	H	138.00	-30.32	43.50	-8.64
305.55	33.15	46.00	H	129.00	-29.26	46.00	-12.85
229.15	27.01	43.00	H	126.00	-29.33	46.00	-18.99
381.94	26.35	70.00	H	144.00	-28.51	46.00	-19.65
299.84	29.46	194.00	H	101.00	-29.13	46.00	-16.54
283.32	19.81	360.00	H	112.00	-28.96	46.00	-26.19

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
R&S EMI Test Receiver	ESPI3	101216	11/04/2015	11/03/2016	☒
R&S LISN(9k-30MHz)	ESH3-Z5	838979/005	11/04/2015	11/03/2016	☒
SIEMIC Labview Conducted Emissions software	V1.0	N/A	N/A	N/A	☒
Radiated Emissions					
Spectrum Analyzer	N9010A	MY47191130	10/09/2015	10/08/2016	N/A
R&S EMI Receiver	ESPI3	101216	10/09/2015	10/08/2016	☒
Antenna (30MHz~6GHz)	JB6	A121411	04/15/2015	04/14/2016	☒
EMCO Horn Antenna (1 ~18GHz)	3115	N/A	11/15/2015	11/14/2016	N/A
INFOMW Antenna (1 ~18GHz)	JXTXLB-10180	J2031081120092	10/09/2015	10/08/2016	N/A
Horn Antenna (18~40GHz)	AH-840	101013	04/22/2015	04/21/2016	N/A
Microwave Pre-Amp (18~40GHz)	PA-840	181250	05/29/2015	05/28/2016	N/A
Hp Agilent Pre-Amplifier	8447F	1937A01160	10/27/2015	10/26/2016	☒
MITEQ Pre-Amplifier (0.1 ~ 18GHz)	LPA-6-30	1451709	06/25/2015	06/24/2016	N/A
SIEMIC Labview Radiated Emissions software	V1.0	N/A	N/A	N/A	☒

Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph EUT External Photo



Front View of EUT



Rear View of EUT

Test Report No.	16020220-FCC-E
Page	20 of 29



Top View of EUT



Bottom View of EUT



Left View of EUT




Right View of EUT

Annex B.ii. Photograph EUT Internal Photo



Uncover- Front View

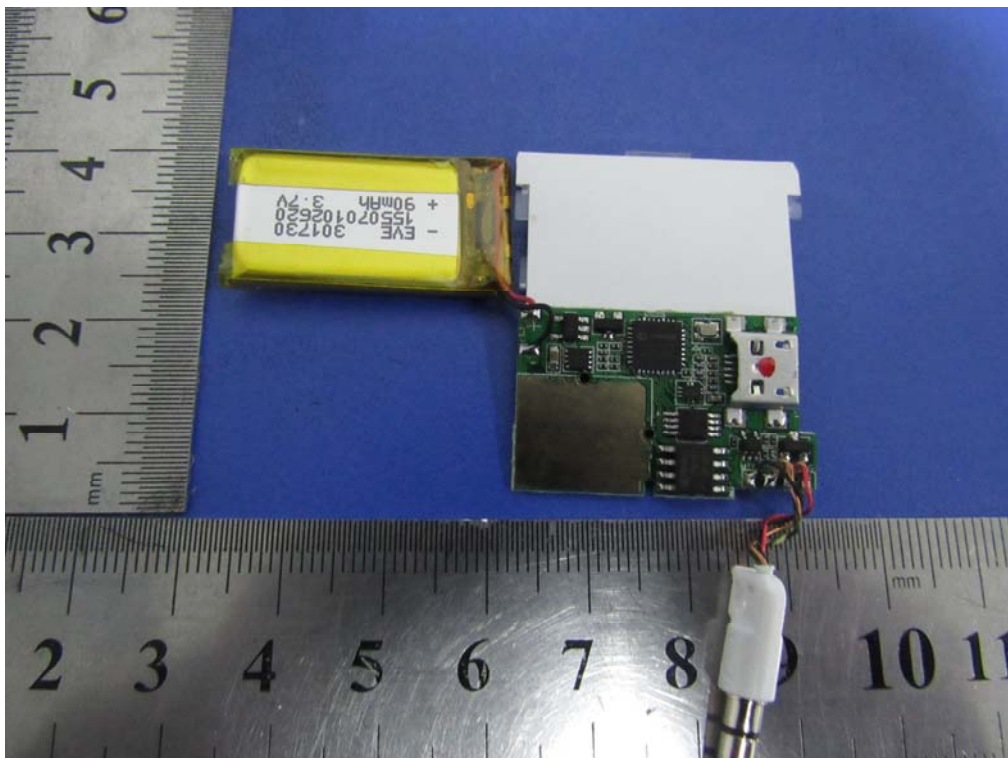


EUT PCB – Front View


Annex B.iii. Photograph: Test Setup Photo



Conducted Emissions Setup Front View

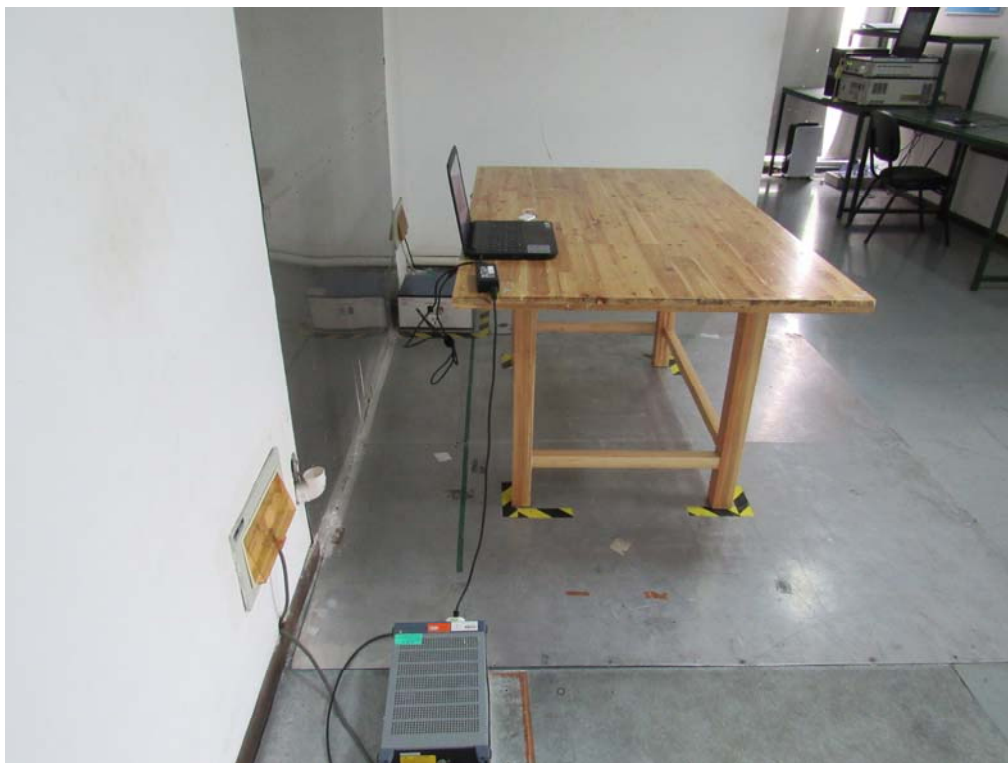


Conducted Emissions Setup Side View

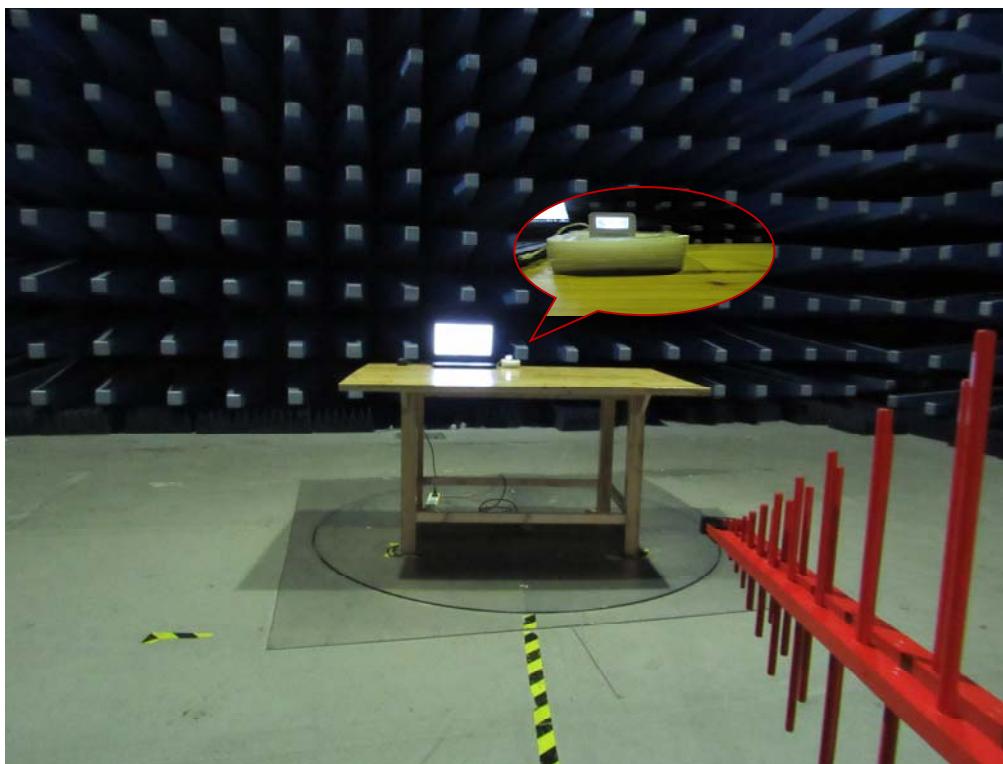


Radiated Emissions Setup Below 1GHz Front View

Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Block Configuration Diagram for Conducted Emissions

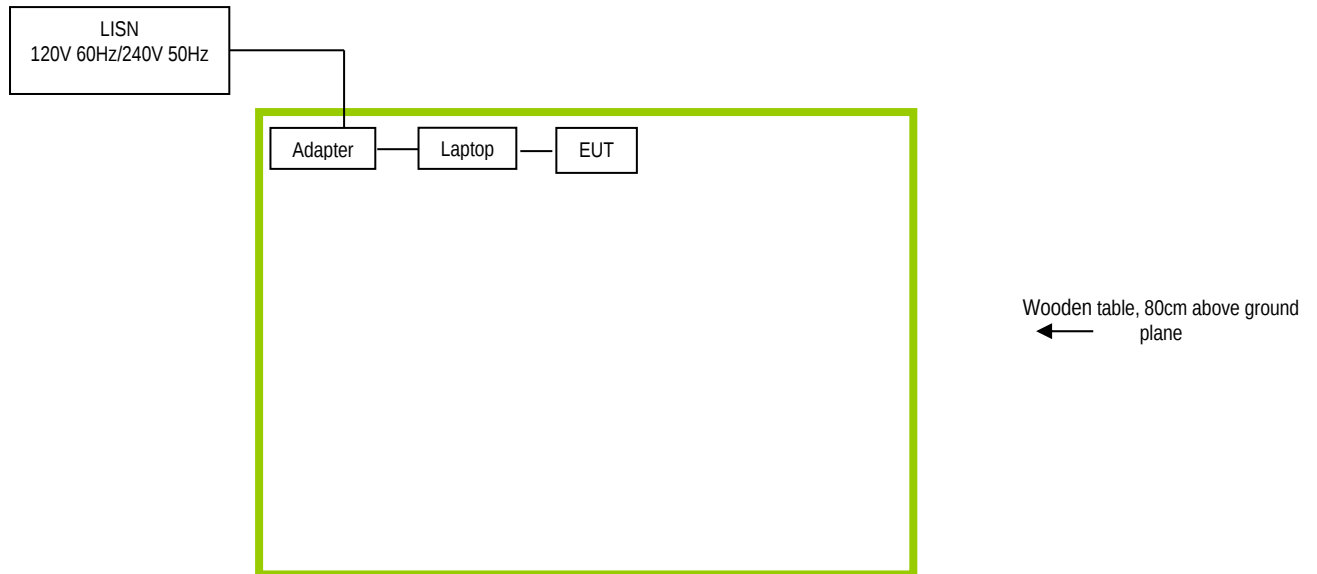

Block Configuration Diagram for Radiated Emissions

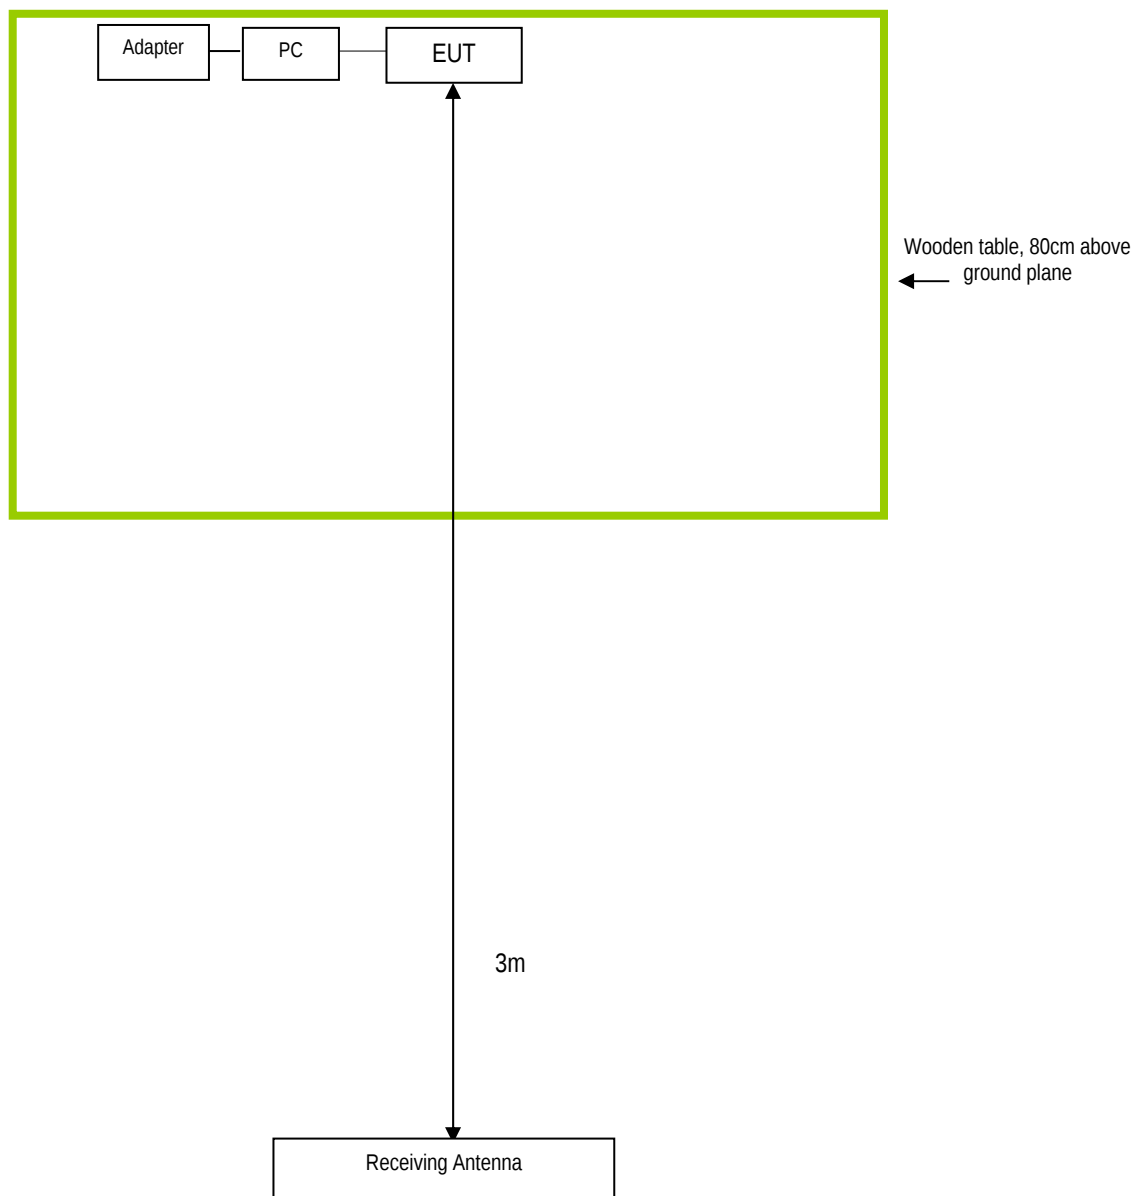

Test Report No.	16020220-FCC-E
Page	27 of 29

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Manufacturer	Equipment Description	Model	Calibration Date
Dell	Laptop	DSCM	N/A
N/A	USB Cable/ Unshielding/1M	N/A	N/A

Test Report No.	16020220-FCC-E
Page	28 of 29

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see Attachment

Test Report No.	16020220-FCC-E
Page	29 of 29

Annex E. DECLARATION OF SIMILARITY

N/A