



A Test Lab Techno Corp.

Changan Lab : No. 140 -1, Changan Street, Bade City, Taoyuan County, Taiwan R.O.C.

Tel : 886-3-271-0188 / Fax : 886-3-271-0190



SAR EVALUATION REPORT

Test Report No.	: 1601FS18
Applicant	: UNIDEN AMERICA CORPORATION
Product Type	: Walkie Talkie
Trade Name	: UNIDEN
Model Number	: GMR4055, GMR4060
Date of Received	: Nov. 14, 2015
Test Period	: Jan. 18 ~ Jan. 19, 2016
Date of Issued	: Feb. 03, 2016
Test Environment	: Ambient Temperature : 22 ± 2 ° C Relative Humidity : 40 - 70 %
Standard	: ANSI/IEEE C95.1-1999 IEEE Std. 1528-2013 47 CFR Part §2.1093 KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04 KDB 865664 D02 RF Exposure Reporting v01r02 KDB 447498 D01 General RF Exposure Guidance v06
Test Lab Location	: Chang-an Lab



1. The test operations have to be performed with cautious behavior, the test results are as attached.
2. The test results are under chamber environment of A Test Lab Techno Corp. A Test Lab Techno Corp. does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples.
3. The measurement report has to be written approval of A Test Lab Techno Corp. It may only be reproduced or published in full. This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. The test results in the report only apply to the tested sample.

Approved By : Bill Hu
(Bill Hu)

Tested By : Sky Chou
(Sky Chou)



Contents

1. Summary of Highest Reported SAR Value	3
2. Description of Equipment under Test (EUT)	4
3. Applicable Standards	5
4. Measurement System	6
4.1 SAR Definition	6
4.2 SAR Measurement Setup.....	7
4.3 DASY E-Field Probe System.....	8
4.4 Data Acquisition Electronic (DAE) System.....	10
4.5 Robot.....	10
4.6 Measurement Server.....	10
4.7 Device Holder.....	11
4.8 Oval Flat Phantom.....	11
4.9 Data Storage and Evaluation.....	12
4.10 Test Instruments	14
5. Tissue Simulating Liquids.....	15
5.1 Ingredients.....	16
5.2 Recipes.....	16
5.3 Liquid Parameters	17
5.4 Liquid Depth	17
6. System Verification.....	18
6.1 Symmetric Dipoles for System Verification	18
6.2 Verification Summary	19
6.3 Validation Summary	19
6.4 Measurement Uncertainty	20
7. Measurement Procedure.....	24
7.1 Spatial Peak SAR Evaluation	24
7.2 Area & Zoom Scan Procedures	25
7.3 Volume Scan Procedures.....	25
7.4 SAR Averaged Methods	25
7.5 Power Drift Monitoring.....	25
8. Conducted Power.....	26
9. Evaluation of SAR Test	27
9.1 Evaluation of SAR Test Reduction	27
9.2 Antenna Location	27
9.3 Stand-alone SAR Evaluate.....	28
9.4 SAR v.s. Time sweeps at 100 mW	28
10. The SAR scaling detail with KDB Inquiry	39
11. Test Results	40
11.1 Applicable Limit Regulations	40
11.2 Brain SAR Results.....	41
11.3 Muscle SAR Results.....	43
11.4 SAR Variability Results.....	45
Appendix A - System Performance Check	46
Appendix B - SAR Measurement Data	48
Appendix C - Calibration.....	62



1. Summary of Highest Reported SAR Value

GMR4055:

Standalone SAR				
Equipment Class	Head SAR _{1g} (W/kg)	Body-Worn Accessories SAR _{1g} (W/kg)	Product Specific SAR _{1g} (W/kg)	Extremity SAR _{10g} (W/kg)
FRF	0.732	1.396	N/A ^(Note 1)	N/A ^(Note 1)

GMR4060:

Standalone SAR				
Equipment Class	Head SAR _{1g} (W/kg)	Body-Worn Accessories SAR _{1g} (W/kg)	Product Specific SAR _{1g} (W/kg)	Extremity SAR _{10g} (W/kg)
FRF	0.775	1.378	N/A ^(Note 1)	N/A ^(Note 1)

NOTE: 1. The N/A is EUT not apply to the assessment of the exposure conditions.

- The test procedures, as described in American National Standards, Institute ANSI/IEEE C95.1 were employed and they specify the maximum exposure limit of Head & Body is SAR_{1g} 1.6 W/kg of tissue for portable devices being used within 20cm between user and EUT in the uncontrolled environment. A description of the product and operating configuration, detailed summary of the test results, methodology and procedures used in the equipment used are included within this test report.
- For body worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and which provides a minimum separation distance of 10 mm between this device and the body of the user. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.
- The EUT battery have be fully charged and checked periodically during the test to ascertain uniform power output.



2. Description of Equipment under Test (EUT)

Applicant	UNIDEN AMERICA CORPORATION 3001 Gateway Drive, Suite 130 Irving Texas USA		
Manufacture	Anyue Electronic (shenzhen) Co., Ltd. Tangxiayong No. 3 Industrial Park, 39 Area, Bao'an, Shenzhen, Guangdong, China		
Product Type	Walkie Talkie		
Trade Name	UNIDEN		
Model Number	GMR4055, GMR4060		
Model Different Description	The two model numbers differ is appearance, color and battery type. All the other characteristic e.g. circuit, PCB layout, RF power are exactly same.		
FCC ID	AMWON4055		
RF Function information	Operate Band	Operate Frequency (MHz)	RF Conducted Power (Avg.)
	FRS	462.5625 - 462.7125 467.5625 - 467.7125	20dBm
	GMRS	462.5625 - 462.7125 462.5500 - 462.7250	20dBm
Device Category	Portable Device		
RF Exposure Environment	General population / Uncontrolled environment		
Antenna Type	FIXED Antenna		
Antenna Max. Gain	-2 dBi		
Battery Option	Standard		
	For GMR4055: 1.2V, 650mAh (Ni-MH AA battery*3pcs) 1.5V (ALKALINE AA battery*3pcs) For GMR4060: Uniden, 673448AL 3.7V, 1000mAh (Li-ion battery)		
Application Type	Certification		

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for General population / Uncontrolled environment limits specified in Standard C95.1-1999 and had been tested in accordance with the measurement procedures specified in IEEE Std. 1528-2013.



3. *Applicable Standards*

- ANSI/IEEE C95.1-1992 - American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 300 KHz to 100 GHz, New York.
- IEEE 1528-2013 - IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head From Wireless Communications Devices: Measurement Techniques
- FCC 47 CFR Part 2.1093 - Radiofrequency radiation exposure evaluation: portable devices.
- FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04 - describes SAR measurement procedures for devices operating between 100 MHz to 6 GHz.
- FCC KDB 865664 D02 RF Exposure Reporting v01r02 - provides general reporting requirements as well as certain specific information required to support MPE and SAR compliance.
- FCC KDB 447498 D01 General RF Exposure Guidance v06 - provides guidance pertaining to RF exposure requirements for mobile and portable device equipment authorizations.

4. Measurement System

4.1 SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy (dw) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Figure 2).

$$\text{SAR} = \frac{d}{dt} \left(\frac{dw}{dm} \right) = \frac{d}{dt} \left(\frac{dw}{\rho dv} \right)$$

Figure 2. SAR Mathematical Equation

SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma E^2}{\rho}$$

Where :

σ = conductivity of the tissue (S/m)


ρ = mass density of the tissue (kg/m^3)

E = RMS electric field strength (V/m)

* Note :

The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane [2]

4.2 SAR Measurement Setup

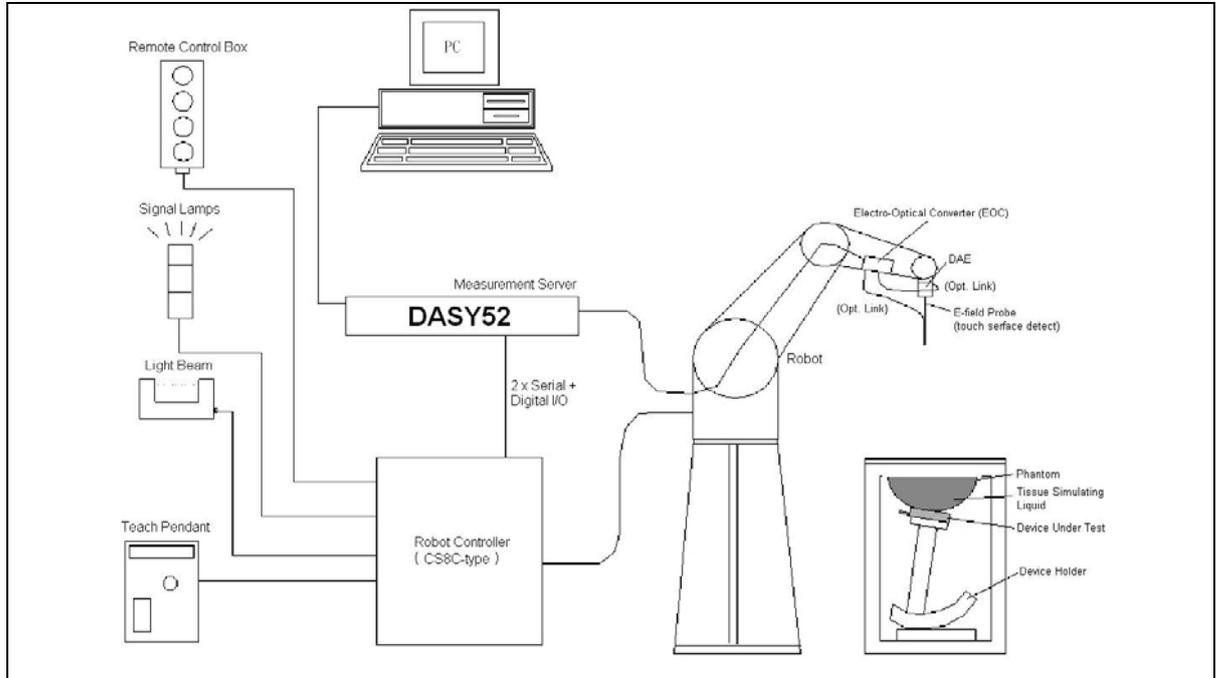

The DASY52 system for performing compliance tests consists of the following items:

1. A standard high precision 6-axis robot (Stäubli TX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
3. A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
5. A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
6. A computer operating Windows 2000 or Windows XP.
7. DASY52 software.
8. Remote controls with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
9. The SAM twin phantom enabling testing left-hand and right-hand usage.
10. The device holder for handheld mobile phones.
11. Tissue simulating liquid mixed according to the given recipes.
12. Validation dipole kits allowing validating the proper functioning of the system.

4.3 DASYS E-Field Probe System

The SAR measurements were conducted with the dosimetric probe (manufactured by SPEAG), designed in the classical triangular configuration [3] and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multi-fiber line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASYS software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting. The approach is stopped when reaching the maximum.

■ E-Field Probe Specification

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available
Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in brain tissue (rotation around probe axis) ± 0.5 dB in brain tissue (rotation normal probe axis)
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm

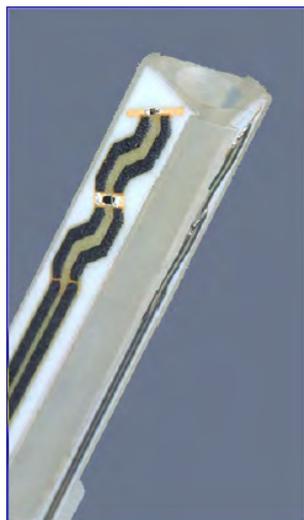


Figure 3. E-field Probe



Figure 4. Probe setup on robot



■ E-Field Probe Calibration process

Dosimetric Assessment Procedure

Each E-Probe/Probe Amplifier combination has unique calibration parameters. A TEM cell calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm²) using an RF Signal generator, TEM cell, and RF Power Meter.

Free Space Assessment

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1 mW/cm².

Temperature Assessment

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated head tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \frac{\Delta T}{\Delta t}$$

Where :

Δt = Exposure time (30 seconds),

C = Heat capacity of tissue (head or body),

ΔT = Temperature increase due to RF exposure.

$$\text{Or } SAR = \frac{|E|^2 \sigma}{\rho}$$

Where :

σ = Simulated tissue conductivity,

ρ = Tissue density (kg/m³).



4.4 Data Acquisition Electronic (DAE) System

Model : DAE3, DAE4
Construction : Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY4/5 embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.
Measurement Range : -100 to +300 mV (16 bit resolution and two range settings: 4mV, 400mV)
Input Offset Voltage : < 5 μ V (with auto zero)
Input Bias Current : < 50 fA
Dimensions : 60 x 60 x 68 mm

4.5 Robot


Positioner : Stäubli Unimation Corp. Robot Model: TX90XL
Repeatability : ± 0.02 mm
No. of Axis : 6

4.6 Measurement Server

Processor : PC/104 with a 400MHz intel ULV Celeron
I/O-board : Link to DAE4 (or DAE3)
16-bit A/D converter for surface detection system
Digital I/O interface
Serial link to robot
Direct emergency stop output for robot

4.7 Device Holder

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon=3$ and loss tangent $\delta=0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

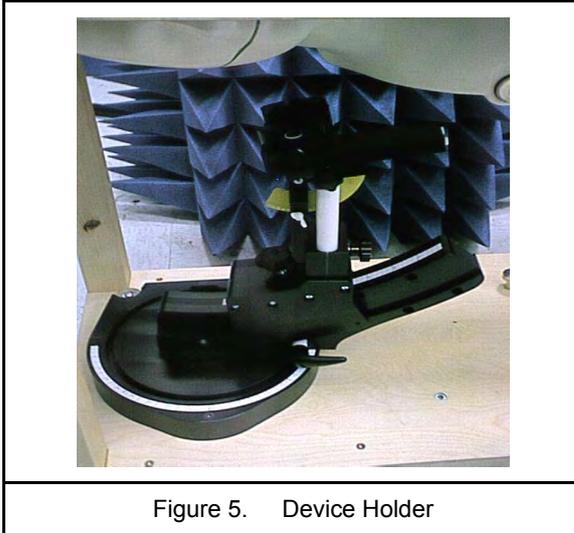

4.8 Oval Flat Phantom

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (Oval Flat) phantom defined in IEEE 1528-2013., CENELEC 50361 and IEC 62209-2. It enables the dosimetric evaluation of wireless portable device usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.

Specification of ELI 5.0	
Shell Thickness	2 ±0.2 mm
Filling Volume	Approx. 30 liters
Dimensions	190×600×400 mm (H×L×W)
Table 1. Specification of ELI 5.0	

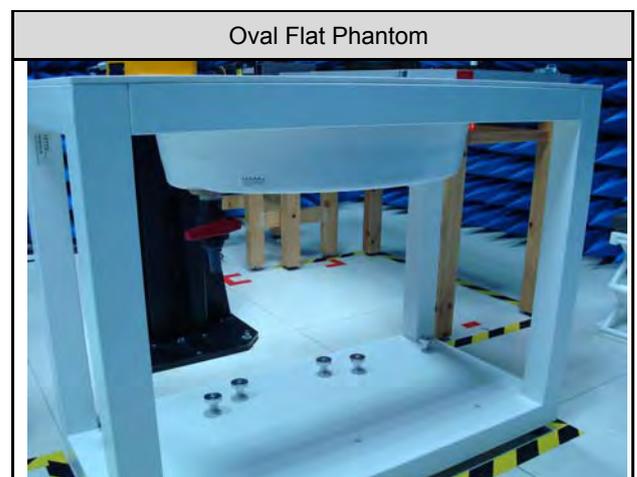


Figure 6. Oval Flat Phantom



4.9 Data Storage and Evaluation

■ Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension DA4 or DA52. The post processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

■ Data Evaluation

The DASY post processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software :

- Probe parameters : - Sensitivity $Norm_i, ai0, ai1, ai2$
- Conversion factor $ConvFi$
- Diode compression point dcp_i
- Device parameters : - Frequency f
- Crest factor cf
- Media parameters : - Conductivity σ
- Density ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as :

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

- With V_i = compensated signal of channel i (i = x, y, z)
 U_i = input signal of channel i (i = x, y, z)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated :

$$E\text{-field probes : } E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

$$H\text{-field probes : } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

with V_i = compensated signal of channel i (i = x, y, z)
 $Norm_i$ = sensor sensitivity of channel i (i = x, y, z)
 $\mu V/(V/m)^2$ for E-field Probes
 $ConvF$ = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude) :

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in mW/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm³

* Note : That the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = \frac{E_{tot}^2}{3770} \quad \text{or} \quad P_{pwe} = \frac{H_{tot}^2}{37.7}$$

with P_{pwe} = equivalent power density of a plane wave in mW/cm²
 E_{tot} = total electric field strength in V/m
 H_{tot} = total magnetic field strength in A/m



4.10 Test Instruments

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	450MHz System Validation Kit	D450V2	1021	Apr. 24, 2015	Apr. 24, 2016
SPEAG	Dosimetric E-Field Probe	EX3DV4	3977	Apr. 30, 2015	Apr. 30, 2016
SPEAG	Data Acquisition Electronics	DAE4	541	Feb. 03, 2015	Feb. 03, 2016
SPEAG	Device Holder	N/A	N/A	NCR	
SPEAG	Measurement Server	SE UMS 001 BA	1021	NCR	
SPEAG	Phantom	ELI V5.0	TP-1133	NCR	
SPEAG	Robot	Staubli RX90L	F00/589B1/A/01	NCR	
SPEAG	Software	DASY4 V4.7 Build 80	N/A	NCR	
SPEAG	Software	SEMCAD V1.8 Build 186	N/A	NCR	
Agilent	Dielectric Probe Kit	85070C	US99360094	NCR	
Agilent	ENA Series Network Analyzer	E5071B	MY42404655	Apr. 10, 2014	Apr. 10, 2016
R&S	Power Sensor	NRP-Z22	100179	Jun. 01, 2015	Jun. 01, 2016
Agilent	MXG Vector Signal Generator	N5182B	MY53050382	May 28, 2015	May 28, 2016
Agilent	Power Sensor	8481H	3318A20779	Jun. 15, 2015	Jun. 15, 2016
Agilent	Power Meter	EDM Series E4418B	GB40206143	Jun. 15, 2015	Jun. 15, 2016
Anritsu	Power Meter	ML2495A	1135009	Aug. 24, 2015	Aug. 24, 2016
Agilent	Dual Directional Coupler	778D	50334	NCR	
Mini-Circuits	Power Amplifier	ZHL-42W-SMA	D111103#5	NCR	
Mini-Circuits	Power Amplifier	ZVE-8G-SMA	D042005 671800514	NCR	
Aisi	Attenuator	IEAT 3dB	N/A	NCR	



5. Tissue Simulating Liquids

The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the tissue.

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an 85070C Dielectric Probe Kit and an E5071B Network Analyzer.

IEEE SCC-34/SC-2 in 1528 recommended Tissue Dielectric Parameters

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in 1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in human head. Other head and body tissue parameters that have not been specified in 1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equation and extrapolated according to the head parameter specified in 1528.

Target Frequency	Head		Body	
(MHz)	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 - 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00
(ϵ_r = relative permittivity, σ = conductivity and $\rho = 1000$ kg/m ³)				

Table 2. Tissue dielectric parameters for head and body phantoms



5.1 Ingredients

The following ingredients are used:

- Water: deionized water (pure H₂O), resistivity $\geq 16 \text{ M } \Omega$ -as basis for the liquid
- Sugar: refined white sugar (typically 99.7 % sucrose, available as crystal sugar in food shops)
-to reduce relative permittivity
- Salt: pure NaCl -to increase conductivity
- Cellulose: Hydroxyethyl-cellulose, medium viscosity (75-125 mPa.s, 2% in water, 20 °C), CAS # 54290 -to increase viscosity and to keep sugar in solution.
- Preservative: Preventol D-7 Bayer AG, D-51368 Leverkusen, CAS # 55965-84-9 -to prevent the spread of bacteria and molds
- DGBE: Diethylenglycol-monobutyl ether (DGBE), Fluka Chemie GmbH, CAS # 112-34-5 -to reduce relative permittivity

5.2 Recipes

The following tables give the recipes for tissue simulating liquids to be used in different frequency bands.

Note: The goal dielectric parameters (at 22 °C) must be achieved within a tolerance of $\pm 5\%$ for ϵ and $\pm 5\%$ for σ .

Liquid type	HSL 450 - A	
Ingredient	Weight (g)	Weight (%)
Water	522.94	38.91
Sugar	765.09	56.93
Cellulose	3.39	0.25
Salt	50.94	3.79
Preventol	1.63	0.12
Total amount	1'344.00	100.00
Goal dielectric parameters		
Frequency [MHz]	450	
Relative Permittivity	43.5	
Conductivity [S/m]	0.87	

Liquid type	MSL 450 - B	
Ingredient	Weight (g)	Weight (%)
Water	590.62	46.21
Sugar	654.00	51.17
Cellulose	2.36	0.18
Salt	29.96	2.34
Preventol	1.06	0.08
Total amount	1'278.00	100.00
Goal dielectric parameters		
Frequency [MHz]	450	
Relative Permittivity	56.7	
Conductivity [S/m]	0.94	

5.3 Liquid Parameters

Liquid Verify								
Ambient Temperature : 22 ± 2 °C ; Relative Humidity : 40 -70%								
Liquid Type	Frequency	Temp (°C)	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)	Measured Date
450MHz (Head)	450MHz	22.0	ϵ_r	43.50	43.70	0.46%	± 5%	Jan. 18, 2016
			σ	0.870	0.870	0.00%	± 5%	
	463MHz	22.0	ϵ_r	43.43	43.49	0.23%	± 5%	
			σ	0.871	0.882	1.15%	± 5%	
	468MHz	22.0	ϵ_r	43.40	43.38	0.00%	± 5%	
			σ	0.871	0.887	2.30%	± 5%	
450MHz (Body)	450MHz	22.0	ϵ_r	56.70	58.41	3.00%	± 5%	Jan. 18, 2016
			σ	0.940	0.938	0.00%	± 5%	
	463MHz	22.0	ϵ_r	56.65	58.33	3.00%	± 5%	
			σ	0.941	0.949	1.06%	± 5%	
	468MHz	22.0	ϵ_r	56.63	58.30	3.00%	± 5%	
			σ	0.941	0.954	1.06%	± 5%	

5.4 Liquid Depth

According to KDB 865664 ,the depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm with $\leq \pm 0.5$ cm variation for SAR measurements ≤ 3 GHz and ≥ 10.0 cm with $\leq \pm 0.5$ cm variation for measurements > 3 GHz.

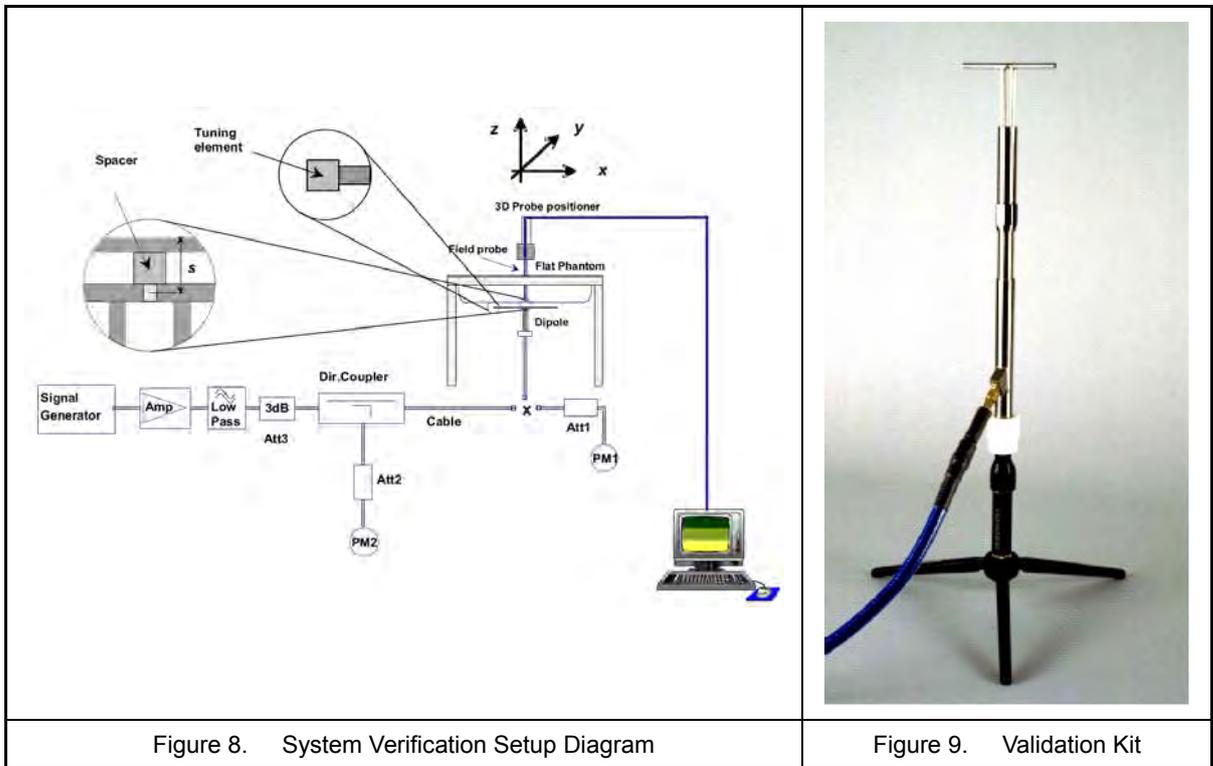


Figure 7. Body-Position

6. System Verification

6.1 Symmetric Dipoles for System Verification

Construction	Symmetrical dipole with 1/4 balun enables measurement of feed point impedance with NWA matched for use near flat phantoms filled with head simulating solutions Includes distance holder and tripod adaptor Calibration Calibrated SAR value for specified position and input power at the flat phantom in head simulating solutions.
Frequency	450 MHz
Return Loss	> 20 dB at specified verification position
Power Capability	> 100 W (f < 1GHz); > 40 W (f > 1GHz)
Options	Dipoles for other frequencies or solutions and other calibration conditions are available upon request
Dimensions	D450V2 : dipole length 270 mm; overall height 330 mm





6.2 Verification Summary

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of $\pm 7\%$. The verification was performed at 450MHz.

Mixture Type	Frequency (MHz)	Power	SAR _{1g} (W/Kg)	SAR _{10g} (W/Kg)	Drift (dB)	Difference percentage		Probe Model / Serial No.	Dipole Model / Serial No.	1W Target		Date
						1g	10g			SAR _{1g} (W/Kg)	SAR _{10g} (W/Kg)	
Head	450	250 mW	1.16	0.787	0.02	-3.3%	-1.3%	EX3DV4 SN: 3977	D450V2 SN:1021	4.8	3.19	Jan. 18, 2016
		Normalize to 1 Watt	4.64	3.15								
Body	450	250 mW	1.16	0.787	0.01	-1.1%	2.2%	EX3DV4 SN: 3977	D450V2 SN:1021	4.69	3.08	Jan. 18, 2016
		Normalize to 1 Watt	4.64	3.15								

6.3 Validation Summary

Per FCC KDB 865664 D02v01r02, SAR system validation status should be documented to confirm measurement accuracy. The SAR systems (including SAR probes, system components and software versions) used for this device were validated against its performance specifications prior to the SAR measurements. Reference dipoles were used with the required tissue- equivalent media for system validation, according to the procedures outlined in IEEE 1528-2013 and FCC KDB 865664 D01v01r04. Since SAR probe calibrations are frequency dependent, each probe calibration point was validated at a frequency within the valid frequency range of the probe calibration point, using the system that normally operates with the probe for routine SAR measurements and according to the required tissue-equivalent media.

A tabulated summary of the system validation status including the validation date(s), measurement frequencies, SAR probes and tissue dielectric parameters as below.

Probe Type Model / Serial No.	Prob Cal. Point (MHz)	Head / Body	Cond.	Perm.	CW Validation			Mod. Validation			Date
			ϵ_r	σ	Sensitivity	Probe	Probe	Mod. Type	Duty Factor	PAR	
						Linearity	Isotropy				
EX3DV4 SN: 3977	450	Head	43.7	0.87	Pass	Pass	Pass	FM	Pass	N/A	Jan. 18, 2016
EX3DV4 SN: 3977	463	Head	43.49	0.882	Pass	Pass	Pass	FM	Pass	N/A	Jan. 18, 2016
EX3DV4 SN: 3977	468	Head	43.38	0.887	Pass	Pass	Pass	FM	Pass	N/A	Jan. 18, 2016
EX3DV4 SN: 3977	450	Body	58.41	0.938	Pass	Pass	Pass	FM	Pass	N/A	Jan. 18, 2016
EX3DV4 SN: 3977	463	Body	58.33	0.949	Pass	Pass	Pass	FM	Pass	N/A	Jan. 18, 2016
EX3DV4 SN: 3977	468	Body	58.3	0.954	Pass	Pass	Pass	FM	Pass	N/A	Jan. 18, 2016

6.4 Measurement Uncertainty

IEC62209-1/IEEE 1528:2013

Item	Uncertainty Component	Uncertainty Value	Prob. Dist	Div.	c_i (1g)	c_i (10g)	Std. Unc. (1-g)	Std. Unc. (10-g)	v_i or V_{eff}
Measurement System									
u1	Probe Calibration ($k=1$)	±6.7%	Normal	1	1	1	±6.7%	±6.7%	∞
u2	Axial Isotropy	±4.7%	Rectangular	$\sqrt{3}$	0.7	0.7	±1.9%	±1.9%	∞
u3	Hemispherical Isotropy	±9.6%	Rectangular	$\sqrt{3}$	0.7	0.7	±3.9%	±3.9%	
u4	Boundary Effect	±1.0%	Rectangular	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
u5	Linearity	±4.7%	Rectangular	$\sqrt{3}$	1	1	±2.7%	±2.7%	∞
u6	System Detection Limit	±1.0%	Rectangular	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
u7	Readout Electronics	±0.3%	Normal	1	1	1	±0.3%	±0.3%	∞
u8	Response Time	±0.8%	Rectangular	$\sqrt{3}$	1	1	±0.5%	±0.5%	∞
u9	Integration Time	±1.9%	Rectangular	$\sqrt{3}$	1	1	±1.1%	±1.1%	∞
u10	RF Ambient Conditions	±3.0%	Rectangular	$\sqrt{3}$	1	1	±1.7%	±1.7%	∞
u11	RF Ambient Reflections	±3.0%	Rectangular	$\sqrt{3}$	1	1	±1.7%	±1.7%	∞
u12	Probe Positioner Mechanical Tolerance	±0.4%	Rectangular	$\sqrt{3}$	1	1	±0.2%	±0.2%	∞
u13	Probe Positioning with respect to Phantom Shell	±2.9%	Rectangular	$\sqrt{3}$	1	1	±1.7%	±1.7%	∞
u14	Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	±1.0%	Rectangular	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
Test sample Related									
u15	Test sample Positioning	±3.6%	Normal	1	1	1	±3.6%	±3.6%	∞
u16	Device Holder Uncertainty	±2.7%	Normal	1	1	1	±2.7%	±2.7%	∞
u17	Output Power Variation - SAR drift measurement	±5.0%	Rectangular	$\sqrt{3}$	1	1	±2.9%	±2.9%	∞
Phantom and Tissue Parameters									
u18	Phantom Uncertainty (shape and thickness tolerances)	±4.0%	Rectangular	$\sqrt{3}$	1	1	±2.3%	±2.3%	∞
u19	Liquid Conductivity - deviation from target values	±5.0%	Rectangular	$\sqrt{3}$	0.64	0.43	±1.8%	±1.2%	∞
u20	Liquid Conductivity - measurement uncertainty	±2.5%	Normal	1	0.64	0.43	±1.6%	±1.08%	∞
u21	Liquid Permittivity - deviation from target values	±5.0%	Rectangular	$\sqrt{3}$	0.6	0.49	±1.7%	±1.4%	∞
u22	Liquid Permittivity - measurement uncertainty	±2.5%	Normal	1	0.6	0.49	±1.5%	±1.23%	∞
Combined standard uncertainty			RSS				±10.58%	±10.15%	∞
Expanded uncertainty (95% CONFIDENCE LEVEL)			$k=2$				±21.15%	±20.31%	

Table 3. Uncertainty Budget for frequency range 300MHz to 3GHz

Item	Uncertainty Component	Uncertainty Value	Prob. Dist	Div.	c_i (1g)	c_i (10g)	Std. Unc. (1-g)	Std. Unc. (10-g)	V_i or V_{eff}
Measurement System									
u1	Probe Calibration ($k=1$)	±6.7%	Normal	1	1	1	±6.7%	±6.7%	∞
u2	Axial Isotropy	±4.7%	Rectangular	$\sqrt{3}$	0.7	0.7	±1.9%	±1.9%	∞
u3	Hemispherical Isotropy	±9.6%	Rectangular	$\sqrt{3}$	0.7	0.7	±3.9%	±3.9%	
u4	Boundary Effect	±2.0%	Rectangular	$\sqrt{3}$	1	1	±1.2%	±1.2%	∞
u5	Linearity	±4.7%	Rectangular	$\sqrt{3}$	1	1	±2.7%	±2.7%	∞
u6	System Detection Limit	±1.0%	Rectangular	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
u7	Readout Electronics	±0.3%	Normal	1	1	1	±0.3%	±0.3%	∞
u8	Response Time	±0.8%	Rectangular	$\sqrt{3}$	1	1	±0.5%	±0.5%	∞
u9	Integration Time	±1.9%	Rectangular	$\sqrt{3}$	1	1	±1.1%	±1.1%	∞
u10	RF Ambient Conditions	±3.0%	Rectangular	$\sqrt{3}$	1	1	±1.7%	±1.7%	∞
u11	RF Ambient Reflections	±3.0%	Rectangular	$\sqrt{3}$	1	1	±1.7%	±1.7%	∞
u12	Probe Positioner Mechanical Tolerance	±0.8%	Rectangular	$\sqrt{3}$	1	1	±0.5%	±0.5%	∞
u13	Probe Positioning with respect to Phantom Shell	±6.7%	Rectangular	$\sqrt{3}$	1	1	±3.9%	±3.9%	∞
u14	Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	±1.0%	Rectangular	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
Test sample Related									
u15	Test sample Positioning	±3.6%	Normal	1	1	1	±3.6%	±3.6%	∞
u16	Device Holder Uncertainty	±2.7%	Normal	1	1	1	±2.7%	±2.7%	∞
u17	Output Power Variation - SAR drift measurement	±5.0%	Rectangular	$\sqrt{3}$	1	1	±2.9%	±2.9%	∞
Phantom and Tissue Parameters									
u18	Phantom Uncertainty (shape and thickness tolerances)	±4.0%	Rectangular	$\sqrt{3}$	1	1	±2.3%	±2.3%	∞
u19	SAR correction	±1.9%	Rectangular	$\sqrt{3}$	1	0.84	±1.11%	±0.9%	∞
u20	Liquid Conductivity – deviation from target values	±5.0%	Rectangular	$\sqrt{3}$	0.64	0.43	±1.8%	±1.2%	∞
u21	Liquid Conductivity – measurement uncertainty	±2.5%	Normal	1	0.64	0.43	±1.6%	±1.08%	∞
u22	Liquid Permittivity - deviation from target values	±5.0%	Rectangular	$\sqrt{3}$	0.64	0.43	±1.8%	±1.2%	∞
u23	Liquid Permittivity - measurement uncertainty	±2.5%	Normal	1	0.64	0.43	±1.6%	±1.08%	∞
u24	Temp.Unc.- Conductivity	±3.4%	Rectangular	$\sqrt{3}$	0.78	0.71	±1.5%	±1.4%	∞
u25	Temp.Unc.- Permittivity	±0.4%	Normal	$\sqrt{3}$	0.23	0.26	±0.1%	±0.1%	∞
Combined standard uncertainty			RSS				±12.08%	±11.44%	∞
Expanded uncertainty (95% CONFIDENCE LEVEL)			$k=2$				±24.16%	±22.88%	

Table 4. Uncertainty Budget for frequency range 300MHz to 3GHz



Uncertainty of a System Performance Check with DASY System_ IEC62209-2

Item	Uncertainty Component	Uncertainty Value	Prob. Dist	Div.	c_i (1g)	c_i (10g)	Std. Unc. (1-g)	Std. Unc. (10-g)	V_i or V_{eff}
Measurement System									
u1	Probe calibration (k=1)	±6.0%	Normal	1	1	1	±6%	±6%	∞
u2	Isotropy	±4.7%	Rectangular	$\sqrt{3}$	1	1	±0.52%	±0.52%	∞
u3	Linearity	±9.6%	Rectangular	$\sqrt{3}$	1	1	±0.52%	±0.52%	∞
u4	Modulation response	±1.0%	Rectangular	$\sqrt{3}$	1	1	±1.56%	±1.56%	∞
u5	Detection limits	±4.7%	Rectangular	$\sqrt{3}$	1	1	±0.58%	±0.58%	∞
u6	Boundary effect	±1.0%	Rectangular	$\sqrt{3}$	1	1	±0.58%	±0.58%	∞
u7	Readout electronics	±0.3%	Normal	1	1	1	±0.3%	±0.3%	∞
u8	Response time	±0.8%	Rectangular	$\sqrt{3}$	1	1	±0.46%	±0.46%	∞
u9	Integration time	±1.9%	Rectangular	$\sqrt{3}$	1	1	±1.5%	±1.5%	∞
u10	RF ambient conditions- noise	±3.0%	Rectangular	$\sqrt{3}$	1	1	±1.73%	±1.73%	∞
u11	RF ambient conditions- reflections	±3.0%	Rectangular	$\sqrt{3}$	1	1	±1.73%	±1.73%	∞
u12	Probe positioner mech. restrictions	±0.4%	Rectangular	$\sqrt{3}$	1	1	±0.23%	±0.23%	∞
u13	Probe positioning with respect to phantom shell	±2.9%	Rectangular	$\sqrt{3}$	1	1	±1.67%	±1.67%	∞
u14	Post-processing	±1.0%	Rectangular	$\sqrt{3}$	1	1	±0.58%	±0.58%	∞
Field source									
u15	Deviation of the experimental source from numerical source	±3.6%	Normal	1	1	1	±2%	±2%	∞
u16	Source to liquid distance	±2.7%	Rectangular	$\sqrt{3}$	1	1	±0.58%	±0.58%	∞
u17	Drift of output power (measured SAR drift)	±5.0%	Rectangular	$\sqrt{3}$	1	1	±2.89%	±2.89%	∞
Phantom and set-up									
u18	Phantom uncertainty (shape and thickness tolerances)	±4.0%	Rectangular	$\sqrt{3}$	1	1	±2.31%	±2.31%	∞
u19	Algorithm for correcting SAR for deviations in permittivity and conductivity	±5.0%	Normal	1	1	0.84	±2%	±1.68%	∞
u20	Liquid conductivity (meas.)	±2.5%	Normal	1	0.78	0.21	±1.95%	±0.53%	M
u21	Liquid permittivity (meas.)	±5.0%	Normal	1	0.23	0.26	±0.58%	±0.65%	M
u22	Liquid conductivity – temperature uncertainty	±2.5%	Rectangular	$\sqrt{3}$	0.78	0.71	±1.13%	±1.02%	∞
u23	Liquid permittivity – temperature uncertainty	±2.5%	Rectangular	$\sqrt{3}$	0.23	0.26	±0.33%	±0.38%	∞
Combined standard uncertainty			RSS				±8.88%	±8.61%	∞
Expanded uncertainty (95% CONFIDENCE LEVEL)			k=2				±17.77%	±17.22%	

Table 5. Uncertainty Budget for frequency range 300MHz to 3GHz



Uncertainty of a System Performance Check with DASY System_ IEEE 1528-2013

Item	Uncertainty Component	Uncertainty Value	Prob. Dist	Div.	c_i (1g)	c_i (10g)	Std. Unc. (1-g)	Std. Unc. (10-g)	V_i or V_{eff}
Measurement System									
u1	Probe calibration ($k=1$)	±6%	Normal	1	1	1	±6%	±6%	∞
u2	Axial isotropy	±0.9%	Rectangular	$\sqrt{3}$	1	1	±0.52%	±0.52%	∞
u3	Hemispherical isotropy	±9.6%	Rectangular	$\sqrt{3}$	0	0	±0%	±0%	∞
u4	Boundary effect	±2.7%	Rectangular	$\sqrt{3}$	1	1	±1.56%	±1.56%	∞
u5	Linearity	±1%	Rectangular	$\sqrt{3}$	1	1	±0.58%	±0.58%	∞
u6	System detection limits	±1%	Rectangular	$\sqrt{3}$	1	1	±0.58%	±0.58%	∞
u7	Modulation response	±2.7%	Rectangular	$\sqrt{3}$	0	0	±0%	±0%	∞
u8	Readout electronics	±0.3%	Normal	1	1	1	±0.3%	±0.3%	∞
u9	Response time	±0.8%	Rectangular	$\sqrt{3}$	0	0	±0%	±0%	∞
u10	Integration time	±2.6%	Rectangular	$\sqrt{3}$	0	0	±0%	±0%	∞
u11	RF ambient conditions—noise	±3%	Rectangular	$\sqrt{3}$	1	1	±1.73%	±1.73%	∞
u12	RF ambient conditions—reflections	±3%	Rectangular	$\sqrt{3}$	1	1	±1.73%	±1.73%	∞
u13	Probe positioner mechanical tolerance	±0.4%	Rectangular	$\sqrt{3}$	1	1	±0.23%	±0.23%	∞
u14	Probe positioning with respect to phantom shell	±2.9%	Rectangular	$\sqrt{3}$	1	1	±1.67%	±1.67%	∞
u15	Extrapolation, interpolation and integration algorithms for max. SAR evaluation	±1%	Rectangular	$\sqrt{3}$	1	1	±0.58%	±0.58%	∞
System validation source (dipole)									
u16	Deviation of experimental dipole from numerical dipole	±2%	Normal	1	1	1	±2%	±2%	∞
u17	Input power and SAR drift measurement	±1%	Rectangular	$\sqrt{3}$	1	1	±0.58%	±0.58%	∞
u18	Dipole axis to liquid distance	±5%	Rectangular	$\sqrt{3}$	1	1	±2.89%	±2.89%	∞
Phantom and set-up									
u19	Phantom shell uncertainty—thickness and permittivity	±4%	Rectangular	$\sqrt{3}$	1	1	±2.31%	±2.31%	∞
u20	Uncertainty in SAR correction for deviations in permittivity and conductivity	±2%	Normal	1	1	0.84	±2%	±1.68%	∞
u21	Liquid conductivity measurement	±2.5%	Normal	1	0.78	0.71	±1.95%	±1.78%	M
u22	Liquid permittivity measurement	±2.5%	Normal	1	0.23	0.26	±0.58%	±0.65%	M
u23	Liquid conductivity—temperature uncertainty	±2.5%	Rectangular	$\sqrt{3}$	0.78	0.71	±1.13%	±1.02%	∞
u24	Liquid permittivity—temperature uncertainty	±2.5%	Rectangular	$\sqrt{3}$	0.23	0.26	±0.33%	±0.38%	∞
Combined standard uncertainty			RSS				±8.73%	±8.62%	∞
Expanded uncertainty (95% CONFIDENCE LEVEL)			$k=2$				±17.46%	±17.23%	

Table 6. Uncertainty Budget for frequency range 300MHz to 3GHz



7. Measurement Procedure

The measurement procedures are as follows:

1. Measure output power through RF cable and power meter
2. Set scan area, grid size and other setting on the DASY software
3. Find out the largest SAR result on these testing positions of each band

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

1. Power reference measurement
2. Area scan
3. Zoom scan
4. Power drift measurement

7.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages

1. Extraction of the measured data (grid and values) from the Zoom Scan
2. Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
3. Generation of a high-resolution mesh within the measured volume
4. Interpolation of all measured values from the measurement grid to the high-resolution grid
5. Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
6. Calculation of the averaged SAR within masses of 1g and 10g



7.2 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures points and step size follow as below. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g.

Grid Type	Frequency		Step size (mm)			X*Y*Z (Point)	Cube size			Step size		
			X	Y	Z		X	Y	Z	X	Y	Z
uniform grid	≤ 3GHz	≤ 2GHz	≤ 8	≤ 8	≤ 5	5*5*7	32	32	30	8	8	5
		2G - 3G	≤ 5	≤ 5	≤ 5	7*7*7	30	30	30	5	5	5
	3 - 6GHz	3 - 4GHz	≤ 5	≤ 5	≤ 4	7*7*8	30	30	28	5	5	4
		4 - 5GHz	≤ 4	≤ 4	≤ 3	8*8*10	28	28	27	4	4	3
		5 - 6GHz	≤ 4	≤ 4	≤ 2	8*8*12	28	28	22	4	4	2

(Our measure settings are refer KDB Publication 865664 D01v01r04)

7.3 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the DUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

7.4 SAR Averaged Methods

In DASYS, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation. Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

7.5 Power Drift Monitoring

All SAR testing is under the DUT install full charged battery and transmit maximum output power. In DASYS measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of DUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.



8. Conducted Power

The conducted power turn-up tolerance, please reference manufacturer specification.

■ Measurement result

GMR4055:

Usage		Operates with a built-in test mode by client						
EUT Battery		Fully-charged with Ni-MH Battery						
Frequency Band	Channel	Frequency (MHz)	Before SAR Test Time-Avg. (dBm)	After SAR Test Time-Avg. (dBm)	Duty Cycle	Time-Avg. Power Tune-up Range (dBm)		
						Max.	Nominal	Min.
FRS	11	467.638	20	19.9	1	27	26	25
GMRS	4	462.637	20	19.9	1	33.01	32.55	32.04

GMR4060:

Usage		Operates with a built-in test mode by client						
EUT Battery		Fully-charged with Li-ion Battery						
Frequency Band	Channel	Frequency (MHz)	Before SAR Test Time-Avg. (dBm)	After SAR Test Time-Avg. (dBm)	Duty Cycle	Time-Avg. Power Tune-up Range (dBm)		
						Max.	Nominal	Min.
FRS	11	467.638	20	19.9	1	27	26	25
GMRS	4	462.637	20	19.9	1	33	32.2	31.5

9. Evaluation of SAR Test

9.1 Evaluation of SAR Test Reduction

■ General:

1. The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used were according to IEEE1528-2013..
2. All modes of operation were investigated, and worst-case results are reported.
3. Tissue parameters and temperatures are listed on the SAR plots.
4. Batteries are fully charged for all readings.


■ According to FCC KDB KDB 447498:

1. The test data reported are the worst-case SAR value with the position set in a typical configuration. Test procedures used were according to IEEE1528-2013.

■ According to FCC KDB 865664:

1. Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg.
2. When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
3. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg.
4. Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

9.2 Antenna Location

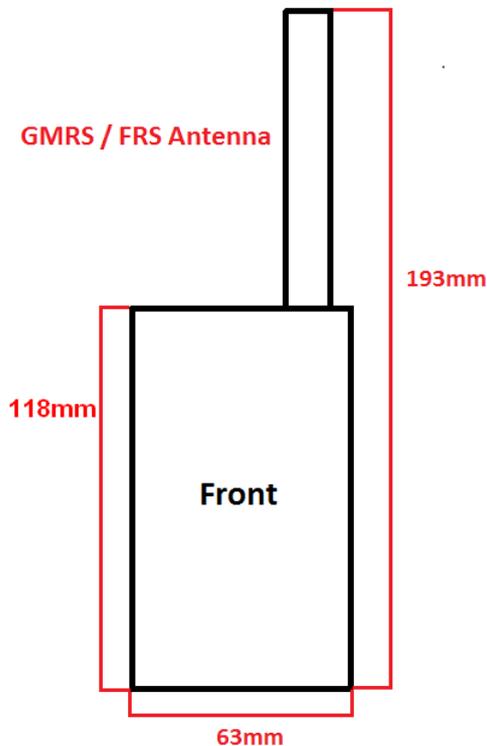



9.3 Stand-alone SAR Evaluate

Transmitter and antenna implementation as below:

Band	FRS Antenna	GMRS Antenna
FRS	V	---
GMRS	---	V

Stand-alone transmission configurations as below:

Band	Front	Back
FRS	V	V
GMRS	V	V

9.4 SAR v.s. Time sweeps at 100 mW

Difference between two models	
GMR4055	support Alkaline battery
	support Ni-MH battery
GMR4060	support Li-Ion battery


■ SAR Value Summary (100mW):

Model	Configuration	Power Source	SAR Value (W/kg)
GMR4055	25mm front of EUT	Alkaline Battery	0.072
		Ni-MH Battery	0.077
		Power Supply	0.091
GMR4060	25mm front of EUT	Li-Ion Battery	0.076
		Power Supply	0.091

Note: The detail result see follow page.




Brain SAR v.s. Time		
Model: GMR4055		Power Source: Alkaline battery
Operate Freqeunc Band: GMRS		Configuration: 25mm front of EUT
Channel: CH 18		
Time (Minute)	Drift measurement (dB)	SAR Total (W/kg)
0	Start	0.08257
1	-0.02	0.08214
2	-0.03	0.08201
3	-0.03	0.08198
4	-0.04	0.08186
5	-0.04	0.08189
6	-0.05	0.08165
7	-0.04	0.08176
8	-0.04	0.08179
9	-0.04	0.08177
10	-0.05	0.08158
11	-0.05	0.08162
12	-0.05	0.08159
13	-0.05	0.08169
14	-0.06	0.08146
15	-0.06	0.08137
16	-0.05	0.08167
17	-0.06	0.08143
18	-0.06	0.08135
19	-0.06	0.08138
20	-0.04	0.08182
21	-0.06	0.0814
22	-0.06	0.08152
23	-0.06	0.0814
24	-0.07	0.08129
25	-0.06	0.08148
26	-0.04	0.08174
27	-0.06	0.08143
28	-0.08	0.08105
29	-0.06	0.08146
30	-0.07	0.08132
31	-0.09	0.08094
32	-0.07	0.0813
33	-0.07	0.08119
34	-0.08	0.08107
35	-0.07	0.08129
36	-0.06	0.08144
37	-0.07	0.08129
38	-0.07	0.08132
39	-0.07	0.08126
40	-0.06	0.08136

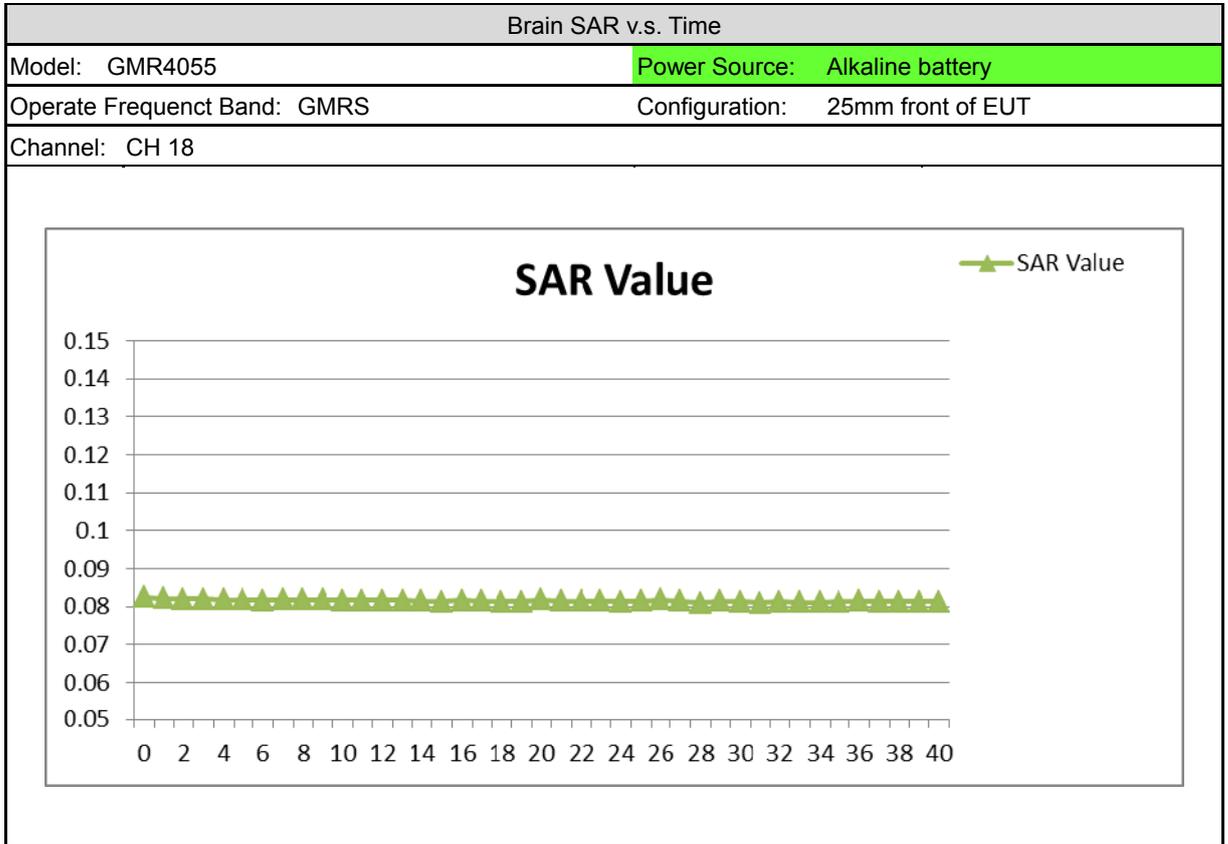




Brain SAR v.s. Time		
Model: GMR4055		Power Source: Ni-MH Battery (DC 1.4V x 3pcs)
Operate Freqeent Band: GMRS		Configuration: 25mm front of EUT
Channel: CH 18		
Time (Minute)	Drift measurement (dB)	SAR Total (W/kg)
0	Start	0.0923
1	-0.01	0.0921
2	0	0.09237
3	-0.01	0.09226
4	0	0.09248
5	-0.01	0.09222
6	-0.01	0.0922
7	-0.01	0.09227
8	0	0.09242
9	-0.01	0.09213
10	-0.01	0.09213
11	-0.02	0.09201
12	-0.01	0.0921
13	-0.01	0.09222
14	-0.02	0.09194
15	-0.01	0.09221
16	-0.01	0.09207
17	-0.01	0.09214
18	0	0.09232
19	-0.01	0.09207
20	-0.01	0.09223
21	-0.01	0.09217
22	0	0.09241
23	-0.01	0.09221
24	-0.01	0.09207
25	-0.02	0.09194
26	0.02	0.09278
27	-0.01	0.0922
28	-0.01	0.09211
29	-0.02	0.09199
30	0.01	0.09251
31	-0.01	0.09211
32	-0.01	0.09212
33	-0.01	0.09218
34	-0.03	0.09175
35	-0.01	0.09222
36	-0.01	0.09219
37	0	0.09229
38	-0.01	0.09222
39	-0.02	0.09197
40	-0.01	0.09215

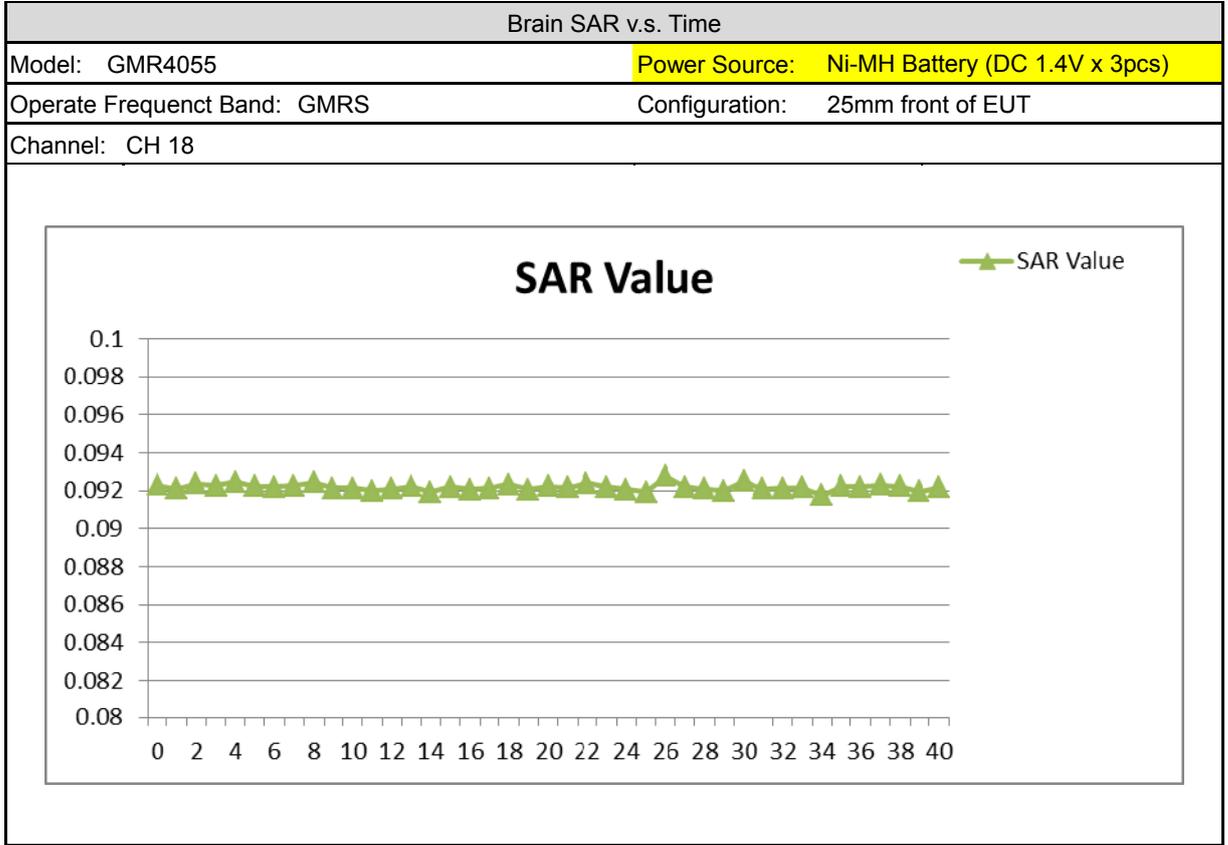




Brain SAR v.s. Time		
Model: GMR4055		Power Source: Power Supply (DC 4.5V, 2A)
Operate Freqeunc Band: GMRS		Configuration: 25mm front of EUT
Channel: CH 18		
Time (Minute)	Drift measurement (dB)	SAR Total (W/kg)
0	Start	0.09746
1	-0.01	0.09728
2	0	0.0974
3	-0.01	0.09723
4	-0.01	0.09712
5	-0.01	0.09718
6	-0.01	0.09722
7	-0.01	0.09713
8	-0.01	0.09727
9	-0.01	0.09731
10	-0.01	0.0972
11	-0.02	0.09692
12	-0.02	0.09699
13	-0.03	0.09677
14	-0.02	0.0971
15	-0.03	0.09683
16	-0.02	0.09695
17	-0.03	0.09684
18	-0.02	0.09692
19	-0.02	0.09701
20	-0.03	0.09672
21	-0.03	0.09681
22	-0.03	0.09677
23	-0.04	0.09663
24	-0.03	0.09681
25	-0.03	0.09675
26	-0.02	0.097
27	-0.03	0.09675
28	-0.04	0.09648
29	-0.04	0.09663
30	-0.03	0.09674
31	-0.03	0.09677
32	-0.04	0.09666
33	-0.04	0.0966
34	-0.04	0.09655
35	-0.05	0.09639
36	-0.04	0.09667
37	-0.04	0.09659
38	-0.05	0.09641
39	-0.04	0.09652
40	-0.04	0.09654

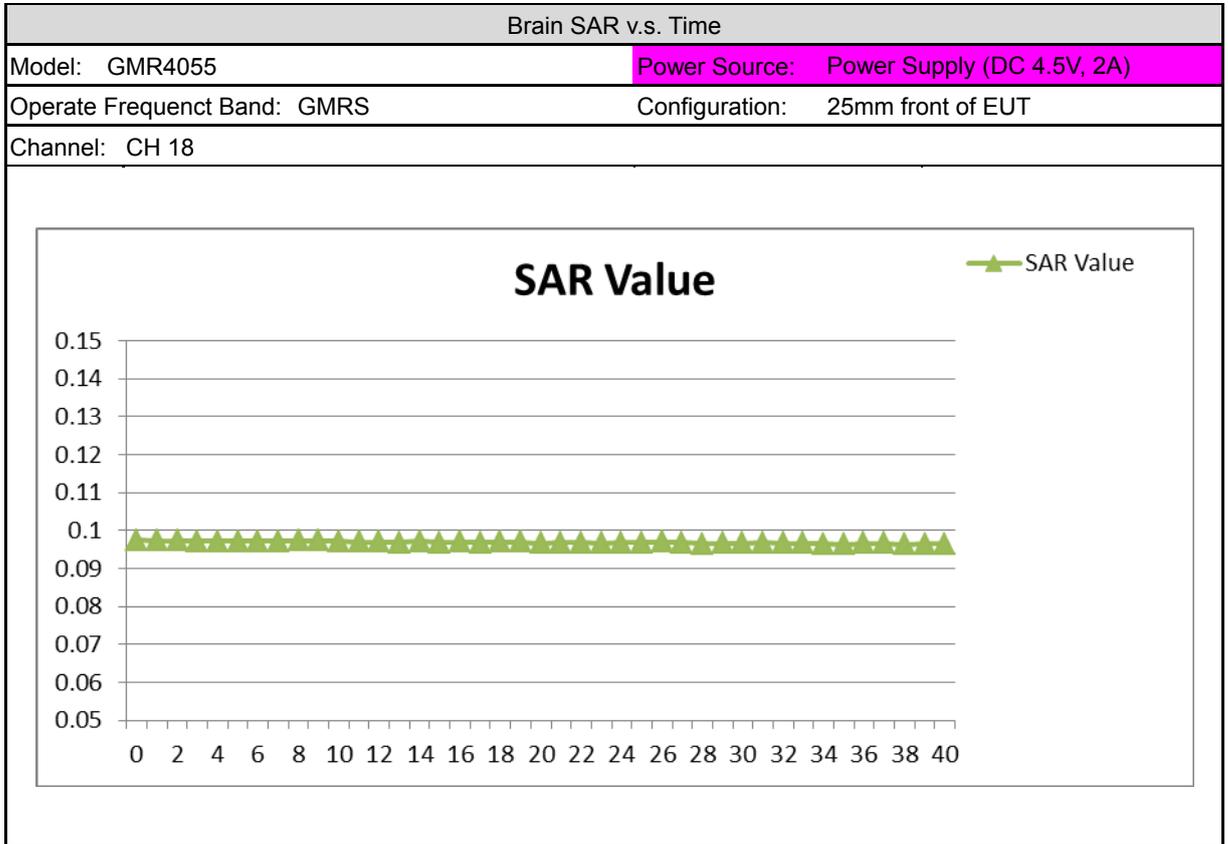




Brain SAR v.s. Time		
Model: GMR4060		Power Source: Li-ion Battery (DC 4.2V)
Operate Frequenc Band: GMRS		Configuration: 25mm front of EUT
Channel: CH 18		
Time (Minute)	Drift measurement (dB)	SAR Total (W/kg)
0	Start	0.08783
1	-0.01	0.08761
2	-0.01	0.08757
3	-0.01	0.08763
4	-0.02	0.08742
5	-0.02	0.08747
6	-0.01	0.08755
7	-0.02	0.08737
8	-0.03	0.08723
9	-0.03	0.08728
10	-0.03	0.08721
11	-0.04	0.0871
12	-0.02	0.08736
13	-0.03	0.08739
14	-0.02	0.0874
15	-0.03	0.08725
16	-0.05	0.08692
17	-0.03	0.08721
18	-0.04	0.0871
19	-0.04	0.08704
20	-0.04	0.0871
21	-0.05	0.08678
22	-0.04	0.087
23	-0.04	0.08711
24	-0.04	0.08694
25	-0.05	0.08692
26	-0.05	0.08687
27	-0.05	0.08691
28	-0.04	0.08707
29	-0.05	0.08678
30	-0.05	0.08687
31	-0.07	0.08649
32	-0.04	0.08706
33	-0.05	0.08675
34	-0.04	0.08705
35	-0.06	0.08671
36	-0.07	0.0865
37	-0.05	0.08678
38	-0.06	0.0866
39	-0.05	0.0868
40	-0.07	0.08652

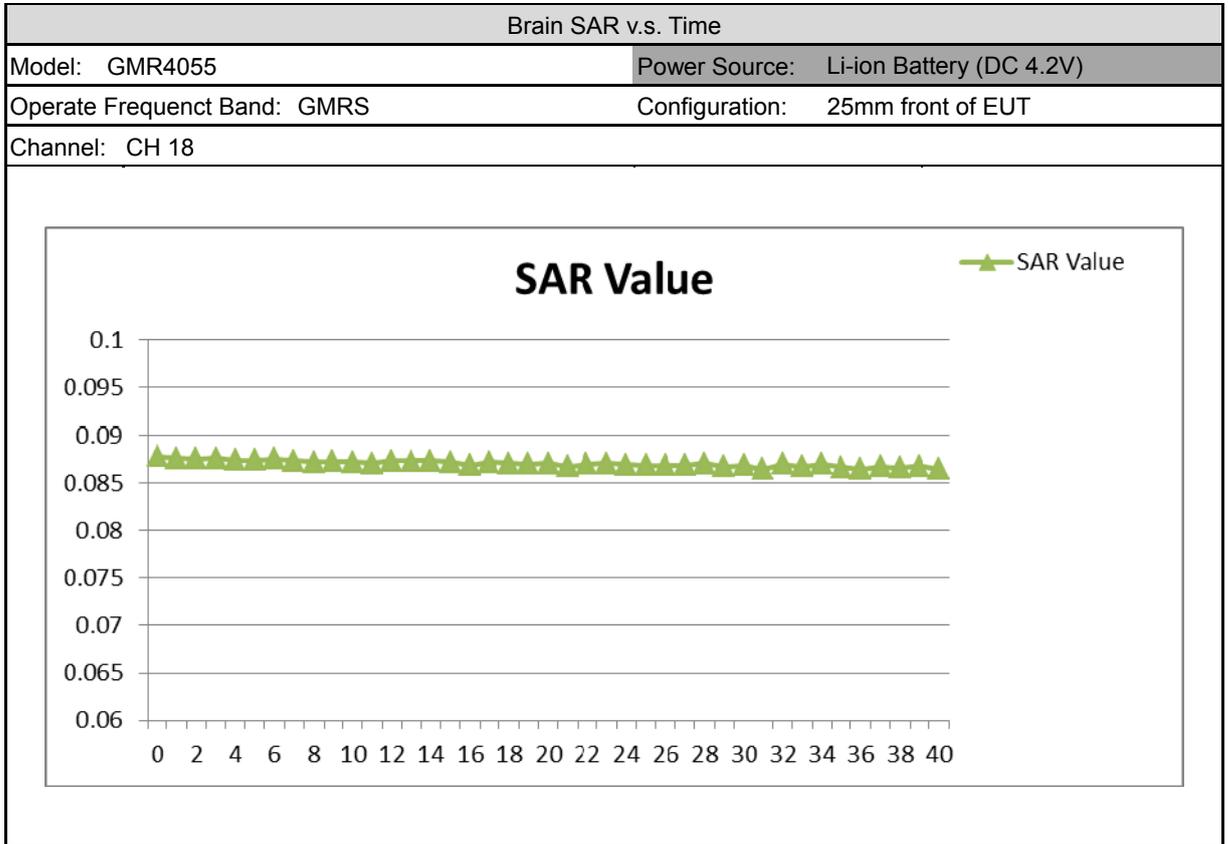



Brain SAR v.s. Time		
Model: GMR4060		Power Source: Power Supply (DC 4.5V, 2A)
Operate Freqeunc Band: GMRS		Configuration: 25mm front of EUT
Channel: CH 18		
Time (Minute)	Drift measurement (dB)	SAR Total (W/kg)
0	Start	0.1012
1	0	0.1012
2	-0.02	0.1007
3	-0.01	0.1011
4	0	0.1011
5	-0.03	0.1006
6	-0.01	0.1011
7	-0.01	0.1009
8	-0.03	0.1005
9	-0.02	0.1007
10	-0.02	0.1007
11	-0.03	0.1004
12	-0.03	0.1005
13	-0.03	0.1005
14	-0.03	0.1004
15	-0.02	0.1007
16	-0.02	0.1007
17	-0.03	0.1004
18	-0.04	0.1003
19	-0.04	0.1003
20	-0.04	0.1002
21	-0.03	0.1004
22	-0.05	0.1001
23	-0.05	0.09999
24	-0.04	0.1002
25	-0.03	0.1005
26	-0.04	0.1002
27	-0.04	0.1002
28	-0.05	0.1
29	-0.06	0.09982
30	-0.06	0.09975
31	-0.05	0.1001
32	-0.07	0.09963
33	-0.05	0.1001
34	-0.06	0.09979
35	-0.06	0.0998
36	-0.05	0.09993
37	-0.05	0.09998
38	-0.06	0.09986
39	-0.06	0.09972
40	-0.05	0.09974

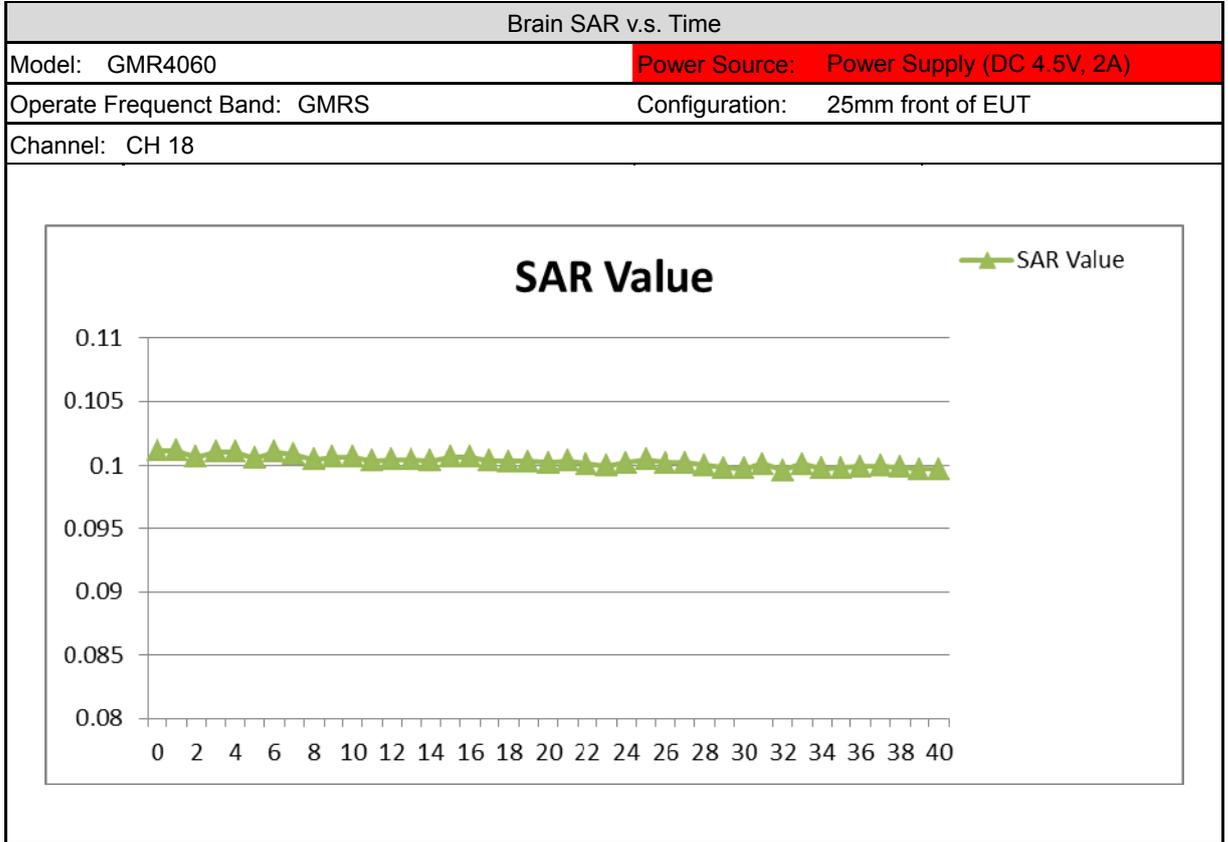



10. The SAR scaling detail with KDB Inquiry

According to KDB Inquiry:

1. 100 mW to tune-up tolerance
2. 50% duty factor for PTT

Note:

1. The Reported SAR should be scale up twice.
First SAR scale up is through 100 mW (100% duty factor) scaled to max tune-up tolerance.
Second SAR scale up is for 50% duty factor for PTT, which through 100% duty factor's Reported SAR scaled to SAR 50% duty factor.
However, the final data will be based in second result of SAR scale up.
2. The test should use Ni-MH battery for the GMR4055 model and Li-Ion battery for the GMR4060 model. No need to test using the alkaline battery for GMR4055 or a power supply.
3. The detail KDB Inquiry plrase refer attach file.



11. Test Results

■ Test Condition of EUT:

1. The "Time Avg Power" is 100mw lower power level setting for GMR4055 and GMR4060. The "Max Tune-up" is full power level setting for GMR4055 and GMR4060.

11.1 Applicable Limit Regulations

Accroding ANSI/IEEE C95.1 - IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

Safety Limits for Partial Body Exposure		
Human Exposure	Population Uncontrolled Exposure (W/kg) or (mW/g)	Occupational Controlled Exposure (W/kg) or (mW/g)
Spatial Peak SAR* (head)	1.60	8.00
Spatial Peak SAR** (Whole Body)	0.08	0.40
Spatial Peak SAR*** (Partial-Body)	1.60	8.00
Spatial Peak SAR**** (Hands / Feet / Ankle / Wrist)	4.00	20.00

NOTE :

- * The Spatial Peak value of the SAR averaged over any 1 gram of tissue. (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
- ** The Spatial Average value of the SAR averaged over the whole – body.
- *** The Spatial Average value of the SAR averaged over the partial – body.
- **** The Spatial Peak value of the SAR averaged over any 10 grams of tissue. (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Population / Uncontrolled Environments : are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Occupational / Controlled Environments : are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).



11.2 Brain SAR Results

GMR4055:

Test Position	Band	Ch.	Frequency (MHz)	Spacing (mm)	Battery	ASSY	SAR _{1g} (W/Kg)	Power Drift	Avg Power	Max tune-up	Reported SAR _{1g} (W/Kg)
Front	FRS	11	467.638	25	Ni-MH	N/A	0.071	-0.01	20	27	0.36
Front	GMRS	4	462.637	25	Ni-MH	N/A	0.073	-0.01	20	33.01	1.46

◆ SAR values are scaled for the power drift

Band	Ch.	Battery	ASSY.	SAR _{1g} [W/Kg]		power drift (dB)	+ power drift 10 ^{^(dB/10)}	SAR _{1g} [W/Kg] (include +power drift)		Remark
				Duty Cycle				Duty Cycle		
				100%	50%			100%	50%	
FRS	11	Ni-MH	N/A	0.360	0.1800	-0.010000	1.002	0.361	0.180	---
GMRS	4	Ni-MH	N/A	1.460	0.7300	-0.010000	1.002	1.463	0.732	---

SAR is basically proportional to average transmit power and duty cycle

(i.e. SAR = P x T where P is the average transmit power and T is the transmit duty cycle).

SAR(unknown) = SAR(know) x (PxTx/P(know) T(know))

Where Px is the unknown power (i.e. the power at the highest drift)

Tx is the transmit duty cycle used at that unknown power.

If transmitter duty cycle is the same then it should be a relationship of Px/Pknown)



GMR4060:

Test Position	Band	Ch.	Frequency (MHz)	Spacing (mm)	Battery	ASSY	SAR _{1g} (W/Kg)	Power Drift	Avg Power	Max tune-up	Reported SAR _{1g} (W/Kg)
Front	FRS	11	467.638	25	Li-ion	N/A	0.003	0.10	20	27	0.01
Front	GMRS	4	462.637	25	Li-ion	N/A	0.077	-0.03	20	33	1.54

◆ **SAR values are scaled for the power drift**

Band	Ch.	Battery	ASSY.	SAR _{1g} [W/Kg]		power drift (dB)	+ power drift 10 ^{^(dB/10)}	SAR _{1g} [W/Kg] (include +power drift)		Remark
				Duty Cycle				Duty Cycle		
				100%	50%			100%	50%	
FRS	11	Li-ion	N/A	0.010	0.0050	0.100000	1.023	0.010	0.005	---
GMRS	4	Li-ion	N/A	1.540	0.7700	-0.030000	1.007	1.551	0.775	---

SAR is basically proportional to average transmit power and duty cycle

(i.e. SAR = P x T where P is the average transmit power and T is the transmit duty cycle).

SAR(unknown) = SAR(know) x (PxTx/P(known) T(known))

Where Px is the unknown power (i.e. the power at the highest drift)

Tx is the transmit duty cycle used at that unknown power.

If transmitter duty cycle is the same then it should be a relationship of Px/Pknown)



11.3 Muscle SAR Results

GMR4055:

Test Position	Band	Ch.	Frequency (MHz)	Spacing (mm)	Battery	ASSY	SAR _{1g} (W/Kg)	Power Drift	Avg Power	Max tune-up	Reported SAR _{1g} (W/Kg)
Back	FRS	11	467.637	10	Ni-MH	Headset	0.114	0.13	20	27	0.57
Back	FRS	11	467.637	0	Ni-MH	Headset & Belt clip	0.132	0.01	20	27	0.66
Back	GMRS	4	462.637	10	Ni-MH	Headset	0.100	0.03	20	33.01	2.00
Back	GMRS	4	462.637	0	Ni-MH	Headset & Belt clip	0.138	0.05	20	33.01	2.76

◆ **SAR values are scaled for the power drift**

Band	Ch.	Battery	ASSY.	SAR _{1g} [W/Kg]		power drift (dB)	+ power drift 10 ^{^(dB/10)}	SAR _{1g} [W/Kg] (include +power drift)		Remark
				Duty Cycle				Duty Cycle		
				100%	50%			100%	50%	
FRS	11	Ni-MH	Headset	0.570	0.2850	0.130000	1.030	0.587	0.294	---
	11	Ni-MH	Headset & Belt clip	0.660	0.3300	0.010000	1.002	0.662	0.331	---
GMRS	4	Ni-MH	Headset	2.000	1.0000	0.030000	1.007	2.014	1.007	---
	4	Ni-MH	Headset & Belt clip	2.760	1.3800	0.050000	1.012	2.792	1.396	---

SAR is basically proportional to average transmit power and duty cycle

(i.e. SAR = P x T where P is the average transmit power and T is the transmit duty cycle).

$$SAR(\text{unknown}) = SAR(\text{know}) \times (P_x T_x / P(\text{known}) T(\text{known}))$$

Where P_x is the unknown power (i.e. the power at the highest drift)

T_x is the transmit duty cycle used at that unknown power.

If transmitter duty cycle is the same then it should be a relationship of P_x/P_{known})



GMR4060:

Test Position	Band	Ch.	Frequency (MHz)	Spacing (mm)	Battery	ASSY	SAR _{1g} (W/Kg)	Power Drift	Avg Power	Max tune-up	Reported SAR _{1g} (W/Kg)
Back	FRS	11	467.637	10	Li-ion	Headset	0.005	-0.14	20	27	0.03
Back	FRS	11	467.637	0	Li-ion	Headset & Belt clip	0.007	0.13	20	27	0.03
Back	GMRS	4	462.637	10	Li-ion	Headset	0.103	0.03	20	33	2.06
Back	GMRS	4	462.637	0	Li-ion	Headset & Belt clip	0.138	-0.01	20	33	2.75

◆ **SAR values are scaled for the power drift**

Band	Ch.	Battery	ASSY.	SAR _{1g} [W/Kg]		power drift (dB)	+ power drift 10 ^{^(dB/10)}	SAR _{1g} [W/Kg] (include +power drift)		Remark
				Duty Cycle				Duty Cycle		
				100%	50%			100%	50%	
FRS	11	Li-ion	Headset	0.030	0.0150	-0.140000	1.033	0.031	0.015	---
	11	Li-ion	Headset & Belt clip	0.030	0.0150	0.130000	1.030	0.031	0.015	---
GMRS	4	Li-ion	Headset	2.060	1.0300	0.030000	1.007	2.074	1.037	---
	4	Li-ion	Headset & Belt clip	2.750	1.3750	-0.010000	1.002	2.756	1.378	---

SAR is basically proportional to average transmit power and duty cycle

(i.e. SAR = P x T where P is the average transmit power and T is the transmit duty cycle).

$$SAR(\text{unknown}) = SAR(\text{know}) \times (P_x T_x / P(\text{known}) T(\text{known}))$$

Where P_x is the unknown power (i.e. the power at the highest drift)

T_x is the transmit duty cycle used at that unknown power.

If transmitter duty cycle is the same then it should be a relationship of P_x/P_{known})



11.4 SAR Variability Results

■ Test Condition of Variability:

1. The original highest measured Reported SAR 1g (50% Duty factor) is ≥ 0.80 W/kg, repeat that measurement once.
2. Perform a second repeated measurement the ratio of largest to smallest SAR(50% Duty factor) for the original and first repeated measurements is < 1.2 , the original or repeated measurement(50% Duty factor) is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
3. Perform a third repeated measurement only if the original, first or second repeated measurement(50% Duty factor) is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

GMR4055:

Test Position	Band	Ch.	Frequency (MHz)	Spacing (mm)	Battery	ASSY	SAR _{1g} (W/kg)	Power Drift	Avg Power	Max tune-up	Reported SAR _{1g} (W/kg)	Repeated measure-ment Ratio
Back	GMRS	4	462.637	0	Ni-MH	Headset & Belt clip	0.144	0.02	20	33.01	2.88	1.04 < 1.2

GMR4060:

Test Position	Band	Ch.	Frequency (MHz)	Spacing (mm)	Battery	ASSY	SAR _{1g} (W/kg)	Power Drift	Avg Power	Max tune-up	Reported SAR _{1g} (W/kg)	Repeated measure-ment Ratio
Back	GMRS	4	462.637	0	Li-ion	Headset & Belt clip	0.135	0.02	20	33	2.69	1.02 < 1.2



Appendix A - System Performance Check

Test Laboratory: A Test Lab Techno Corp.

Date: 2016/1/18 Time: PM 02:26:50

System Performance Check at 450MHz_20160118_Head

DUT: Dipole 450MHz; Type: D450V2; Serial: D450V2 SN:1021

Communication System: UID 0, CW (0); Frequency: 450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 450$ MHz; $\sigma = 0.87$ S/m; $\epsilon_r = 43.701$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(11.39, 11.39, 11.39); Calibrated: 2015/4/30;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 2015/2/3
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1133
- Measurement SW: DASYS52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

System Performance Check at 450MHz/Area Scan (61x201x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.45 W/kg

System Performance Check at 450MHz/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 41.37 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.75 W/kg

SAR(1 g) = 1.16 W/kg; SAR(10 g) = 0.787 W/kg

Maximum value of SAR (measured) = 1.47 W/kg

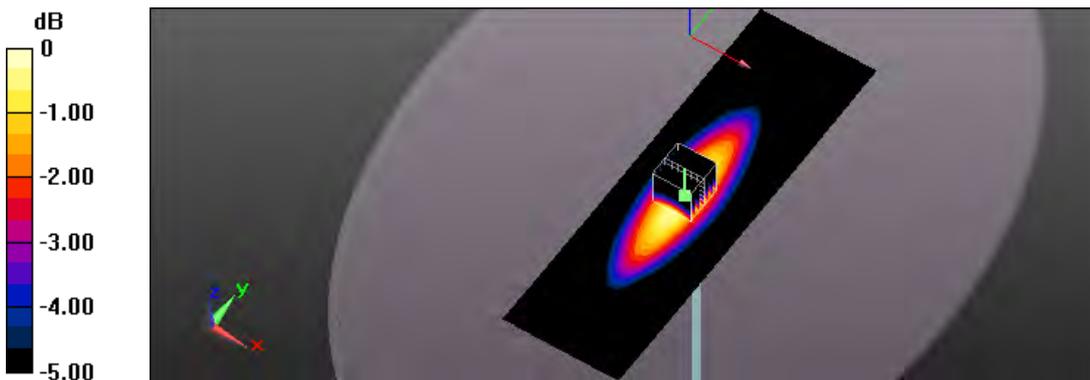

0 dB = 1.47 W/kg = 1.67 dBW/kg

Test Laboratory: A Test Lab Techno Corp.
 Date: 2016/1/18 Time: PM 07:31:27

System Performance Check at 450MHz_20160118_Body
 DUT: Dipole 450MHz; Type: D450V2; Serial: D450V2 SN:1021


Communication System: UID 0, CW (0); Frequency: 450 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 450 \text{ MHz}$; $\sigma = 0.938 \text{ S/m}$; $\epsilon_r = 58.413$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(11.8, 11.8, 11.8); Calibrated: 2015/4/30;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 2015/2/3
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1133
- Measurement SW: DASYS52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

System Performance Check at 450MHz/Area Scan (61x201x1):
 Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 1.45 W/kg

System Performance Check at 450MHz/Zoom Scan (7x7x7)/Cube 0:
 Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 39.57 V/m; Power Drift = 0.01 dB
 Peak SAR (extrapolated) = 1.74 W/kg
 SAR(1 g) = 1.16 W/kg; SAR(10 g) = 0.787 W/kg
 Maximum value of SAR (measured) = 1.46 W/kg

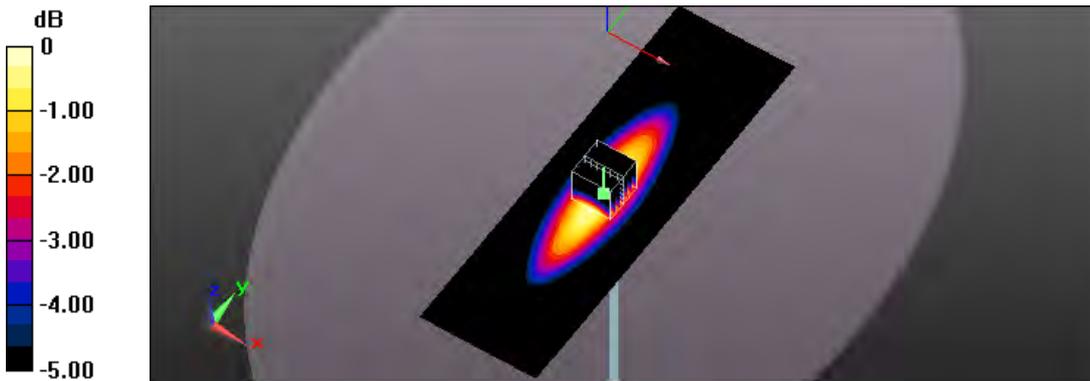

0 dB = 1.46 W/kg = 1.64 dBW/kg

Appendix B - SAR Measurement Data

Test Laboratory: A Test Lab Techno Corp.

Date: 2016/1/18 Time: PM 04:04:15

1_FRS CH11_Front_25mm_Brain_Ni-MH

DUT: GMR4055; Type: Walkie Talkie

Communication System: UID 0, FRS (0); Frequency: 467.638 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 468 \text{ MHz}$; $\sigma = 0.887 \text{ S/m}$; $\epsilon_r = 43.375$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(11.39, 11.39, 11.39); Calibrated: 2015/4/30;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 2015/2/3
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1133
- Measurement SW: DASYS52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (71x161x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0842 W/kg

Flat/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.697 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.0950 W/kg

SAR(1 g) = 0.071 W/kg; SAR(10 g) = 0.053 W/kg

Maximum value of SAR (measured) = 0.0842 W/kg

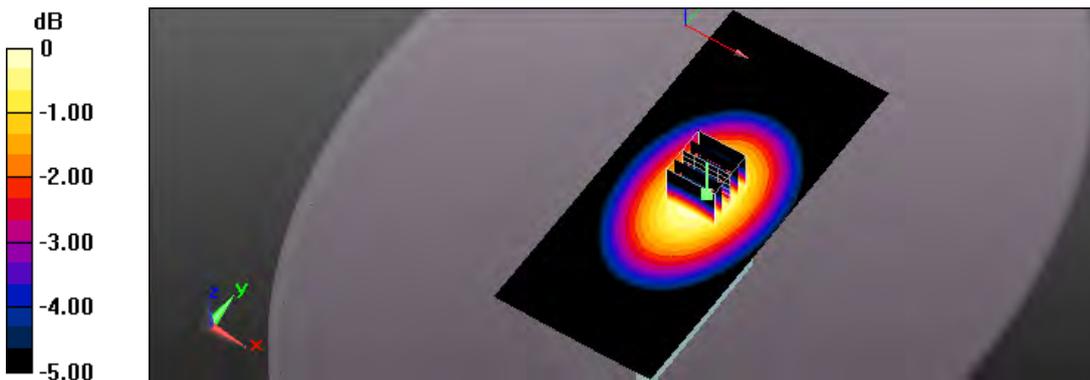

0 dB = 0.0842 W/kg = -10.75 dBW/kg

Test Laboratory: A Test Lab Techno Corp.
 Date: 2016/1/18 Time: PM 04:40:21

2_GMRS CH4_Front_25mm_Brain_Ni-MH
 DUT: GMR4055; Type: Walkie Talkie


Communication System: UID 0, GMRS (0); Frequency: 462.637 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 463 \text{ MHz}$; $\sigma = 0.882 \text{ S/m}$; $\epsilon_r = 43.488$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(11.39, 11.39, 11.39); Calibrated: 2015/4/30;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 2015/2/3
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1133
- Measurement SW: DASYS52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (71x161x1):
 Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0868 W/kg

Flat/Zoom Scan (5x5x7)/Cube 0:
 Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 9.844 V/m; Power Drift = -0.01 dB
 Peak SAR (extrapolated) = 0.0970 W/kg
 SAR(1 g) = 0.073 W/kg; SAR(10 g) = 0.055 W/kg
 Maximum value of SAR (measured) = 0.0862 W/kg

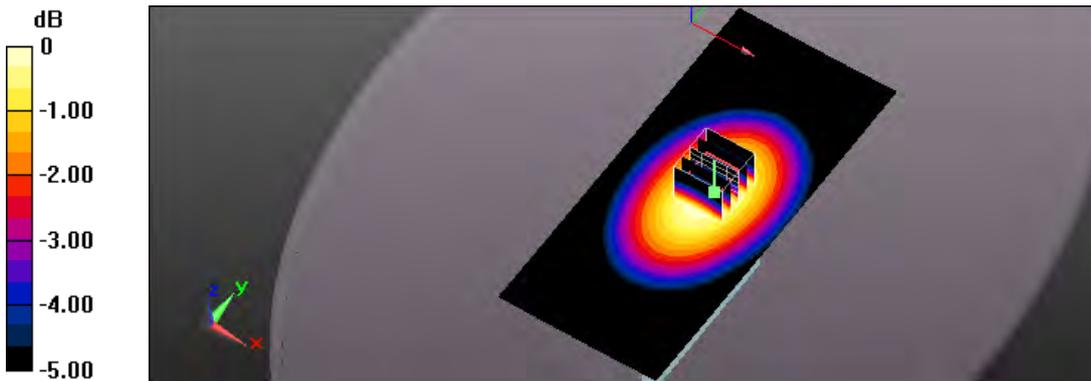

0 dB = 0.0862 W/kg = -10.64 dBW/kg

Test Laboratory: A Test Lab Techno Corp.
 Date: 2016/1/18 Time: PM 05:53:41

1_FRS CH11_Front_25mm_Brain_Li-ion
 DUT: GMR4060; Type: Walkie Talkie


Communication System: UID 0, FRS (0); Frequency: 467.638 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 468 \text{ MHz}$; $\sigma = 0.887 \text{ S/m}$; $\epsilon_r = 43.375$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(11.39, 11.39, 11.39); Calibrated: 2015/4/30;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 2015/2/3
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1133
- Measurement SW: DASYS52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (71x161x1):
 Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.00304 W/kg

Flat/Zoom Scan (5x5x7)/Cube 0:
 Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 1.604 V/m; Power Drift = 0.10 dB
 Peak SAR (extrapolated) = 0.00336 W/kg
 $\text{SAR}(1 \text{ g}) = 0.00256 \text{ W/kg}$; $\text{SAR}(10 \text{ g}) = 0.0019 \text{ W/kg}$
 Maximum value of SAR (measured) = 0.00297 W/kg

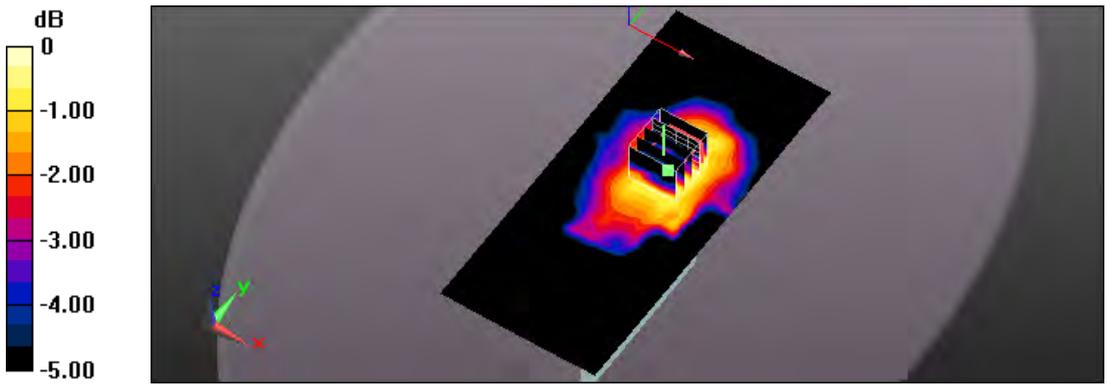

0 dB = 0.00297 W/kg = -25.27 dBW/kg

Test Laboratory: A Test Lab Techno Corp.
 Date: 2016/1/18 Time: PM 06:26:43

2_GMRS CH4_Front_25mm_Brain_Li-ion
 DUT: GMR4060; Type: Walkie Talkie


Communication System: UID 0, GMRS (0); Frequency: 462.637 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 463 \text{ MHz}$; $\sigma = 0.882 \text{ S/m}$; $\epsilon_r = 43.488$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(11.39, 11.39, 11.39); Calibrated: 2015/4/30;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 2015/2/3
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1133
- Measurement SW: DASYS52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (71x161x1):
 Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0901 W/kg

Flat/Zoom Scan (5x5x7)/Cube 0:
 Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 9.238 V/m; Power Drift = -0.03 dB
 Peak SAR (extrapolated) = 0.101 W/kg
 SAR(1 g) = 0.077 W/kg; SAR(10 g) = 0.057 W/kg
 Maximum value of SAR (measured) = 0.0898 W/kg

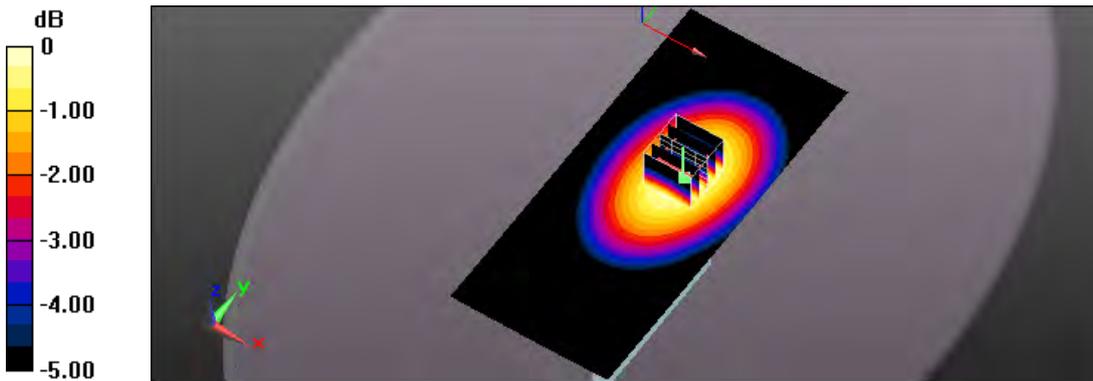

0 dB = 0.0898 W/kg = -10.47 dBW/kg

Test Laboratory: A Test Lab Techno Corp.
 Date: 2016/1/18 Time: PM 08:23:20

3_FRS CH11_Back_10mm_Muscle_Headset_Ni-MH
 DUT: GMR4055; Type: Walkie Talkie


Communication System: UID 0, FRS (0); Frequency: 467.638 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 468 \text{ MHz}$; $\sigma = 0.954 \text{ S/m}$; $\epsilon_r = 58.299$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(11.8, 11.8, 11.8); Calibrated: 2015/4/30;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 2015/2/3
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1133
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (71x161x1):
 Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.135 W/kg

Flat/Zoom Scan (5x5x7)/Cube 0:
 Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 10.39 V/m; Power Drift = 0.13 dB
 Peak SAR (extrapolated) = 0.155 W/kg
 $\text{SAR}(1 \text{ g}) = 0.114 \text{ W/kg}$; $\text{SAR}(10 \text{ g}) = 0.085 \text{ W/kg}$
 Maximum value of SAR (measured) = 0.136 W/kg

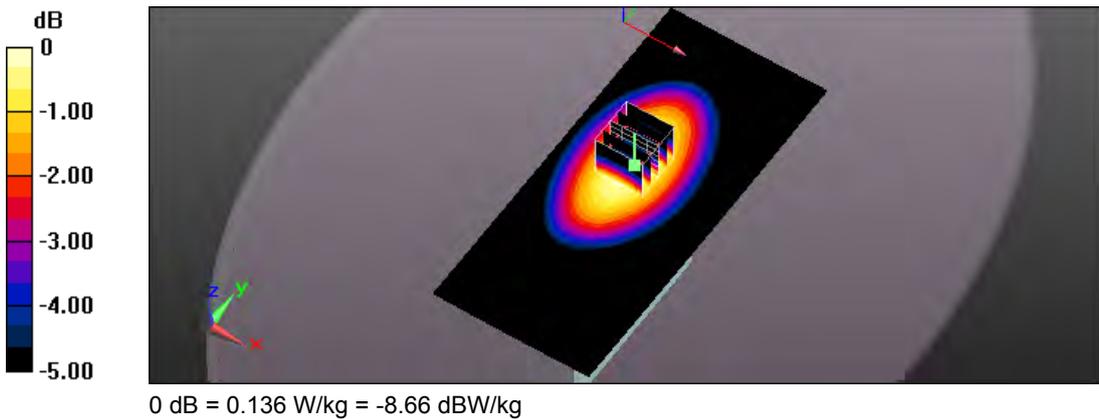

Test Laboratory: A Test Lab Techno Corp.
 Date: 2016/1/18 Time: PM 09:43:28

4_FRS CH11_Back_0mm_Muscle_Belt clip_Headset_Ni-MH
 DUT: GMR4055; Type: Walkie Talkie


Communication System: UID 0, FRS (0); Frequency: 467.638 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 468 \text{ MHz}$; $\sigma = 0.954 \text{ S/m}$; $\epsilon_r = 58.299$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(11.8, 11.8, 11.8); Calibrated: 2015/4/30;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 2015/2/3
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1133
- Measurement SW: DASYS52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (71x161x1):
 Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.160 W/kg

Flat/Zoom Scan (5x5x7)/Cube 0:
 Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 10.96 V/m; Power Drift = 0.01 dB
 Peak SAR (extrapolated) = 0.184 W/kg
 SAR(1 g) = 0.132 W/kg; SAR(10 g) = 0.096 W/kg
 Maximum value of SAR (measured) = 0.159 W/kg

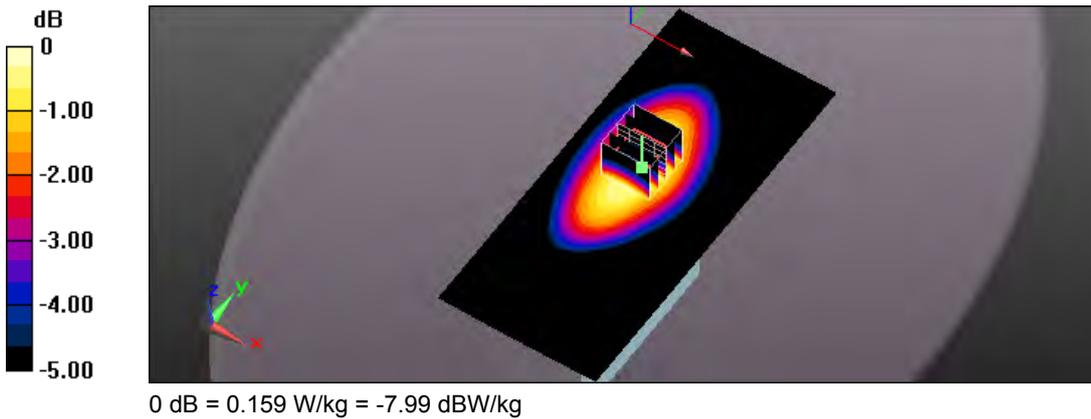

Test Laboratory: A Test Lab Techno Corp.
 Date: 2016/1/18 Time: PM 11:00:48

5_GMRS CH4_Back_10mm_Muscle_Headset_Ni-MH
 DUT: GMR4055; Type: Walkie Talkie


Communication System: UID 0, GMRS (0); Frequency: 462.637 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 463 \text{ MHz}$; $\sigma = 0.949 \text{ S/m}$; $\epsilon_r = 58.327$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(11.8, 11.8, 11.8); Calibrated: 2015/4/30;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 2015/2/3
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1133
- Measurement SW: DASYS52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (71x161x1):
 Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.119 W/kg

Flat/Zoom Scan (5x5x7)/Cube 0:
 Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 9.561 V/m; Power Drift = 0.03 dB
 Peak SAR (extrapolated) = 0.136 W/kg
 SAR(1 g) = 0.100 W/kg; SAR(10 g) = 0.074 W/kg
 Maximum value of SAR (measured) = 0.119 W/kg

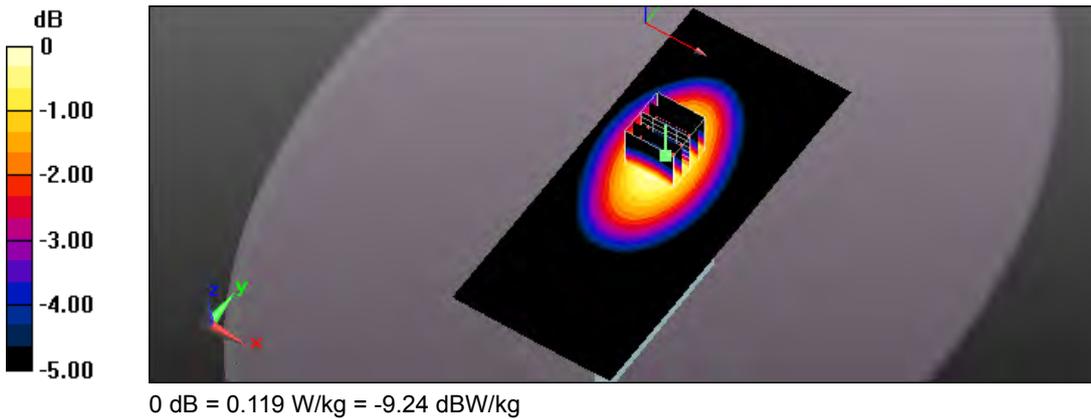

Test Laboratory: A Test Lab Techno Corp.
 Date: 2016/1/18 Time: PM 10:36:34

6_GMRS CH4_Back_0mm_Muscle_Belt clip_Headset_Ni-MH
 DUT: GMR4055; Type: Walkie Talkie

Communication System: UID 0, GMRS (0); Frequency: 462.637 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 463 \text{ MHz}$; $\sigma = 0.949 \text{ S/m}$; $\epsilon_r = 58.327$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:


- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(11.8, 11.8, 11.8); Calibrated: 2015/4/30;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 2015/2/3
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1133
- Measurement SW: DASYS52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (71x161x1):

\Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.166 W/kg

Flat/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 11.32 V/m; Power Drift = 0.05 dB
 Peak SAR (extrapolated) = 0.191 W/kg
 SAR(1 g) = 0.138 W/kg; SAR(10 g) = 0.101 W/kg
 Maximum value of SAR (measured) = 0.166 W/kg

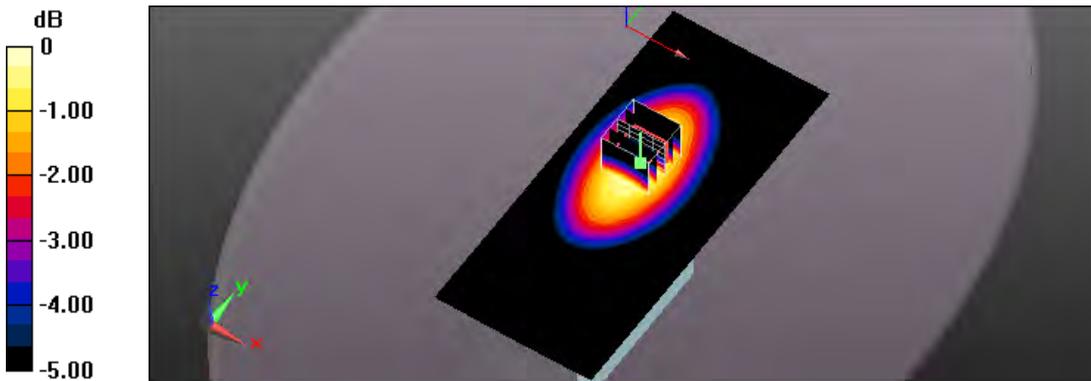

0 dB = 0.166 W/kg = -7.80 dBW/kg

Test Laboratory: A Test Lab Techno Corp.
 Date: 2016/1/19 Time: AM 11:46:51

7_GMRS CH4_Back_0mm_DUT: GMR4055 original 6_Muscle_Belt clip_Headset_Ni-MH_measurement once
 DUT: GMR4055; Type: Walkie Talkie


Communication System: UID 0, GMRS (0); Frequency: 462.637 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 463 \text{ MHz}$; $\sigma = 0.949 \text{ S/m}$; $\epsilon_r = 58.327$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(11.8, 11.8, 11.8); Calibrated: 2015/4/30;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 2015/2/3
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1133
- Measurement SW: DASYS52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (71x161x1):
 Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.171 W/kg

Flat/Zoom Scan (5x5x7)/Cube 0:
 Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 12.65 V/m; Power Drift = 0.02 dB
 Peak SAR (extrapolated) = 0.198 W/kg
 SAR(1 g) = 0.144 W/kg; SAR(10 g) = 0.105 W/kg
 Maximum value of SAR (measured) = 0.172 W/kg

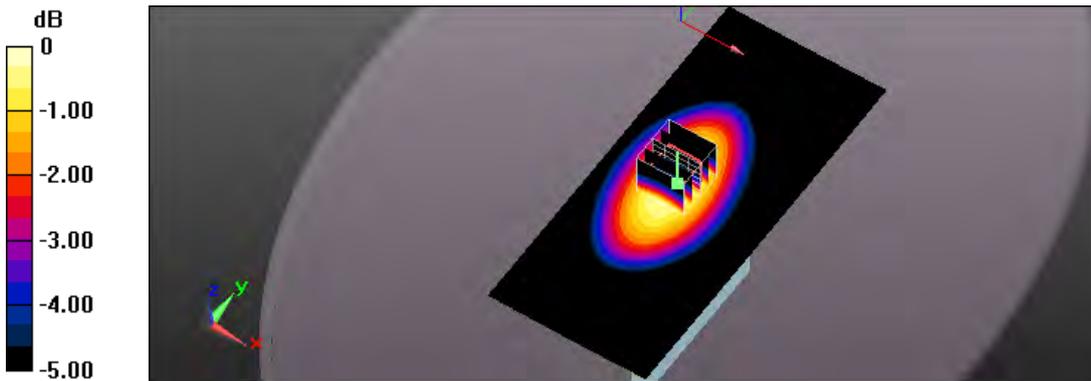

0 dB = 0.172 W/kg = -7.64 dBW/kg

Test Laboratory: A Test Lab Techno Corp.
 Date: 2016/1/19 Time: AM 01:06:23

3_FRS CH11_Back_10mm_Muscle_Headset_Li-ion
 DUT: GMR4060; Type: Walkie Talkie


Communication System: UID 0, FRS (0); Frequency: 467.638 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 468$ MHz; $\sigma = 0.954$ S/m; $\epsilon_r = 58.299$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(11.8, 11.8, 11.8); Calibrated: 2015/4/30;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 2015/2/3
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1133
- Measurement SW: DASYS52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (71x161x1):
 Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.00658 W/kg

Flat/Zoom Scan (5x5x7)/Cube 0:
 Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 2.129 V/m; Power Drift = -0.14 dB
 Peak SAR (extrapolated) = 0.00714 W/kg
 SAR(1 g) = 0.00521 W/kg; SAR(10 g) = 0.00379 W/kg
 Maximum value of SAR (measured) = 0.00626 W/kg

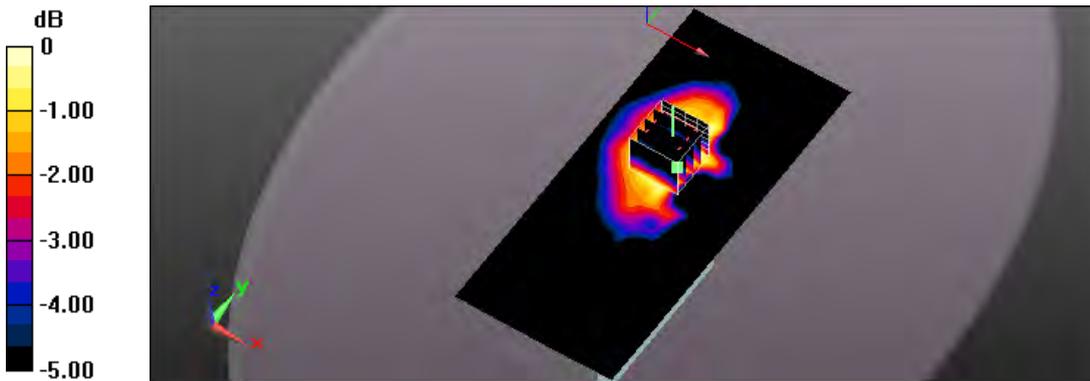

0 dB = 0.00626 W/kg = -22.03 dBW/kg

Test Laboratory: A Test Lab Techno Corp.
 Date: 2016/1/19 Time: AM 02:17:33

4_FRS CH11_Back_0mm_Muscle_Belt clip_Headset_Li-ion
 DUT: GMR4060; Type: Walkie Talkie


Communication System: UID 0, FRS (0); Frequency: 467.638 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 468 \text{ MHz}$; $\sigma = 0.954 \text{ S/m}$; $\epsilon_r = 58.299$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(11.8, 11.8, 11.8); Calibrated: 2015/4/30;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 2015/2/3
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1133
- Measurement SW: DASYS52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (71x161x1):
 Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.00777 W/kg

Flat/Zoom Scan (5x5x7)/Cube 0:
 Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 2.276 V/m; Power Drift = 0.13 dB
 Peak SAR (extrapolated) = 0.00951 W/kg
 $\text{SAR}(1 \text{ g}) = 0.00675 \text{ W/kg}$; $\text{SAR}(10 \text{ g}) = 0.00483 \text{ W/kg}$
 Maximum value of SAR (measured) = 0.00808 W/kg

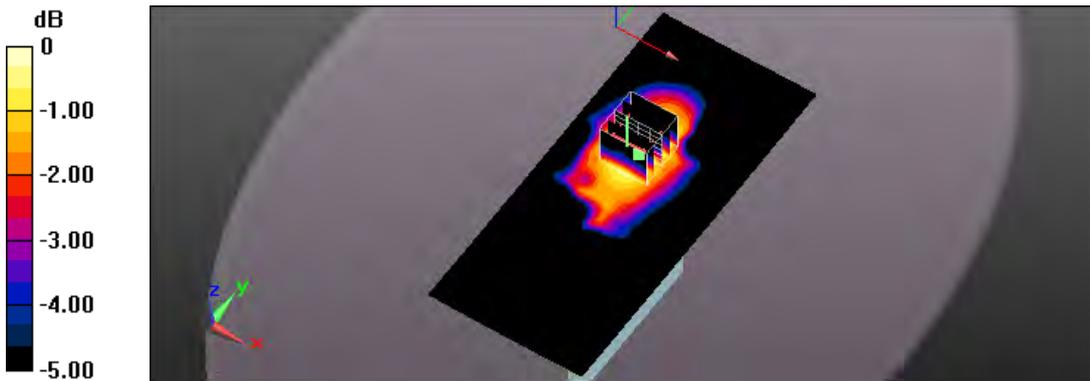

0 dB = 0.00808 W/kg = -20.93 dBW/kg

Test Laboratory: A Test Lab Techno Corp.
 Date: 2016/1/19 Time: AM 01:40:44

5_GMRS CH4_Back_10mm_Muscle_Headset_Li-ion
 DUT: GMR4060; Type: Walkie Talkie


Communication System: UID 0, GMRS (0); Frequency: 462.637 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 463 \text{ MHz}$; $\sigma = 0.949 \text{ S/m}$; $\epsilon_r = 58.327$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(11.8, 11.8, 11.8); Calibrated: 2015/4/30;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 2015/2/3
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1133
- Measurement SW: DASYS52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (71x161x1):
 Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.122 W/kg

Flat/Zoom Scan (5x5x7)/Cube 0:
 Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 9.180 V/m; Power Drift = 0.03 dB
 Peak SAR (extrapolated) = 0.141 W/kg
 $\text{SAR}(1 \text{ g}) = 0.103 \text{ W/kg}$; $\text{SAR}(10 \text{ g}) = 0.076 \text{ W/kg}$
 Maximum value of SAR (measured) = 0.123 W/kg

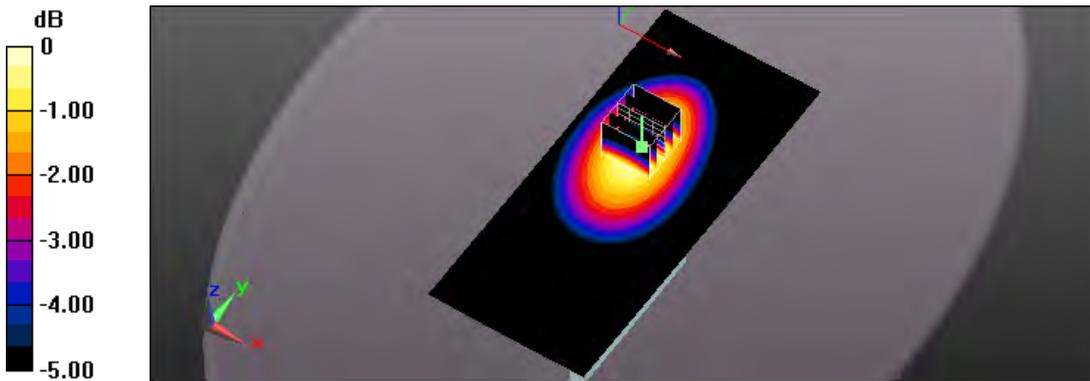

0 dB = 0.123 W/kg = -9.10 dBW/kg

Test Laboratory: A Test Lab Techno Corp.
 Date: 2016/1/19 Time: AM 09:12:16

6_GMRS CH4_Back_0mm_Muscle_Belt clip_Headset_Li-ion
 DUT: GMR4060; Type: Walkie Talkie


Communication System: UID 0, GMRS (0); Frequency: 462.637 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 463 \text{ MHz}$; $\sigma = 0.949 \text{ S/m}$; $\epsilon_r = 58.327$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(11.8, 11.8, 11.8); Calibrated: 2015/4/30;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 2015/2/3
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1133
- Measurement SW: DASYS52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (71x161x1):
 Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.166 W/kg

Flat/Zoom Scan (5x5x7)/Cube 0:
 Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 12.09 V/m; Power Drift = -0.01 dB
 Peak SAR (extrapolated) = 0.191 W/kg
 SAR(1 g) = 0.138 W/kg; SAR(10 g) = 0.100 W/kg
 Maximum value of SAR (measured) = 0.166 W/kg

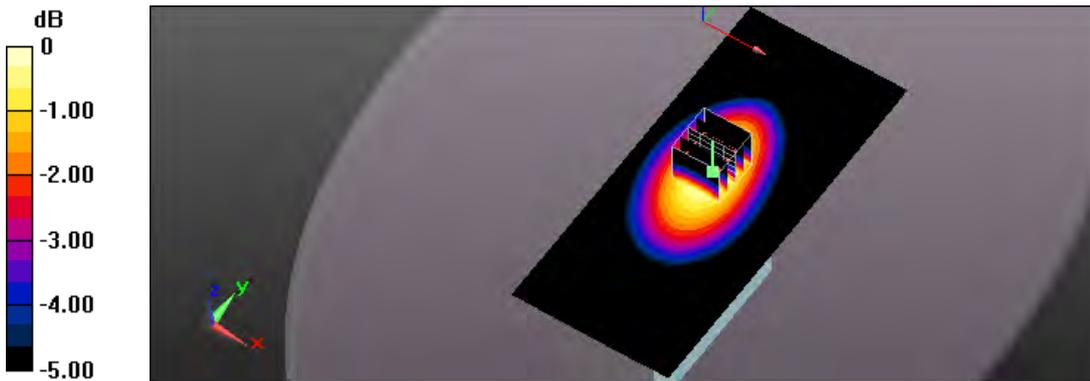

0 dB = 0.166 W/kg = -7.80 dBW/kg

Test Laboratory: A Test Lab Techno Corp.
 Date: 2016/1/19 Time: PM 01:11:36

7_GMRS CH4_Back_0mm_DUT: GMR4060 original 6_Muscle_Belt clip_Headset_Li-ion_measurement_once
 DUT: GMR4060; Type: Walkie Talkie


Communication System: UID 0, GMRS (0); Frequency: 462.637 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 463 \text{ MHz}$; $\sigma = 0.949 \text{ S/m}$; $\epsilon_r = 58.327$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(11.8, 11.8, 11.8); Calibrated: 2015/4/30;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 2015/2/3
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1133
- Measurement SW: DASYS52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat/Area Scan (71x161x1):
 Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.161 W/kg

Flat/Zoom Scan (5x5x7)/Cube 0:
 Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 11.83 V/m; Power Drift = 0.02 dB
 Peak SAR (extrapolated) = 0.186 W/kg
 SAR(1 g) = 0.135 W/kg; SAR(10 g) = 0.098 W/kg
 Maximum value of SAR (measured) = 0.162 W/kg

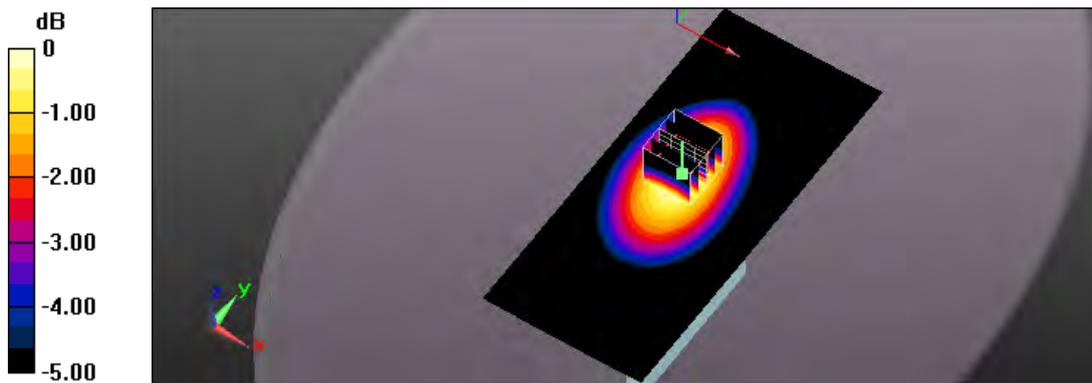

0 dB = 0.162 W/kg = -7.90 dBW/kg



Appendix C - Calibration

All of the instruments Calibration information are listed below.

- Dipole _ D450V2 SN:1021 Calibration No.D450V2-1021_Apr15
- Probe _ EX3DV4 SN:3977 Calibration No.EX3-3977_Apr15
- DAE _ DAE4 SN:541 Calibration No.Z15-97004



**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **ATL (Auden)**

Certificate No: **D450V2-1021_Apr15**

CALIBRATION CERTIFICATE

Object **D450V2 - SN:1021**

Calibration procedure(s) **QA CAL-15.v8
Calibration procedure for dipole validation kits below 700 MHz**

Calibration date: **April 24, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	01-Apr-15 (No. 217-02128)	Mar-16
Power sensor E4412A	MY41498087	01-Apr-15 (No. 217-02128)	Mar-16
Reference 3 dB Attenuator	SN: S5054 (3c)	01-Apr-15 (No. 217-02129)	Mar-16
Reference 20 dB Attenuator	SN: S5058 (20k)	01-Apr-15 (No. 217-02131)	Mar-16
Type-N mismatch combination	SN: 5047.2 / 06327	01-Apr-15 (No. 217-02134)	Mar-16
Reference Probe ET3DV6	SN: 1507	30-Dec-14 (No. ET3-1507_Dec14)	Dec-15
DAE4	SN: 654	30-Jun-14 (No. DAE4-654_Jun14)	Jun-15

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	04-Aug-99 (in house check Apr-13)	In house check: Apr-16
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: April 24, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.



Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Flat Phantom V4.4	Shell thickness: 6 ± 0.2 mm
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	450 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	43.5	0.87 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	43.9 \pm 6 %	0.91 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 W input power	1.24 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	4.80 W/kg \pm 18.1 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 W input power	0.821 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	3.19 W/kg \pm 17.6 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	56.7	0.94 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	55.1 \pm 6 %	0.95 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 W input power	1.19 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	4.69 W/kg \pm 18.1 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 W input power	0.779 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	3.08 W/kg \pm 17.6 % (k=2)



Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	54.6 Ω - 6.5 j Ω
Return Loss	- 22.4 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	52.2 Ω - 8.9 j Ω
Return Loss	- 21.0 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.350 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	February 04, 2004

DASY5 Validation Report for Head TSL

Date: 24.04.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 450 MHz; Type: D450V2; Serial: D450V2 - SN:1021


Communication System: UID 0 - CW; Frequency: 450 MHz
 Medium parameters used: $f = 450 \text{ MHz}$; $\sigma = 0.91 \text{ S/m}$; $\epsilon_r = 43.9$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(6.58, 6.58, 6.58); Calibrated: 30.12.2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn654; Calibrated: 30.06.2014
- Phantom: Flat Phantom 4.4 ; Type: Flat Phantom 4.4; Serial: 1002
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)


Dipole Calibration for Head Tissue/d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 39.78 V/m; Power Drift = 0.00 dB
 Peak SAR (extrapolated) = 1.78 W/kg
SAR(1 g) = 1.24 W/kg; SAR(10 g) = 0.821 W/kg
 Maximum value of SAR (measured) = 1.33 W/kg

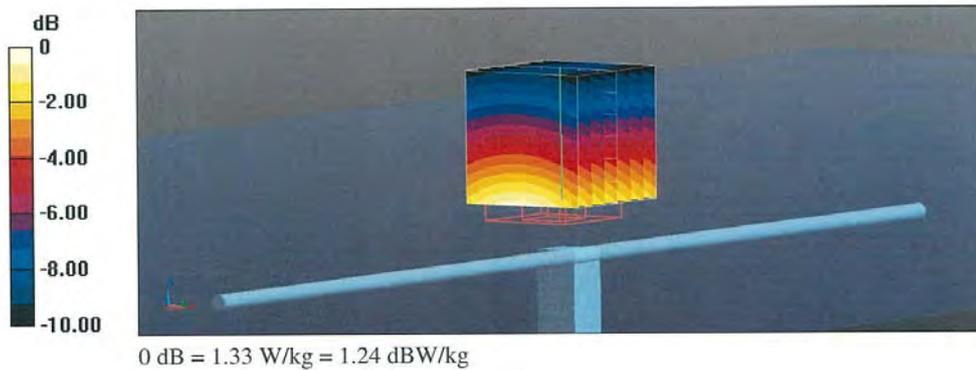



Impedance Measurement Plot for Head TSL

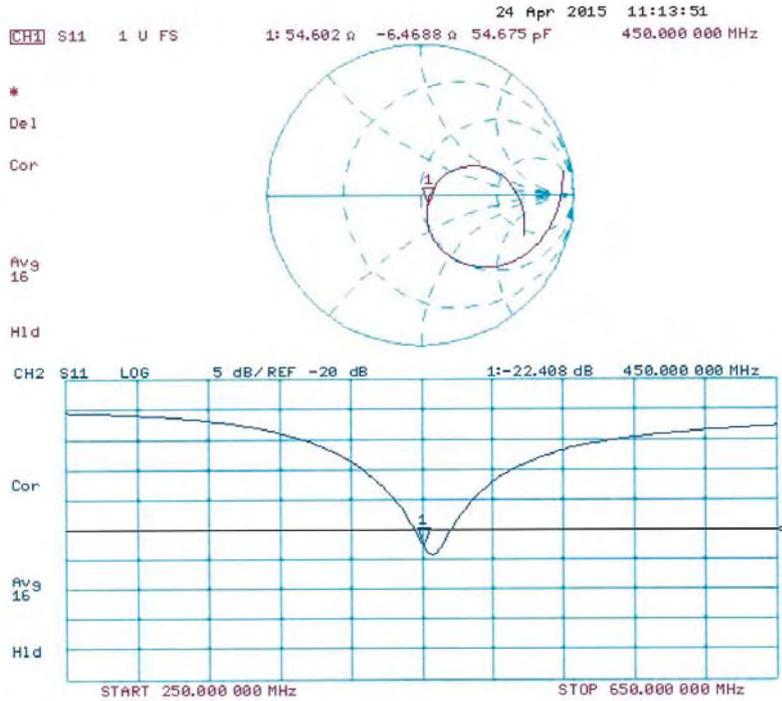

DASY5 Validation Report for Body TSL

Date: 24.04.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 450 MHz; Type: D450V2; Serial: D450V2 - SN:1021

Communication System: UID 0 - CW; Frequency: 450 MHz

Medium parameters used: $f = 450$ MHz; $\sigma = 0.95$ S/m; $\epsilon_r = 55.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(7.05, 7.05, 7.05); Calibrated: 30.12.2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn654; Calibrated: 30.06.2014
- Phantom: Flat Phantom 4.4 ; Type: Flat Phantom 4.4; Serial: 1002
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue/d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 36.66 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 1.92 W/kg

SAR(1 g) = 1.19 W/kg; SAR(10 g) = 0.779 W/kg

Maximum value of SAR (measured) = 1.27 W/kg

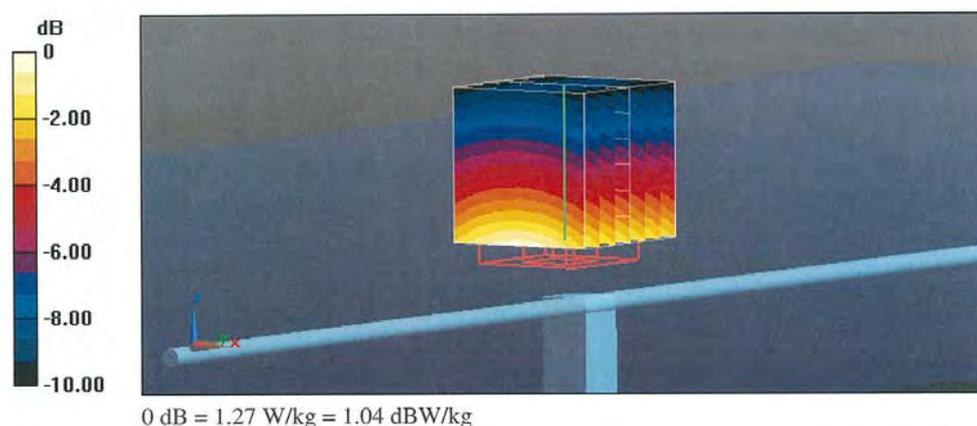

Impedance Measurement Plot for Body TSL

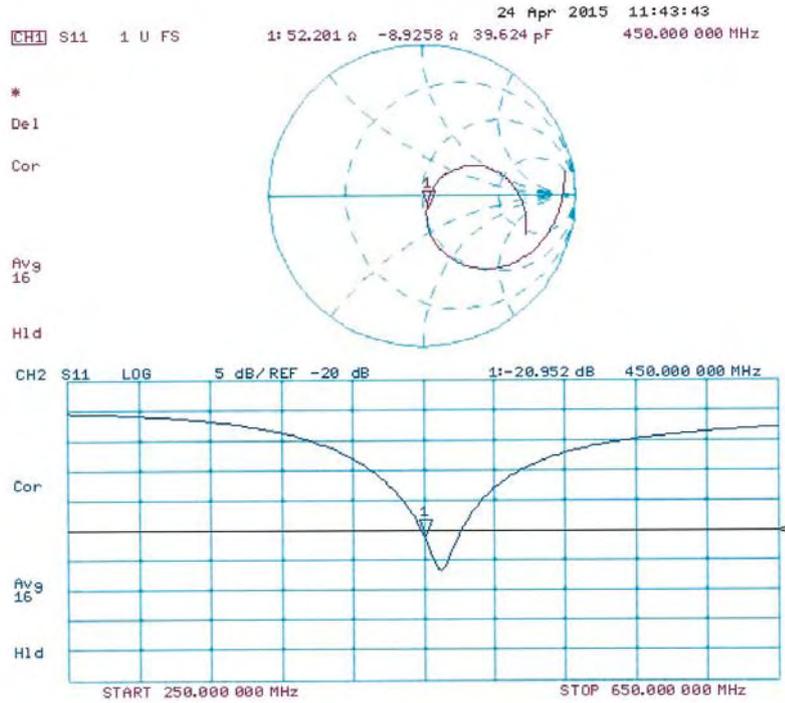



**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **ATL (Auden)**

Certificate No: **EX3-3977_Apr15**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3977**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-12.v9, QA CAL-23.v5, QA CAL-25.v6
Calibration procedure for dosimetric E-field probes**

Calibration date: **April 30, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	01-Apr-15 (No. 217-02128)	Mar-16
Power sensor E4412A	MY41498087	01-Apr-15 (No. 217-02128)	Mar-16
Reference 3 dB Attenuator	SN: S5054 (3c)	01-Apr-15 (No. 217-02129)	Mar-16
Reference 20 dB Attenuator	SN: S5277 (20x)	01-Apr-15 (No. 217-02132)	Mar-16
Reference 30 dB Attenuator	SN: S5129 (30b)	01-Apr-15 (No. 217-02133)	Mar-16
Reference Probe ES3DV2	SN: 3013	30-Dec-14 (No. ES3-3013_Dec14)	Dec-15
DAE4	SN: 660	14-Jan-15 (No. DAE4-660_Jan15)	Jan-16
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-13)	In house check: Apr-16
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: April 30, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: EX3-3977_Apr15

Page 1 of 11

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- **NORM_{x,y,z}:** Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- **NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- **DCP_{x,y,z}:** DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- **PAR:** PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- **A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}:** A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- **ConvF and Boundary Effect Parameters:** Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- **Spherical isotropy (3D deviation from isotropy):** in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- **Sensor Offset:** The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- **Connector Angle:** The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).



EX3DV4 – SN:3977

April 30, 2015

Probe EX3DV4

SN:3977

Manufactured: November 5, 2013
Calibrated: April 30, 2015

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)



EX3DV4- SN:3977

April 30, 2015

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3977

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.54	0.57	0.54	± 10.1 %
DCP (mV) ^B	101.3	101.4	101.4	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	173.3	±3.3 %
		Y	0.0	0.0	1.0		176.3	
		Z	0.0	0.0	1.0		168.3	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



EX3DV4– SN:3977

April 30, 2015

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3977

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^c	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unct. (k=2)
450	43.5	0.87	11.39	11.39	11.39	0.18	1.20	± 13.4 %

^c Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



EX3DV4– SN:3977

April 30, 2015

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3977

Calibration Parameter Determined in Body Tissue Simulating Media


f (MHz) ^c	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^S (mm)	Unct. (k=2)
450	56.7	0.94	11.80	11.80	11.80	0.11	1.25	± 13.4 %

^c Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.



^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

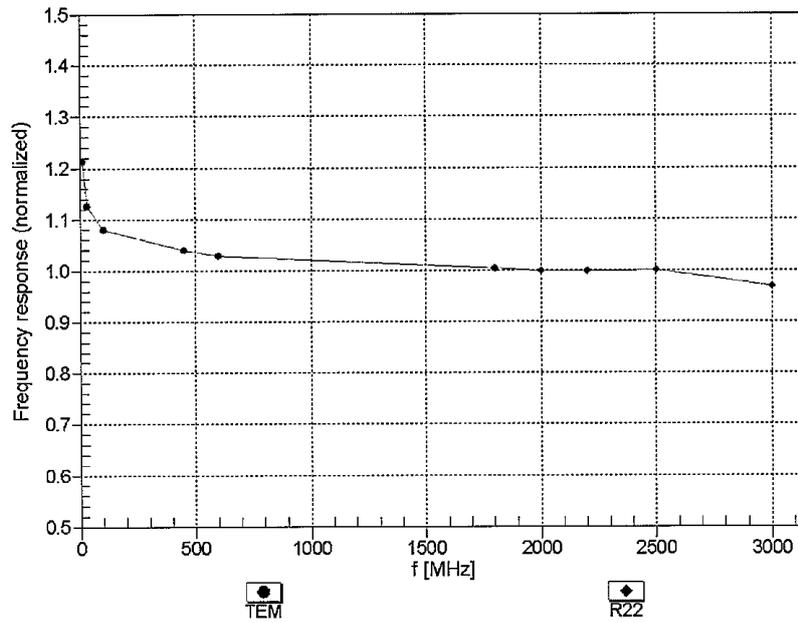



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

Receiving Pattern (ϕ), $\theta = 0^\circ$

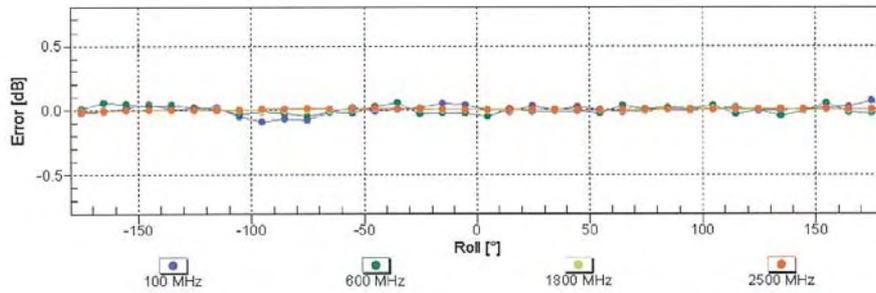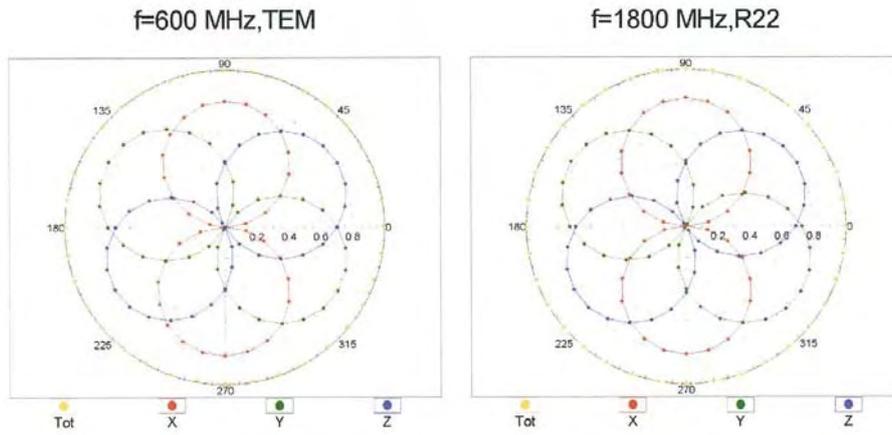


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

Dynamic Range $f(SAR_{head})$ (TEM cell, $f_{eval}=1900$ MHz)

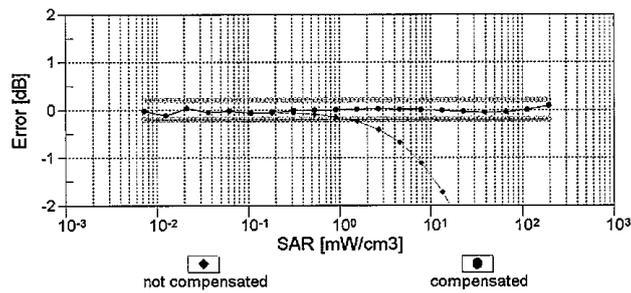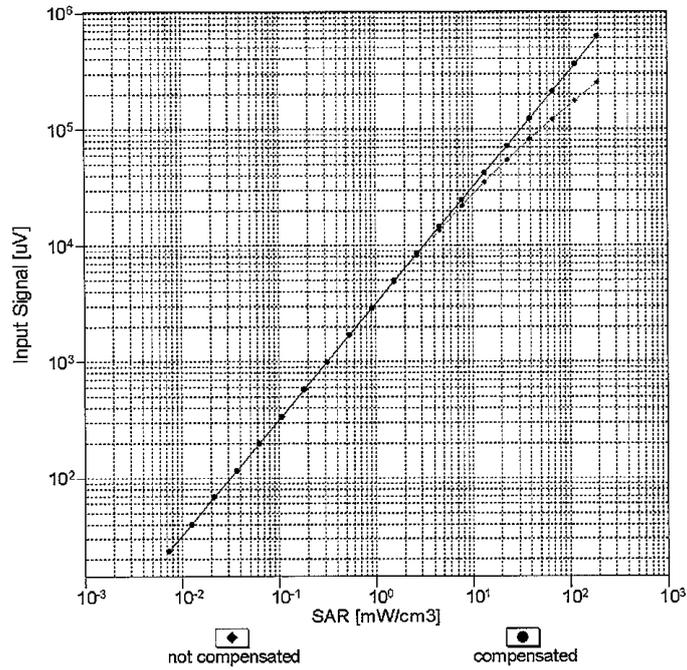


Uncertainty of Linearity Assessment: $\pm 0.6\%$ (k=2)

Conversion Factor Assessment

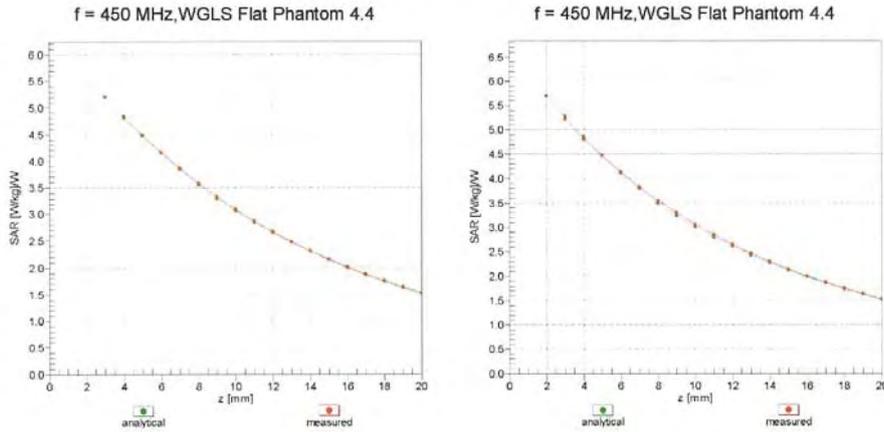

Deviation from Isotropy in Liquid Error (ϕ, θ), f = 900 MHz

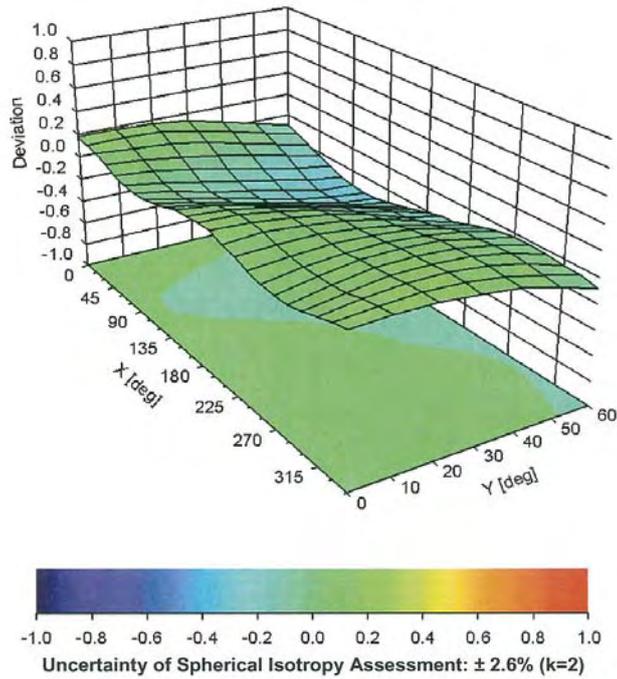



EX3DV4-- SN:3977

April 30, 2015

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3977

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	24.7
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
 E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)



Client : **ATL**

Certificate No: **Z15-97004**

CALIBRATION CERTIFICATE			
Object	DAE4 - SN: 541		
Calibration Procedure(s)	FD-Z11-2-002-01 Calibration Procedure for the Data Acquisition Electronics (DAEx)		
Calibration date:	February 03, 2015		
<p>This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.</p> <p>Calibration Equipment used (M&TE critical for calibration)</p>			
Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Process Calibrator 753	1971018	01-July-14 (CTTL, No:J14X02147)	July-15
Calibrated by:	Name	Function	Signature
	Yu Zongying	SAR Test Engineer	
Reviewed by:	Qi Dianyuan	SAR Project Leader	
Approved by:	Lu Bingsong	Deputy Director of the laboratory	
Issued: February 04, 2015			
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			

Certificate No: Z15-97004

Page 1 of 3



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com Http://www.chinattl.cn

Glossary:

DAE data acquisition electronics
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters:

- *DC Voltage Measurement:* Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle:* The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The report provide only calibration results for DAE, it does not contain other performance test results.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
 E-mail: cttl@chinattl.com Http://www.chinattl.cn

DC Voltage Measurement

A/D - Converter Resolution nominal
 High Range: 1LSB = 6.1μV , full range = -100...+300 mV
 Low Range: 1LSB = 61nV , full range = -1.....+3mV
 DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	404.549 ± 0.15% (k=2)	404.414 ± 0.15% (k=2)	404.175 ± 0.15% (k=2)
Low Range	3.96723 ± 0.7% (k=2)	3.93603 ± 0.7% (k=2)	3.97491 ± 0.7% (k=2)

Connector Angle

Connector Angle to be used in DASY system	290.5° ± 1 °
---	--------------