

849 NW State Road 45
Newberry, Fl 32669 USA
Phone: 888.472.2424 or 352.472.5500
Fax: 352.472.2030
Email: info@timcoengr.com
Website: www.timcoengr.com

FCC PART 15 B CLASS B TEST REPORT

| | |
|----------------------|---|
| Applicant | UNIDEN AMERICA CORPORATION |
| Address | ENGINEERING SERVICES OFFICE 181 N. COUNTRY CLUB ROAD P.O. BOX 580 LAKE CITY SOUTH CAROLINA 29560 UNITED STATES |
| Model Number | BCD396XT |
| Product Description | COMPACT HANDHELD SCANNER |
| Date Sample Received | 9/11/2008 |
| Date Tested | 10/1/2008 |
| Tested By | NAM NGUYEN |
| Approved By | MARIO DE ARANZETA |
| Report Number | 2132BUT8TestReport.doc |
| Test Results | <input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL |

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**



Testing Certificate # 0955-01

APPLICANT: UNIDEN AMERICA CORPORATION
MODEL: BCD396XT
REPORT: U\UNIDEN AMW\2132BUT8\2132BUT8TestReport.doc



TABLE OF CONTENTS

| | |
|---|----|
| GENERAL REMARKS..... | 3 |
| REPORT SUMMARY..... | 4 |
| TEST ENVIRONMENT | 4 |
| TEST SETUP SUMMARY | 4 |
| DUT SPECIFICATION..... | 5 |
| TEST EQUIPMENT LIST..... | 6 |
| TEST PROCEDURES | 7 |
| RADIATED SPURIOUS EMISSIONS..... | 8 |
| POWER LINE CONDUCTED INTERFERENCE..... | 9 |
| RADIATED EMISSIONS TEST SETUP PHOTO | 12 |
| POWERLINE CONDUCTED EMISSIONS TEST SET UP PHOTO | 13 |

APPLICANT: UNIDEN AMERICA CORPORATION
MODEL: BCD396XT
REPORT: U\UNIDEN AMW\2132BUT8\2132BUT8TestReport.doc

GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

The test results only relate to the item tested.

Summary

The device under test does:

- fulfill the general approval requirements as identified in this test report
- not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025:2005 requirements.



Testing Certificate # 0955-01

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, Fl 32669



Authorized Signatory Name:

Mario de Aranzeta C.E.T.
Compliance Engineer/ Lab. Supervisor

Date: 10/1/2008

APPLICANT: UNIDEN AMERICA CORPORATION
MODEL: BCD396XT
REPORT: U\UNIDEN AMW\2132BUT8\2132BUT8TestReport.doc

REPORT SUMMARY

| | |
|--------------------|--|
| Applicable Rule(s) | Pt 15.109, Pt 15.107, ANSI C63.4: 2003 |
|--------------------|--|

TEST ENVIRONMENT

| | |
|----------------------------------|--|
| Test Facility | Timco Engineering, Inc. 849 NW State Road 45 Newberry, FL 32669 USA. |
| Test Condition in the laboratory | Temperature: 26°C Relative humidity: 50% |

TEST SETUP SUMMARY

| | |
|---------------------------------------|--|
| Test Setup Diagram/Description | The DUT was placed on the turntable per setup per ANSI C63.4: 2003. A test set up photo is provided for clarification. |
| Deviation from the standard/procedure | No deviation |
| Modification of DUT | No modification |

DUT SPECIFICATION

| | |
|-----------------------------------|---|
| DUT Description | COMPACT HANDHELD SCANNER |
| Model Number | BCD396XT |
| DUT Power Source | <input checked="" type="checkbox"/> 110-120Vac/50- 60Hz |
| | <input type="checkbox"/> DC Power |
| | <input type="checkbox"/> Battery Operated Exclusively |
| Test Item | <input type="checkbox"/> Prototype |
| | <input checked="" type="checkbox"/> Pre-Production |
| | <input type="checkbox"/> Production |
| Type of Equipment | <input type="checkbox"/> Fixed |
| | <input type="checkbox"/> Mobile |
| | <input checked="" type="checkbox"/> Portable |
| Laboratory Test Conditions | Temperature: 26°C Humidity: 55% |
| Modifications to DUT: | <input checked="" type="checkbox"/> No <input type="checkbox"/> Yes (explanation below) |

TEST EQUIPMENT LIST

| Device | Manufacturer | Model | Serial Number | Cal/Char Date | Due Date |
|---------------------------------------|--------------------|---------------|--------------------------|-------------------|----------|
| 3-Meter Semi-Anechoic Chamber | Panashield | N/A | N/A | Listed 5/11/07 | 5/10/10 |
| AC Voltmeter | HP | 400FL | 2213A14499 | CAL 12/29/06 | 12/29/08 |
| Coaxial Cable #64 | Semflex Inc. | 60637 | Timco #64 | CHAR 3/30/07 | 3/30/09 |
| Antenna: Dipole Kit | Electro-Metrics | TDA-30/1-4 | 152 | CAL 3/3/06 | 3/3/09 |
| Antenna: Dipole Kit | Electro-Metrics | TDA-30/1-4 | 153 | CHAR 4/5/06 | 4/5/09 |
| Frequency Counter | HP | 5385A | 2730A03025 | CAL 7/6/07 | 7/6/09 |
| Hygro-Thermometer | Extech | 445703 | 0602 | CAL 11/15/07 | 11/15/09 |
| Antenna: Log-Periodic | Electro-Metrics | LPA-25 | 1122 | CAL 12/1/06 | 12/1/08 |
| Measuring Tape-7.5M | Kraftixx | 7.5M PROFI | | CHAR 11/13/07 | 11/13/09 |
| Modulation Analyzer | HP | 8901A | 3435A06868 | CAL 5/9/07 | 5/9/09 |
| Digital Multimeter | Fluke | FLUKE-77-3 | 79510405 | CAL 5/14/07 | 5/14/09 |
| System One | Audio Precision | System One | SYS1-45868 | CHAR 2/27/08 | 2/27/10 |
| Analyzer Tan Tower Preamplifier | HP | 8449B-H02 | 3008A00372 | CAL 11/30/07 | 11/30/09 |
| Analyzer Tan Tower Quasi-Peak Adapter | HP | 85650A | 3303A01690 | CAL 11/30/07 | 11/30/09 |
| Analyzer Tan Tower RF Preselector | HP | 85685A | 3221A01400 | CAL 11/30/07 | 11/30/09 |
| Analyzer Tan Tower Spectrum Analyzer | HP | 8566B Opt 462 | 3138A07786 3144A20661 | CAL 11/30/07 | 11/30/09 |
| Temperature Chamber | Tenney Engineering | TTRC | 11717-7 | CHAR 4/25/08 | 4/25/10 |

APPLICANT: UNIDEN AMERICA CORPORATION

MODEL: BCD396XT

REPORT: U\UNIDEN AMW\2132BUT8\2132BUT8TestReport.doc

TEST PROCEDURES

Power line conducted Emission: The test procedure used was ANSI C63.4-2003. The spectrum was scanned from 0.15 to 30 MHz.

Radiation Interference: The test procedure used was ANSI C63.4-2003 using a spectrum analyzer with preselector. The resolution bandwidth used was 100 kHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The video bandwidth was always greater than or equal to the RBW.

The unit under test was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The table used for radiated measurements is capable of continuous rotation. When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes. The frequency was scanned from 30 MHz to 1.0 GHz.. The DUT was measured in three (3) orthogonal planes when necessary.

Formula Of Conversion Factors: The field strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer plus the coax loss. The antenna correction factors are stated in terms of dB. The gain of the preselector was accounted for in the spectrum analyzer meter reading.

Example:

| | | | | |
|------------|---------------|--------------|----------|--------------------|
| Freq (MHz) | Meter Reading | + ACF | +CL | = FS |
| 33 | 20 dBuV | + 10.36 dB/m | +0.40 dB | =30.36 dBuV/m @ 3m |

RADIATED SPURIOUS EMISSIONS

Rules Part No.: 15.109

Requirements:

| Frequency MHz | Limits |
|---------------|---------------------------------------|
| 30 – 88 | 40.0 dB μ V/m measured @ 3 meters |
| 80 – 216 | 43.5 dB μ V/m measured @ 3 meters |
| 216 – 960 | 46.0 dB μ V/m measured @ 3 meters |
| Above 960 | 54.0 dB μ V/m measured @ 3 meters |

Test Data:

| Emission Frequency MHz | Meter Reading dB μ V | Ant. Polarity | Coax Loss dB | Correction Factor dB | Field Strength dB μ V/m | Margin dB |
|------------------------|--------------------------|---------------|--------------|----------------------|-----------------------------|-----------|
| 77.23 | 19.3 | H | 0.59 | 6.47 | 26.36 | 13.64 |
| 77.24 | 4.7 | V | 0.59 | 7.44 | 12.73 | 27.27 |
| 81.75 | 10.1 | H | 0.60 | 6.51 | 17.21 | 22.79 |
| 89.10 | 8.9 | H | 0.62 | 7.88 | 17.40 | 26.10 |
| 103.65 | 11.9 | V | 0.65 | 12.21 | 24.76 | 18.74 |
| 103.70 | 12.1 | H | 0.65 | 11.52 | 24.27 | 19.23 |
| 354.53 | 12.9 | V | 1.15 | 14.69 | 28.74 | 17.26 |
| 354.55 | 7.3 | H | 1.15 | 15.00 | 23.45 | 22.55 |

APPLICANT: UNIDEN AMERICA CORPORATION
 MODEL: BCD396XT
 REPORT: U\UNIDEN AMW\2132BUT8\2132BUT8TestReport.doc

POWER LINE CONDUCTED INTERFERENCE

Rules Part No.: Part 15.107

Requirements:

| Frequency (MHz) | Quasi Peak Limits (dBUv) | Average Limits (dBUV) |
|--|--------------------------|-----------------------|
| 0.15 – 0.5 | 66 – 56 * | 56 – 46 * |
| 0.5 – 5.0 | 56 | 46 |
| 5.0 – 30 | 60 | 50 |
| * Decrease with logarithm of frequency | | |


Test Data: The following plots represent the emissions read for power line conducted. Both lines were observed.

POWERLINE CONDUCTED EMISSIONS – LINE 1

NOTES:

UNIDEN AMERICA CORPORATION - FCC ID: AMWUB359
 POWERLINE CONDUCTED PLOT - LINE 1

FCC 15.107 Mask Class B

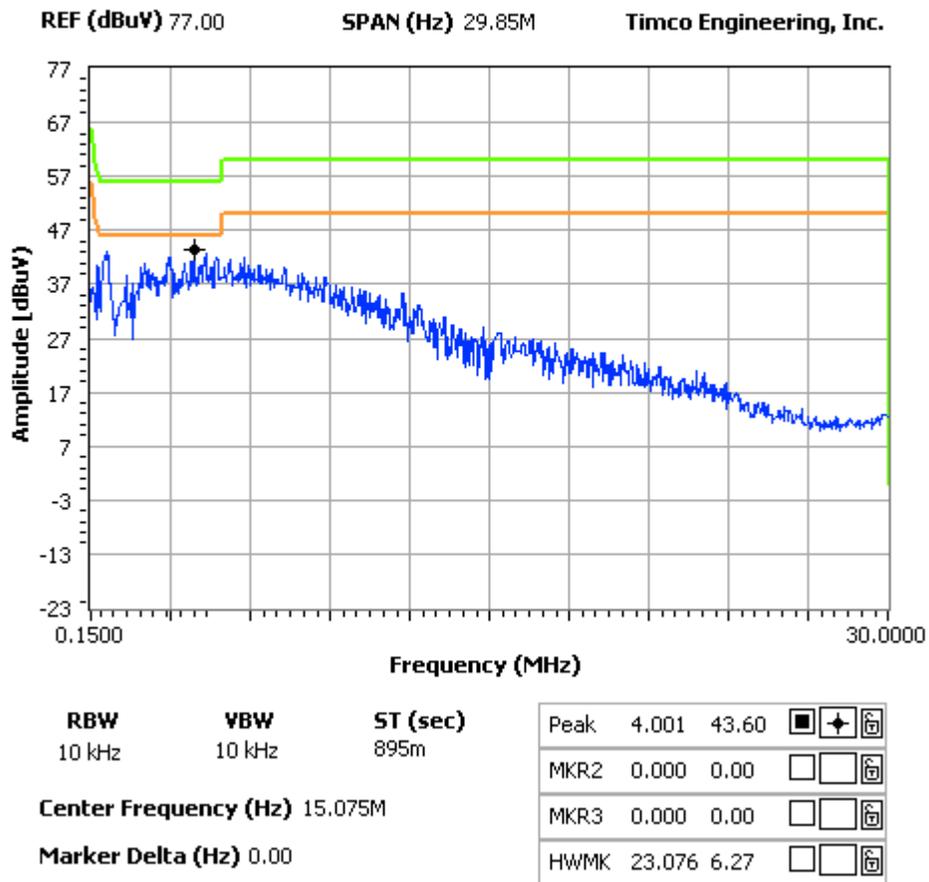


APPLICANT: UNIDEN AMERICA CORPORATION
 MODEL: BCD396XT
 REPORT: U\UNIDEN AMW\2132BUT8\2132BUT8TestReport.doc

POWERLINE CONDUCTED EMISSIONS – LINE 2

NOTES:

UNIDEN AMERICA CORPORATION - FCC ID: AMWUB359
 POWERLINE CONDUCTED PLOT - LINE 2

FCC 15.107 Mask Class B

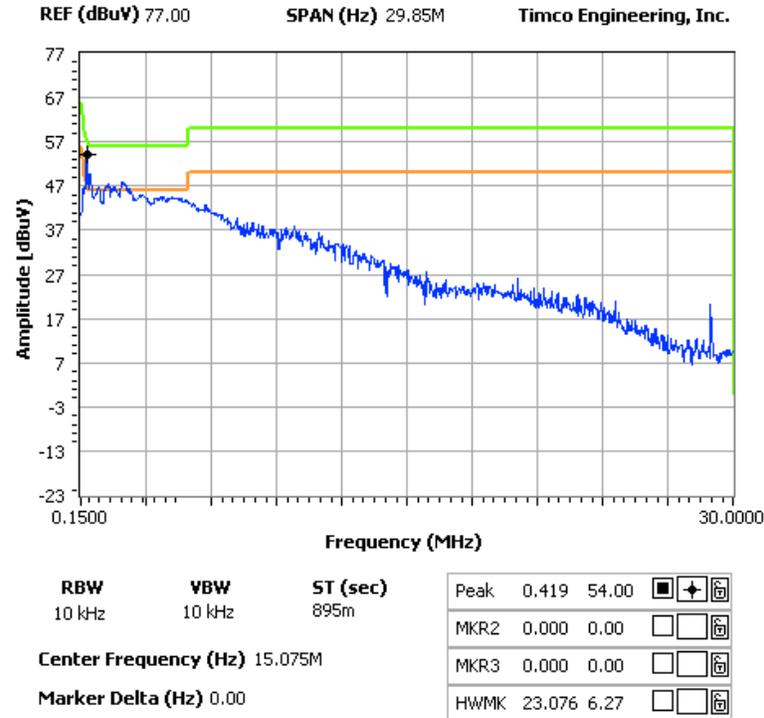

| Averaging | | |
|--------------------------|----------------------|-------------------|
| Emission Frequency (MHz) | Meter Reading (dBuV) | Limit @ EF (dBuV) |
| 0.409 | 46.63 | 47.67 |
| 0.449 | 44.86 | 46.89 |
| 0.552 | 42.37 | 46 |
| 1.239 | 37.05 | 46 |
| 1.589 | 35.73 | 46 |
| 1.974 | 36.08 | 46 |
| 2.279 | 35.29 | 46 |

| Quasi Peak | | |
|--------------------------|----------------------|-------------------|
| Emission Frequency (MHz) | Meter Reading (dBuV) | Limit @ EF (dBuV) |
| 0.415 | 53.84 | 57.55 |
| 0.444 | 52.03 | 57 |
| 0.549 | 50.22 | 56 |
| 0.897 | 46.38 | 56 |
| 1.287 | 46.44 | 56 |
| 1.632 | 46.59 | 56 |
| 2.031 | 46.91 | 56 |

APPLICANT: UNIDEN AMERICA CORPORATION
 MODEL: BCD396XT
 REPORT: U\UNIDEN AMW\2132BUT8\2132BUT8TestReport.doc

RADIATED EMISSIONS TEST SETUP PHOTO



APPLICANT: UNIDEN AMERICA CORPORATION
MODEL: BCD396XT
REPORT: U\UNIDEN AMW\2132BUT8\2132BUT8TestReport.doc

POWERLINE CONDUCTED EMISSIONS TEST SET UP PHOTO



APPLICANT: UNIDEN AMERICA CORPORATION

MODEL: BCD396XT

REPORT: U\UNIDEN AMW\2132BUT8\2132BUT8TestReport.doc