


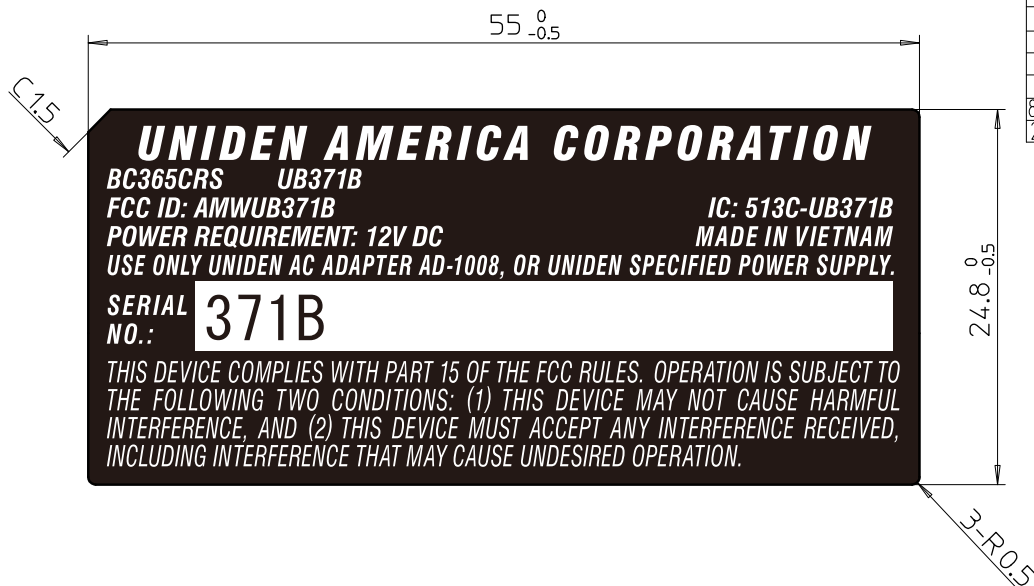

GENERAL TOLERANCE					
	G	H	J	K	L
~ 8	±0.1	±0.1	±0.2	±0.2	±0.4
8up ~ 25	±0.15	±0.15	±0.3	±0.3	±0.6
25up ~ 80	±0.2	±0.25	±0.4	±0.5	±0.8
80up ~ 250	±0.3	±0.4	±0.6	±0.8	±1.2
250over	±0.6	±0.8	±1.0	±1.5	±2.0

DO NOT SCALE DRAWING

(INDICATION OF SERIAL NO.)

XXXXXXXXXX

SERIAL No. 000001~999999
STARTS FROM 000001 EVERY YEAR

FACTORY CODE
EX: UV---8

THE END OF A.D.(YEAR)
EX: 2019---9
2020---0

CAUTION:
 MATERIAL MUST BE MET DIRECTIVE 94/62/EC AS FOLLOWS;
 THE FOLLOWING SUBSTANCE TOTAL CONTENTS SHOULD BE LESS THAN 100ppm
 (1) Cadmium and Cadmium Compounds
 (2) Hexavalent Chromium Compounds
 (3) Lead and Lead Compounds
 (4) Mercury and Mercury Compounds
 MATERIAL MUST BE MET DIRECTIVE 2002/95/EC(RoHS) AS FOLLOWS
 THE FOLLOWING SUBSTANCE EACH CONTENT SHOULD BE LESS THAN 1000ppm
 (5) Polybrominated Biphenyls(PBBs)
 (6) Polybrominated Diphenyl ethers(PBDEs)
 At the time of parts approval request you have to prove and guarantee that the material comply with the above requirement by attaching SAMPLE and 'GREEN PROCUREMENT BASIC INFORMATION SURVEY (CHEMICAL SUBSTANCE) TABLE' When material is changed after parts approval, it necessary to do same thing again.

NOTE

1. MATERIAL : POLYESTER TACK FORM SILVER $t=0.1$
2. PRINT COLOR : BACKGROUND:BLACK
SILVER (LETTER)
3. ARTWORK : DATA:D*****
4. LAMINATE : POLYPROPYLENE (GLOSS) CLEAR $t=0.025$
5. ADHESIVE STRENGTH : MORE THAN 1000g/25mm (180 PEEL OFF TEST)

					CAUTION: Approval sample must be submitted for Uniden(ENG) approval. Using any materials in this drawing before Uniden(ENG) approval is prohibited.			
REV.MARK	CONTENS	REVISED	CHECKED	APPV'D	APPROVED BY	CHECKED BY	DESIGNED BY	DRAWN BY
DRAWING ISSUE STAMP ENG'G. DIM. REQMT. FOR UNIDEN IQC INSP YES NO ANGLE UNITS mm TOLERANCE SCALE 2:1 MOLD CAVITIES pcs TOOL CODE					EBASHI Nov.13'19		KURIH Nov.13'19	KURIH Nov.13'19
ISSUE DATE :					MODEL UB371B BASIC MODEL	PARTS NAME LABEL ID BASIC PARTS CODE		PARTS CODE XXX100000ZZ