



## Test Report - FCC Part 15.247 Spot-Check Applicant: Uniden America Corporation

Signature:

A handwritten signature in black ink, appearing to read 'Tim Royer', written over a horizontal line.

Sr. EMC Engineer  
EMC-003838-NE



Name & Title:

Tim Royer, EMC Engineer

Date of Signature

6/5/2025

Signature:

A handwritten signature in black ink, appearing to read 'Kristoffer Costa', written over a horizontal line.

Name & Title:

Kristoffer Costa, EMC Technician

Date of Signature

6/5/2025

This test report relates only to the items tested as identified and is not valid for any subsequent changes or modifications made to the equipment under test.

## Table of Contents

---

1.	APPLICANT INFORMATION.....	3
1.1	TEST RESULT SUMMARY.....	3
2.	LOCATION OF TESTING.....	4
2.1	TEST LABORATORY.....	4
3.	TEST SAMPLE(S) (EUT/DUT).....	4
3.1	DESCRIPTION OF THE EUT.....	5
3.2	CONFIGURATION OF EUT.....	6
3.3	TEST SETUP OF EUT.....	6
4.	TEST METHODS & APPLICABLE REGULATORY LIMITS.....	7
4.1	TEST METHODS/STANDARDS/GUIDANCE:.....	7
4.2	APPLIED LIMITS AND REGULATORY LIMITS:.....	7
5.	MEASUREMENT UNCERTAINTY.....	7
6.	ENVIRONMENTAL CONDITIONS.....	7
6.1	TEMPERATURE & HUMIDITY.....	7
7.	LIST OF TEST EQUIPMENT AND TEST FACILITY.....	8
7.1	LIST OF TEST EQUIPMENT.....	8
8.	TEST RESULTS.....	9
8.1	BAND-EDGE MEASUREMENTS.....	10
8.1.1	Lower Band Edge Plot, 2402 MHz.....	11
8.1.2	Upper Band Edge Plot, 2480 MHz.....	12
8.2	RADIATED EMISSIONS.....	13
8.2.1	Radiated Emissions, 2402 MHz.....	14
8.2.2	Radiated Emissions, 2426 MHz.....	15
8.2.3	Radiated Emissions, 2480 MHz.....	16
9.	ANNEX-B – TEST SETUP PHOTOGRAPHS.....	17
10.	HISTORY OF TEST REPORT CHANGES.....	17

## 1. Applicant Information

**Applicant:** Uniden America Corporation  
**Address:** 301 International Pkwy  
 Suite 460  
 Flower Mound TX 75022 United States

### 1.1 Test Result Summary

The following test procedure and guidance were used for measuring Digital Transmission System (DTS); FCC KDB 558074 D01 DTS Measurement Guidance and ANSI C63.10-2013. Full test results are available in this report.

No additions to the test methods were needed. There were no deviations, or exclusions from the test methods. No test results are from external providers or from the customer. The test results relate only to the items tested. Timco does not offer opinions and interpretations, only a pass/fail statement.

Applicable Clauses from Part 15.247		
FCC Clauses	Description of the requirements	Result: (Pass, Fail, N/A)
15.247 (d), 15.215 (b)	Conducted Emissions in Non-restricted bands	Pass
15.247 (d), 15.215 (b)	Conducted Emissions at the Band-edge	Pass

Applicable Clauses from Part 2 and Part 15 Subpart C		
FCC Clauses	Description of the requirements	Result: (Pass, Fail, N/A)
15.207	AC Power Conducted Emissions	N/A
15.209	Radiated Emissions	Pass

## 2. Location of Testing

### 2.1 Test Laboratory

Timco Engineering Inc. is a subsidiary of Industrial Inspection & Analysis, Inc. ("IIA"). Testing was performed at IIA's permanent laboratory located at 13146 NW 86<sup>th</sup> Drive, Suite 400, Alachua, Florida 32615.

FCC test firm # 578780  
FCC Designation # US1070  
FCC site registration is under A2LA certificate # 0955.01  
ISED Canada test site registration # 2056A  
EU Notified Body # 1177  
For all designations see A2LA scope # 0955.01

## 3. Test Sample(s) (EUT/DUT)

The test sample was received: 5/28/2025

Dates of Testing: 6/2/2025 – 6/4/2025

### 3.1 Description of the EUT

A description as well as unambiguous identification of the EUT(s) tested. Where more than one sample is required for technical reasons (such as the use of connected units for the purpose of conducted output power testing where the product units will have integral antennas), each specific test shall identify which unit was tested.

Identification	
FCC ID:	AMWUB391
Installed Certified Module FCC ID*:	SH6MDBT53V
Brief Description	Bluetooth Module
Model(s) #	SDS150
Firmware version	N/A
Software version	1.00.17
Serial Number	N/A

Technical Characteristics	
Frequency Range	2400 MHz- 2483.5 MHz
RF O/P Power (Max.)	81.32 dBμV/ -13.91 dBm/ 0.0000406443 W
Modulation	FM
Bandwidth & Emission Class	N/A
Number of Channels	N/A
Duty Cycle	100%
Antenna Connector	SMA
Voltage Rating (AC or Batt.)	3.6VDC

\*Host device is FCC ID AMWUB391 and module installed in host is FCC ID: SH6MDBT53V

### 3.2 Configuration of EUT

Band (MHz)	Mode	Number of Ant.
2400 MHz- 2483.5 MHz	Transmit	1

#### Operating conditions during Testing:

No modifications of the device under test (including firmware, specific software settings, and input/output signal levels to the EUT).

#### Peripherals used during Testing:

No peripherals used.

### 3.3 Test Setup of EUT

Equipment, antenna, and cable arrangement. The setup of the equipment and cable or wire placement on the test site that produces the highest radiated and the highest ac power line conducted emissions shall be shown clearly and described. Information on the orientation of portable equipment during testing shall be included. Drawings or photographs may be used for this purpose.

Test Setups are included in the test report.

#### 4. Test methods & Applicable Regulatory Limits

##### 4.1 Test methods/Standards/Guidance:

Test procedures and guidance for measuring Digital Transmission System (DTS) are provided in the FCC KDB 558074 D01 DTS Measurement Guidance and in Clause 11 of ANSI C63.10-2013.

- 1) ANSI C63.10-2013
- 2) FCC KDB 558074 D01
- 3) KDB 996369 D04 Module Integration Guide v01, May 1 2019, Section 3

##### 4.2 Applied Limits and Regulatory Limits:

- 4) FCC CFR 47 Part 15.247 (2020)

#### 5. Measurement Uncertainty

Parameter	Uncertainty (dB)
Conducted Emissions	± 3.14 dB
Radiated Emissions (9kHz – 30 MHz)	± 3.08 dB
Radiated Emissions (30 – 200 MHz)	± 2.16 dB
Radiated Emissions (200 – 1000 MHz)	± 2.15 dB
Radiated Emissions (1 GHz – 18 GHz)	± 2.14 dB
Radiated Emissions (18 GHz – 40 GHz)	± 2.31 dB
<b>Note:</b> The uncertainties provided in this table represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of K=2.	

#### 6. Environmental Conditions

##### 6.1 Temperature & Humidity

Measurements performed at the test site did not exceed the following:

Temperature	23 C +/- 5%
Humidity	55% +/- 5%
Barometric pressure	30.05 inHg
<b>Note:</b> Specific environmental conditions that are applicable to a specific test are available in the test result section.	

## 7. List of Test Equipment and Test Facility

The test equipment used identified by type, manufacturer, serial number, or other identification and the date on which the next calibration or service check is due.

Description of the firmware or software used to operate EUT for testing purposes.

A complete list of all test equipment used shall be included with the test report. The manufacturer’s model and serial numbers, and date of last calibration, and calibration interval shall be included. Measurement cable loss, measuring instrument bandwidth and detector function, video bandwidth, if appropriate, and antenna factors shall also be included where applicable.

### 7.1 List of Test Equipment

Test Equipment						
Type	Device	Manufacturer	Model	SN#	Current Cal	Cal Due
Antenna	Biconical 1096	Eaton	94455-1	1096	10/3/24	10/3/2027
Antenna, NSA	Log-Periodic 1243	Eaton	96005	1243	10/8/24	10/8/2027
Antenna	Double-Ridged Horn/ETS Horn 1	ETS-Lindgren	3117	00035923	5/31/23	10/27/2026
CHAMBER	CHAMBER	Panashield	3M	N/A	12/29/23	12/18/2025
Pre-amp	Pre-amp	RF-LAMBDA	RLNA00M45GA	NA	7/27/22	7/26/2025
Receiver	EMI Test Receiver R&S ESW44	Rohde & Schwarz	ESW44	103049	1/20/25	1/20/2028
LISN	LISN (Primary)	Electro-Metrics	ANS-25/2	2604	11/10/23	11/10/2026

Software			
Software	Author	Version	Validation on
ESU Firmware	Rohde & Schwarz	4.43 SP3; BIOS v5.1-24-3	2018
RSCCommander	Rohde & Schwarz	1.6.4	2014
ScopeExplorer	LeCroy	v2.25.0.0	2009
Field Strength	Timco	v4.10.7.0	2016

## 8. Test Results

The results of the test are usually indicated in the form of tables, spectrum analyzer plots, charts, sample calculations, as appropriate for each test procedure.

A description and/or a block diagram of the test setup is usually provided.

The measurement results, along with the appropriate limits for comparison, may be presented in tabular or graphical form. In addition, any variation in the measurement environment may be reported if applicable (e.g., a significant change of temperature that could affect the cable loss and amplifier response).

Unless noted otherwise in the referenced standard, the measurements of **ac power-line conducted emissions and conducted power output** will be reported in units of dB $\mu$ V. Unless noted otherwise in the referenced standard, the measurements of **radiated emissions** will be reported in units of decibels, referenced to one microvolt per meter (dB $\mu$ V/m) for electric fields, or to one ampere per meter (dBA/m) for magnetic fields, at the distance specified in the appropriate standards or requirements. The measurements of antenna-conducted power for receivers may be reported in units of dB $\mu$ V if the impedance of the measuring instrument is also reported. Otherwise, antenna-conducted power will be reported in units of decibels referenced to one milliwatt (dBm). All formulas for data conversions and conversion factors, if used, will be included in this measurement report.




### Example:

Freq (MHz)	Meter Reading	+ ACF	+CL	= FS
33	20 dB $\mu$ V	+ 10.36 dB/m	+0.40 dB	=30.36 dB $\mu$ V/m @ 3m

EIRP = Pcond (dBm) + dBi


### 8.1 Band-edge measurements

Requirement from KDB 996369 D04 and test procedure from ANSI C63.10-2013 section 7.8 or 11.13 as applicable.

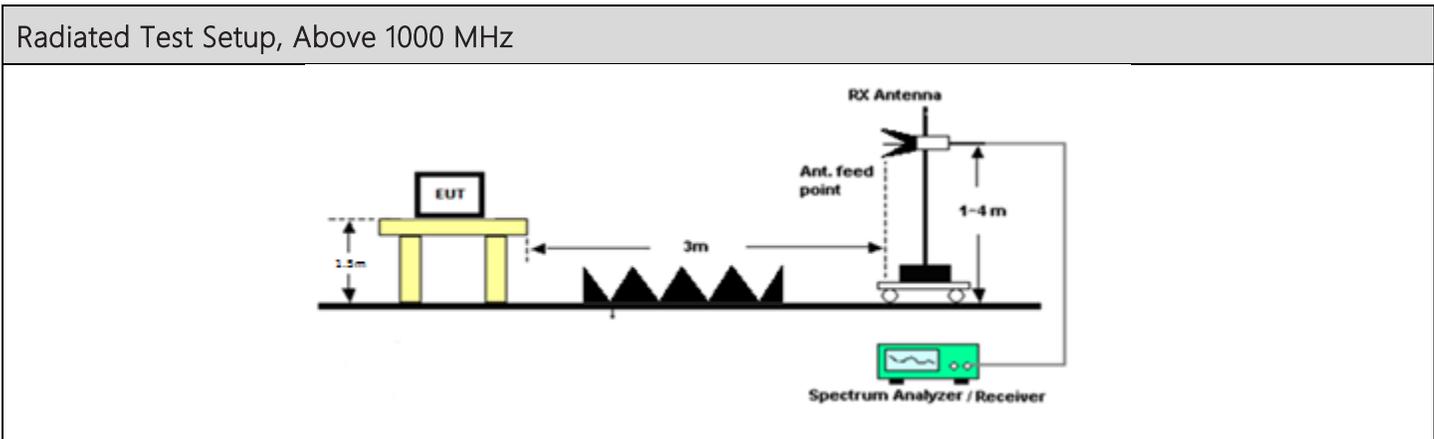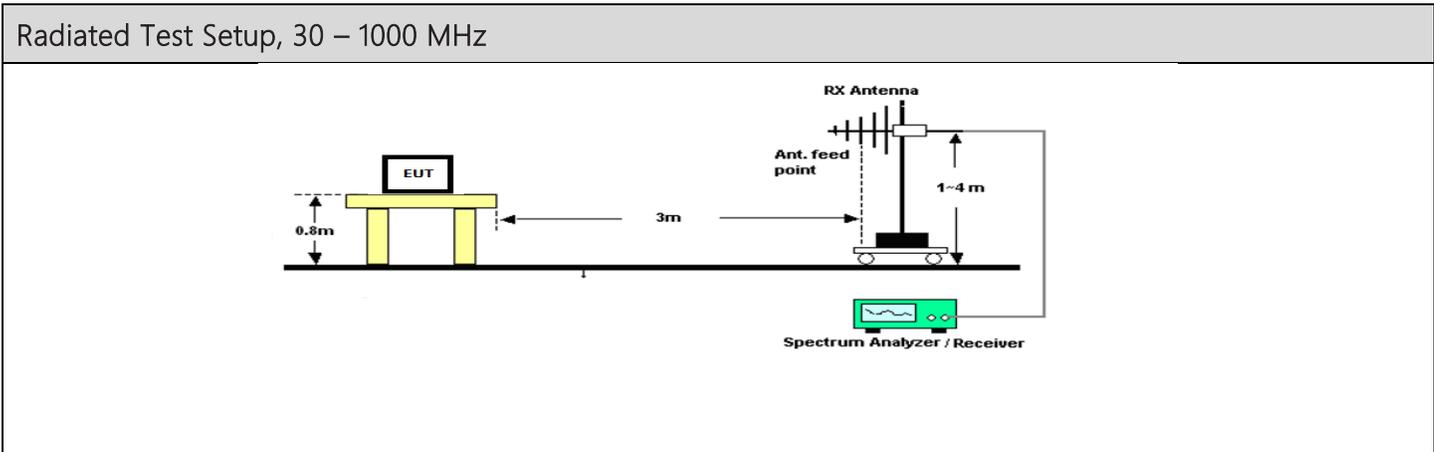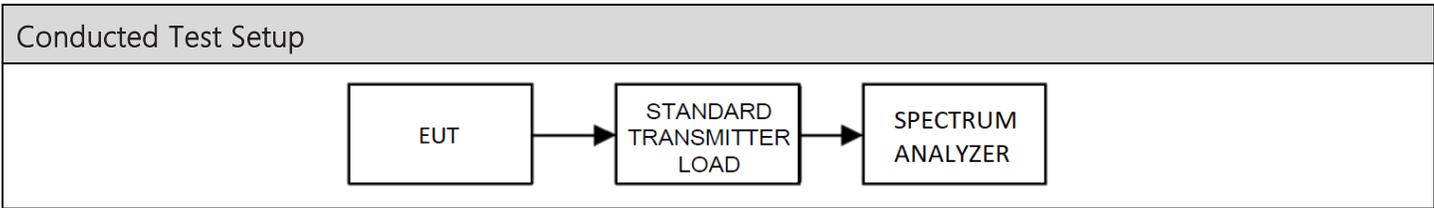

## Band-edge Spectrum Plots

### 8.1.1 Lower Band Edge Plot, 2402 MHz

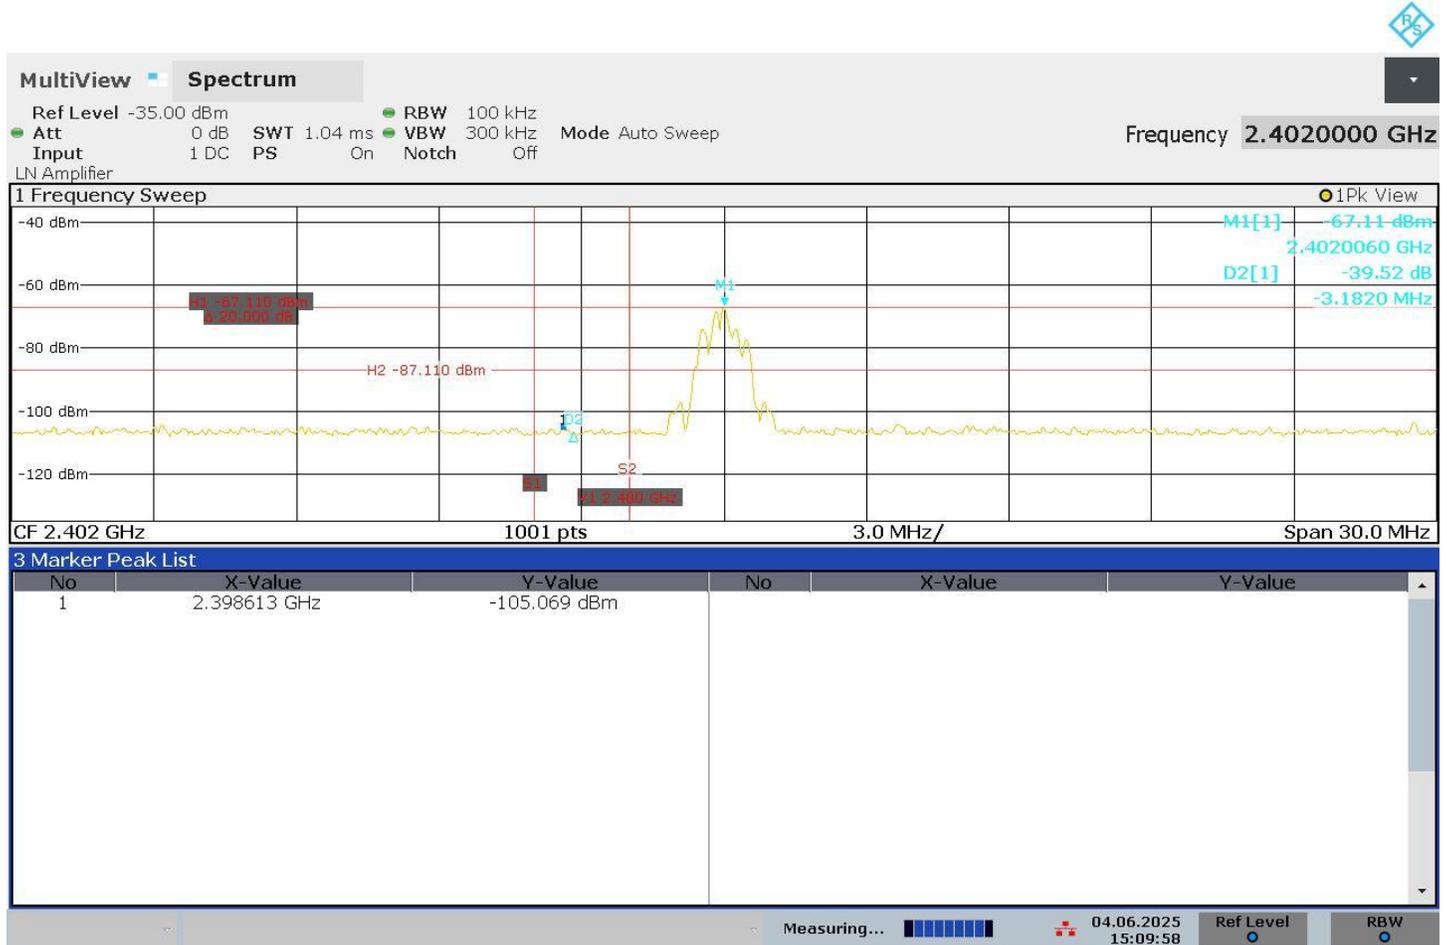


15:09:59 04.06.2025




## 8.2 Radiated Emissions

Restricted Bands from FCC Part 15.205; Limits from FCC Part 15.209


### Radiated Test Setup, Below 30 MHz

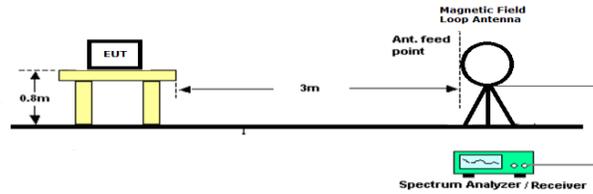

### Radiated Test Setup, 30 – 1000 MHz

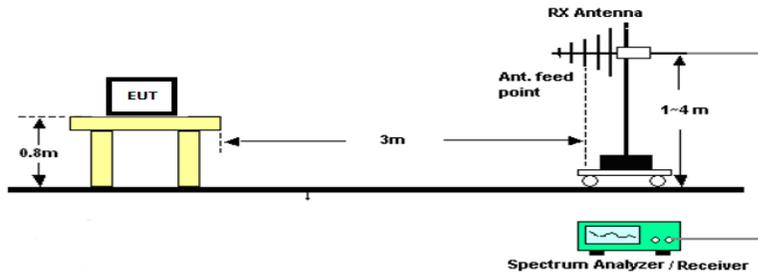

### Radiated Test Setup, Above 1000 MHz

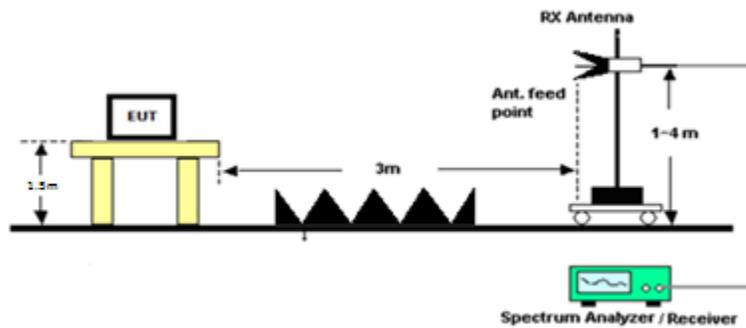

Radiated Emissions Tabular Data

8.2.1 Radiated Emissions, 2402 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	15.205 Restricted Band	15.205, 15.35, 15.247(d)	Meter Reading (dBµV)	Antenna Polarity	Coax Loss (dB)	Duty Cycle Correction (dB)	Antenna Correction Factor	Distance (m)	Field Strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2402.00	4804.00	X	PK	4.00	H	7.10	0.00	34.19	3.00	45.28	73.98	28.70
2402.00	4804.00	X	PK	4.00	V	7.10	0.00	34.19	3.00	45.28	73.98	28.70
2402.00	4804.00	X	AVG	-15.00	H	7.10	0.00	34.19	3.00	26.28	53.98	27.70
2402.00	4804.00	X	AVG	-15.00	V	7.10	0.00	34.19	3.00	26.28	53.98	27.70
2402.00	7206.00		PK	-1.80	H	9.54	0.00	36.31	3.00	44.04	53.98	9.94
2402.00	7206.00		PK	-2.10	V	9.54	0.00	36.31	3.00	43.74	53.98	10.24
2402.00	9608.00		PK	-0.60	H	10.70	0.00	36.81	3.00	46.91	53.98	7.07
2402.00	9608.00		PK	-1.20	V	10.70	0.00	36.81	3.00	46.31	53.98	7.67
2402.00	12010.00	X	PK	-2.30	H	12.40	0.00	38.79	3.00	48.89	73.98	25.09
2402.00	12010.00	X	PK	-1.10	V	12.40	0.00	38.79	3.00	50.09	73.98	23.89
2402.00	12010.00	X	AVG	-16.20	H	12.40	0.00	38.79	3.00	34.99	53.98	18.99
2402.00	12010.00	X	AVG	-16.30	V	12.40	0.00	38.79	3.00	34.89	53.98	19.09
2402.00	14412.00		PK	-3.70	H	13.35	0.00	39.72	3.00	49.37	53.98	4.61
2402.00	14412.00		PK	-3.00	V	13.35	0.00	39.72	3.00	50.07	53.98	3.91
2402.00	16814.00		AVG	-15.50	H	14.60	0.00	42.29	3.00	41.40	53.98	12.58
2402.00	16814.00		AVG	-15.50	V	14.60	0.00	42.29	3.00	41.40	53.98	12.58
2402.00	19216.00	X	PK	-1.20	H	16.00	0.00	16.00	3.00	30.80	73.98	43.18
2402.00	19216.00	X	PK	-1.30	V	16.00	0.00	16.00	3.00	30.70	73.98	43.28
2402.00	19216.00	X	AVG	-14.70	H	16.00	0.00	16.00	3.00	17.30	53.98	36.68
2402.00	19216.00	X	AVG	-14.70	V	16.00	0.00	16.00	3.00	17.30	53.98	36.68
2402.00	21618.00		PK	0.40	H	16.90	0.00	16.90	3.00	34.20	53.98	19.78
2402.00	21618.00		PK	0.90	V	16.90	0.00	16.90	3.00	34.70	53.98	19.28
2402.00	24020.00		PK	3.30	H	17.95	0.00	17.95	3.00	39.20	53.98	14.78
2402.00	24020.00		PK	3.50	V	17.95	0.00	17.95	3.00	39.40	53.98	14.58

## 8.2.2 Radiated Emissions, 2426 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	15.205 Restricted Band	15.205, 15.35, 15.247(d) Detector	Meter Reading (dBµV)	Antenna Polarity	Coax Loss (dB)	Duty Cycle Correction (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2426.00	4852.00	X	PK	5.20	H	7.23	0.00	34.17	3.00	46.59	73.98	27.39
2426.00	4852.00	X	PK	5.80	V	7.23	0.00	34.17	3.00	47.19	73.98	26.79
2426.00	4852.00	X	AVG	-13.70	H	7.23	0.00	34.17	3.00	27.69	53.98	26.29
2426.00	4852.00	X	AVG	-13.60	V	7.23	0.00	34.17	3.00	27.79	53.98	26.19
2426.00	7278.00	X	PK	-2.50	H	9.56	0.00	36.48	3.00	43.54	73.98	30.44
2426.00	7278.00	X	PK	-1.90	V	9.56	0.00	36.48	3.00	44.14	73.98	29.84
2426.00	7278.00	X	AVG	-16.00	H	9.56	0.00	36.48	3.00	30.04	53.98	23.94
2426.00	7278.00	X	AVG	-16.00	V	9.56	0.00	36.48	3.00	30.04	53.98	23.94
2426.00	9704.00		PK	-2.00	H	10.87	0.00	37.01	3.00	45.89	53.98	8.09
2426.00	9704.00		PK	-1.10	V	10.87	0.00	37.01	3.00	46.79	53.98	7.19
2426.00	12130.00	X	PK	-2.80	H	12.31	0.00	38.87	3.00	48.37	73.98	25.61
2426.00	12130.00	X	PK	-3.00	V	12.31	0.00	38.87	3.00	48.17	73.98	25.81
2426.00	12130.00	X	AVG	-16.60	H	12.31	0.00	38.87	3.00	34.57	53.98	19.41
2426.00	12130.00	X	AVG	-16.60	V	12.31	0.00	38.87	3.00	34.57	53.98	19.41
2426.00	14556.00		PK	-3.40	H	13.77	0.00	39.76	3.00	50.13	53.98	3.85
2426.00	14556.00		PK	-3.70	V	13.77	0.00	39.76	3.00	49.83	53.98	4.15
2426.00	16982.00		AVG	-15.80	H	14.81	0.00	42.14	3.00	41.15	53.98	12.83
2426.00	16982.00		AVG	-15.70	V	14.81	0.00	42.14	3.00	41.25	53.98	12.73
2426.00	19408.00	X	PK	-1.20	H	15.58	0.00	15.58	3.00	29.97	73.98	44.01
2426.00	19408.00	X	PK	-1.30	V	15.58	0.00	15.58	3.00	29.87	73.98	44.11
2426.00	19408.00	X	AVG	-15.00	H	15.58	0.00	15.58	3.00	16.17	53.98	37.81
2426.00	19408.00	X	AVG	-15.00	V	15.58	0.00	15.58	3.00	16.17	53.98	37.81
2426.00	21834.00		PK	0.40	H	17.00	0.00	17.00	3.00	34.41	53.98	19.57
2426.00	21834.00		PK	-0.10	V	17.00	0.00	17.00	3.00	33.91	53.98	20.07
2426.00	24260.00		PK	4.30	H	18.03	0.00	18.03	3.00	40.36	53.98	13.62
2426.00	24260.00		PK	4.10	V	18.03	0.00	18.03	3.00	40.16	53.98	13.82

### 8.2.3 Radiated Emissions, 2480 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	15.205 Restricted Band	15.205, 15.35, 15.247(d) Detector	Meter Reading (dBµV)	Antenna Polarity	Coax Loss (dB)	Duty Cycle Correction (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2480.00	4960.00	X	PK	4.40	H	7.72	0.00	33.99	3.00	46.11	73.98	27.87
2480.00	4960.00	X	PK	4.60	V	7.72	0.00	33.99	3.00	46.31	53.98	7.67
2480.00	4960.00	X	AVG	-14.30	H	7.72	0.00	33.99	3.00	27.41	53.98	26.57
2480.00	4960.00	X	AVG	-14.30	V	7.72	0.00	33.99	3.00	27.41	53.98	26.57
2480.00	7440.00	X	PK	-2.10	H	9.56	0.00	36.21	3.00	43.67	73.98	30.31
2480.00	7440.00	X	PK	-1.70	V	9.56	0.00	36.21	3.00	44.07	73.98	29.91
2480.00	7440.00	X	AVG	-15.90	H	9.56	0.00	36.21	3.00	29.87	53.98	24.11
2480.00	7440.00	X	AVG	-15.80	V	9.56	0.00	36.21	3.00	29.97	53.98	24.01
2480.00	9920.00		PK	-2.50	H	11.15	0.00	37.07	3.00	45.72	53.98	8.26
2480.00	9920.00		PK	-1.90	V	11.15	0.00	37.07	3.00	46.32	53.98	7.66
2480.00	12400.00	X	PK	-2.90	H	12.54	0.00	39.26	3.00	48.90	73.98	25.08
2480.00	12400.00	X	PK	-2.90	V	12.54	0.00	39.26	3.00	48.90	73.98	25.08
2480.00	12400.00	X	AVG	-16.50	H	12.54	0.00	39.26	3.00	35.30	53.98	18.68
2480.00	12400.00	X	AVG	-16.50	V	12.54	0.00	39.26	3.00	35.30	53.98	18.68
2480.00	14880.00		PK	-3.80	H	13.44	0.00	40.09	3.00	49.74	53.98	4.24
2480.00	14880.00		PK	-4.20	V	13.44	0.00	40.09	3.00	49.34	53.98	4.64
2480.00	17360.00		AVG	-14.70	H	15.01	0.00	41.59	3.00	41.90	53.98	12.08
2480.00	17360.00		AVG	-14.70	V	15.01	0.00	41.59	3.00	41.90	53.98	12.08
2480.00	19840.00	X	PK	-1.20	H	16.21	0.00	16.21	3.00	31.23	73.98	42.75
2480.00	19840.00	X	PK	-0.90	V	16.21	0.00	16.21	3.00	31.53	73.98	42.45
2480.00	19840.00	X	AVG	-15.00	H	16.21	0.00	16.21	3.00	17.43	53.98	36.55
2480.00	19840.00	X	AVG	-14.90	V	16.21	0.00	16.21	3.00	17.53	53.98	36.45
2480.00	22320.00	X	PK	0.30	H	17.02	0.00	17.02	3.00	34.33	73.98	39.65
2480.00	22320.00	X	PK	0.90	V	17.02	0.00	17.02	3.00	34.93	73.98	39.05
2480.00	22320.00	X	AVG	-13.20	H	17.02	0.00	17.02	3.00	20.83	53.98	33.15
2480.00	22320.00	X	AVG	-13.20	V	17.02	0.00	17.02	3.00	20.83	53.98	33.15
2480.00	24800.00		PK	7.00	H	18.07	0.00	18.07	3.00	43.14	53.98	10.84
2480.00	24800.00		PK	6.70	V	18.07	0.00	18.07	3.00	42.84	53.98	11.14

## 9. ANNEX-B – Test Setup Photographs

Test setup photographs are located in a separate supplementary ANNEX-B document.

## 10. History of Test Report Changes

Test Report #	Revision #	Description	Date of Issue
TR_21242-25_FCC 15.247 SC_	1	Initial release	6/5/2025
	2	Changes in 3.1	7/8/2025



13146 NW 86<sup>th</sup> Drive, Suite 400, Alachua, Florida 32615  
(352) 472-5500 / [testing@industrial-ia.com](mailto:testing@industrial-ia.com)

---

END OF TEST REPORT

---