


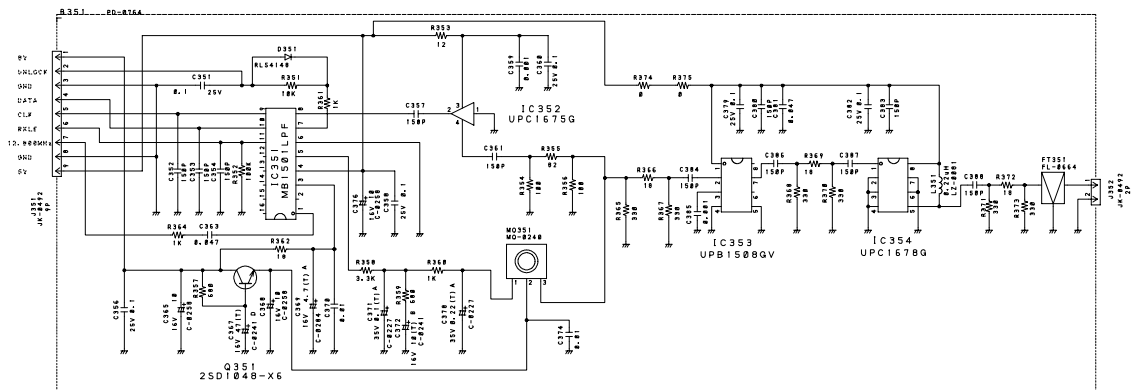

NOTES:

1. RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED. (K=KILLO OHM, M=MEG OHM)
2. RESISTOR RATINGS ARE [1/10W] UNLESS OTHERWISE NOTED.
3. CAPACITANCE VALUES ARE INDICATED IN MICRO FARADS UNLESS OTHERWISE NOTED. (P=PICO-MICRO FARAD)
4. ALL CAPACITORS TEMPERATURE CHARACTERISTICS ARE [CH] (LESS THAN 100PPF) OR [B] (MORE THAN 100PPF) UNLESS OTHERWISE NOTED.

5. CHIP PARTS ARE NOT SPECIFIED IN THIS DRAWING PLEASE REFER TO THE PARTS LIST FOR THE CHIP PARTS.
6. CHIP CAPACITORS TYPE ARE [2125] UNLESS OTHERWISE NOTED.

DESIGN	DRAWN BY	UNIDEN No.	MODEL No.
		UL-107Z	MRU408L
CHECK BY	APPROV BY	TITLE RX PLL MODULE	
		SCHEMATIC DIAGRAM	
		DRAWING No.	
REV. No.		UNIDEN CORP.	

