

	<u>Date(s) of Evaluation</u> November 10, 14, 2011	<u>Test Report Serial No.</u> 110811AMW-T1131-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	
	<u>Test Report Issue Date</u> December 12, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

DECLARATION OF COMPLIANCE		SAR RF EXPOSURE EVALUATION				FCC & IC	
Test Lab Information	Name	CELLTECH LABS INC.					
	Address	21-364 Lougheed Road, Kelowna, British Columbia V1X 7R8 Canada					
Test Lab Accreditation(s)	ISO 17025	A2LA Test Lab Certificate No. 2470.01					
Applicant Information	Name	UNIDEN AMERICA CORPORATION					
	Address	4700 Amon Carter Boulevard, Fort Worth, Texas 76155 United States					
Application Type(s)	FCC	Part 95 Certification					
	IC	RSS-210 Certification					
Standard(s) Applied	FCC	47 CFR §2.1093	IC	Health Canada Safety Code 6			
	FCC	OET Bulletin 65, Supplement C (Edition 01-01)			KDB 447498 D01v04		
Procedure(s) Applied	IC	RSS-102 Issue 4	IEEE	1528-2003	IEC	62209-2:2010	
	FCC ID:	AMWUT064					
Device Identifier(s)	IC:	513C-UT064					
	Date of Sample Receipt	November 08, 2011	Date(s) of SAR Evaluation	November 10, 14, 2011			
Device Model(s)	GMR4099 (Base Model)						
	GMR4040 (electrically & mechanically identical to GMR4099 - front panel color difference only)						
Test Sample Serial No.	TA Sample No. 3 - GMR4099 Base Model (Identical Prototype)						
Test Sample Hardware Rev. No.	EPP Stage	Test Sample Hardware Rev. No.	EPP Stage				
Device Description	Portable FM UHF GMRS/FRS Push-To-Talk (PTT) Radio Transceiver						
Transmit Frequency Range(s)	462.5500 - 462.7250 MHz (GMRS Channels 15-22)						
	467.5625 - 467.7125 MHz (FRS Channels 8-14)						
Max. RF Output Power Measured	GMRS	0.92 W	29.64 dBm	ERP	462.5625 MHz	Ch1	Boost Mode
	GMRS	0.65 W	28.13 dBm	ERP	462.5625 MHz	Ch1	Normal Mode
	FRS	0.39 W	25.91 dBm	ERP	467.5625 MHz	Ch8	Normal Mode
Battery Type(s) Tested	Ni-MH Battery Pack		Model: BP-1029			3.6V, 650mAh	
	Alkaline Energizer		AAA (x3)			4.5V	
Antenna Type(s) Tested	Permanent (Non-detachable)						
Body-worn Accessories Tested	Belt-Clip (Plastic)		does not contain metal			supplied with DUT	
	Carabiner		contains metal			supplied with DUT	
Audio Accessory Tested	Headset-Microphone					P/N: ZA-133	
Max. SAR Level(s) Evaluated	Face-held	0.720 W/kg	1g	50% PTT duty factor			General Population / Uncontrolled Environment
	Body-worn	1.05 W/kg	1g	50% PTT duty factor			
FCC/IC Spatial Peak SAR Limit	Head/Body	1.6 W/kg	1g	50% PTT duty factor			
Celltech Labs Inc. declares under its sole responsibility that this wireless portable device has demonstrated compliance with the Specific Absorption Rate (SAR) RF exposure requirements specified in FCC 47 CFR §2.1093 and Health Canada's Safety Code 6 for the General Population / Uncontrolled Exposure environment. The device was tested in accordance with the measurement procedures specified in FCC OET Bulletin 65, Supplement C (Edition 01-01), Industry Canada RSS-102 Issue 4, IEEE Standard 1528-2003 and International Standard IEC 62209-2:2010. All measurements were performed in accordance with the SAR system manufacturer recommendations.							
I attest to the accuracy of data. All measurements were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.							
The results and statements contained in this report pertain only to the device(s) evaluated.							
This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc.							
Test Report Approved By			Sean Johnston	Lab Manager	Celltech Labs Inc.		

Applicant:	Uniden America Corporation	FCC ID:	AMWUT064	IC:	513C-UT064	
DUT Type:	Portable GMRS/FRS UHF PTT Radio Transceiver	DUT Model(s):	GMR4099 / GMR4040			
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 1 of 47

	<u>Date(s) of Evaluation</u> November 10, 14, 2011	<u>Test Report Serial No.</u> 110811AMW-T1131-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 12, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

TABLE OF CONTENTS

1.0 INTRODUCTION	4
2.0 SAR MEASUREMENT SYSTEM	4
3.0 REFERENCE OUTPUT POWER MEASUREMENT	5
4.0 FCC POWER THRESHOLDS FOR PTT DEVICES ($F < 0.5$ GHZ)	5
5.0 SAR PROBE CALIBRATION & MEASUREMENT FREQUENCIES	5
6.0 FLUID DIELECTRIC PARAMETERS	6
7.0 SAR MEASUREMENT SUMMARY	8
8.0 DETAILS OF SAR EVALUATION	9
9.0 SAR EVALUATION PROCEDURES	9
10.0 SYSTEM PERFORMANCE CHECK	10
11.0 SIMULATED EQUIVALENT TISSUES	11
12.0 SAR LIMITS	11
13.0 ROBOT SYSTEM SPECIFICATIONS	12
14.0 PROBE SPECIFICATION (ET3DV6)	13
15.0 BARKSI PLANAR PHANTOM	13
16.0 DEVICE HOLDER	13
17.0 TEST EQUIPMENT LIST	14
18.0 JUSTIFICATION FOR EXTENDED SAR DIPOLE CALIBRATION	14
19.0 MEASUREMENT UNCERTAINTIES	15
20.0 REFERENCES	16
APPENDIX A - SAR MEASUREMENT PLOTS	17
APPENDIX B - SYSTEM PERFORMANCE CHECK PLOTS	27
APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS	32
APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS	35
APPENDIX E - DIPOLE CALIBRATION	45
APPENDIX F - PROBE CALIBRATION	46
APPENDIX G - BARKSI PLANAR PHANTOM CERTIFICATE OF CONFORMITY	47

Applicant:	Uniden America Corporation	FCC ID:	AMWUT064	IC:	513C-UT064	
DUT Type:	Portable GMRS/FRS UHF PTT Radio Transceiver	DUT Model(s):	GMR4099 / GMR4040			
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 2 of 47

	<u>Date(s) of Evaluation</u> November 10, 14, 2011	<u>Test Report Serial No.</u> 110811AMW-T1131-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 12, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

REVISION HISTORY			
REVISION NO.	DESCRIPTION	IMPLEMENTED BY	RELEASE DATE
1.0	1st Release	Jon Hughes	December 08, 2011
1.1	2nd Release	Jon Hughes	December 12, 2011
	Corrected Section 3.0		

TEST REPORT SIGN-OFF			
DEVICE TESTED BY	REPORT PREPARED BY	QA REVIEW BY	REPORT APPROVED BY
Mike Meaker	Mike Meaker	Jon Hughes	Sean Johnston

Applicant:	Uniden America Corporation	FCC ID:	AMWUT064	IC:	513C-UT064	
DUT Type:	Portable GMRS/FRS UHF PTT Radio Transceiver	DUT Model(s):	GMR4099 / GMR4040			
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 3 of 47


	<u>Date(s) of Evaluation</u> November 10, 14, 2011	<u>Test Report Serial No.</u> 110811AMW-T1131-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 12, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

1.0 INTRODUCTION

This measurement report demonstrates that the Uniden America Corporation Models: GMR4099 / GMR4040 Portable FM GMRS/FRS UHF Push-To-Talk (PTT) Radio Transceiver complies with the SAR (Specific Absorption Rate) RF exposure requirements specified in FCC 47 CFR §2.1093 (see reference [1]) and Health Canada's Safety Code 6 (see reference [2]) for the General Population / Uncontrolled Exposure environment. The test procedures described in FCC OET Bulletin 65, Supplement C Edition 01-01 (see reference [3]), IC RSS-102 Issue 4 (see reference [4]), IEEE Standard 1528-2003 (see reference [5]) and International Standard IEC 62209-2:2010 (see reference [6]) were employed. A description of the product and operating configuration, detailed summary of the test results, methodology and procedures used in the evaluation, equipment used, and the provisions of the rules are included within this test report.

2.0 SAR MEASUREMENT SYSTEM

Celltech Labs Inc. SAR measurement facility utilizes the Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY4 measurement system is comprised of the measurement server, robot controller, computer, near-field probe, probe alignment sensor, specific anthropomorphic mannequin (SAM) phantom, and various planar phantoms for head and/or body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the DASY4 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the DASY4 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot utilizes a controller with built in VME-bus computer.

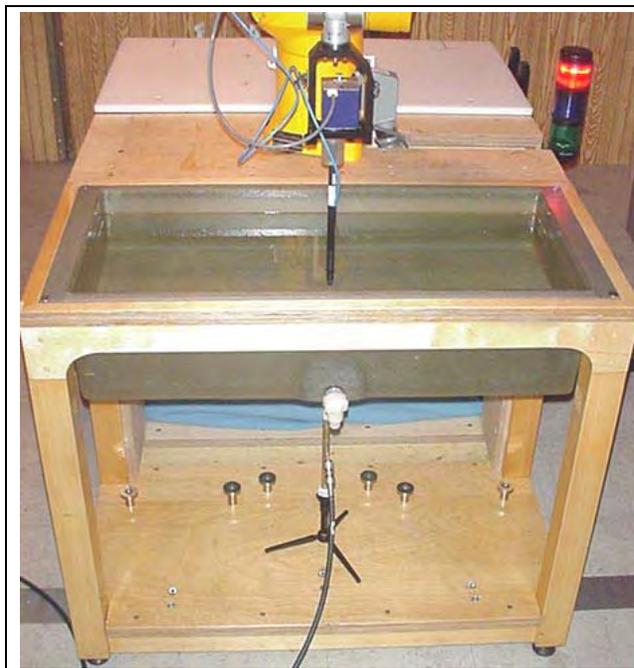

DASY4 SAR System with Barski Fiberglass Planar Phantom



DASY4 Measurement Server

Applicant:	Uniden America Corporation	FCC ID:	AMWUT064	IC:	513C-UT064	
DUT Type:	Portable GMRS/FRS UHF PTT Radio Transceiver	DUT Model(s):	GMR4099 / GMR4040			
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 4 of 47

	<u>Date(s) of Evaluation</u> November 10, 14, 2011	<u>Test Report Serial No.</u> 110811AMW-T1131-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 12, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

3.0 REFERENCE OUTPUT POWER MEASUREMENT

RF OUTPUT POWER MEASUREMENT								
Nc	Test Freq.	Ch.	Mode	Power Setting	Battery	dBm	Watts	Method
1	462.5625 MHz	1	GMRS	Boost (Max. Power)	Ni-MH	29.64	0.92	ERP
1	462.5625 MHz	1	GMRS	Normal	Ni-MH	28.13	0.65	ERP
1	467.5625 MHz	8	FRS	Normal	Ni-MH	25.91	0.39	ERP
Notes								
1. The number of test channels (Nc=1) was selected in accordance with the procedures specified in FCC KDB 447498 Section 6) c) (see reference [7]).								
2. The Boost power setting is not supported in FRS mode.								
3. The ERP level of the DUT was measured by Celltech prior to the SAR evaluations on the open area test site using the substitution method in accordance with the procedures specified in ANSI/TIA/EIA-603-C (see reference [12]).								
4. The DUT was evaluated for SAR in GMRS Boost mode only, based on the maximum output power setting.								

4.0 FCC POWER THRESHOLDS FOR PTT DEVICES ($f \leq 0.5$ GHz)

FCC SAR Evaluation Power Thresholds for PTT Devices, $f \leq 0.5$ GHz*		
Exposure Conditions	P mW (General Population)	P mW (Occupational)
Held to face, $d \geq 2.5$ cm	250	1250
Body-worn, $d \geq 1.5$ cm	200	1000
Body-worn, $d \geq 1.0$ cm	150	750
1. The time-averaged output power, corresponding to the required PTT duty factor, is compared with these thresholds.		
2. The closest distance between the user and the device or its antenna is used to determine the power thresholds.		
* Per FCC KDB 447498 D01v04 Section 5)b)i) (see reference [7]).		

5.0 SAR PROBE CALIBRATION & MEASUREMENT FREQUENCIES

The following procedures are recommended for measurements at 150 MHz - 3 GHz to minimize probe calibration and tissue dielectric parameter discrepancies. In general, SAR measurements below 300 MHz should be within ± 50 MHz of the probe calibration frequency. At 300 MHz to 3 GHz, measurements should be within ± 100 MHz of the probe calibration frequency. Measurements exceeding 50% of these intervals, ± 25 MHz < 300 MHz and ± 50 MHz ≥ 300 MHz, require additional steps (per FCC KDB 450824 D01 v01r01, SAR Probe Calibration and System Verification Considerations for Measurements at 150 MHz - 3 GHz - see reference [8]).

Probe Calibration Freq.	Device Measurement Freq.	Frequency Interval	± 50 MHz ≥ 300 MHz
450 MHz	462.5625 MHz	12.5625 MHz	< 50 MHz
The probe calibration and measurement frequency interval is < 50 MHz; therefore the additional steps are not required.			

Applicant:	Uniden America Corporation	FCC ID:	AMWUT064	IC:	513C-UT064	
DUT Type:	Portable GMRS/FRS UHF PTT Radio Transceiver	DUT Model(s):	GMR4099 / GMR4040			
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 5 of 47

	<u>Date(s) of Evaluation</u> November 10, 14, 2011	<u>Test Report Serial No.</u> 110811AMW-T1131-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 12, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

6.0 FLUID DIELECTRIC PARAMETERS

FLUID DIELECTRIC PARAMETERS						
Date: 11/10/2011		Frequency: 450 MHz			Tissue: BODY	
Freq	Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity
0.350	59.41	0.82	56.7	0.94	4.78%	-12.77%
0.360	58.84	0.83	56.7	0.94	3.77%	-11.70%
0.370	58.22	0.83	56.7	0.94	2.68%	-11.70%
0.380	58.67	0.85	56.7	0.94	3.47%	-9.57%
0.390	58.08	0.85	56.7	0.94	2.43%	-9.57%
0.400	58.02	0.87	56.7	0.94	2.33%	-7.45%
0.410	57.69	0.88	56.7	0.94	1.75%	-6.38%
0.420	57.44	0.89	56.7	0.94	1.31%	-5.32%
0.430	57.27	0.91	56.7	0.94	1.01%	-3.19%
0.440	56.72	0.88	56.7	0.94	0.04%	-6.38%
0.450	57.35	0.92	56.7	0.94	1.15%	-2.13%
0.460	57.04	0.93	56.7	0.94	0.60%	-1.06%
0.4625625*	57	0.933	56.7	0.94	0.53%	-0.74%
0.470	56.76	0.94	56.7	0.94	0.11%	0.00%
0.480	56.72	0.93	56.7	0.94	0.04%	-1.06%
0.490	55.92	0.93	56.7	0.94	-1.38%	-1.06%
0.500	56.07	0.95	56.7	0.94	-1.11%	1.06%
0.510	55.89	0.97	56.7	0.94	-1.43%	3.19%
0.520	55.97	0.97	56.7	0.94	-1.29%	3.19%
0.530	55.76	0.98	56.7	0.94	-1.66%	4.26%
0.540	55.82	1	56.7	0.94	-1.55%	6.38%
0.550	55.71	1	56.7	0.94	-1.75%	6.38%

*interpolated using DASY4 software

Test Date	Fluid Type	Ambient Temperature	Fluid Temperature	Fluid Depth	Atmospheric Pressure	Relative Humidity	ρ (Kg/m ³)
Nov 10	450 Body	22.0 °C	21.4 °C	≥ 15 cm	101.1 kPa	30%	1000

Applicant:	Uniden America Corporation	FCC ID:	AMWUT064	IC:	513C-UT064	
DUT Type:	Portable GMRS/FRS UHF PTT Radio Transceiver	DUT Model(s):	GMR4099 / GMR4040			
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 6 of 47

	<u>Date(s) of Evaluation</u> November 10, 14, 2011	<u>Test Report Serial No.</u> 110811AMW-T1131-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 12, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

FLUID DIELECTRIC PARAMETERS						
Date: 11/14/2011		Frequency: 450 MHz			Tissue: HEAD	
Freq	Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity
0.350	47.69	0.77	43.5	0.87	9.63%	-11.49%
0.360	47.11	0.78	43.5	0.87	8.30%	-10.34%
0.370	47.32	0.78	43.5	0.87	8.78%	-10.34%
0.380	46.04	0.79	43.5	0.87	5.84%	-9.20%
0.390	46.9	0.8	43.5	0.87	7.82%	-8.05%
0.400	45.35	0.81	43.5	0.87	4.25%	-6.90%
0.410	45.67	0.83	43.5	0.87	4.99%	-4.60%
0.420	46.17	0.82	43.5	0.87	6.14%	-5.75%
0.430	45.39	0.84	43.5	0.87	4.34%	-3.45%
0.440	45.15	0.84	43.5	0.87	3.79%	-3.45%
0.450	45.29	0.87	43.5	0.87	4.11%	0.00%
0.460	44.68	0.87	43.5	0.87	2.71%	0.00%
0.4625625*	44.8	0.873	43.5	0.87	2.99%	0.34%
0.470	45.1	0.88	43.5	0.87	3.68%	1.15%
0.480	44.77	0.88	43.5	0.87	2.92%	1.15%
0.490	44.6	0.9	43.5	0.87	2.53%	3.45%
0.500	44.21	0.91	43.5	0.87	1.63%	4.60%
0.510	43.65	0.9	43.5	0.87	0.34%	3.45%
0.520	43.65	0.93	43.5	0.87	0.34%	6.90%
0.530	43.58	0.93	43.5	0.87	0.18%	6.90%
0.540	43.47	0.95	43.5	0.87	-0.07%	9.20%
0.550	43.07	0.94	43.5	0.87	-0.99%	8.05%

*interpolated using DASY4 software

Test Date	Fluid Type	Ambient Temperature	Fluid Temperature	Fluid Depth	Atmospheric Pressure	Relative Humidity	ρ (Kg/m ³)
Nov 14	450 Head	21.0 °C	20.8 °C	≥ 15 cm	101.1 kPa	35%	1000

Applicant:	Uniden America Corporation	FCC ID:	AMWUT064	IC:	513C-UT064	
DUT Type:	Portable GMRS/FRS UHF PTT Radio Transceiver	DUT Model(s):	GMR4099 / GMR4040			
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 7 of 47

	<u>Date(s) of Evaluation</u> November 10, 14, 2011	<u>Test Report Serial No.</u> 110811AMW-T1131-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 12, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

7.0 SAR MEASUREMENT SUMMARY

SAR MEASUREMENT RESULTS														
Test Plot No.*	Test Freq.	Ch.	DUT Mode & Power Setting ⁴	Battery Type	DUT Position to Planar Phantom	Accessories		DUT Spacing to Planar Phantom		Measured SAR 1g (W/kg)		SAR Drift During Test	Scaled SAR with droop 1g (W/kg)	
										PTT Duty Factor			dB	PTT Duty Factor
	MHz					Body	Audio	DUT	Antenna	100%	50%	100%		50%
F1	462.5625	1	GMRS Boost	Ni-MH	Front Side	n/a	n/a	2.5 cm	3.2 cm	1.44	0.720	-0.859	1.76	0.880
F2	462.5625	1	GMRS Boost	Alkaline	Front Side	n/a	n/a	2.5 cm	3.2 cm	1.20	0.600	-1.21	1.59	0.795
B1	462.5625	1	GMRS Normal	Ni-MH	Back Side	Belt-Clip	Headset	1.0 cm	2.0 cm	1.33	0.665	-0.483	1.49	0.745
B2	462.5625	1	GMRS Normal	Alkaline	Back Side	Belt-Clip	Headset	1.0 cm	2.0 cm	1.12	0.560	-0.833	1.36	0.680
B3	462.5625	1	GMRS Normal	Ni-MH	Front Side	Carabiner	Headset	Touch	1.2 cm	2.10	1.05	-0.552	2.39	1.20
B4	462.5625	1	GMRS Normal	Alkaline	Front Side	Carabiner	Headset	Touch	1.2 cm	1.98	0.990	-0.789	2.38	1.19
B5	462.5625	1	GMRS Normal	Ni-MH	Back Side	Carabiner	Headset	Touch	1.0 cm	1.80	0.900	-0.513	2.03	1.02
SAR LIMIT(S)						HEAD / BODY		SPATIAL PEAK		RF EXPOSURE CATEGORY				
FCC 47 CFR 2.1093			Health Canada Safety Code 6			1.6 W/kg		averaged over 1 gram		General Population / Uncontrolled				
Notes														
*	F1-F2 = Face-held; B1-B5 = Body-worn													
1.	Detailed measurement plots showing the maximum SAR location of the DUT are reported in Appendix A.													
2.	The DUT with carabiner body-worn accessory configuration was evaluated for SAR utilizing the Ni-MH battery with the front side of the DUT touching the planar phantom and then with the back side of the DUT touching the planar phantom. The maximum SAR configuration was then evaluated with the alkaline batteries.													
3.	The SAR drift of the DUT was measured by the DASY4 system for the duration of the SAR evaluations. The measured SAR droop was added to the measured SAR level to report the scaled SAR level as shown in the SAR test data table. A SAR-versus-Time droop evaluation was also performed (see Appendix A).													
4.	The Boost mode maximum power setting cannot be enabled when an audio accessory is connected to the DUT; therefore the body-worn evaluations were performed in the GMRS Normal mode power setting.													
5.	The DUT was tested in unmodulated continuous transmit operation (Continuous Wave mode at 100% duty factor) with the PTT depressed. For a push-to-talk device the 50% duty factor compensation reported assumes a transmit/receive cycle of equal time base.													
6.	The fluid temperature remained within +/-2°C from the dielectric parameter measurement to the completion of the SAR evaluations.													
7.	The dielectric parameters of the simulated tissue mixtures were measured prior to the SAR evaluations using a Dielectric Probe Kit and a Network Analyzer (see Section 6 and Appendix C).													
8.	DUT Test Mode: CW													

Applicant:	Uniden America Corporation	FCC ID:	AMWUT064	IC:	513C-UT064	
DUT Type:	Portable GMRS/FRS UHF PTT Radio Transceiver	DUT Model(s):	GMR4099 / GMR4040			
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 8 of 47

	<u>Date(s) of Evaluation</u> November 10, 14, 2011	<u>Test Report Serial No.</u> 110811AMW-T1131-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 12, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

8.0 DETAILS OF SAR EVALUATION

The Uniden America Corporation Models: GMR4099 / GMR4040 Portable FM GMRS/FRS UHF PTT Radio Transceiver was compliant for localized Specific Absorption Rate (General Population / Uncontrolled Exposure) based on the test provisions and conditions described below. The detailed test setup photographs are shown in Appendix D.

1. The DUT was evaluated in a face-held configuration with the front side of the radio placed parallel to the planar phantom. A 2.5 cm separation distance was maintained between the front side of the DUT and the planar phantom.
2. The DUT was evaluated in a body-worn configuration with the back side of the radio facing parallel to the planar phantom and the attached belt-clip body-worn accessory touching the planar phantom. The belt-clip accessory provided a 1.0 cm spacing from the back side of the DUT to the planar phantom.
3. The DUT was evaluated in a body-worn configuration with the carabiner body-worn accessory attached and the front side of the radio facing parallel and touching the planar phantom. The metal carabiner clip was taped to the underside of the phantom in the touch position.
4. The DUT was evaluated in a body-worn configuration with the carabiner body-worn accessory attached and the back side of the radio facing parallel and touching the planar phantom. The metal carabiner clip was taped to the underside of the phantom in the touch position.
5. The body-worn SAR evaluations were performed with the supplied headset-microphone audio accessory connected to the audio jack of the DUT.
6. The SAR evaluations were performed with a fully charged Ni-MH battery pack or new alkaline batteries installed in the DUT.

9.0 SAR EVALUATION PROCEDURES

- a. (i) The evaluation was performed in the applicable area of the phantom depending on the type of device being tested. For devices held to the ear during normal operation, both the left and right ear positions were evaluated using the SAM phantom.
(ii) For body-worn and face-held devices a planar phantom was used.
- b. The SAR was determined by a pre-defined procedure within the DASY4 software. Upon completion of a reference and optical surface check, the exposed region of the phantom was scanned near the inner surface with a grid spacing of 15mm x 15mm.
An area scan was determined as follows:
 - c. Based on the defined area scan grid, a more detailed grid is created to increase the points by a factor of 10. The interpolation function then evaluates all field values between corresponding measurement points.
 - d. A linear search is applied to find all the candidate maxima. Subsequently, all maxima are removed that are >2 dB from the global maximum. The remaining maxima are then used to position the cube scans.
A 1g and 10g spatial peak SAR was determined as follows:
- e. Extrapolation is used to find the points between the dipole center of the probe and the surface of the phantom. This data cannot be measured, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.4 mm (see probe calibration document in Appendix F). The extrapolation was based on trivariate quadratics computed from the previously calculated 3D interpolated points nearest the phantom surface.
- f. Interpolated data is used to calculate the average SAR over 1g and 10g cubes by spatially discretizing the entire measured cube. The volume used to determine the averaged SAR is a 1mm grid (42875 interpolated points).
- g. A zoom scan volume of 30 mm x 30 mm x 30 mm (5 x 5 x 7 points) centered at the peak SAR location determined from the area scan is used for all zoom scans for devices with a transmit frequency < 800 MHz. Zoom scans for frequencies ≥ 800 MHz are determined with a scan volume of 30 mm x 30 mm x 30 mm (7 x 7 x 7) to ensure complete capture of the peak spatial-average SAR.

Applicant:	Uniden America Corporation	FCC ID:	AMWUT064	IC:	513C-UT064	
DUT Type:	Portable GMRS/FRS UHF PTT Radio Transceiver	DUT Model(s):	GMR4099 / GMR4040			
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 9 of 47

	<u>Date(s) of Evaluation</u> November 10, 14, 2011	<u>Test Report Serial No.</u> 110811AMW-T1131-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	
	<u>Test Report Issue Date</u> December 12, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

10.0 SYSTEM PERFORMANCE CHECK


Prior to the SAR evaluations a system check was performed with a planar phantom and SPEAG 450 MHz validation dipole (see Appendix B for system performance check evaluation plots) in accordance with the procedures described in IEEE Standard 1528-2003 (see reference [5]). The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer (see Appendix C for measured fluid dielectric parameters). A forward power of 398 mW was applied to the dipole and the system was verified to a tolerance of $\pm 10\%$ from the SAR system manufacturer's dipole calibration target SAR value (see Appendix E for system manufacturer's dipole calibration procedures).

SYSTEM PERFORMANCE CHECK EVALUATION


Test Date	Equiv. Tissue	SAR 1g (W/kg)			Dielectric Constant ϵ_r			Conductivity σ (mho/m)			ρ (Kg/m ³)	Amb. Temp. (°C)	Fluid Temp. (°C)	Fluid Depth (cm)	Humid. (%)	Barom. Press. (kPa)
		Freq. (MHz)	Target	Meas.	Dev.	Target	Meas.	Dev.	Target	Meas.						
Nov 10	Body 450	1.78 $\pm 10\%$	1.77	-0.6%	56.7 $\pm 5\%$	57.4	+1.2%	0.94 $\pm 5\%$	0.92	-2.1%	1000	22.0	21.4	≥ 15	30	101.1
Nov 14	Head 450	1.87 $\pm 10\%$	1.99	+6.4%	43.5 $\pm 5\%$	45.3	+4.1%	0.87 $\pm 5\%$	0.87	-0.0%	1000	21.0	20.8	≥ 15	35	101.1

Notes

- The target SAR value is the measured value from the SAR system manufacturer's dipole calibration (see Appendix E).
- The target fluid dielectric parameters are the nominal values from the SAR system manufacturer's dipole calibration (see Appendix E) and specified in IEEE 1528-2003 (Head) and IC RSS-102 Issue 4 (Body).
- The fluid temperature remained within $\pm 2^\circ\text{C}$ from the dielectric parameter measurement to the completion of the evaluation.
- The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer (see Appendix C).

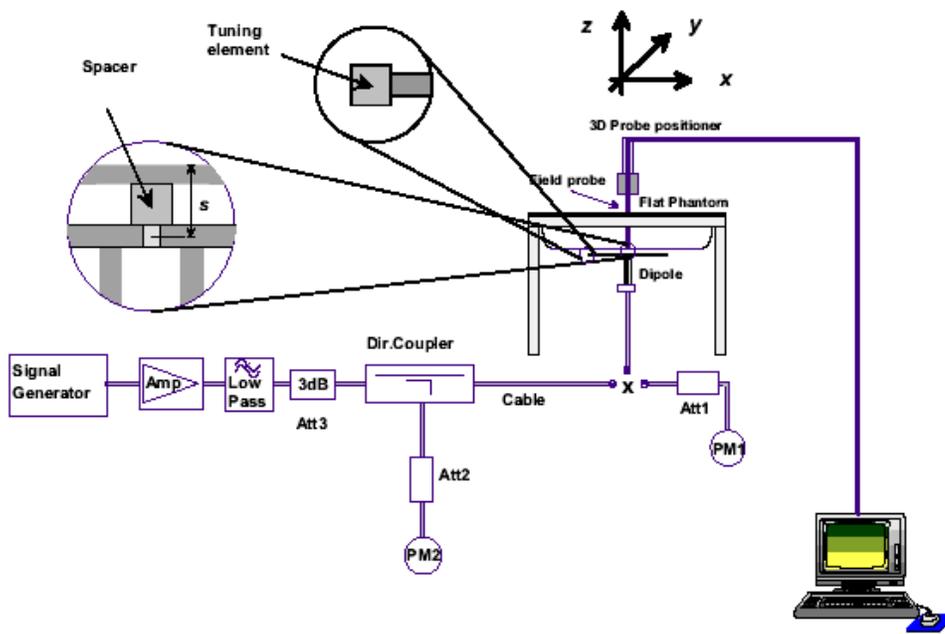

System Performance Check Measurement Setup (IEEE Standard 1528-2003)

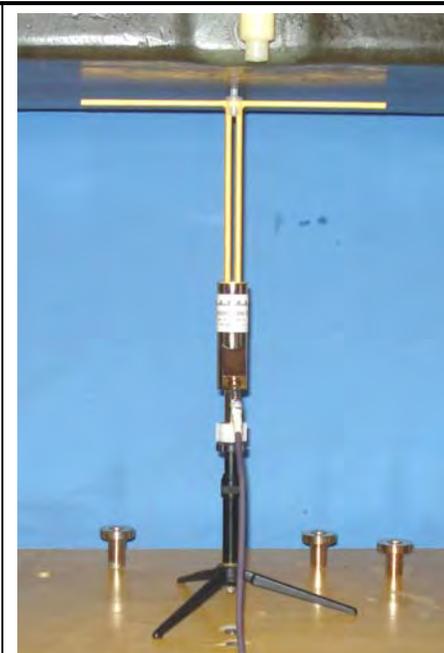

450 MHz SPEAG Validation Dipole Setup

Applicant:	Uniden America Corporation	FCC ID:	AMWUT064	IC:	513C-UT064	
DUT Type:	Portable GMRS/FRS UHF PTT Radio Transceiver	DUT Model(s):	GMR4099 / GMR4040			
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 10 of 47

	<u>Date(s) of Evaluation</u> November 10, 14, 2011	<u>Test Report Serial No.</u> 110811AMW-T1131-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 12, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

11.0 SIMULATED EQUIVALENT TISSUES

The simulated equivalent tissue recipes in the table below are derived from the SAR system manufacturer's suggested recipe in the DASY4 manual (see references [9] and [10]) in accordance with the procedures and requirements specified in IEEE Standard 1528-2003 (see reference [5]). The ingredient percentage may have been adjusted minimally in order to achieve the appropriate target dielectric parameters within the specified tolerance.

SIMULATED TISSUE MIXTURES		
INGREDIENT	450 MHz HEAD	450 MHz BODY
Water	38.56 %	52.00 %
Sugar	56.32 %	45.65 %
Salt	3.95 %	1.75 %
HEC	0.98 %	0.50 %
Bactericide	0.19 %	0.10 %

12.0 SAR LIMITS

SAR RF EXPOSURE LIMITS			
FCC 47 CFR 2.1093	Health Canada Safety Code 6	General Population	Occupational
Spatial Average (averaged over the whole body)		0.08 W/kg	0.4 W/kg
Spatial Peak (averaged over any 1 g of tissue)		1.6 W/kg	8.0 W/kg
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)		4.0 W/kg	20.0 W/kg
The Spatial Average value of the SAR averaged over the whole body.			
The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.			
The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.			
Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.			
Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.			

Applicant:	Uniden America Corporation	FCC ID:	AMWUT064	IC:	513C-UT064	
DUT Type:	Portable GMRS/FRS UHF PTT Radio Transceiver	DUT Model(s):	GMR4099 / GMR4040			
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 11 of 47

	<u>Date(s) of Evaluation</u> November 10, 14, 2011	<u>Test Report Serial No.</u> 110811AMW-T1131-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 12, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

13.0 ROBOT SYSTEM SPECIFICATIONS

<u>Specifications</u>	
Positioner	Stäubli Unimation Corp. Robot Model: RX60L
Repeatability	0.02 mm
No. of axis	6
<u>Data Acquisition Electronic (DAE) System</u>	
<u>Cell Controller</u>	
Processor	AMD Athlon XP 2400+
Clock Speed	2.0 GHz
Operating System	Windows XP Professional
<u>Data Converter</u>	
Features	Signal Amplifier, multiplexer, A/D converter, and control logic
Software	Measurement Software: DASY4, V4.7 Build 44
	Postprocessing Software: SEMCAD, V1.8 Build 171
Connecting Lines	Optical downlink for data and status info., Optical uplink for commands and clock
<u>DASY4 Measurement Server</u>	
Function	Real-time data evaluation for field measurements and surface detection
Hardware	PC/104 166MHz Pentium CPU; 32 MB chipdisk; 64 MB RAM
Connections	COM1, COM2, DAE, Robot, Ethernet, Service Interface
<u>E-Field Probe</u>	
Model	ET3DV6
Serial No.	1590
Construction	Triangular core fiber optic detection system
Frequency	10 MHz to 6 GHz
Linearity	±0.2 dB (30 MHz to 3 GHz)
<u>Phantom</u>	
Type	Barski Planar Phantom
Shell Material	Fiberglass
Thickness	2.0 ±0.1 mm
Volume	Approx. 70 liters

Applicant:	Uniden America Corporation	FCC ID:	AMWUT064	IC:	513C-UT064	
DUT Type:	Portable GMRS/FRS UHF PTT Radio Transceiver	DUT Model(s):	GMR4099 / GMR4040			
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 12 of 47

	<u>Date(s) of Evaluation</u> November 10, 14, 2011	<u>Test Report Serial No.</u> 110811AMW-T1131-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 12, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

14.0 PROBE SPECIFICATION (ET3DV6)

<p>Construction: Symmetrical design with triangular core; Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, glycol)</p> <p>Calibration: In air from 10 MHz to 2.5 GHz In head simulating tissue at frequencies of 900 MHz and 1.8 GHz (accuracy $\pm 8\%$)</p> <p>Frequency: 10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)</p> <p>Directivity: ± 0.2 dB in head tissue (rotation around probe axis) ± 0.4 dB in head tissue (rotation normal to probe axis)</p> <p>Dynamic Range: 5 μW/g to > 100 mW/g; Linearity: ± 0.2 dB</p> <p>Surface Detect: ± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces</p> <p>Dimensions: Overall length: 330 mm; Tip length: 16 mm; Body diameter: 12 mm; Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm</p> <p>Application: General dosimetry up to 3 GHz; Compliance tests of mobile phone</p>	
ET3DV6 E-Field Probe	

15.0 BARKSI PLANAR PHANTOM

<p>The Barski Planar Phantom is a fiberglass shell phantom with a 2.0 mm (+/-0.2mm) thick device measurement area at the center of the phantom for SAR evaluations of devices with a larger surface area than the planar section of the SAM phantom. The planar phantom is integrated in a wooden table. The planar phantom was used for the DUT SAR evaluations and the system performance check evaluations. See Appendix G for dimensions and specifications of the Barski planar phantom.</p>	
Barski Planar Phantom	

16.0 DEVICE HOLDER

<p>The DASY4 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.</p>	
Device Holder	

Applicant: Uniden America Corporation	FCC ID: AMWUT064	IC: 513C-UT064	
DUT Type: Portable GMRS/FRS UHF PTT Radio Transceiver	DUT Model(s):	GMR4099 / GMR4040	
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.		Page 13 of 47

	<u>Date(s) of Evaluation</u> November 10, 14, 2011	<u>Test Report Serial No.</u> 110811AMW-T1131-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	
	<u>Test Report Issue Date</u> December 12, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

17.0 TEST EQUIPMENT LIST

TEST EQUIPMENT		ASSET NO.	SERIAL NO.	DATE CALIBRATED	CALIBRATION INTERVAL
USED	DESCRIPTION				
x	Schmid & Partner DASY4 System	-	-	-	-
x	-DASY4 Measurement Server	00158	1078	CNR	CNR
x	-Robot	00046	599396-01	CNR	CNR
x	-DAE4	00019	353	27Apr10	Biennial
x	-ET3DV6 E-Field Probe	00017	1590	22Jun11	Annual
x	-SPEAG D450V3 Validation Dipole	00217	1068	18Jan10	Triennial
x	-Barski Planar Phantom	00155	03-01	CNR	CNR
x	HP 85070C Dielectric Probe Kit	00033	none	CNR	CNR
x	Gigatronics 8652A Power Meter	00007	1835272	04May10	Biennial
x	Gigatronics 80701A Power Sensor	00014	1833699	04May10	Biennial
x	HP 8753ET Network Analyzer	00134	US39170292	04May10	Biennial
x	Rohde & Schwarz SMR20 Signal Generator	00006	100104	CNR	CNR
x	Amplifier Research 5S1G4 Power Amplifier	00106	26235	CNR	CNR
Abbr.	CNR = Calibration Not Required				

18.0 JUSTIFICATION FOR EXTENDED SAR DIPOLE CALIBRATION

SAR dipoles calibrated less than two years ago but more than one year ago were confirmed by maintaining return loss (< -20dB, within 20% of prior calibration) and impedance (within 5Ω from prior calibration) requirements per extended calibrations in FCC KDB 450824 (see reference [8]).

SPEAG VALIDATION DIPOLE D450V3 - SN: 1068						
Measurement Date	Freq.	TSL	Return Loss (dB)	Δ %	Impedance (Ω)	Δ Ω
January 18, 2010	450 MHz	Head	-21.0		57.5	
February 7, 2011			-21.3	1.5%	53.8	3.7
January 18, 2010	450 MHz	Body	-20.0		54.8	
February 7, 2011			-20.5	2.5%	50.4	4.4

Applicant:	Uniden America Corporation	FCC ID:	AMWUT064	IC:	513C-UT064	
DUT Type:	Portable GMRS/FRS UHF PTT Radio Transceiver	DUT Model(s):	GMR4099 / GMR4040			
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 14 of 47

	<u>Date(s) of Evaluation</u> November 10, 14, 2011	<u>Test Report Serial No.</u> 110811AMW-T1131-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	
	<u>Test Report Issue Date</u> December 12, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

19.0 MEASUREMENT UNCERTAINTIES

UNCERTAINTY BUDGET FOR DEVICE EVALUATION									
Uncertainty Component	IEEE 1528 Section	Uncertainty Value ±%	Probability Distribution	Divisor	ci 1g	ci 10g	Uncertainty Value ±% (1g)	Uncertainty Value ±% (10g)	V _i or V _{eff}
Measurement System									
Probe Calibration (450 MHz)	E.2.1	6.7	Normal	1	1	1	6.7	6.7	∞
Axial Isotropy	E.2.2	4.7	Rectangular	1.732050808	0.7	0.7	1.9	1.9	∞
Hemispherical Isotropy	E.2.2	9.6	Rectangular	1.732050808	0.7	0.7	3.9	3.9	∞
Boundary Effect	E.2.3	1	Rectangular	1.732050808	1	1	0.6	0.6	∞
Linearity	E.2.4	4.7	Rectangular	1.732050808	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1	Rectangular	1.732050808	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	0.3	Normal	1	1	1	0.3	0.3	∞
Response Time	E.2.7	0.8	Rectangular	1.732050808	1	1	0.5	0.5	∞
Integration Time	E.2.8	2.6	Rectangular	1.732050808	1	1	1.5	1.5	∞
RF Ambient Conditions	E.6.1	3	Rectangular	1.732050808	1	1	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	Rectangular	1.732050808	1	1	0.2	0.2	∞
Probe Positioning wrt Phantom Shell	E.6.3	2.9	Rectangular	1.732050808	1	1	1.7	1.7	∞
Extrapolation, interpolation & integration algorithms for max. SAR evaluation	E.5	1	Rectangular	1.732050808	1	1	0.6	0.6	∞
Test Sample Related									
Test Sample Positioning	E.4.2	2.9	Normal	1	1	1	2.9	2.9	12
Device Holder Uncertainty	E.4.1	3.6	Normal	1	1	1	3.6	3.6	8
SAR Drift Measurement	6.6.2	5	Rectangular	1.732050808	1	1	2.9	2.9	∞
Phantom and Tissue Parameters									
Phantom Uncertainty	E.3.1	4	Rectangular	1.732050808	1	1	2.3	2.3	∞
Liquid Conductivity (target)	E.3.2	5	Rectangular	1.732050808	0.64	0.43	1.8	1.2	∞
Liquid Conductivity (measured)	E.3.3	0.74	Normal	1	0.64	0.43	0.5	0.3	∞
Liquid Permittivity (target)	E.3.2	5	Rectangular	1.732050808	0.6	0.49	1.7	1.4	∞
Liquid Permittivity (measured)	E.3.3	2.99	Normal	1	0.6	0.49	1.8	1.5	∞
Combined Standard Uncertainty			RSS				11.19	11.01	
Expanded Uncertainty (95% Confidence Interval)			k=2				22.38	22.01	
Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003									
This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2									

Applicant:	Uniden America Corporation	FCC ID:	AMWUT064	IC:	513C-UT064	
DUT Type:	Portable GMRS/FRS UHF PTT Radio Transceiver	DUT Model(s):	GMR4099 / GMR4040			
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 15 of 47

	<u>Date(s) of Evaluation</u> November 10, 14, 2011	<u>Test Report Serial No.</u> 110811AMW-T1131-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 12, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

20.0 REFERENCES

- [1] Federal Communications Commission - "Radiofrequency radiation exposure evaluation: portable devices", Rule Part 47 CFR §2.1093.
- [2] Health Canada - "Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz", Safety Code 6: 1999.
- [3] Federal Communications Commission - "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields", OET Bulletin 65, Supplement C (Edition 01-01), FCC, Washington, D.C.: June 2001.
- [4] Industry Canada - "Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)", Radio Standards Specification RSS-102 Issue 4: March 2010.
- [5] IEEE Standard 1528-2003 - "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques": December 2003.
- [6] International Standard IEC 62209-2 Edition 1.0 2010-03 - "Human exposure to radio frequency fields from hand-held & body-mounted wireless communication devices - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)".
- [7] Federal Communications Commission, Office of Engineering and Technology - "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies"; KDB 447498 D01v04: November 2009.
- [8] Federal Communications Commission, Office of Engineering and Technology - "Application Note: SAR Probe Calibration and System Verification Considerations for Measurements at 150 MHz - 3 GHz"; KDB 450824 D01 v01r01: January 2007.
- [9] Schmid & Partner Engineering AG - DASY4 Manual V4.6, Chapter 16 Application Note, Head Tissue Recipe: Sept. 2005.
- [10] Schmid & Partner Engineering AG - DASY4 Manual V4.6, Chapter 17 Application Note, Body Tissue Recipe: Sept. 2005.
- [11] ISO/IEC 17025 - "General requirements for the competence of testing and calibration laboratories (ISO/IEC 17025:2005)."
- [12] ANSI/TIA-603-C - "Land Mobile FM or PM Communications Equipment - Measurement and Performance Standards": December 2004.

Applicant:	Uniden America Corporation	FCC ID:	AMWUT064	IC:	513C-UT064	
DUT Type:	Portable GMRS/FRS UHF PTT Radio Transceiver	DUT Model(s):	GMR4099 / GMR4040			
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 16 of 47

	<u>Date(s) of Evaluation</u> November 10, 14, 2011	<u>Test Report Serial No.</u> 110811AMW-T1131-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 12, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

APPENDIX A - SAR MEASUREMENT PLOTS

Applicant:	Uniden America Corporation	FCC ID:	AMWUT064	IC:	513C-UT064	
DUT Type:	Portable GMRS/FRS UHF PTT Radio Transceiver	DUT Model(s):	GMR4099 / GMR4040			
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 17 of 47

	<u>Date(s) of Evaluation</u> November 10, 14, 2011	<u>Test Report Serial No.</u> 110811AMW-T1131-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	
	<u>Test Report Issue Date</u> December 12, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

Date Tested: 11/14/2011

SAR Plot #F1

DUT: Uniden GMR4099; Type: Portable UHF FRS/GMRS PTT Radio Transceiver; Serial: TA Sample No. 3

Ambient Temp: 21C; Fluid Temp: 20.8C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Frequency: 462.563 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used (interpolated): $f = 462.563 \text{ MHz}$; $\sigma = 0.873 \text{ mho/m}$; $\epsilon_r = 44.8$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.3, 7.3, 7.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Face-held - Ni-MH/Area Scan (6x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.60 mW/g

Face-held - Ni-MH/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 43.5 V/m; Power Drift = -0.859 dB

Peak SAR (extrapolated) = 2.01 W/kg

SAR(1 g) = 1.44 mW/g; SAR(10 g) = 1.06 mW/g

Info: Interpolated medium parameters used for SAR evaluation.


Maximum value of SAR (measured) = 1.51 mW/g

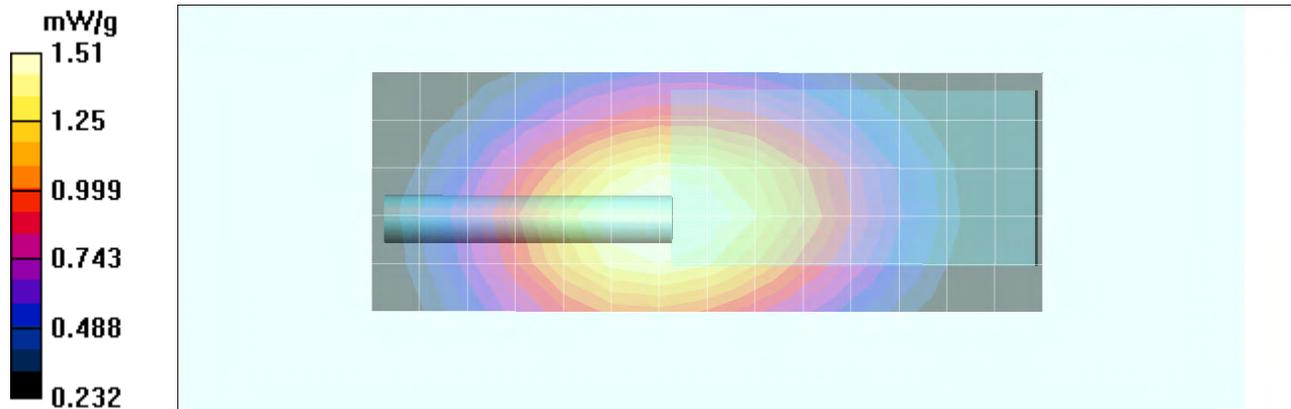

Applicant:	Uniden America Corporation	FCC ID:	AMWUT064	IC:	513C-UT064	
DUT Type:	Portable GMRS/FRS UHF PTT Radio Transceiver	DUT Model(s):	GMR4099 / GMR4040			
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 18 of 47

	<u>Date(s) of Evaluation</u> November 10, 14, 2011	<u>Test Report Serial No.</u> 110811AMW-T1131-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 12, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

Z-axis Scan

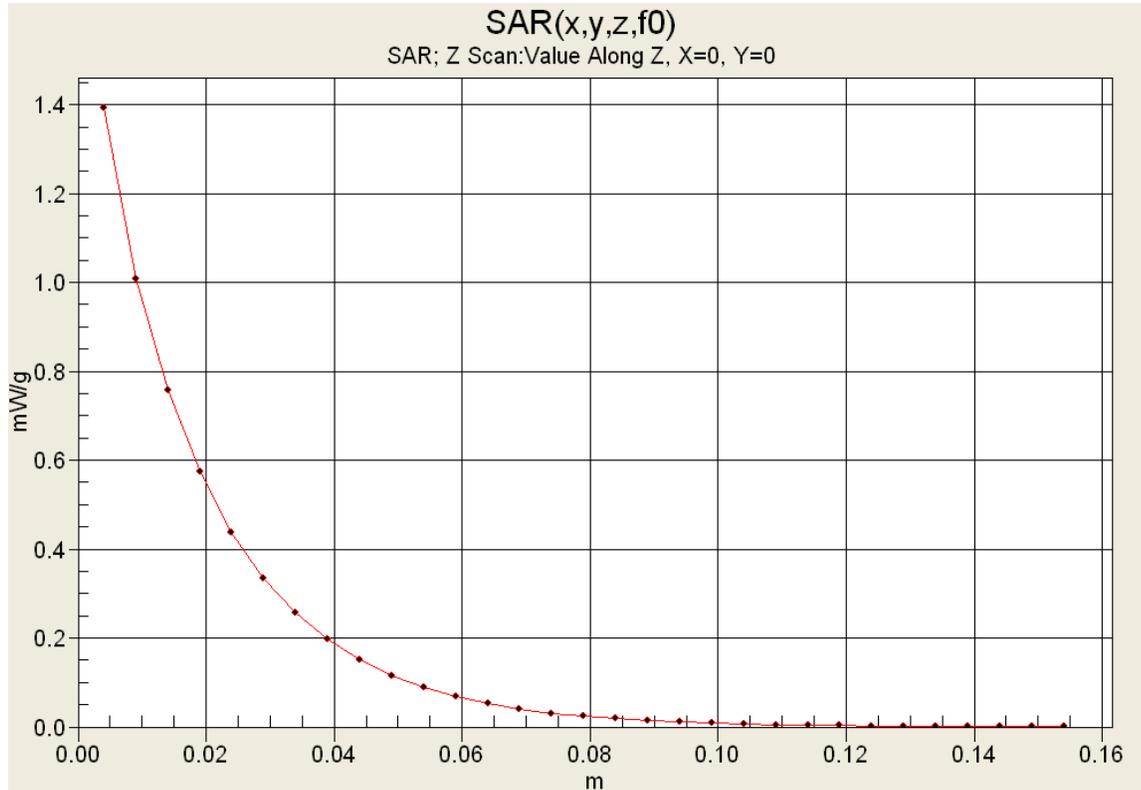

Applicant:	Uniden America Corporation	FCC ID:	AMWUT064	IC:	513C-UT064	
DUT Type:	Portable GMRS/FRS UHF PTT Radio Transceiver	DUT Model(s):	GMR4099 / GMR4040			
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 19 of 47

	<u>Date(s) of Evaluation</u> November 10, 14, 2011	<u>Test Report Serial No.</u> 110811AMW-T1131-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	
	<u>Test Report Issue Date</u> December 12, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

Date Tested: 11/14/2011

SAR Plot #F2

DUT: Uniden GMR4099; Type: Portable UHF FRS/GMRS PTT Radio Transceiver; Serial: TA Sample No. 3

Ambient Temp: 21C; Fluid Temp: 20.8C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Frequency: 462.563 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used (interpolated): $f = 462.563$ MHz; $\sigma = 0.873$ mho/m; $\epsilon_r = 44.8$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(7.3, 7.3, 7.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Face-held - Alkaline/Area Scan (6x15x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.27 mW/g

Face-held - Alkaline/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 40.8 V/m; Power Drift = -1.21 dB

Peak SAR (extrapolated) = 1.68 W/kg

SAR(1 g) = 1.2 mW/g; SAR(10 g) = 0.877 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.26 mW/g

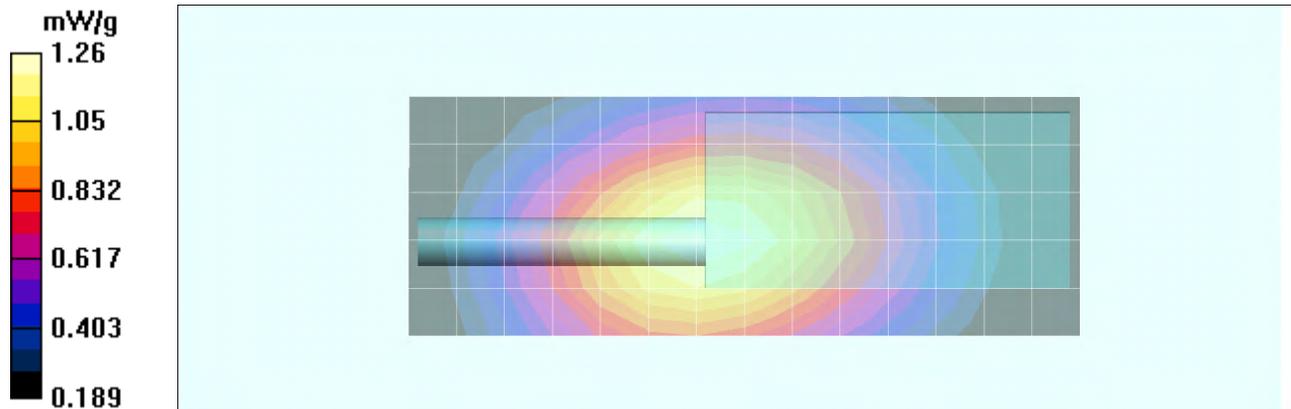

Applicant:	Uniden America Corporation	FCC ID:	AMWUT064	IC:	513C-UT064	
DUT Type:	Portable GMRS/FRS UHF PTT Radio Transceiver	DUT Model(s):	GMR4099 / GMR4040			
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 20 of 47

	<u>Date(s) of Evaluation</u> November 10, 14, 2011	<u>Test Report Serial No.</u> 110811AMW-T1131-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	
	<u>Test Report Issue Date</u> December 12, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

Date Tested: 11/10/2011

SAR Plot #B1

DUT: Uniden GMR4099; Type: Portable UHF FRS/GMRS PTT Radio Transceiver; Serial: TA Sample No. 3

Ambient Temp: 22C; Fluid Temp: 21.4C; Barometric Pressure: 101.1 kPa; Humidity: 30%

Communication System: CW

Frequency: 462.563 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used (interpolated): $f = 462.563 \text{ MHz}$; $\sigma = 0.933 \text{ mho/m}$; $\epsilon_r = 57$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.82, 7.82, 7.82); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn - Ni-MH - Belt-clip/Area Scan (6x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.57 mW/g

Body-worn - Ni-MH - Belt-clip/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 39.1 V/m; Power Drift = -0.483 dB

Peak SAR (extrapolated) = 1.93 W/kg

SAR(1 g) = 1.33 mW/g; SAR(10 g) = 0.945 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.40 mW/g

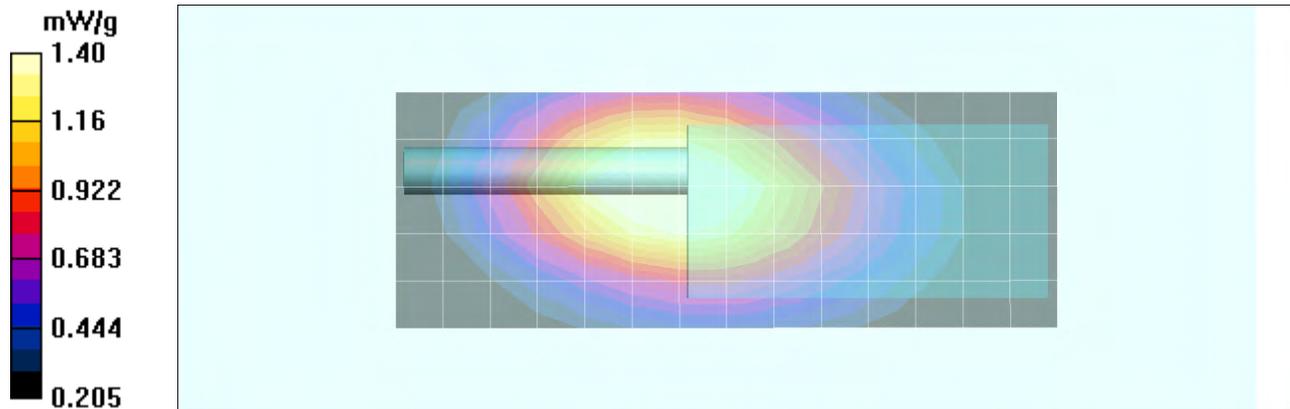

Applicant:	Uniden America Corporation	FCC ID:	AMWUT064	IC:	513C-UT064	
DUT Type:	Portable GMRS/FRS UHF PTT Radio Transceiver	DUT Model(s):	GMR4099 / GMR4040			
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 21 of 47

	<u>Date(s) of Evaluation</u> November 10, 14, 2011	<u>Test Report Serial No.</u> 110811AMW-T1131-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 12, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

Date Tested: 11/10/2011

SAR Plot #B2

DUT: Uniden GMR4099; Type: Portable UHF FRS/GMRS PTT Radio Transceiver; Serial: TA Sample No. 3

Ambient Temp: 22C; Fluid Temp: 21.4C; Barometric Pressure: 101.1 kPa; Humidity: 30%

Communication System: CW

Frequency: 462.563 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used (interpolated): $f = 462.563 \text{ MHz}$; $\sigma = 0.933 \text{ mho/m}$; $\epsilon_r = 57$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.82, 7.82, 7.82); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn - Alkaline - Belt-clip/Area Scan (6x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.51 mW/g

Body-worn - Alkaline - Belt-clip/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 37.7 V/m; Power Drift = -0.833 dB

Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 1.12 mW/g; SAR(10 g) = 0.805 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.18 mW/g

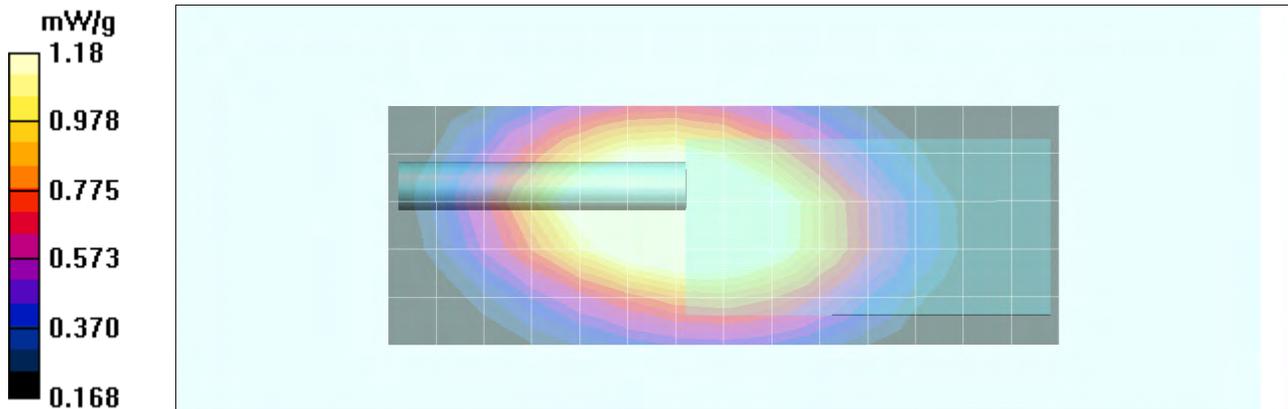

Applicant:	Uniden America Corporation	FCC ID:	AMWUT064	IC:	513C-UT064	
DUT Type:	Portable GMRS/FRS UHF PTT Radio Transceiver	DUT Model(s):	GMR4099 / GMR4040			
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 22 of 47

	<u>Date(s) of Evaluation</u> November 10, 14, 2011	<u>Test Report Serial No.</u> 110811AMW-T1131-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 12, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

Date Tested: 11/10/2011

SAR Plot #B3

DUT: Uniden GMR4099; Type: Portable UHF FRS/GMRS PTT Radio Transceiver; Serial: TA Sample No. 3

Ambient Temp: 22C; Fluid Temp: 21.4C; Barometric Pressure: 101.1 kPa; Humidity: 30%

Communication System: CW

Frequency: 462.563 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used (interpolated): $f = 462.563 \text{ MHz}$; $\sigma = 0.933 \text{ mho/m}$; $\epsilon_r = 57$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.82, 7.82, 7.82); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn - Ni-MH - Carabiner - Front/Area Scan (6x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 2.25 mW/g

Body-worn - Ni-MH - Carabiner - Front/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 44.6 V/m; Power Drift = -0.552 dB

Peak SAR (extrapolated) = 3.20 W/kg

SAR(1 g) = 2.1 mW/g; SAR(10 g) = 1.43 mW/g


Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 2.23 mW/g

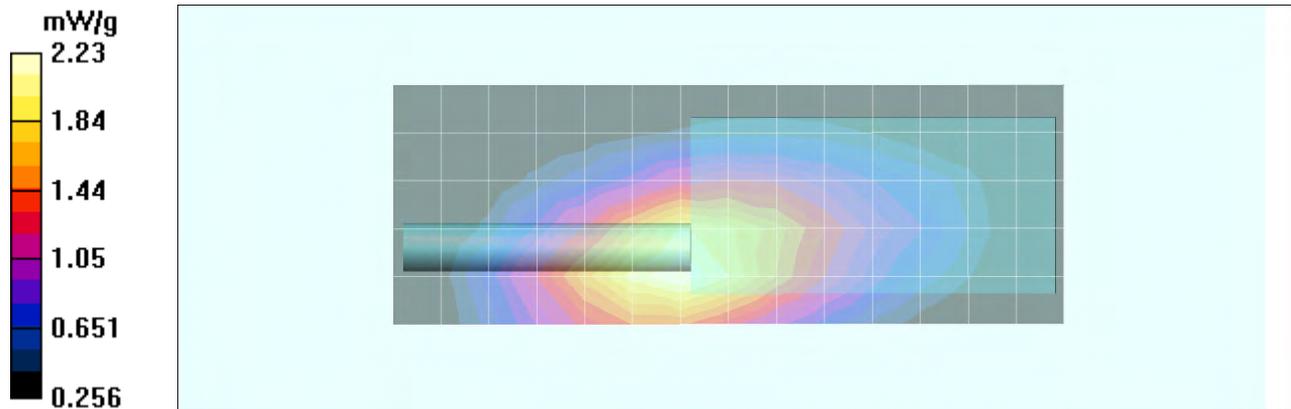

Applicant:	Uniden America Corporation	FCC ID:	AMWUT064	IC:	513C-UT064	
DUT Type:	Portable GMRS/FRS UHF PTT Radio Transceiver	DUT Model(s):	GMR4099 / GMR4040			
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 23 of 47

Z-axis Scan

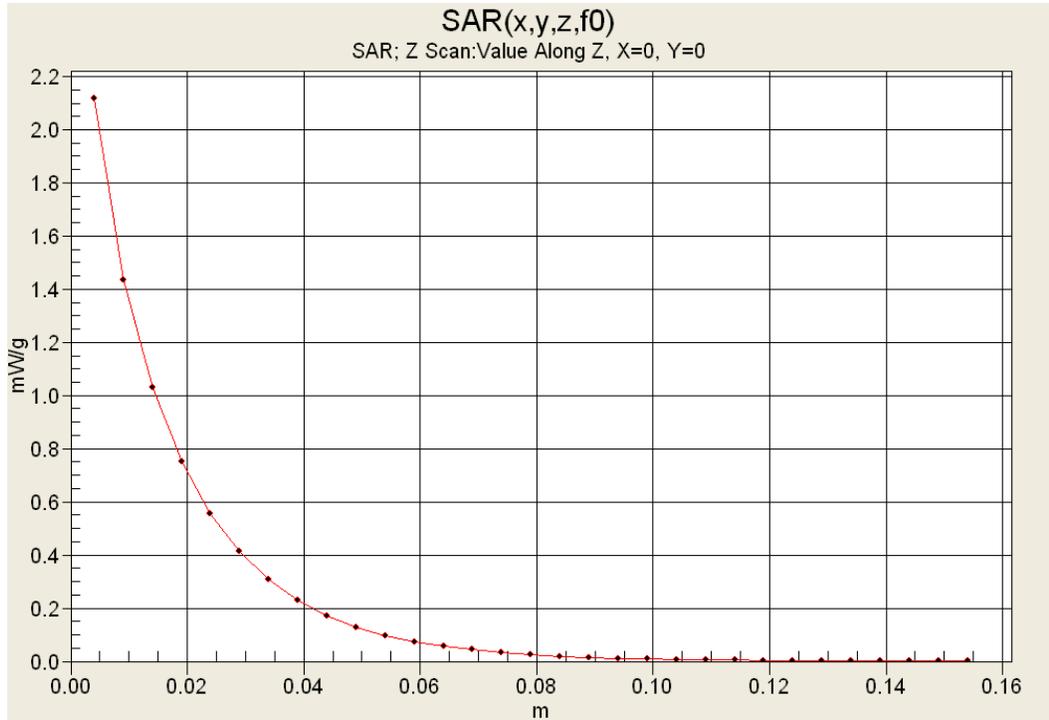

SAR vs. Time



	<u>Date(s) of Evaluation</u> November 10, 14, 2011	<u>Test Report Serial No.</u> 110811AMW-T1131-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 12, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

Date Tested: 11/10/2011

SAR Plot #B4

DUT: Uniden GMR4099; Type: Portable UHF FRS/GMRS PTT Radio Transceiver; Serial: TA Sample No. 3

Ambient Temp: 22C; Fluid Temp: 21.4C; Barometric Pressure: 101.1 kPa; Humidity: 30%

Communication System: CW

Frequency: 462.563 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used (interpolated): $f = 462.563 \text{ MHz}$; $\sigma = 0.933 \text{ mho/m}$; $\epsilon_r = 57$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.82, 7.82, 7.82); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn - Alkaline - Carabiner - Front/Area Scan (6x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 2.26 mW/g

Body-worn - Alkaline - Carabiner - Front/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 44.8 V/m; Power Drift = -0.789 dB

Peak SAR (extrapolated) = 3.04 W/kg

SAR(1 g) = 1.98 mW/g; SAR(10 g) = 1.35 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 2.10 mW/g

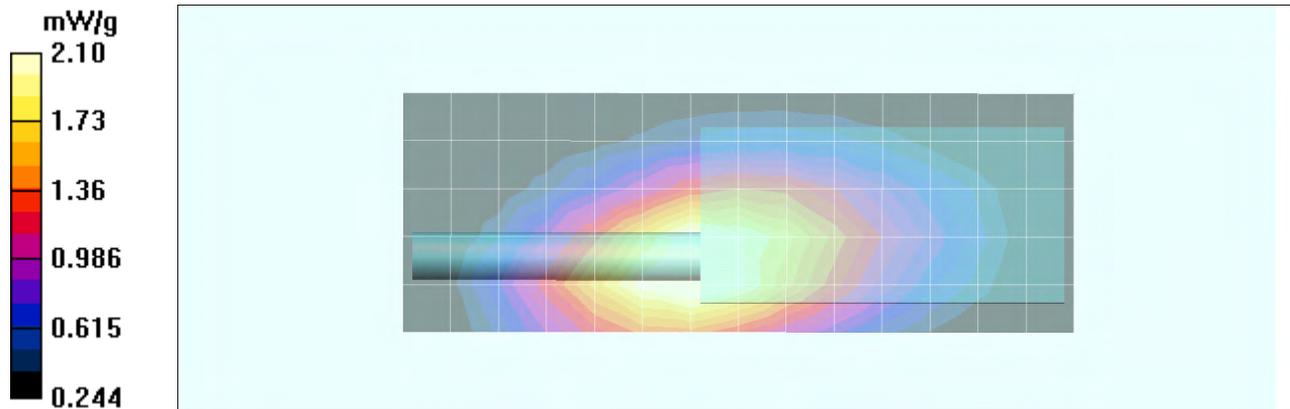

Applicant:	Uniden America Corporation	FCC ID:	AMWUT064	IC:	513C-UT064	
DUT Type:	Portable GMRS/FRS UHF PTT Radio Transceiver	DUT Model(s):	GMR4099 / GMR4040			
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 25 of 47

	<u>Date(s) of Evaluation</u> November 10, 14, 2011	<u>Test Report Serial No.</u> 110811AMW-T1131-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 12, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

Date Tested: 11/10/2011

SAR Plot #B5

DUT: Uniden GMR4099; Type: Portable UHF FRS/GMRS PTT Radio Transceiver; Serial: TA Sample No. 3

Ambient Temp: 22C; Fluid Temp: 21.4C; Barometric Pressure: 101.1 kPa; Humidity: 30%

Communication System: CW

Frequency: 462.563 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used (interpolated): $f = 462.563 \text{ MHz}$; $\sigma = 0.933 \text{ mho/m}$; $\epsilon_r = 57$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.82, 7.82, 7.82); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn - Ni-MH - Carabiner - Back/Area Scan (6x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.94 mW/g

Body-worn - Ni-MH - Carabiner - Back/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 45.5 V/m; Power Drift = -0.513 dB

Peak SAR (extrapolated) = 2.71 W/kg

SAR(1 g) = 1.8 mW/g; SAR(10 g) = 1.24 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.87 mW/g

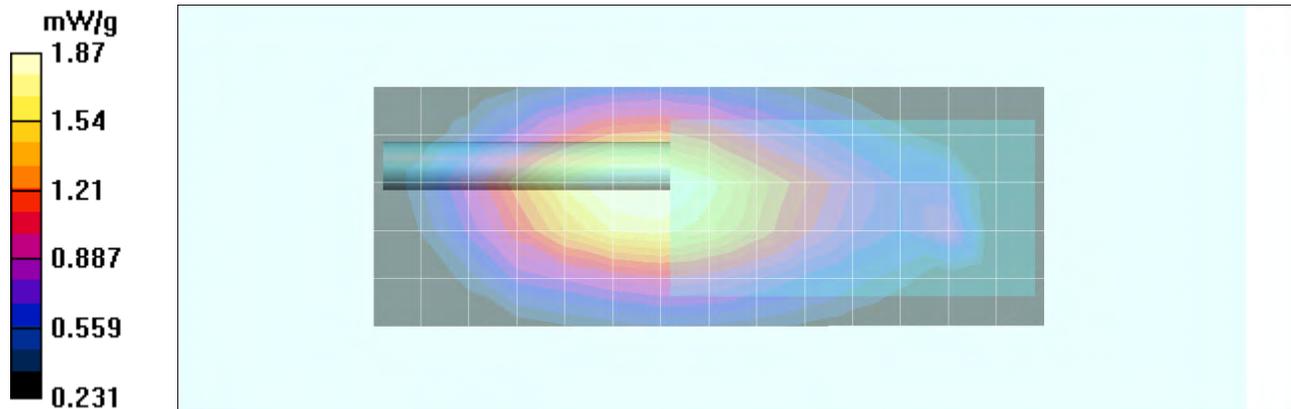

Applicant:	Uniden America Corporation	FCC ID:	AMWUT064	IC:	513C-UT064	
DUT Type:	Portable GMRS/FRS UHF PTT Radio Transceiver	DUT Model(s):	GMR4099 / GMR4040			
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 26 of 47

	<u>Date(s) of Evaluation</u> November 10, 14, 2011	<u>Test Report Serial No.</u> 110811AMW-T1131-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 12, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

APPENDIX B - SYSTEM PERFORMANCE CHECK PLOTS

Applicant:	Uniden America Corporation	FCC ID:	AMWUT064	IC:	513C-UT064	
DUT Type:	Portable GMRS/FRS UHF PTT Radio Transceiver	DUT Model(s):	GMR4099 / GMR4040			
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 27 of 47

	<u>Date(s) of Evaluation</u> November 10, 14, 2011	<u>Test Report Serial No.</u> 110811AMW-T1131-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 12, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

Date Tested: 11/10/2011

System Performance Check - 450 MHz Dipole - Body

DUT: Dipole 450 MHz; Type: D450V3; Serial: 1068; Calibrated: 01/18/2010

Ambient Temp: 22C; Fluid Temp: 21.4C; Barometric Pressure: 101.1 kPa; Humidity: 30%

Communication System: CW

Frequency: 450 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used: $f = 450 \text{ MHz}$; $\sigma = 0.92 \text{ mho/m}$; $\epsilon_r = 57.4$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.82, 7.82, 7.82); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body d=15mm Pin=398mW/Area Scan (6x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.86 mW/g


Body d=15mm Pin=398mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 44.7 V/m; Power Drift = 0.000 dB

Peak SAR (extrapolated) = 2.84 W/kg

SAR(1 g) = 1.77 mW/g; SAR(10 g) = 1.17 mW/g


Maximum value of SAR (measured) = 1.88 mW/g

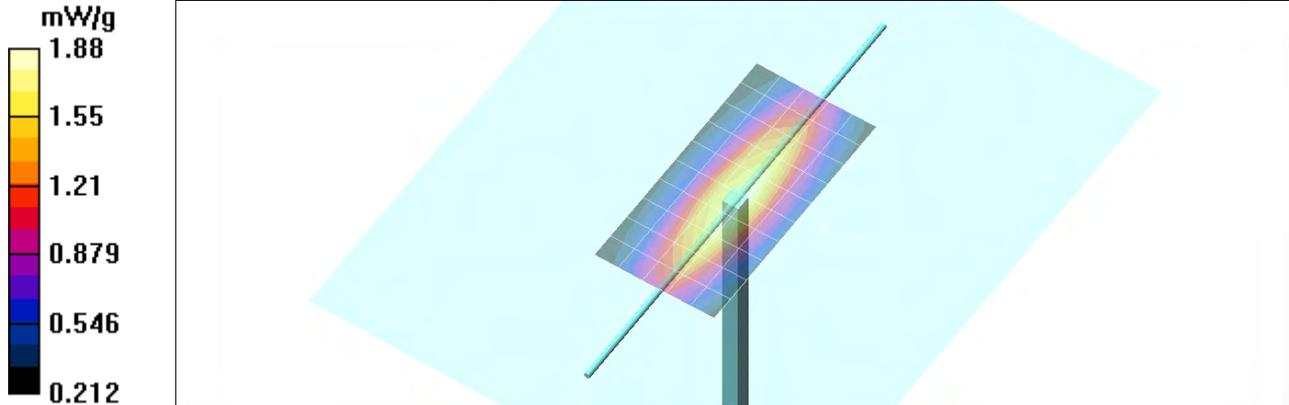

Applicant:	Uniden America Corporation	FCC ID:	AMWUT064	IC:	513C-UT064	
DUT Type:	Portable GMRS/FRS UHF PTT Radio Transceiver	DUT Model(s):	GMR4099 / GMR4040			
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 28 of 47

	<u>Date(s) of Evaluation</u> November 10, 14, 2011	<u>Test Report Serial No.</u> 110811AMW-T1131-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 12, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

Z-Axis Scan

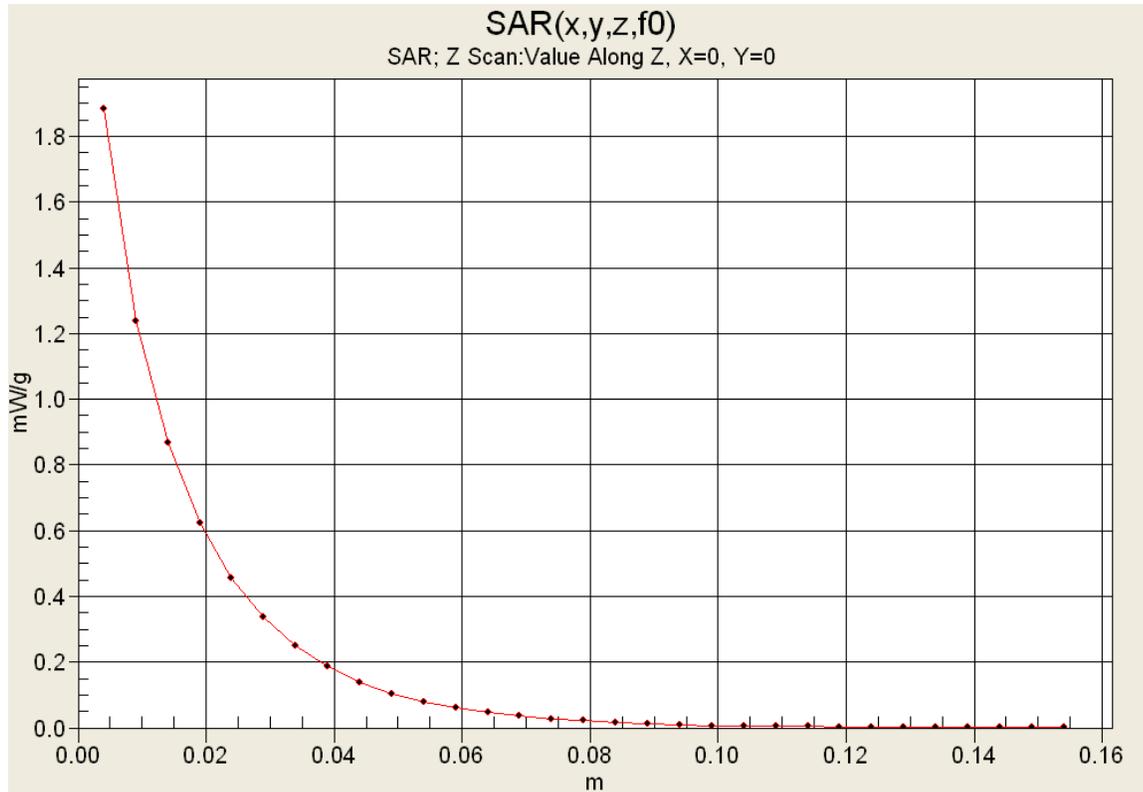

Applicant:	Uniden America Corporation	FCC ID:	AMWUT064	IC:	513C-UT064	
DUT Type:	Portable GMRS/FRS UHF PTT Radio Transceiver	DUT Model(s):	GMR4099 / GMR4040			
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 29 of 47

	<u>Date(s) of Evaluation</u> November 10, 14, 2011	<u>Test Report Serial No.</u> 110811AMW-T1131-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 12, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

Date Tested: 11/14/2011

System Performance Check - 450 MHz Dipole - Head

DUT: Dipole 450 MHz; Type: D450V3; Serial: 1068; Calibrated: 01/18/2010

Ambient Temp: 21C; Fluid Temp: 20.8C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Frequency: 450 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used: $f = 450 \text{ MHz}$; $\sigma = 0.87 \text{ mho/m}$; $\epsilon_r = 45.3$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.3, 7.3, 7.3); Calibrated: 22/06/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Head d=15mm Pin=398mW/Area Scan (6x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 2.08 mW/g


Head d=15mm Pin=398mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 48.6 V/m; Power Drift = 0.042 dB

Peak SAR (extrapolated) = 3.14 W/kg

SAR(1 g) = 1.99 mW/g; SAR(10 g) = 1.32 mW/g


Maximum value of SAR (measured) = 2.11 mW/g

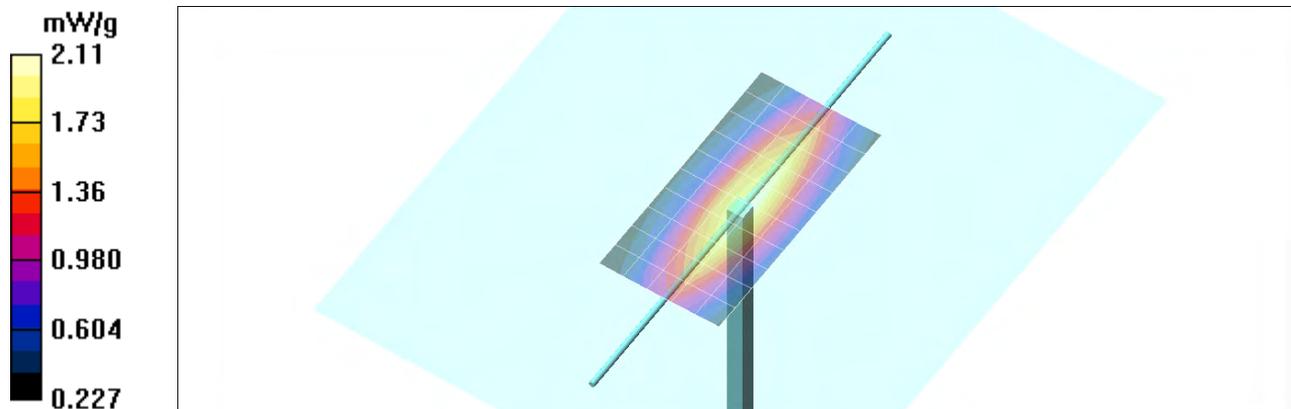

Applicant:	Uniden America Corporation	FCC ID:	AMWUT064	IC:	513C-UT064	
DUT Type:	Portable GMRS/FRS UHF PTT Radio Transceiver	DUT Model(s):	GMR4099 / GMR4040			
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 30 of 47

	<u>Date(s) of Evaluation</u> November 10, 14, 2011	<u>Test Report Serial No.</u> 110811AMW-T1131-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 12, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

Z-axis Scan

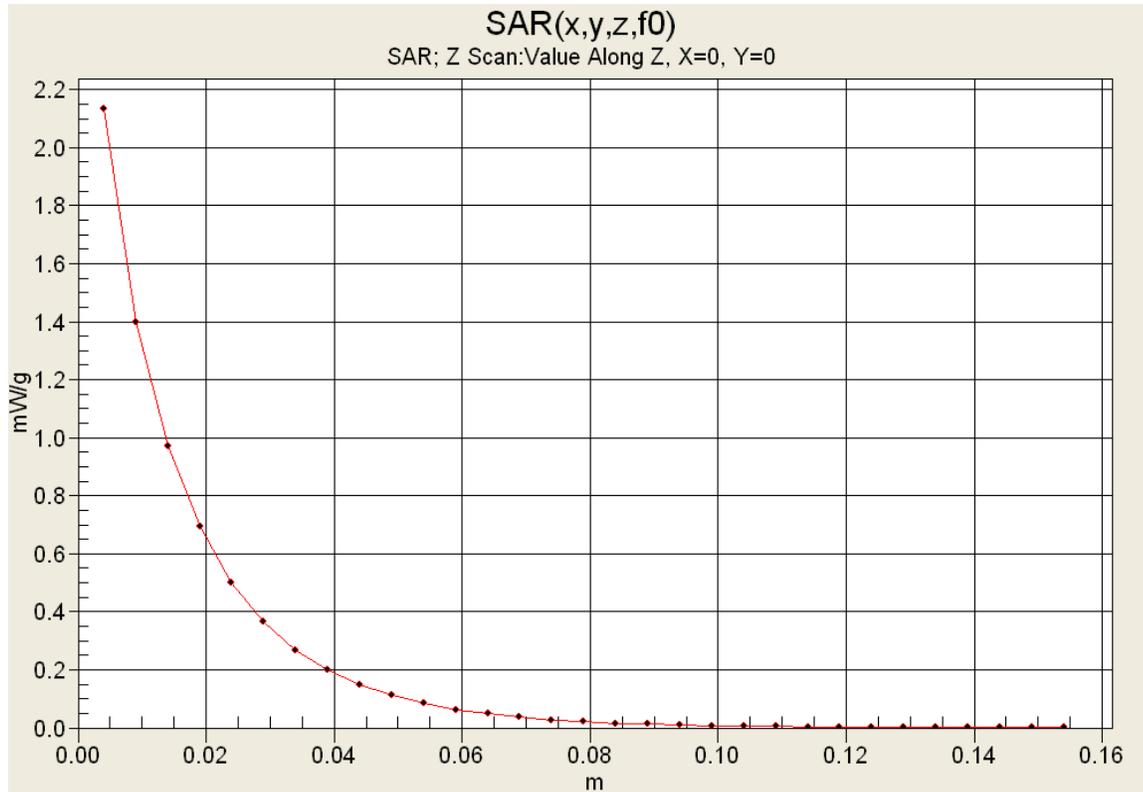

	<u>Date(s) of Evaluation</u> November 10, 14, 2011	<u>Test Report Serial No.</u> 110811AMW-T1131-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 12, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS

Applicant:	Uniden America Corporation	FCC ID:	AMWUT064	IC:	513C-UT064	
DUT Type:	Portable GMRS/FRS UHF PTT Radio Transceiver	DUT Model(s):	GMR4099 / GMR4040			
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 32 of 47

	<u>Date(s) of Evaluation</u> November 10, 14, 2011	<u>Test Report Serial No.</u> 110811AMW-T1131-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 12, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

450 MHz Body

Celltech Labs Inc.
 Test Result for UIM Dielectric Parameter
 10/Nov/2011
 Frequency (GHz)
 FCC_eB FCC Limits for Body Epsilon
 FCC_sB FCC Limits for Body Sigma
 Test_e Epsilon of UIM
 Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.3500	57.70	0.93	59.41	0.82
0.3600	57.60	0.93	58.84	0.83
0.3700	57.50	0.93	58.22	0.83
0.3800	57.40	0.93	58.67	0.85
0.3900	57.30	0.93	58.08	0.85
0.4000	57.20	0.93	58.02	0.87
0.4100	57.10	0.93	57.69	0.88
0.4200	57.00	0.94	57.44	0.89
0.4300	56.90	0.94	57.27	0.91
0.4400	56.80	0.94	56.72	0.88
0.4500	56.70	0.94	57.35	0.92
0.4600	56.66	0.94	57.04	0.93
0.4700	56.62	0.94	56.76	0.94
0.4800	56.58	0.94	56.72	0.93
0.4900	56.54	0.94	55.92	0.93
0.5000	56.51	0.94	56.07	0.95
0.5100	56.47	0.94	55.89	0.97
0.5200	56.43	0.95	55.97	0.97
0.5300	56.39	0.95	55.76	0.98
0.5400	56.35	0.95	55.82	1.00
0.5500	56.31	0.95	55.71	1.00

Applicant:	Uniden America Corporation	FCC ID:	AMWUT064	IC:	513C-UT064	
DUT Type:	Portable GMRS/FRS UHF PTT Radio Transceiver	DUT Model(s):	GMR4099 / GMR4040			
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 33 of 47

	<u>Date(s) of Evaluation</u> November 10, 14, 2011	<u>Test Report Serial No.</u> 110811AMW-T1131-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 12, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

450 MHz Head

Celltech Labs Inc.
Test Result for UIM Dielectric Parameter
14/Nov/2011
Frequency (GHz)
FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma
Test_e Epsilon of UIM
Test_s Sigma of UIM

Freq	FCC_eHFCC_sH	Test_e	Test_s
0.3500	44.70	0.87	47.69
0.3600	44.58	0.87	47.11
0.3700	44.46	0.87	47.32
0.3800	44.34	0.87	46.04
0.3900	44.22	0.87	46.90
0.4000	44.10	0.87	45.35
0.4100	43.98	0.87	45.67
0.4200	43.86	0.87	46.17
0.4300	43.74	0.87	45.39
0.4400	43.62	0.87	45.15
0.4500	43.50	0.87	45.29
0.4600	43.45	0.87	44.68
0.4700	43.40	0.87	45.10
0.4800	43.34	0.87	44.77
0.4900	43.29	0.87	44.60
0.5000	43.24	0.87	44.21
0.5100	43.19	0.87	43.65
0.5200	43.14	0.88	43.65
0.5300	43.08	0.88	43.58
0.5400	43.03	0.88	43.47
0.5500	42.98	0.88	43.07


Applicant:	Uniden America Corporation	FCC ID:	AMWUT064	IC:	513C-UT064	
DUT Type:	Portable GMRS/FRS UHF PTT Radio Transceiver	DUT Model(s):	GMR4099 / GMR4040			
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 34 of 47

	<u>Date(s) of Evaluation</u> November 10, 14, 2011	<u>Test Report Serial No.</u> 110811AMW-T1131-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 12, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS


Applicant:	Uniden America Corporation	FCC ID:	AMWUT064	IC:	513C-UT064	
DUT Type:	Portable GMRS/FRS UHF PTT Radio Transceiver	DUT Model(s):	GMR4099 / GMR4040			
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 35 of 47

FACE-HELD SAR TEST SETUP PHOTOGRAPHS

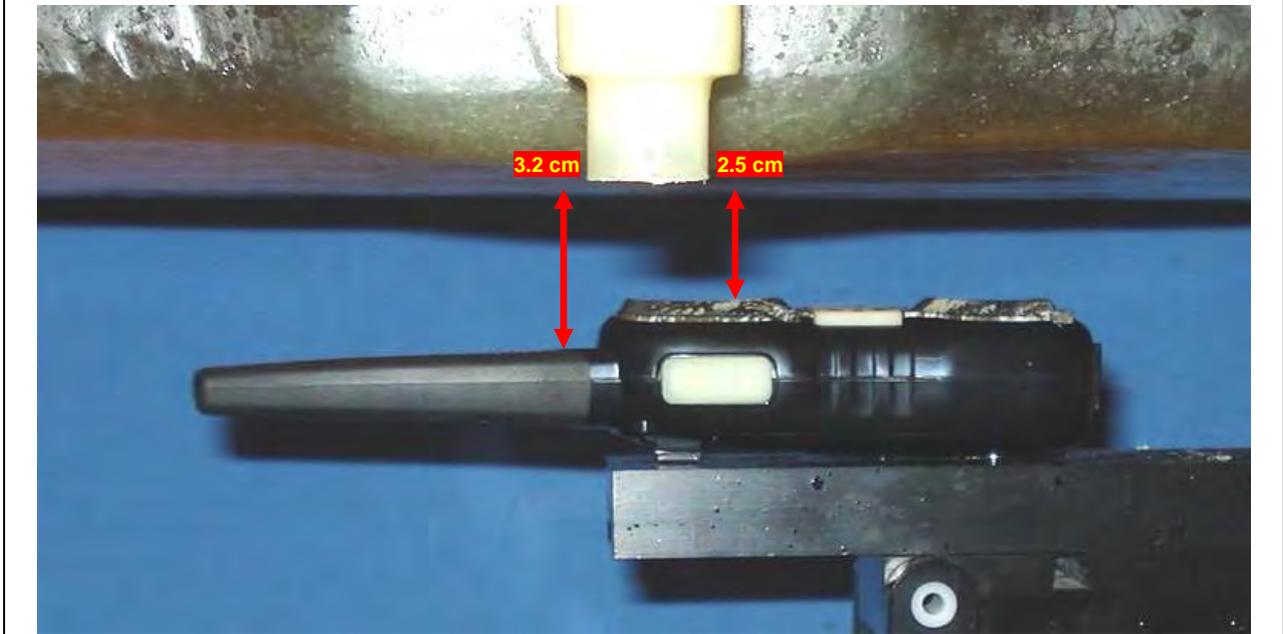


Face-held Configuration - 2.5 cm spacing from front side of DUT to planar phantom

BODY-WORN SAR TEST SETUP PHOTOGRAPHS

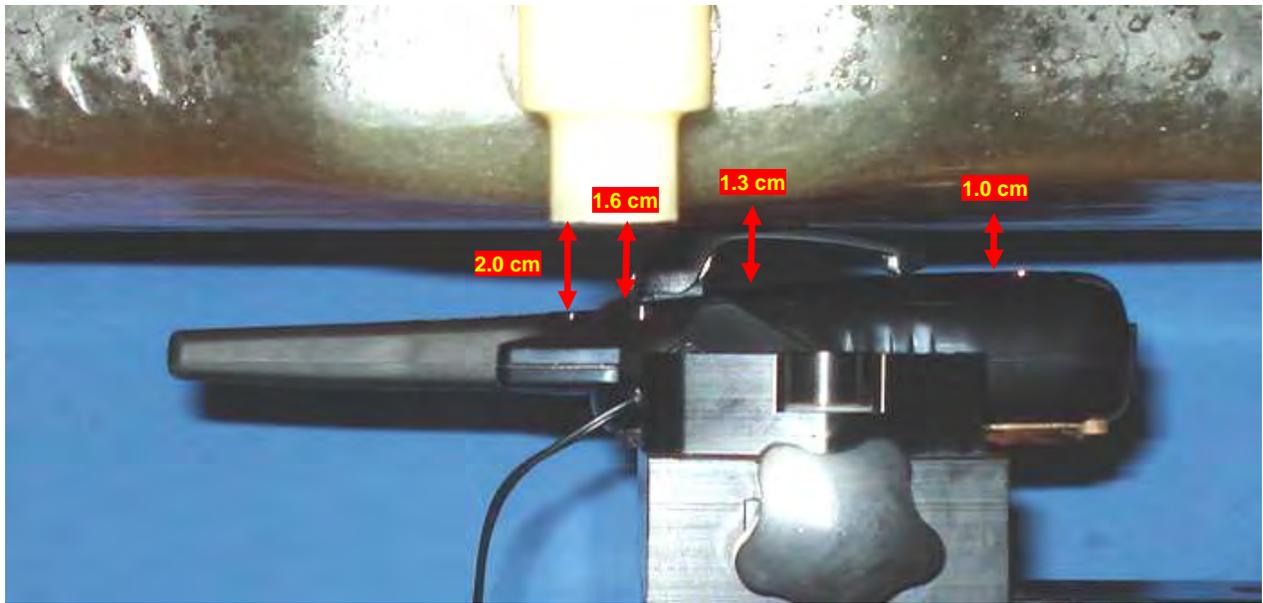

Body-worn Configuration - DUT with Belt-clip & Headset accessories - Back of DUT parallel to planar phantom (belt-clip touch)


BODY-WORN SAR TEST SETUP PHOTOGRAPHS

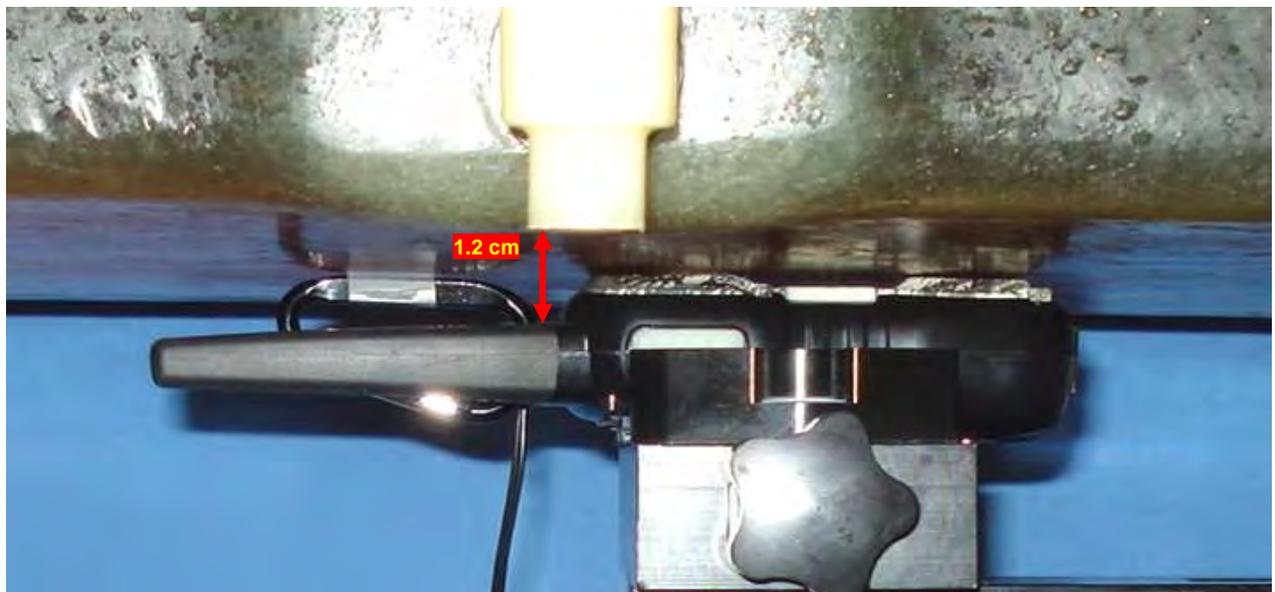

Body-worn Configuration - DUT with Carabiner & Headset accessories - Front of DUT & Carabiner touching planar phantom

	<u>Date(s) of Evaluation</u> November 10, 14, 2011	<u>Test Report Serial No.</u> 110811AMW-T1131-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 12, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

BODY-WORN SAR TEST SETUP PHOTOGRAPHS

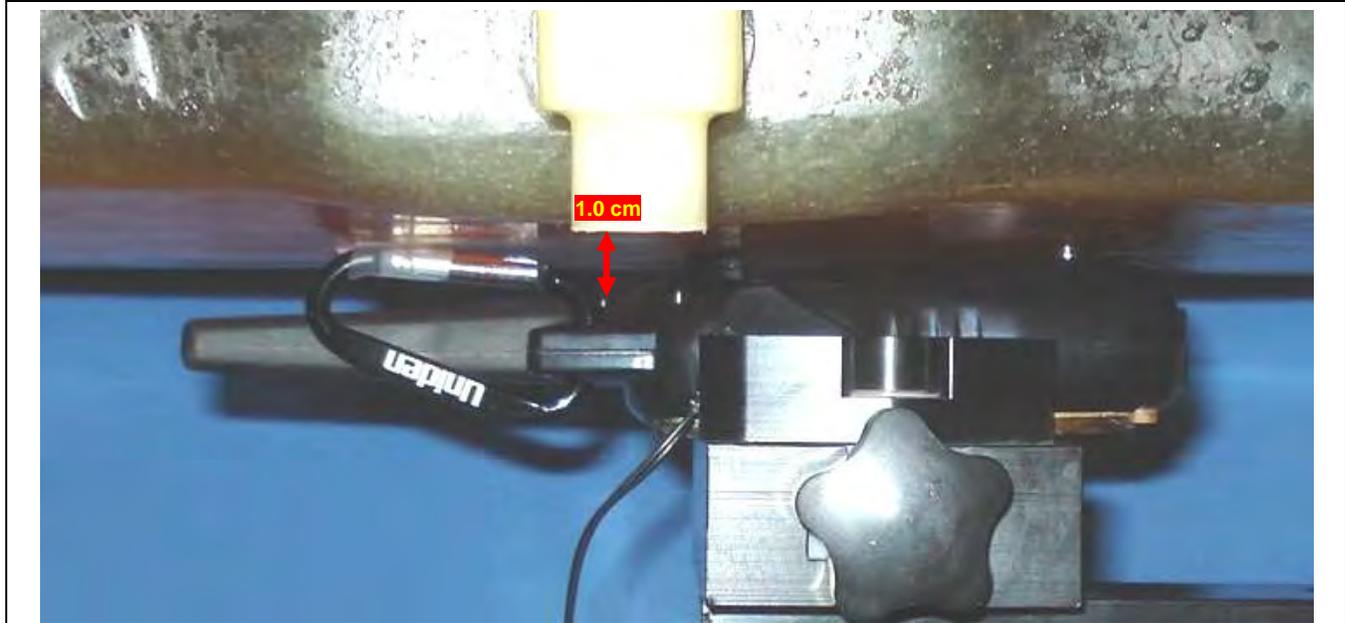

Body-worn Configuration - DUT with Carabiner & Headset accessories - Back of DUT & Carabiner touching planar phantom

Applicant:	Uniden America Corporation	FCC ID:	AMWUT064	IC:	513C-UT064	
DUT Type:	Portable GMRS/FRS UHF PTT Radio Transceiver	DUT Model(s):	GMR4099 / GMR4040			
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 39 of 47

	<u>Date(s) of Evaluation</u> November 10, 14, 2011	<u>Test Report Serial No.</u> 110811AMW-T1131-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 12, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

DUT PHOTOGRAPHS



Front side of GMR4099

Right side of GMR4099

Back side of GMR4099

Left side of GMR4099

Applicant:	Uniden America Corporation	FCC ID:	AMWUT064	IC:	513C-UT064	
DUT Type:	Portable GMRS/FRS UHF PTT Radio Transceiver	DUT Model(s):	GMR4099 / GMR4040			
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 40 of 47

	<u>Date(s) of Evaluation</u> November 10, 14, 2011	<u>Test Report Serial No.</u> 110811AMW-T1131-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	
	<u>Test Report Issue Date</u> December 12, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

DUT PHOTOGRAPHS



Applicant:	Uniden America Corporation	FCC ID:	AMWUT064	IC:	513C-UT064	
DUT Type:	Portable GMRS/FRS UHF PTT Radio Transceiver	DUT Model(s):	GMR4099 / GMR4040			
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 41 of 47

	<u>Date(s) of Evaluation</u> November 10, 14, 2011	<u>Test Report Serial No.</u> 110811AMW-T1131-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 12, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

DUT PHOTOGRAPHS



	<u>Date(s) of Evaluation</u> November 10, 14, 2011	<u>Test Report Serial No.</u> 110811AMW-T1131-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 12, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

DUT PHOTOGRAPHS



Back of DUT with Plastic Belt-clip and Headset/Boom-Microphone audio accessory (P/N: ZA-133)



Side of DUT with Plastic Belt-clip accessory

Applicant:	Uniden America Corporation	FCC ID:	AMWUT064	IC:	513C-UT064	
DUT Type:	Portable GMRS/FRS UHF PTT Radio Transceiver	DUT Model(s):	GMR4099 / GMR4040			
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 43 of 47

	<u>Date(s) of Evaluation</u> November 10, 14, 2011	<u>Test Report Serial No.</u> 110811AMW-T1131-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 12, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	


DUT PHOTOGRAPHS



Front of DUT with Carabiner and Headset/Boom-Microphone audio accessory (P/N: ZA-133)



Back of DUT with Carabiner body-worn accessory

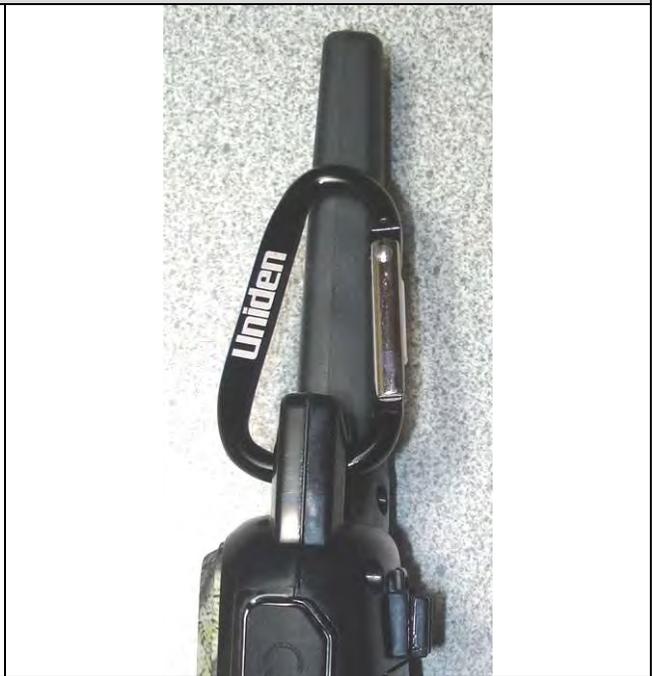

Side of DUT with Carabiner body-worn accessory

Applicant:	Uniden America Corporation	FCC ID:	AMWUT064	IC:	513C-UT064	
DUT Type:	Portable GMRS/FRS UHF PTT Radio Transceiver	DUT Model(s):	GMR4099 / GMR4040			
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 44 of 47

	<u>Date(s) of Evaluation</u> November 10, 14, 2011	<u>Test Report Serial No.</u> 110811AMW-T1131-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 12, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

APPENDIX E - DIPOLE CALIBRATION

Applicant:	Uniden America Corporation	FCC ID:	AMWUT064	IC:	513C-UT064	
DUT Type:	Portable GMRS/FRS UHF PTT Radio Transceiver	DUT Model(s):	GMR4099 / GMR4040			
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 45 of 47



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Celltech**

Certificate No: **D450V3-1068_Jan10**

CALIBRATION CERTIFICATE

Object **D450V3 - SN: 1068**

Calibration procedure(s) **QA CAL-15.v5
Calibration Procedure for dipole validation kits below 800 MHz**

Calibration date: **January 18, 2010**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	1-Apr-09 (No. 217-01030)	Apr-10
Power sensor E4412A	MY41495277	1-Apr-09 (No. 217-01030)	Apr-10
Power sensor E4412A	MY41498087	1-Apr-09 (No. 217-01030)	Apr-10
Reference 3 dB Attenuator	SN: S5054 (3c)	31-Mar-09 (No. 217-01026)	Mar-10
Reference 20 dB Attenuator	SN: S5086 (20b)	31-Mar-09 (No. 217-01028)	Mar-10
Type-N mismatch combination	SN: 5047.2 / 06327	31-Mar-09 (No. 217-01029)	Mar-10
Reference Probe ET3DV6 (LF)	SN: 1507	03-Jul-09 (No. ET3-1507_Jul09)	Jul-10
DAE4	SN: 654	04-May-09 (No. DAE4-654_May09)	May-10
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	04-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-09)	In house check: Oct-10

Calibrated by: **Jeton Kastrati** **Laboratory Technician** Signature *i.v. [Signature]*

Approved by: **Katja Pokovic** **Technical Manager** *[Signature]*

Issued: January 20, 2010

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- d) DASY4 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V5.2
Extrapolation	Advanced Extrapolation	
Phantom	ELI4 Flat Phantom	Shell thickness: 2 ± 0.2 mm
Distance Dipole Center - TSL	15 mm	with Spacer
Area Scan Resolution	dx, dy = 15 mm	
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	450 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	43.5	0.87 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	44.2 \pm 6 %	0.86 mho/m \pm 6 %
Head TSL temperature during test	(22.0 \pm 0.2) °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	condition	
SAR measured	398 mW input power	1.87 mW / g
SAR normalized	normalized to 1W	4.70 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	4.76 mW / g \pm 18.1 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	398 mW input power	1.25 mW / g
SAR normalized	normalized to 1W	3.14 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	3.17 mW / g \pm 17.6 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	56.7	0.94 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	54.1 ± 6 %	0.90 mho/m ± 6 %
Body TSL temperature during test	(22.0 ± 0.2) °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	condition	
SAR measured	398 mW input power	1.78 mW / g
SAR normalized	normalized to 1W	4.47 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	4.58 mW / g ± 18.1 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	398 mW input power	1.19 mW / g
SAR normalized	normalized to 1W	2.99 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	3.06 mW / g ± 17.6 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	57.5 Ω - 5.9 j Ω
Return Loss	- 21.0 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	54.8 Ω - 9.3 j Ω
Return Loss	- 20.0 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.350 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	July 16, 2009

DASY5 Validation Report for Head TSL

Date/Time: 1/18/2010 10:59:37 AM

DUT: Dipole 450 MHz; Type: D450V3; Serial: D450V3 - SN:1068

Communication System: CW; Frequency: 450 MHz; Duty Cycle: 1:1
Medium: HSL450

Medium parameters used: $f = 450$ MHz; $\sigma = 0.86$ mho/m; $\epsilon_r = 44.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ET3DV6 - SN1507 (LF); ConvF(6.66, 6.66, 6.66); Calibrated: 7/3/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn654; Calibrated: 5/4/2009
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1003
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 57

Head/d=15mm, Pin=398mW/Area Scan (41x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.99 mW/g


Head/d=15mm, Pin=398mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 50.2 V/m; Power Drift = -0.020 dB

Peak SAR (extrapolated) = 2.78 W/kg

SAR(1 g) = 1.87 mW/g; SAR(10 g) = 1.25 mW/g

Maximum value of SAR (measured) = 2 mW/g

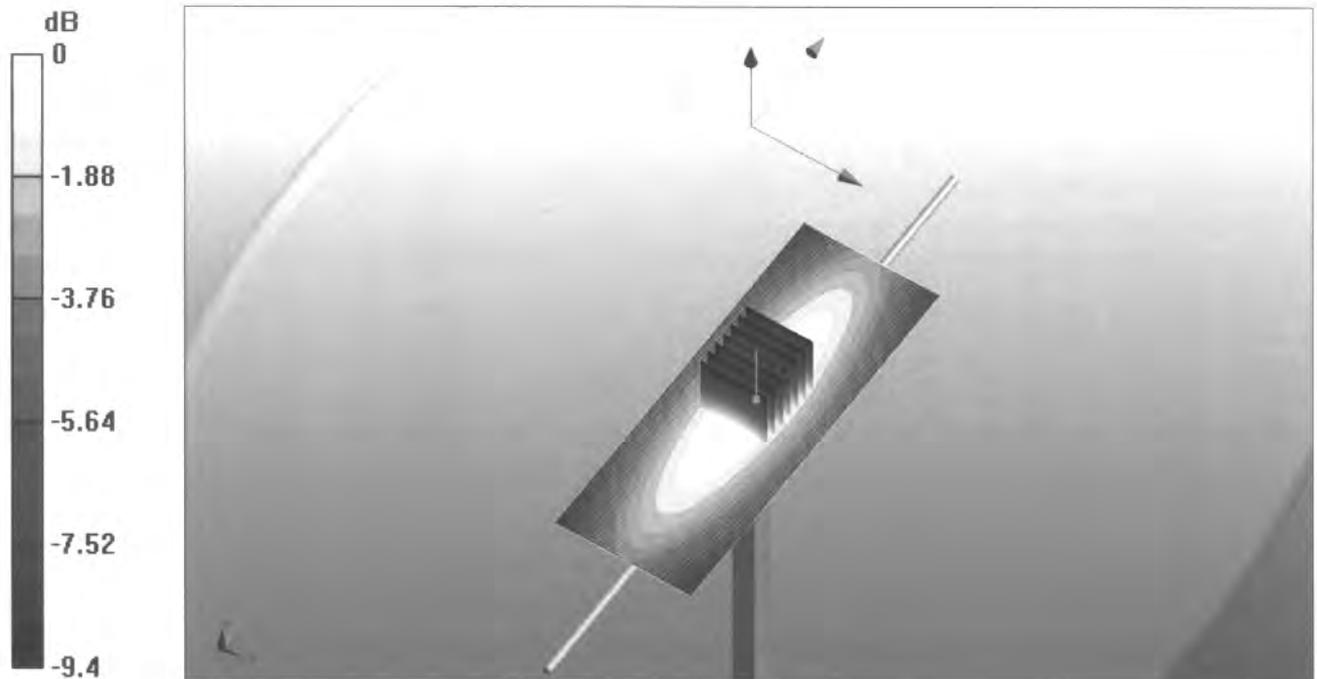

Impedance Measurement Plot for Head TSL

18 Jan 2010 10:25:40

CH1 S11 1 U FS

1: 57.502 Ω -5.9180 Ω 59.763 pF


450.000 000 MHz

*
De1

Cor

Avg
16

↑

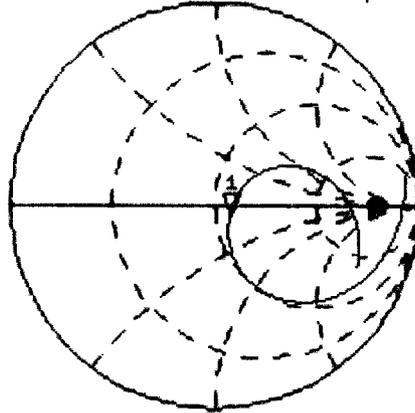


CH2 S11 LOG 5 dB/ REF -20 dB 1:-21.035 dB 450.000 000 MHz

Cor

Avg
16

↑

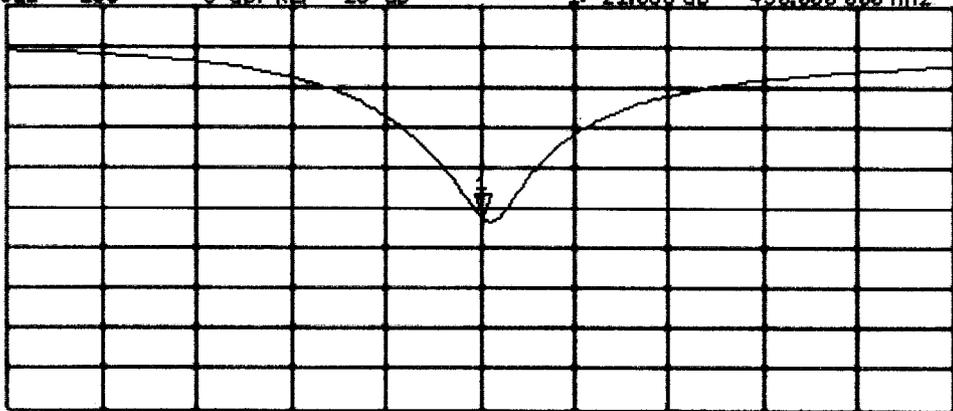

START 250.000 000 MHz

STOP 650.000 000 MHz

DASY5 Validation Report for Body TSL

Date/Time: 1/18/2010 1:24:11 PM

DUT: Dipole 450 MHz; Type: D450V3; Serial: D450V3 - SN:1068

Communication System: CW; Frequency: 450 MHz; Duty Cycle: 1:1

Medium: MSL450

Medium parameters used: $f = 450$ MHz; $\sigma = 0.9$ mho/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ET3DV6 - SN1507 (LF); ConvF(7.11, 7.11, 7.11); Calibrated: 7/3/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn654; Calibrated: 5/4/2009
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1003
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 57

Body/d=15mm, Pin=398mW/Area Scan (61x201x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 1.9 mW/g


Body/d=15mm, Pin=398mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 47.4 V/m; Power Drift = -0.034 dB

Peak SAR (extrapolated) = 2.71 W/kg

SAR(1 g) = 1.78 mW/g; SAR(10 g) = 1.19 mW/g

Maximum value of SAR (measured) = 1.9 mW/g

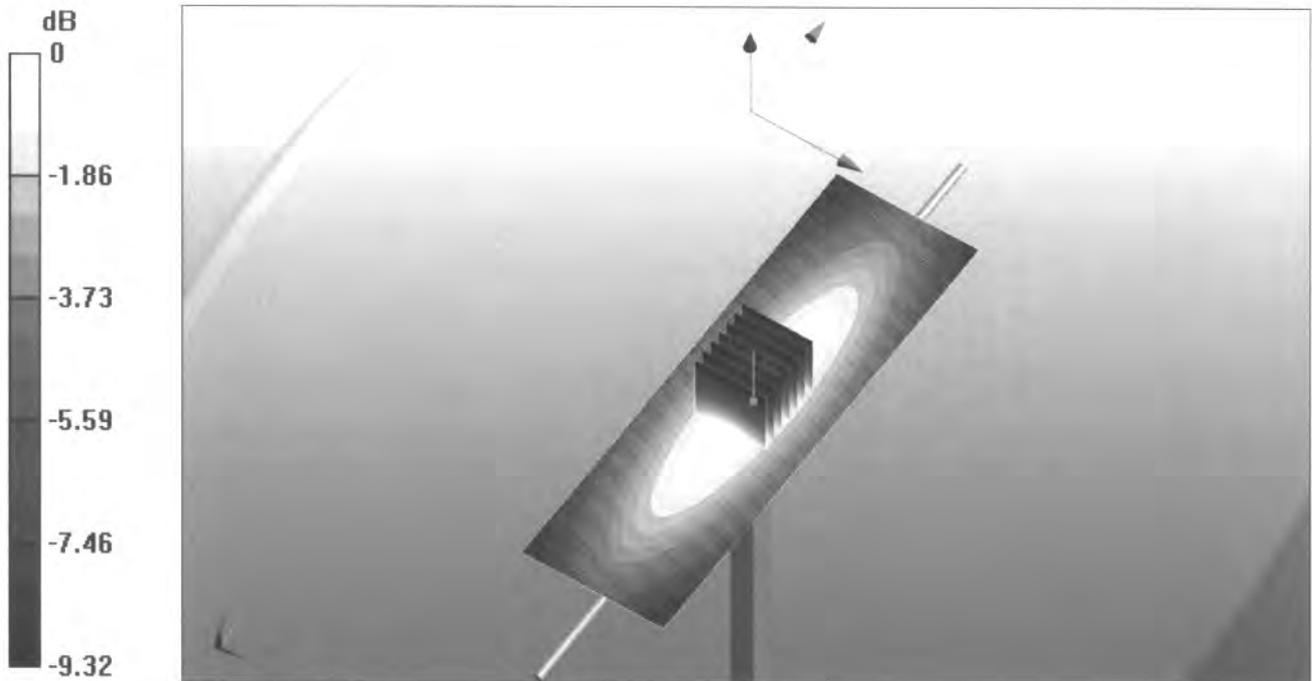


0 dB = 1.9mW/g

Impedance Measurement Plot for Body TSL

18 Jan 2010 12:18:41

CH1 S11 1 U FS 1: 54.824 Ω -9.3047 Ω 38.011 pF 450.000 000 MHz

*
De1
Cor

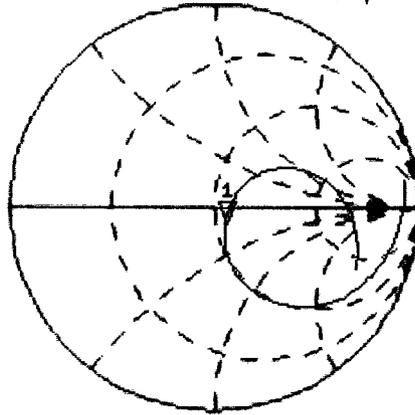

Avg
16


↑

CH2 S11 LOG 5 dB/REF -20 dB 1:-20.034 dB 450.000 000 MHz

Cor

Avg
16

↑

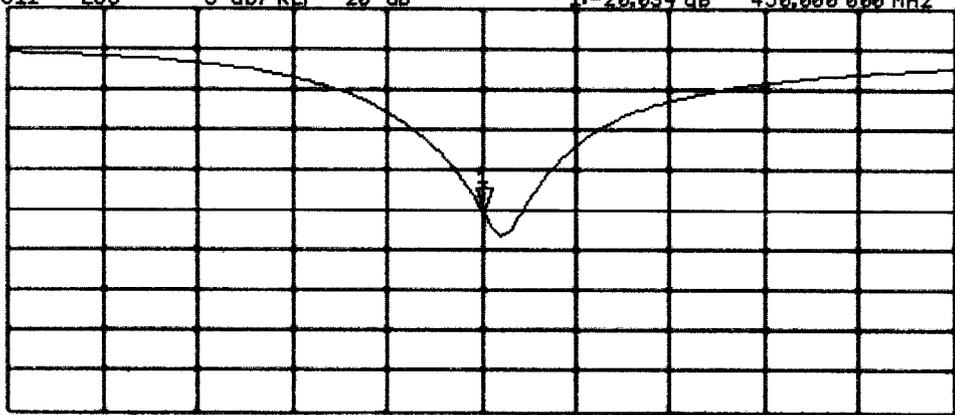

START 250.000 000 MHz

STOP 650.000 000 MHz

	<u>Date(s) of Evaluation</u> November 10, 14, 2011	<u>Test Report Serial No.</u> 110811AMW-T1131-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 12, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

APPENDIX F - PROBE CALIBRATION

Applicant:	Uniden America Corporation	FCC ID:	AMWUT064	IC:	513C-UT064	
DUT Type:	Portable GMRS/FRS UHF PTT Radio Transceiver	DUT Model(s):	GMR4099 / GMR4040			
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 46 of 47



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Celltech**

Certificate No: **ET3-1590_Jun11**

CALIBRATION CERTIFICATE

Object **ET3DV6 - SN:1590**

Calibration procedure(s) **QA CAL-01.v8, QA CAL-12.v7, QA CAL-23.v4, QA CAL-25.v4
 Calibration procedure for dosimetric E-field probes**

Calibration date: **June 22, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	31-Mar-11 (No. 217-01372)	Apr-12
Power sensor E4412A	MY41498087	31-Mar-11 (No. 217-01372)	Apr-12
Reference 3 dB Attenuator	SN: S5054 (3c)	29-Mar-11 (No. 217-01369)	Apr-12
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-11 (No. 217-01367)	Apr-12
Reference 30 dB Attenuator	SN: S5129 (30b)	29-Mar-11 (No. 217-01370)	Apr-12
Reference Probe ES3DV2	SN: 3013	29-Dec-10 (No. ES3-3013_Dec10)	Dec-11
DAE4	SN: 654	3-May-11 (No. DAE4-654_May11)	May-12
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

Calibrated by: **Name** Jeton Kastrati **Function** Laboratory Technician **Signature**

Approved by: **Name** Katja Pokovic **Function** Technical Manager **Signature**

Issued: June 23, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; VR_{x,y,z}; A, B, C** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Probe ET3DV6

SN:1590

Manufactured: March 19, 2001
Calibrated: June 22, 2011

Calibrated for DASYS/EASY Systems
(Note: non-compatible with DASYS2 system!)

DASY/EASY - Parameters of Probe: ET3DV6 - SN:1590

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	1.93	2.00	1.66	$\pm 10.1 \%$
DCP (mV) ^B	96.0	98.7	88.6	

Modulation Calibration Parameters

UID	Communication System Name	PAR		A dB	B dB	C dB	VR mV	Unc ^E (k=2)
10000	CW	0.00	X	0.00	0.00	1.00	104.2	$\pm 2.7 \%$
			Y	0.00	0.00	1.00	117.7	
			Z	0.00	0.00	1.00	129.9	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: ET3DV6 - SN:1590

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
450	43.5	0.87	7.30	7.30	7.30	0.18	2.10	± 13.4 %
835	41.5	0.90	6.50	6.50	6.50	0.38	2.55	± 12.0 %
900	41.5	0.97	6.39	6.39	6.39	0.39	2.47	± 12.0 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

DASY/EASY - Parameters of Probe: ET3DV6- SN:1590

Calibration Parameter Determined in Body Tissue Simulating Media


f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
450	56.7	0.94	7.82	7.82	7.82	0.12	2.04	± 13.4 %
835	55.2	0.97	6.37	6.37	6.37	0.42	2.33	± 12.0 %
900	55.0	1.05	6.27	6.27	6.27	0.40	2.45	± 12.0 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

Frequency Response of E-Field


(TEM-Cell:ifi110 EXX, Waveguide: R22)

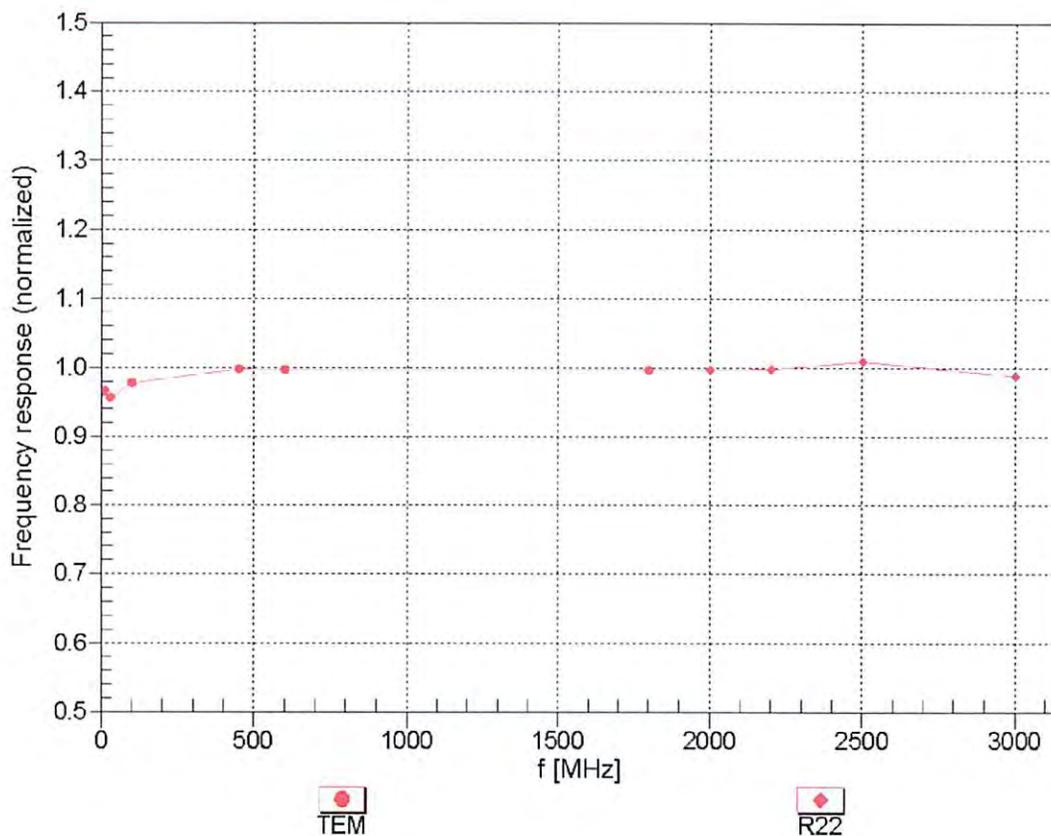



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

f=600 MHz,TEM


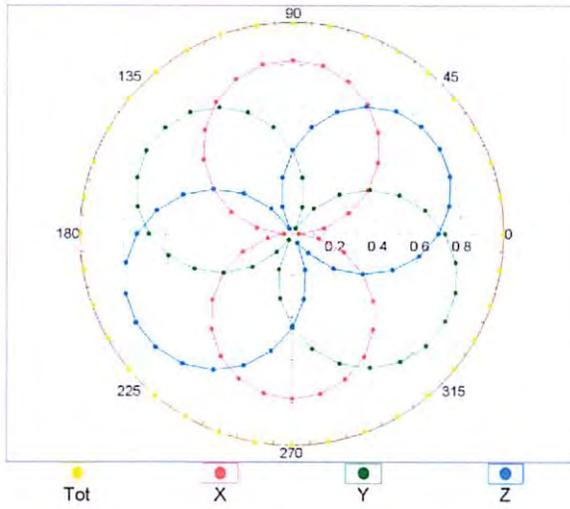


f=1800 MHz,R22

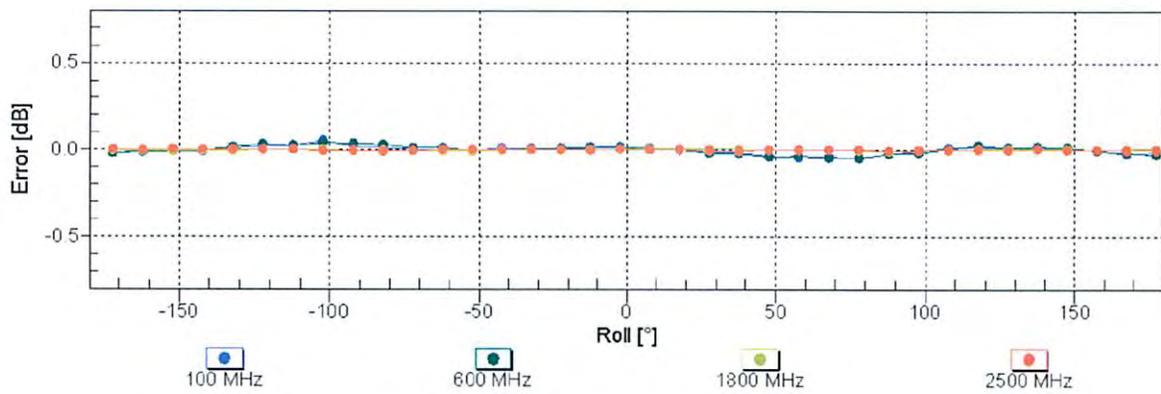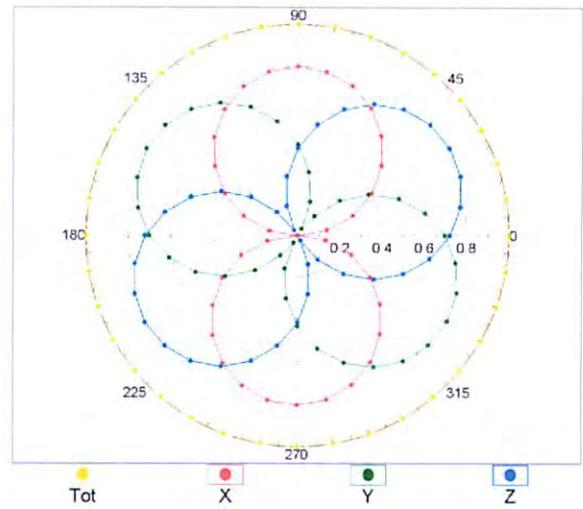


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell , $f = 900 \text{ MHz}$)

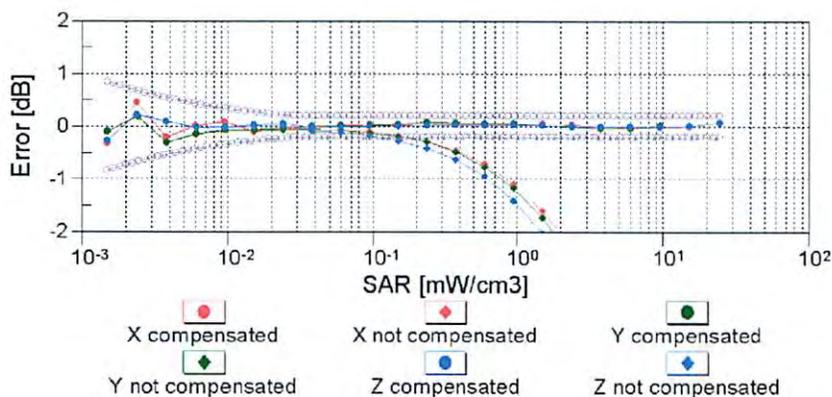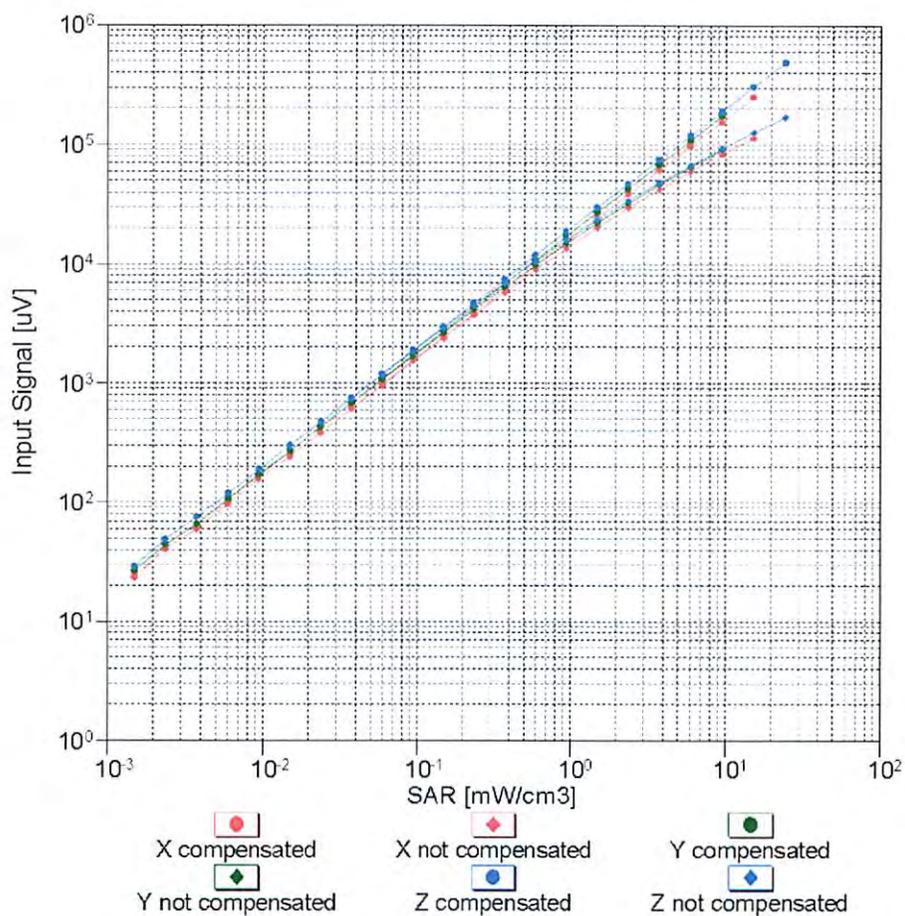



Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

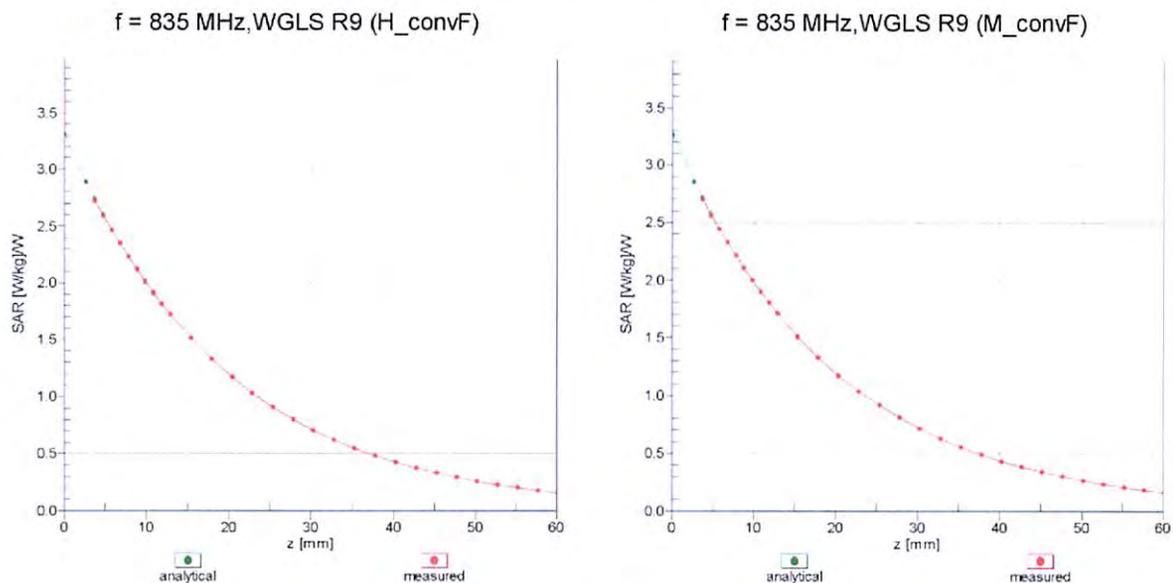

Deviation from Isotropy in Liquid

Error (ϕ, ϑ), f = 900 MHz

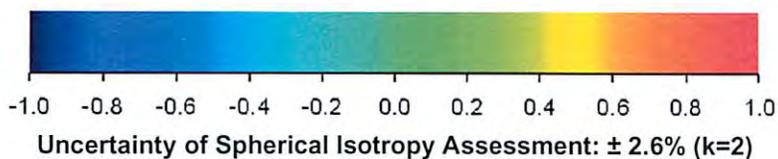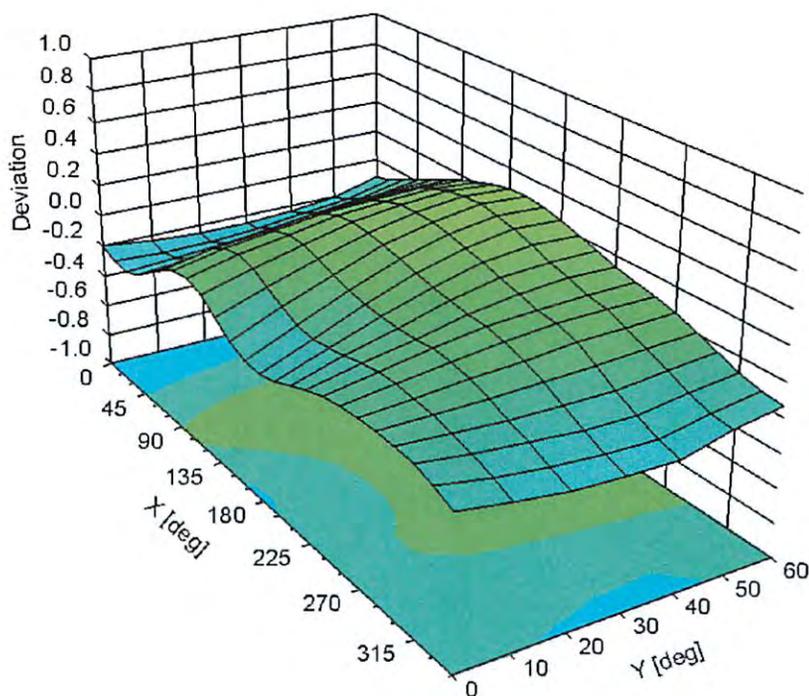

DASY/EASY - Parameters of Probe: ET3DV6 - SN:1590

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	Not applicable
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	enabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	6.8 mm
Probe Tip to Sensor X Calibration Point	2.7 mm
Probe Tip to Sensor Y Calibration Point	2.7 mm
Probe Tip to Sensor Z Calibration Point	2.7 mm
Recommended Measurement Distance from Surface	4 mm

	<u>Date(s) of Evaluation</u> November 10, 14, 2011	<u>Test Report Serial No.</u> 110811AMW-T1131-S95U	<u>Test Report Revision No.</u> Rev. 1.1 (2nd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 12, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

APPENDIX G - BARSKI PLANAR PHANTOM CERTIFICATE OF CONFORMITY

Applicant:	Uniden America Corporation	FCC ID:	AMWUT064	IC:	513C-UT064	
DUT Type:	Portable GMRS/FRS UHF PTT Radio Transceiver	DUT Model(s):	GMR4099 / GMR4040			
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 47 of 47

2378 Westlake Road
Kelowna, B.C. Canada
V1Z-2V2



Ph. # 250-769-6848
Fax # 250-769-6334
E-mail: barskiind@shaw.ca
Web: www.bcfiberglass.com

FIBERGLASS FABRICATORS

Certificate of Conformity

Item : Flat Planar Phantom Unit # 03-01
Date: June 16, 2003
Manufacturer: Barski Industries (1985 Ltd)

Test	Requirement	Details
Shape	Compliance to geometry according to drawing	Supplied CAD drawing
Material Thickness	Compliant with the requirements	2mm +/- 0.2mm in measurement area
Material Parameters	Dielectric parameters for required frequencies Based on Dow Chemical technical data	100 MHz-5 GHz Relative permittivity<5 Loss Tangent<0.05

Conformity

Based on the above information, we certify this product to be compliant to the requirements specified.

Signature: _____

A handwritten signature in black ink, appearing to read 'Daniel Chailier', is written over a horizontal line.


Daniel Chailier



Fiberglass Planar Phantom - Top View



Fiberglass Planar Phantom - Front View

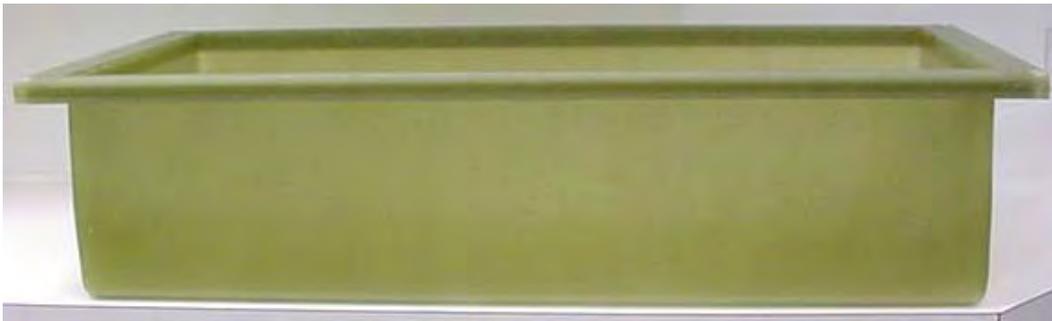


Fiberglass Planar Phantom - Back View



Fiberglass Planar Phantom - Bottom View

Dimensions of Fiberglass Planar Phantom (Manufactured by Barski Industries Ltd. - Unit# 03-01)

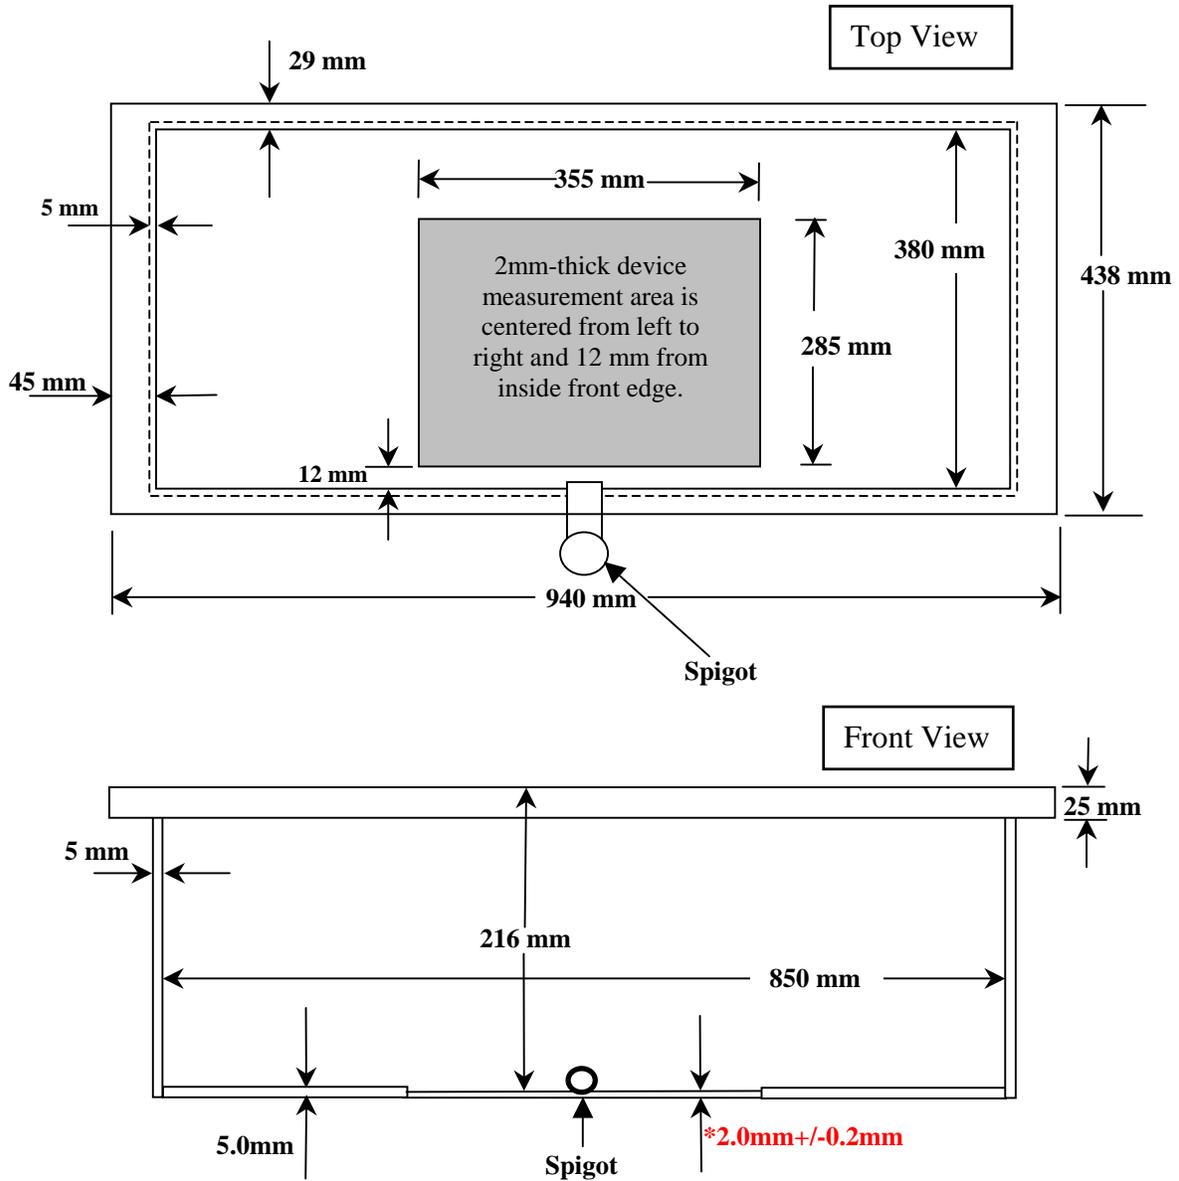

**Note: Measurements that aren't repeated for the opposite sides are the same as the side measured.
This drawing is not to scale.**