



Test Report Serial Number: 45461429R2.0  
Test Report Date: 6 March 2018  
Project Number: 1397

## EMC Test Report - New Filing

Applicant:

# Uniden®

**Uniden America Corporation**  
**3001 Gateway Drive**  
**Suite 130**  
**Irving, Tx, 75063, USA**

FCC ID:

**AMWUT420**

Product Model Number / HVIN

**PC88Elite**

IC Registration Number

**513C-UT420**

Product Name / PMN

**PC88Elite**

In Accordance With:

**FCC 47 CFR Part 95 Subpart D, Part 15 Subpart B**

Licensed Non-Broadcast Station Transmitter (TNB)

**SS-GEN, RSS-236 Issue 1**

Citizen Band (26.960 to 27.410 MHz)

Approved By:

**Ben Hewson, President**

Celltech Labs Inc.  
21-364 Lougheed Rd.  
Kelowna, BC, V1X 7R8  
Canada



Test Lab Certificate: 2470.01



Industry  
Canada

IC Registration 3874A-1



FCC Registration: CA3874

This report shall not be reproduced in any form without the expressed written consent of Celltech Labs Inc.

© 2016 Celltech Labs Inc.

## Table of Contents

1.0 DOCUMENT CONTROL.....	5
2.0 CLIENT AND DUT INFORMATION.....	6
3.0 SCOPE.....	7
4.0 TEST RESULT SUMMARY.....	8
5.0 NORMATIVE REFERENCES.....	9
6.0 FACILITIES AND ACCREDITATIONS.....	10
7.0 CONDUCTED POWER.....	11
8.0 MODULATION RESPONSE.....	12
9.0 OCCUPIED BANDWIDTH AND EMISSION MASKS.....	15
10 CONDUCTED OUT OF BAND SPURIOUS EMISSIONS.....	20
11.0 RADIATED SPURIOUS EMISSIONS.....	31
12.0 FREQUENCY STABILITY.....	35
13.0 RECEIVER RADIATED EMISSIONS - DOC.....	37
APPENDIX A – TEST SETUP DRAWINGS AND CONDITIONS.....	41
APPENDIX B – EQUIPMENT LIST AND CALIBRATION.....	45
APPENDIX C – MEASUREMENT INSTRUMENT UNCERTAINTY.....	46
EXHIBIT 1A – FCC 731 FORM.....	47
EXHIBIT 1B – ISED ANNEX I-II FORM.....	48
EXHIBIT 2A – FCC AGENT AUTHORITY.....	49
EXHIBIT 2B – ISED AGENT AUTHORITY.....	50
EXHIBIT 3A – FCC CONFIDENTIALITY REQUEST.....	51
EXHIBIT 3B – ISED CANADIAN REP ATTESTATION LETTER.....	52
EXHIBIT 4A – RF EXPOSURE (MPE) REPORT - FCC.....	53
EXHIBIT 4B – RF EXPOSURE (MPE) REPORT - ISED.....	54
EXHIBIT 5 – LABEL SAMPLE.....	55
EXHIBIT 6 – LABEL LOCATION.....	56
EXHIBIT 7 –BLOCK DIAGRAM.....	57
EXHIBIT 8 –CIRCUIT DESCRIPTION.....	58
EXHIBIT 9 – SCHEMATIC DIAGRAM.....	59
EXHIBIT 10 – BOM.....	60
EXHIBIT 11 – USER’S MANUAL.....	61
EXHIBIT 12 – ALIGNMENT PROCEDURE.....	62
EXHIBIT 13 – EXTERNAL PHOTOS.....	63
EXHIBIT 14 – INTERNAL PHOTOS.....	68
EXHIBIT 15 – SETUP PHOTOS.....	78

## Table of Figures

Figure A.1 – Test Setup Conducted Measurements.....	41
Figure A.2 – Test Setup Audio Modulation Response Measurements.....	42
Figure A.3 – Test Setup Radiated Emissions Measurements .....	43
Figure A.4 – Test Setup Frequency Stability Measurements .....	44
Figure E5.1 – Sample Label.....	55
Figure E6.1 – Label Location .....	56
Figure E12.1 – External Photo - DUT Front View.....	63
Figure E12.2 – External Photo - DUT Rear View.....	63
Figure E12.3 – External Photo - DUT w/ Accessories.....	64
Figure E12.4 – External Photo - DUT Top View .....	65
Figure E12.5 – External Photo - DUT Bottom View.....	66
Figure E12.6 – External Photo - DUT Right View.....	67
Figure E12.7 – External Photo - DUT Left View .....	67
Figure E13.1 – Internal Photo - DUT w/ Bottom Cover Removed .....	68
Figure E13.2 – Internal Photo – DUT w/ Top Cover Removed.....	69
Figure E13.3 – Internal Photo – Front Control Assembly – Rear View .....	70
Figure E13.4 – Internal Photo – Front Control Assembly – Front View.....	71
Figure E13.5 – Internal Photo – Front Control Assembly – Component View.....	72
Figure E13.6 – Internal Photo – PCB – Top View.....	73
Figure E13.7 – Internal Photo – PCB – Bottom View .....	74
Figure E13.8 – Internal Photo – PCB – Audio Amplifier Section .....	75
Figure E13.9 – Internal Photo – PCB – Audio Amplifier Section – Heat Sink Removed.....	76
Figure E13.10 – Internal Photo – PCB – RF Amplifier Section.....	77
Figure E14.1 – Setup Photo – Frequency Stability – DUT in Environmental Chamber.....	78
Figure E14.2 – Setup Photo – Frequency Stability - External Equipment.....	79
Figure E14.3 – Setup Photo – Radiated Emissions < 1GHz .....	80

## Table of Plots

Plot 8.1 – Audio Frequency and Low Pass Filter Response.....	13
Plot 8.2 – Modulation Limiting Response.....	14
Plot 9.1 – Occupied Bandwidth Channel 1 .....	16
Plot 9.2 – Occupied Bandwidth Channel 19 .....	17
Plot 9.3 – Occupied Bandwidth Channel 40 .....	18
Plot 10.1 – Conducted Out of Band Emissions, 30MHz – 300MHz, Channel 1 .....	21
Plot 10.2 – Conducted Out of Band Emissions, Channel 1, 2 <sup>nd</sup> Harmonic .....	22
Plot 10.3 – Conducted Out of Band Emissions, Channel 1, 3 <sup>rd</sup> Harmonic.....	23
Plot 10.4 – Conducted Out of Band Emissions, 30MHz – 300MHz, Channel 19 .....	24
Plot 10.5 – Conducted Out of Band Emissions, Channel 19, 2 <sup>nd</sup> Harmonic.....	25
Plot 10.6 – Conducted Out of Band Emissions, Channel 19, 3 <sup>rd</sup> Harmonic.....	26
Plot 10.7 – Conducted Out of Band Emissions, 30MHz – 300MHz, Channel 40 .....	27
Plot 10.8 – Conducted Out of Band Emissions, Channel 40, 2 <sup>nd</sup> Harmonic.....	28
Plot 10.9 – Conducted Out of Band Emissions, Channel 40, 3 <sup>rd</sup> Harmonic.....	29
Plot 11.1 – Radiated Spurious Emissions, 30MHz – 1000MHz, Vertical.....	32
Plot 11.2 – Radiated Spurious Emissions, 30MHz – 1000MHz, Horizontal .....	33
Plot 13.1 – Receiver Radiated Emissions - Vertical.....	38
Plot 13.2 – Receiver Radiated Emissions - Horizontal .....	39

**Table of Tables**

<i>Table 7.1 – Summary of Conducted Power Measurements (RMS)</i> .....	11
<i>Table 9.1 - Summary of Occupied Bandwidth and Emission Mask Results</i> .....	19
<i>Table 10.1 – Summary of Conducted Out of Band Emissions</i> .....	30
<i>Table 11.1 – Summary of Radiated Spurious Emissions</i> .....	34
<i>Table 12.1 – Summary of Frequency Stability Results</i> .....	36
<i>Table 13.1 – Summary of Receiver Radiated Emissions</i> .....	40
<i>Table A.1 – Conducted Measurements Equipment and Environmental</i> .....	41
<i>Table A.2 – Audio Modulation Equipment and Environmental</i> .....	42
<i>Table A.3 – Radiated Emissions Equipment and Environmental</i> .....	43
<i>Table A.4 – Frequency Stability Measurement Equipment and Environmental</i> .....	44

**1.0 DOCUMENT CONTROL**

Revision History					
<b>Samples Tested By:</b>		Art Voss, P.Eng.	<b>Date(s) of Evaluation:</b>		22 Feb - 27 Feb, 2017
<b>Report Prepared By:</b>		Art Voss, P.Eng.	<b>Report Reviewed By:</b>		Ben Hewson
Report Revision	Description of Revision		Revised Section	Revised By	Revision Date
1.0	Draft Release		n/a	Art Voss	25 February 2018
2.0	Revised References to Previous Part 95D Requirements		ALL	Art Voss	6 March 2018

## 2.0 CLIENT AND DUT INFORMATION

Client Information	
<b>Applicant Name</b>	Uniden America Corporation
<b>Applicant Address</b>	3001 Gateway Drive, Suite 130
	Irving, TX, 75063
	USA
DUT Information	
<b>Device Identifier(s):</b>	<b>FCC ID:</b> AMWUT420
	<b>IC:</b> 513C-UT420
<b>Device Type:</b>	Mobile CB Radio Transceiver
<b>Type of Equipment:</b>	Analog Transceiver
<b>Device Model(s) / HVIN:</b>	PC88Elite
<b>Device Marketing Name / PMN:</b>	PC88Elite
<b>Firmware Version ID Number / FVIN:</b>	n/a
<b>Host Marketing Name / HMN:</b>	n/a
<b>Test Sample Serial No.:</b>	T/A Sample - Identical Prototype
<b>Transmit Frequency Range:</b>	26.965 - 27.405 MHz (Chan. 1-40)
<b>Number of Channels:</b>	40
<b>Manuf. Max. Rated Output Power:</b>	4.0W AM
<b>Manuf. Max. Rated BW/Data Rate:</b>	8kHz
<b>Antenna Make and Model:</b>	n/a
<b>Antenna Type and Gain:</b>	External Whip, 0dBi nominal (3dBi maximum).
<b>Modulation:</b>	AM
<b>Mode:</b>	n/a
<b>Emission Designator:</b>	5K60A3E
<b>DUT Power Source:</b>	13.8 VDC External (Nominal)
<b>Deviation(s) from standard/procedure:</b>	None
<b>Modification of DUT:</b>	None

**3.0 SCOPE**

This Certification Report was prepared on behalf of:

**Uniden America Corporation**

(the 'Applicant'), in accordance with the applicable Federal Communications Commission (FCC) CFR 47 rules parts and regulations (the 'Rules'). The scope of this investigation was limited to only the equipment, devices and accessories (the 'Equipment') supplied by the Applicant. The tests and measurements performed on this Equipment were only those set forth in the applicable Rules and/or the Test and Measurement Standards they reference. The Rules applied and the Test and Measurement Standards used during this evaluation appear in the Normative References section of this report. The limits set forth in the technical requirements of the applicable Rules were applied to the measurement results obtained during this evaluation and, unless otherwise noted, these limits were used as the Pass/Fail criteria. The Pass/Fail statements made in this report apply to only the tests and measurements performed on only the Equipment tested during this evaluation. Where applicable and permissible, information including test and measurement data and/or results from previous evaluations of same or similar equipment, devices and/or accessories may be cited in this report.

As per FCC CFR 47 Part §2.1091 and §2.1093, an RF Exposure evaluation report is required for this Equipment and the results of the RF Exposure evaluation appear in a separate exhibit from this report.

This Equipment is subject to FCC Declaration of Conformity (DoC). DoC evaluations were performed on this Equipment and the results of the DoC evaluation appear in a separate exhibit from this report.

<p>I attest that the data reported herein is true and accurate within the tolerance of the Measurement Instrument Uncertainty; that all tests and measurements were performed in accordance with accepted practices or procedures; and that all tests and measurements were performed by me or by trained personnel under my direct supervision. The results of this investigation are based solely on the test sample(s) provided by the client which were not adjusted, modified or altered in any manner whatsoever, except as required to carry out specific tests or measurements. This test report has been completed in accordance with ISO/IEC 17025.</p>	 <hr/> <p>Art Voss, P.Eng. Technical Manager Celltech Labs Inc. 25 February 2018 Date</p> 
---	---

**4.0 TEST RESULT SUMMARY**

<b>TEST SUMMARY</b>						
<b>Referenced Standard(s):</b>		<b>FCC CFR Title 47 Parts 2, 95D, 15B</b>				
<b>Section</b>	<b>Description of Test</b>	<b>Procedure Reference</b>	<b>Applicable Rule Part(s) FCC</b>	<b>Applicable Rule Part(s) ISEDC</b>	<b>Test Date</b>	<b>Result</b>
<b>7.0</b>	Conducted Power (Fundamental)	ANSI/TIA/EIA-382-A ANSI C63.4:2014	§2.1046 §95.967	RSS-Gen RSS-236 5.2	22 Feb 2018	<b>Complies</b>
<b>8.0</b>	Modulation Response	ANSI/TIA/EIA-603-D ANSI C63.4:2014	§2.1047 §95.975	RSS-Gen	24 Feb 2018	<b>Complies</b>
<b>9.0</b>	Occupied Bandwidth	ANSI/TIA/EIA-603-D ANSI C63.4:2014	§2.1049 §95.973	RSS-Gen RSS-236 5.3.2	24 Feb 2018	<b>Complies</b>
	Emission Mask	ANSI/TIA/EIA-603-D ANSI C63.4:2014	§2.1049 §95.979	RSS-Gen RSS-236 5.4.4	24 Feb 2018	<b>Complies</b>
<b>10.0</b>	Conducted TX Spurious Emissions	ANSI/TIA/EIA-603-D ANSI C63.4:2014	§2.1051 §95.979	RSS-Gen RSS-236 5.4.4	24 Feb 2018	<b>Complies</b>
<b>11.0</b>	Radiated TX Spurious Emissions	ANSI/TIA/EIA-603-D ANSI C63.4:2014	§2.1053 §95.979	RSS-Gen RSS-236 5.4.4	29 Feb 2018	<b>Complies</b>
<b>12.0</b>	Frequency Stability	ANSI/TIA/EIA-603-D ANSI C63.4:2014	§2.1055 §95.965	RSS-Gen	25 Feb 2018	<b>Complies</b>
<b>13.0</b>	Radiated Receiver Emissions	ANSI C63.4:2014	§15 Subpart B	RSS-Gen	29 Feb 2018	<b>Complies</b>


## 5.0 NORMATIVE REFERENCES

<b>Normative References</b>	
ANSI / ISO 17025:2005	General Requirements for competence of testing and calibration laboratories
IEEE/ANSI C63.4:2014	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI/TIA/EIA-382-A	Minimum Standards - Citizens Band Radion Service Amplitude Modulated (AM) Transceivers Operating in the 27MHz Band
CFR Title 47 Part 2	Code of Federal Regulations Title 47: Telecommunication Part 2: Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
CFR Title 47 Part 95	Code of Federal Regulations Title 47: Telecommunication Subpart D: Citizens Band (CB) Radio Service
CFR Title 47 Part 15	Code of Federal Regulations Title 47: Telecommunication Part 15: Radio Frequency Devices Subpart B: Unintentional Radiators
Industry Canada Spectrum Management & Telecommunications Policy	RSS-Gen Issue 4: General Requirements and Information for the Certification of Radiocommunication Equipment
Industry Canada Spectrum Management & Telecommunications Policy	RSS-236 Issue 1: General Radio Service Equipment Operating in the Band 26.960 to 27.410 MHz (Citizens Band)

**6.0 FACILITIES AND ACCREDITATIONS**

**Facility and Accreditation:**

The facilities used to evaluate this device outlined in this report are located at 21-364 Lougheed Road, Kelowna, British Columbia, Canada V1X 7R8. The radiated emissions site (OATS) conforms to the requirements set forth in ANSI C63.4 and is filed and listed with the FCC under Test Firm Registration Number CA3874 and Industry Canada under Test Site File Number IC 3874A-1. Celltech is accredited to ISO 17025, through accrediting body A2LA and with certificate 2470.01.

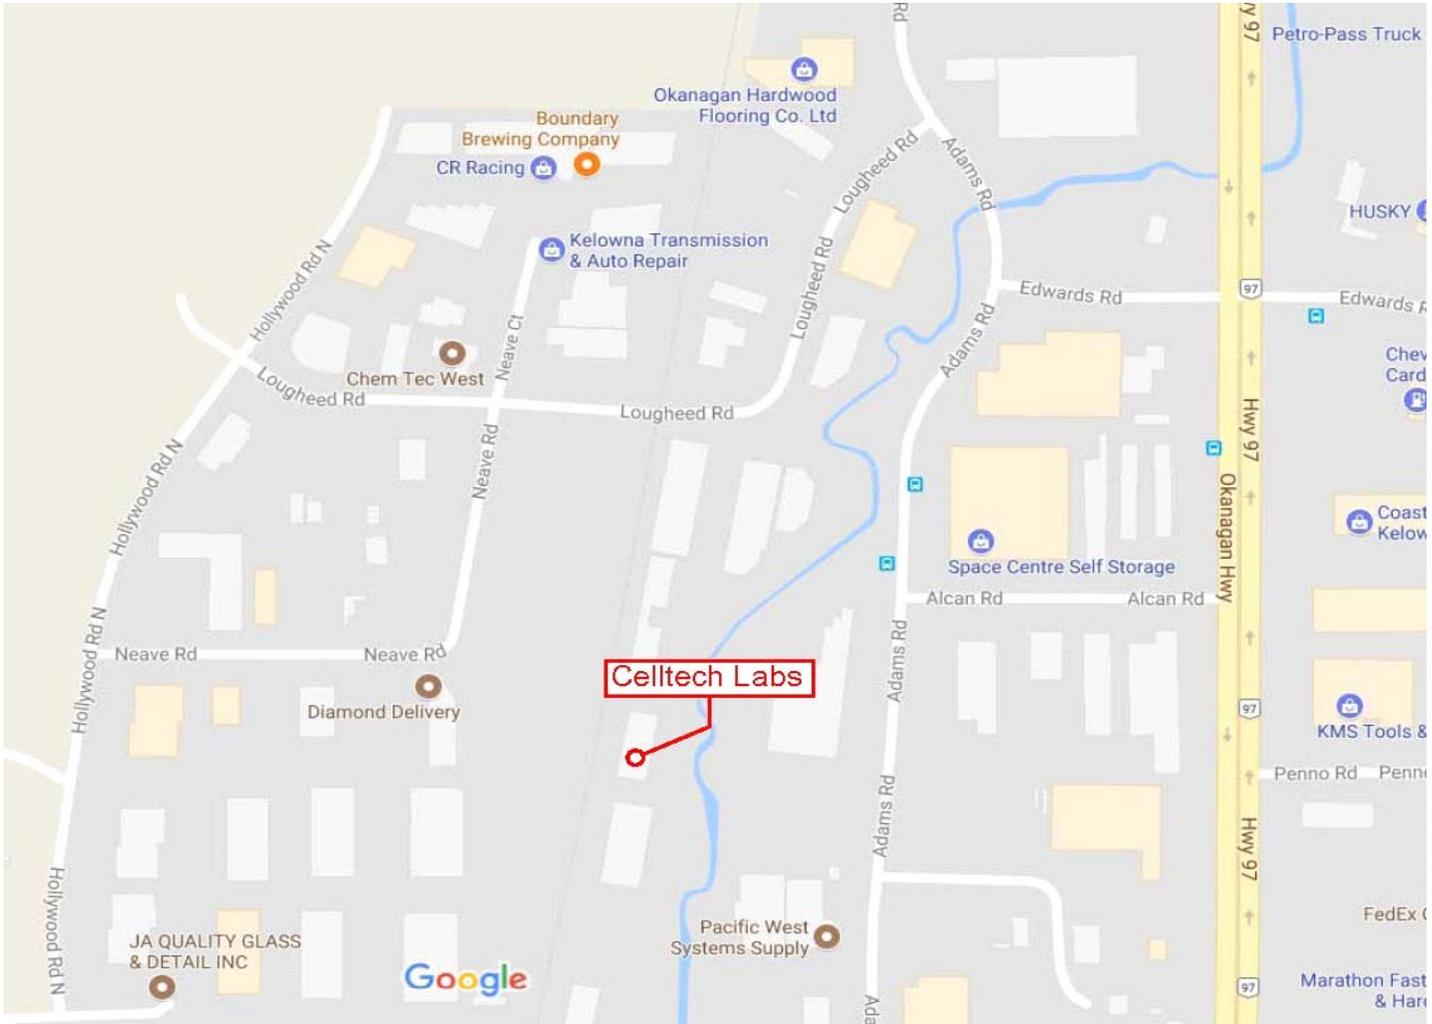

**7.0 CONDUCTED POWER**

**Test Conditions**

<b>Normative Reference</b>	<b>FCC 47 CFR §2.1046, §95.967, RSS-236</b>
----------------------------	---

**Limits**

47 CFR §95.967	Each CBRS transmitter type must be designed such that the transmitter power can not exceed the following limits: (a) When transmitting amplitude modulated (AM) voice signals, the mean carrier power must not exceed 4 Watts.
RSS-236 5.2	The transmitter output power shall not exceed 4.0 watts for a DSB mode of operations.

<b>Test Setup</b>	<b>Appendix A</b>	<b>Figure A.1</b>
-------------------	-------------------	-------------------

**Measurement Procedure**

The DUT was connected to a Spectrum Analyzer (SA) via a 30dB attenuator connected to the DUT's antenna port. The SA Detector was set to Max Peak with the RBW set to  $\geq$  the OBW of the DUT. The output power of the DUT was set to the manufacturer's highest rated setting. The SA trace was set to Max Hold with Marker 1 set to Peak and the value recorded.

Table 7.1 – Summary of Conducted Power Measurements (RMS)

<b>Conducted Power Measurement</b>	
<b>Measured Output Power (Ch 1):</b>	3.64W (35.61dBm)
<b>Measured Output Power (Ch 19):</b>	3.64W (35.60dBm)
<b>Measured Output Power (Ch 40):</b>	3.15W (35.46dBm)
<b>FCC CFR 47 §2.1033( c )(8): Power to Transmitter:</b>	$I_{Rx} = 0.28A, I_{Tx} = 1.18A$
	$I_{xmitter} = 0.90A$
	$(13.6VDC)(2.62) = 12.24W$
<b>Manufacturer's Rated Output Power:</b>	4.0W
<b>FCC/ISED Limit:</b>	4.0W
<b>Result:</b>	<b>Complies</b>

## 8.0 MODULATION RESPONSE

### Test Conditions

**Normative Reference** FCC 47 CFR §2.1047, §95.975, RSS-236 5.3.2

### Limits

47 CFR §2.1047	a) Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted.
47 CFR §95.975	Each CBRS transmitter type must be designed such that the modulation characteristics are in compliance with the rules in this section. (a) When emission type A3E is transmitted with voice modulation, the modulation percentage must be at least 85%, but not more than 100%. (b) When emission type A3E is transmitted by a CBRS transmitter having a transmitter output power of more than 2.5 W, the transmitter must contain a circuit that automatically prevents the modulation percentage from exceeding 100%.
RSS-236	When emission type A3E is transmitted by a CB transmitter having a total power of greater than 2.5 W, the CB transmitter must automatically prevent the modulation from exceeding 100%.

### Test Setup

**Appendix A**                      **Figure A.2**

### Measurement Procedure

#### TIA 382 25.2                      Transmitter Audio Frequency Response


Operate the transmitter under standard test conditions and monitor the output with a modulation monitor or calibrated test receiver. The audio input signal applied through a suitable impedance matching network, as specified by the manufacturer, shall be adjusted to obtain 50% modulation at the maximum audio frequency response of the transmitter, and this point shall be taken as the 0 dB reference level. Vary the modulating frequency from 100 Hz to 10,000 Hz and record the input levels necessary to maintain a constant 50% modulation.

Graph the audio level in dB relative to the 0 dB reference level as a function of the modulating frequency. Record any audio frequency where it is impossible to perform the measurement.


#### TIA 382 24.2.2                      Transmitter Modulation Limiting

The transmitter is modulated by a sinusoidal audio signal applied to the microphone input jack. First the audio input frequency is adjusted to deliver 50% modulation at the audio frequency that produces the maximum modulation level. Record the modulation input level (mV) and use this level as 0 dB for plotting modulation limiting. Increment the audio signal level to 40 dB above the reference level. Record the modulation level (%). Repeat the measurements using a 400 Hz and a 2500 Hz sinusoidal audio signal. Record the modulation level (%). Perform for both positive and negative modulation.

Plot 8.1 – Audio Frequency and Low Pass Filter Response

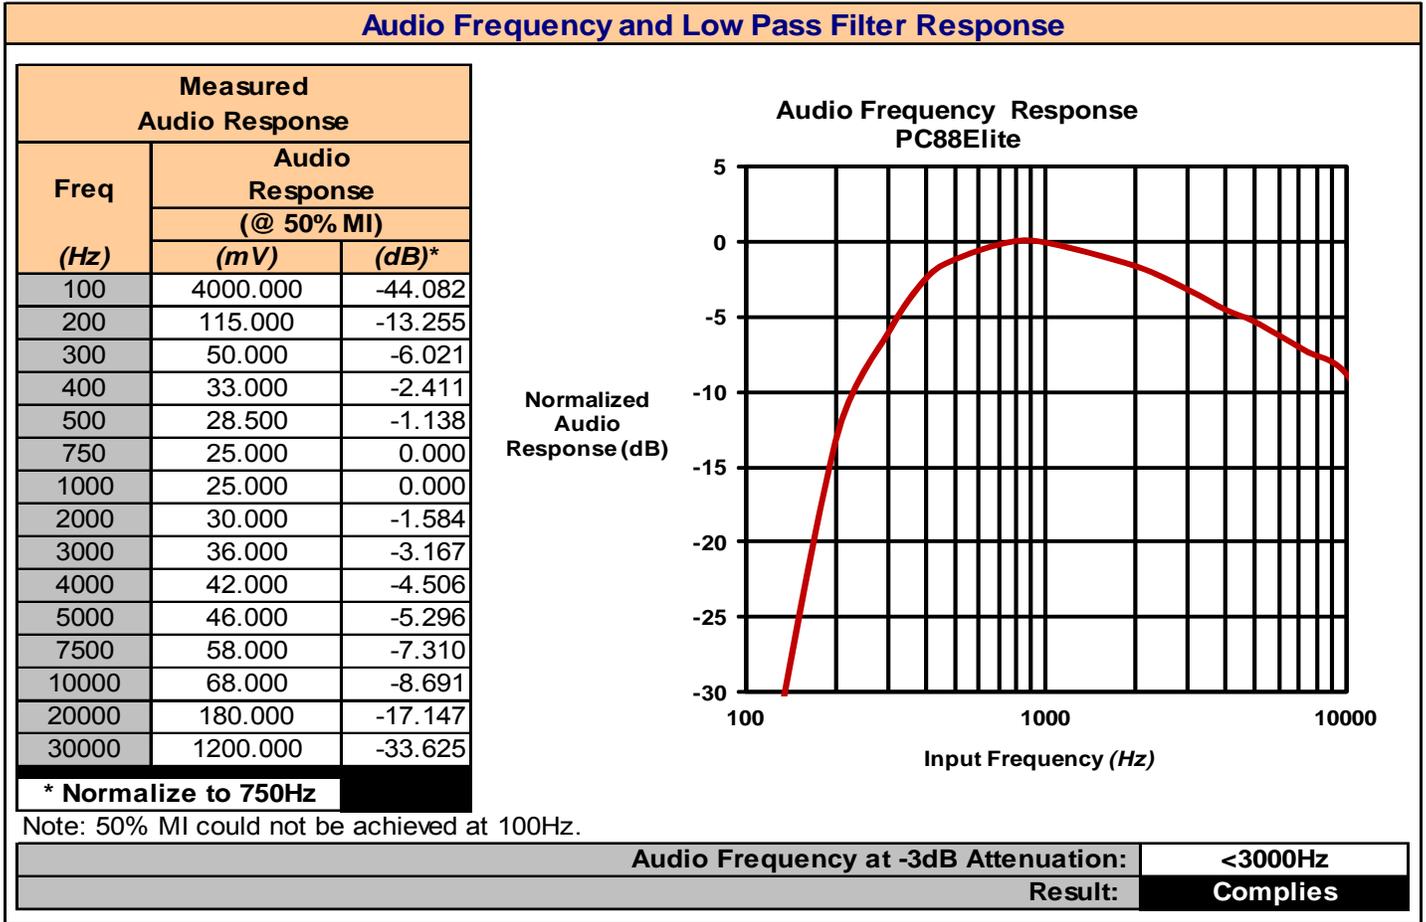

**Plot 8.2 – Modulation Limiting Response**

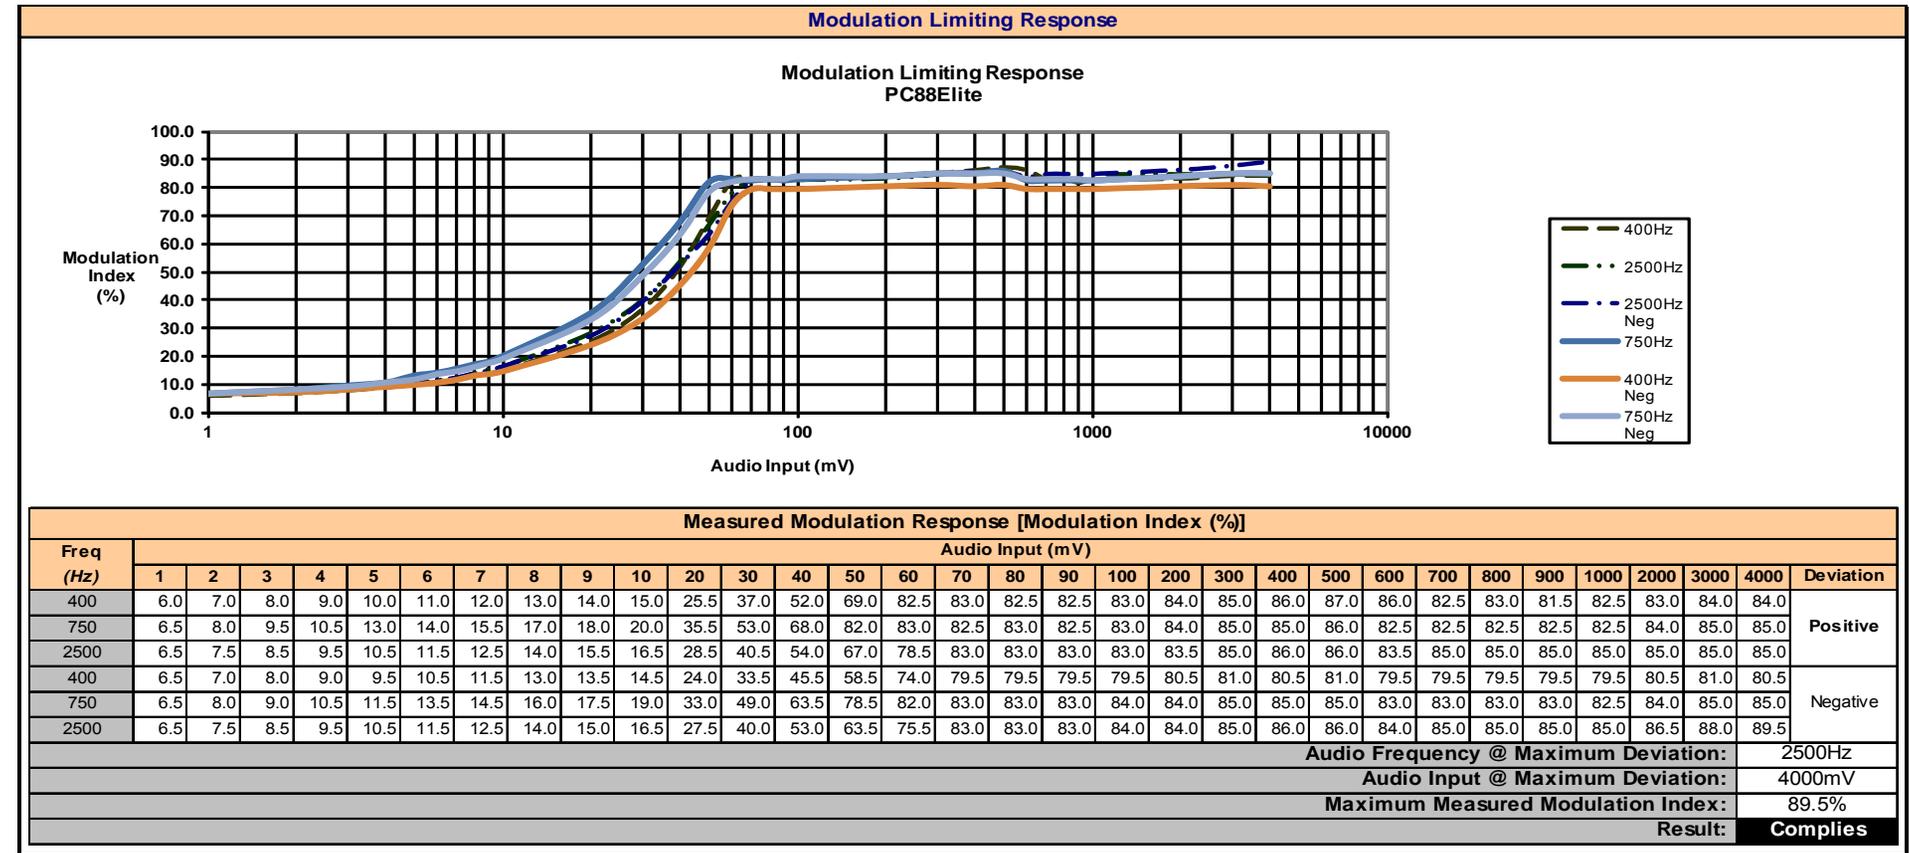


**9.0 OCCUPIED BANDWIDTH AND EMISSION MASKS**

<b>Test Conditions</b>	
<b>Normative Reference</b>	<b>FCC 47 CFR §2.1049, §95.973, RSS-236</b>
<b>Limits</b>	
47 CFR §95.973	Each CBRS transmitter type must be designed such that the occupied bandwidth does not exceed the authorized bandwidth for the emission type under test. (a) AM. The authorized bandwidth for emission type A3E is 8 kHz.
RSS-236 5.3.2	The authorized bandwidth for emission type A1D or A3E is 8 kHz.
47 CFR §95.979	Each CBRS transmitter type must be designed to comply with the applicable unwanted emissions limits in this section. (a) Attenuation requirements. The power of unwanted emissions must be attenuated below the transmitter output power in Watts (P) as specified in the applicable paragraphs listed in the following table: For A3E (1), (3), (5), (6) (1) 25 dB (decibels) in the frequency band 4 kHz to 8 kHz removed from the channel center frequency; (3) 35 dB in the frequency band 8 kHz to 20 kHz removed from the channel center frequency; (5) 53 + 10 log (P) dB in any frequency band removed from the channel center frequency by more than 250% of the authorized bandwidth. (6) 60 dB in any frequency band centered on a harmonic (i.e., an integer multiple of two or more times) of the carrier frequency.
RSS-236 4.4.4	For A1D and A3E: _ At least 25 dB on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth. _ At least 35 dB on any frequency removed from the center of the authorized bandwidth by more than 100% up to and including 250% of the authorized bandwidth. _ At least 53 + 10 log <sub>10</sub> (T) dB on any frequency removed from the center of the authorized bandwidth by more than 250%. _ At least 60 dB on any frequency twice or greater than twice the fundamental frequency.
<b>Test Setup</b>	<b>Appendix A                      Figure A.1</b>

<b>Measurement Procedure</b>	
<b>TIA 382 23.2</b>	<b>Transmitter Modulation Occupied Bandwidth</b>
The transmitter is modulated by a sinusoidal audio signal applied to the microphone input jack. First, the frequency is adjusted to deliver 50% modulation at the highest audio response level (minimum applied audio level). Then the audio signal level is increased 16 dB and the audio frequency is readjusted to 2500 Hz The analyzer is adjusted to display each of the discrete modulation sidebands and their respective harmonic products within +/- 50 kHz of the carrier frequency.	


Plot 9.1 – Occupied Bandwidth Channel 1

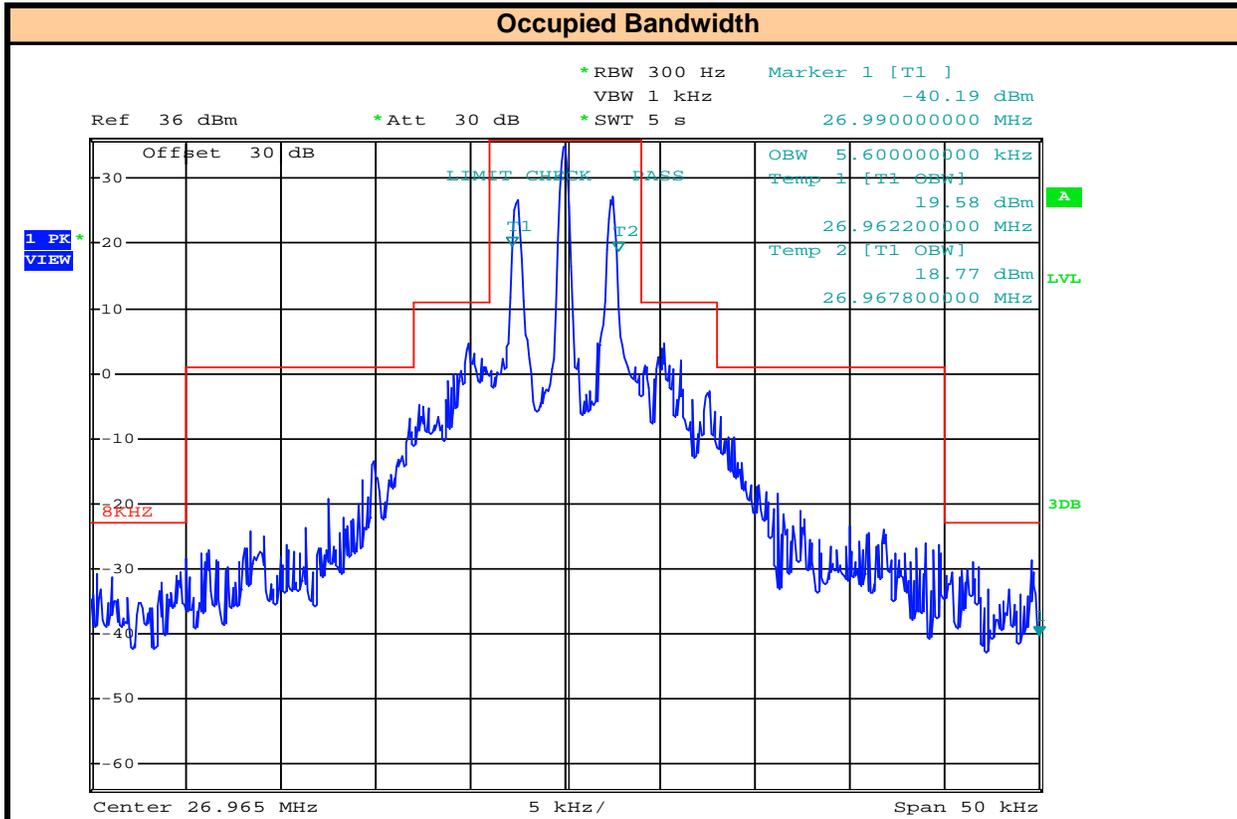

Date: 24.FEB.2018 13:34:58

<b>Channel Frequency (Ch 1):</b>	26.965MHz
<b>Modulation:</b>	AM
<b>Audio Input Frequency:</b>	2.5kHz
<b>Audio Input Level: &gt;16dB Level @ 50% Modulation:</b>	30mV
<b>Measured Occupied Bandwidth (99%):</b>	<b>5.6kHz</b>


Plot 9.2 – Occupied Bandwidth Channel 19

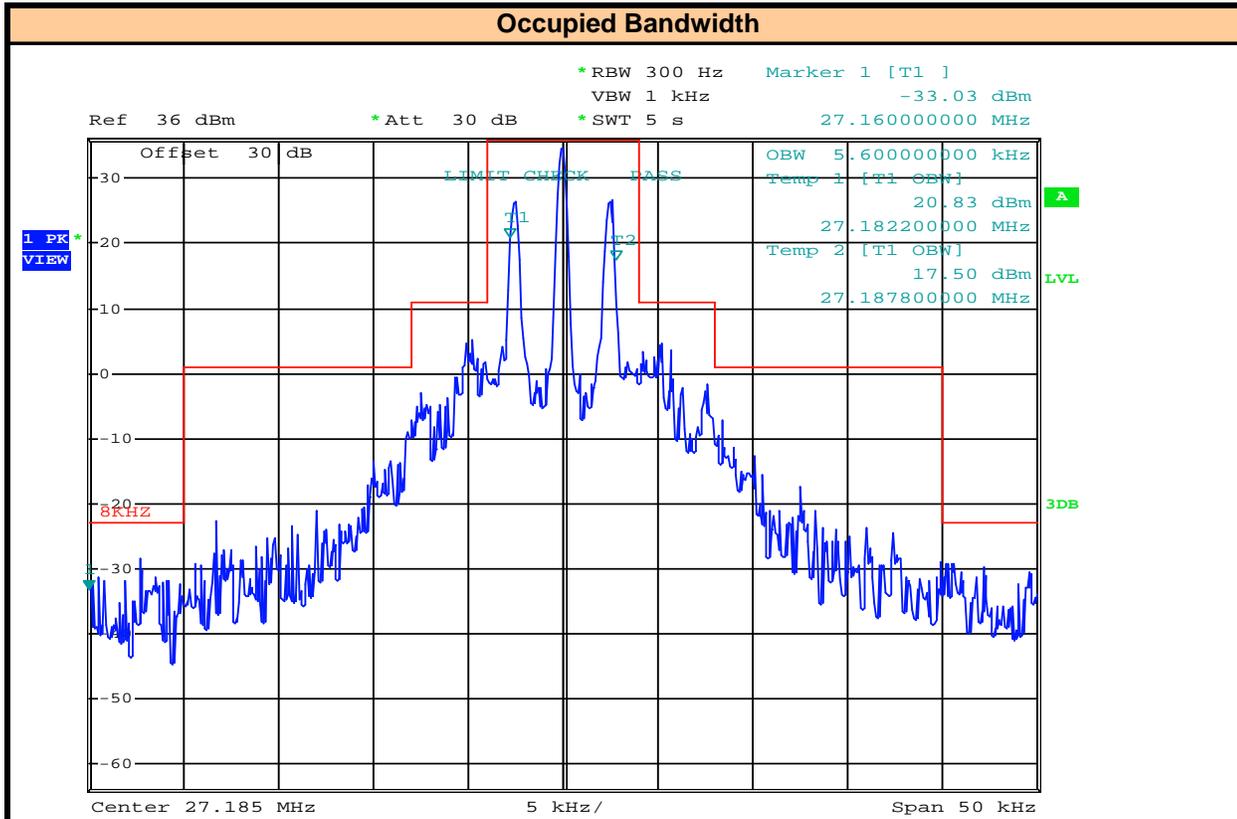

Date: 24.FEB.2018 13:36:01

<b>Channel Frequency (Ch 19):</b>	27.185MHz
<b>Modulation:</b>	AM
<b>Audio Input Frequency:</b>	2.5kHz
<b>Audio Input Level: &gt;16dB Level @ 50% Modulation:</b>	30mV
<b>Measured Occupied Bandwidth (99%):</b>	<b>5.6kHz</b>

Plot 9.3 – Occupied Bandwidth Channel 40

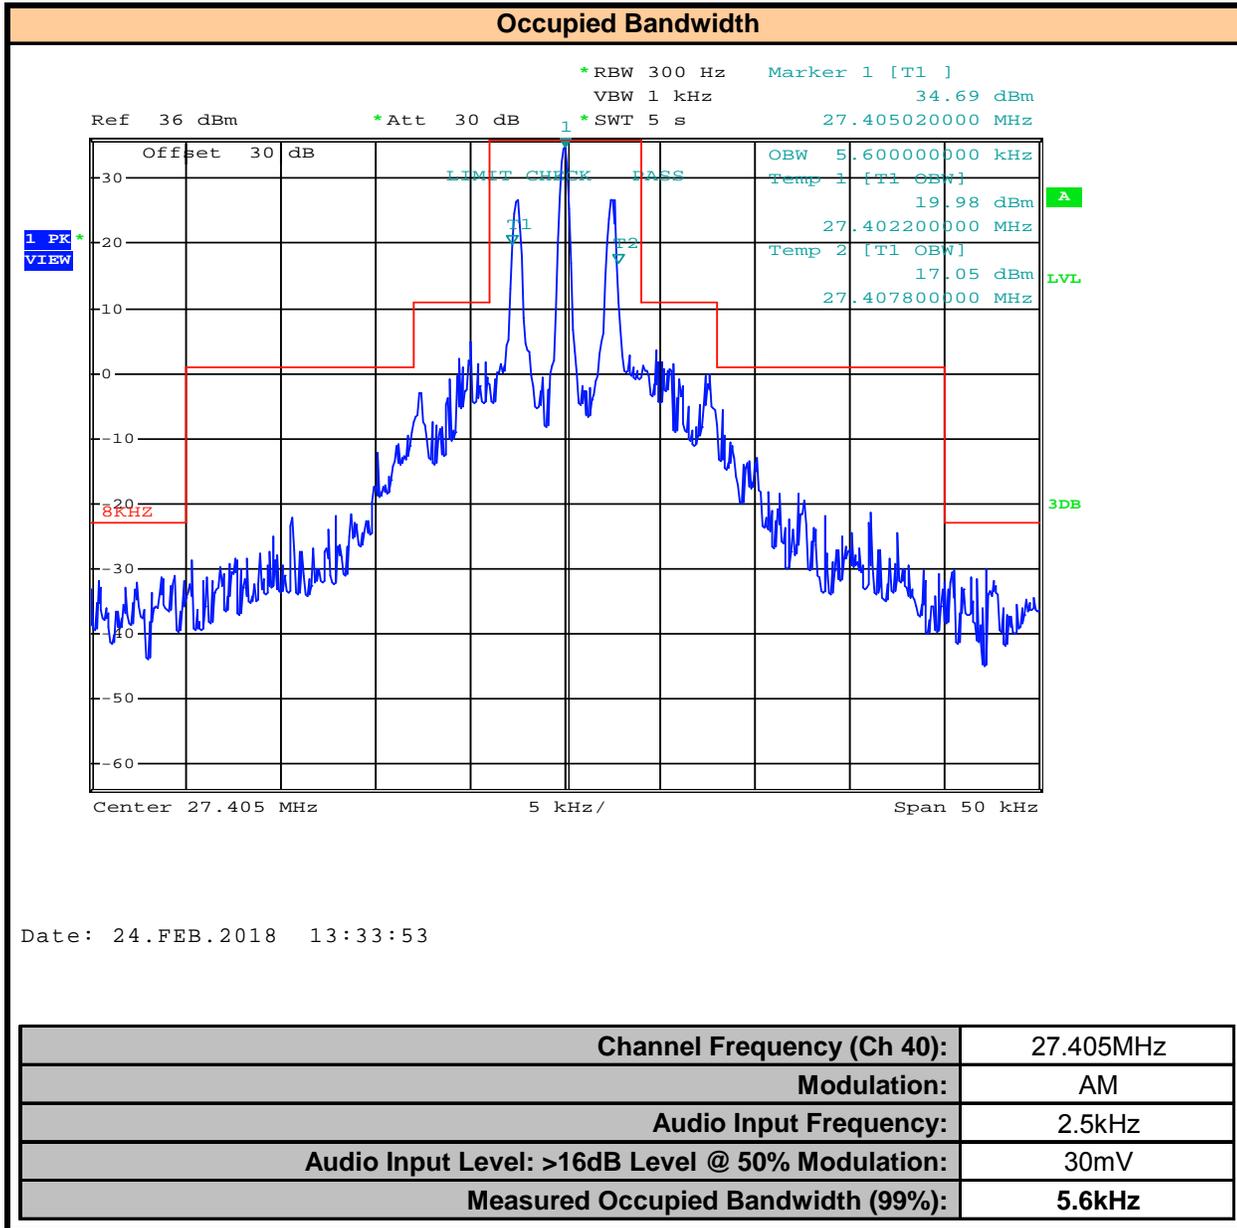

**Table 9.1 - Summary of Occupied Bandwidth and Emission Mask Results**

<b>Occupied Bandwidth Measurement Results</b>							
<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Modulation</b>	<b>Measured Occupied Bandwidth (kHz)</b>	<b>Authorized Bandwidth (kHz)</b>	<b>Margin (kHz)</b>	<b>Emission Mask</b>	<b>Emission Designator</b>
1	26.965	AM	5.6	8.0	2.4	PASS	5K60A3E
19	27.185	AM	5.6	8.0	2.4	PASS	5K60A3E
40	27.405	AM	5.6	8.0	2.4	PASS	5K60A3E
Margin = Authorized BW - Measured BW						<b>Result:</b>	<b>Complies</b>
<b>§95.971 CBRS emission types.</b>							
Each CBRS transmitter type must be designed such that its capabilities are in compliance with the emission type rules in this section.							
(a) Permitted emission types. CBRS transmitter types may transmit only AM voice emission type A3E and SSB voice emission types J3E, R3E, or H3E							
This device only transmits AM voice emission type A3E						<b>Result:</b>	<b>Complies</b>

**10 CONDUCTED OUT OF BAND SPURIOUS EMISSIONS**

**Test Conditions**

**Normative Reference** FCC 47 CFR §95.979, RSS-236

**Limits**

47 CFR §95.979	<p>Each CBRS transmitter type must be designed to comply with the applicable unwanted emissions limits in this section.</p> <p>(a) Attenuation requirements. The power of unwanted emissions must be attenuated below the transmitter output power in Watts (P) as specified in the applicable paragraphs listed in the following table:</p> <p>For A3E (1), (3), (5), (6)</p> <p>(1) 25 dB (decibels) in the frequency band 4 kHz to 8 kHz removed from the channel center frequency;</p> <p>(3) 35 dB in the frequency band 8 kHz to 20 kHz removed from the channel center frequency;</p> <p>(5) 53 + 10 log (P) dB in any frequency band removed from the channel center frequency by more than 250% of the authorized bandwidth.</p> <p>(6) 60 dB in any frequency band centered on a harmonic (i.e., an integer multiple of two or more times) of the carrier frequency.</p>
RSS-236 4.4.4	<p>For A1D and A3E:</p> <p>_ At least 25 dB on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth.</p> <p>_ At least 35 dB on any frequency removed from the center of the authorized bandwidth by more than 100% up to and including 250% of the authorized bandwidth.</p> <p>_ At least 53 + 10 log<sub>10</sub> (T) dB on any frequency removed from the center of the authorized bandwidth by more than 250%.</p> <p>_ At least 60 dB on any frequency twice or greater than twice the fundamental frequency.</p>

**Test Setup**


**Appendix A                      A.1**

**Measurement Procedure**


**TIA 382 21.2                      Transmitter Conducted Spurious and Harmonic Emissions**

The transmitter RF output shall be connected to the standard nonradiating output load. The output shall be sampled and displayed using spectrum analysis techniques. 2500 Hz modulation shall be applied at a level 16 dB above that required to produce 50% modulation at the frequency of maximum response. The sampled output shall be analyzed from the lowest frequency generated in the equipment to the 10th harmonic of the fundamental signal and the levels of all spurious outputs attenuated not more than 20 dB below the maximum required attenuation shall be recorded.


Plot 10.1 – Conducted Out of Band Emissions, 30MHz – 300MHz, Channel 1

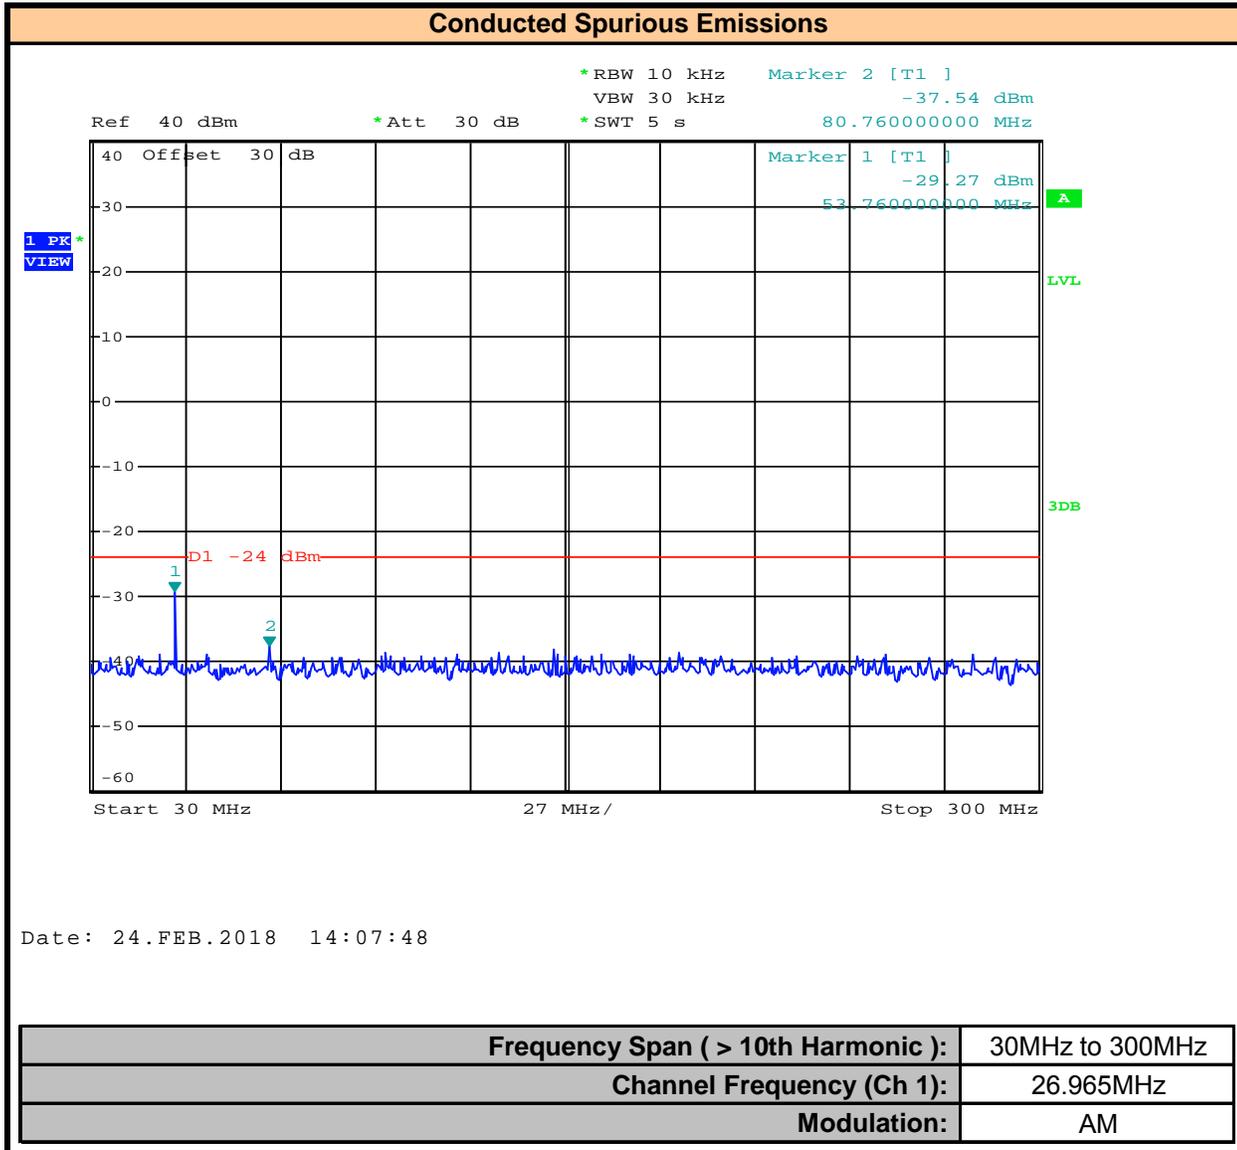


Plot 10.2 – Conducted Out of Band Emissions, Channel 1, 2<sup>nd</sup> Harmonic

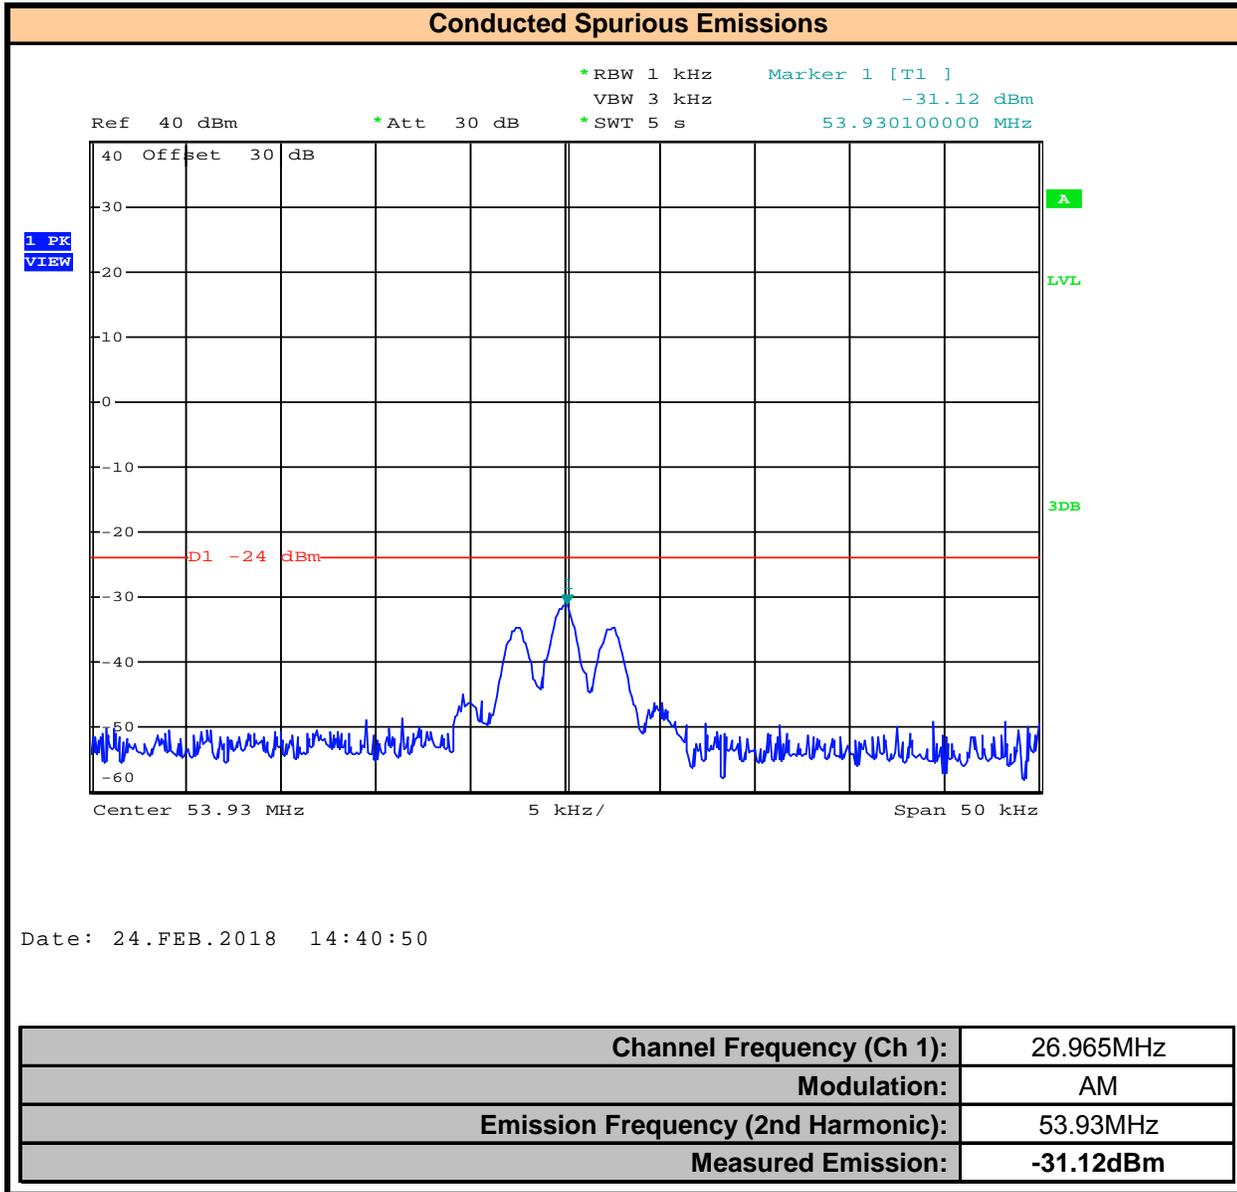


**Plot 10.3 – Conducted Out of Band Emissions, Channel 1, 3<sup>rd</sup> Harmonic**

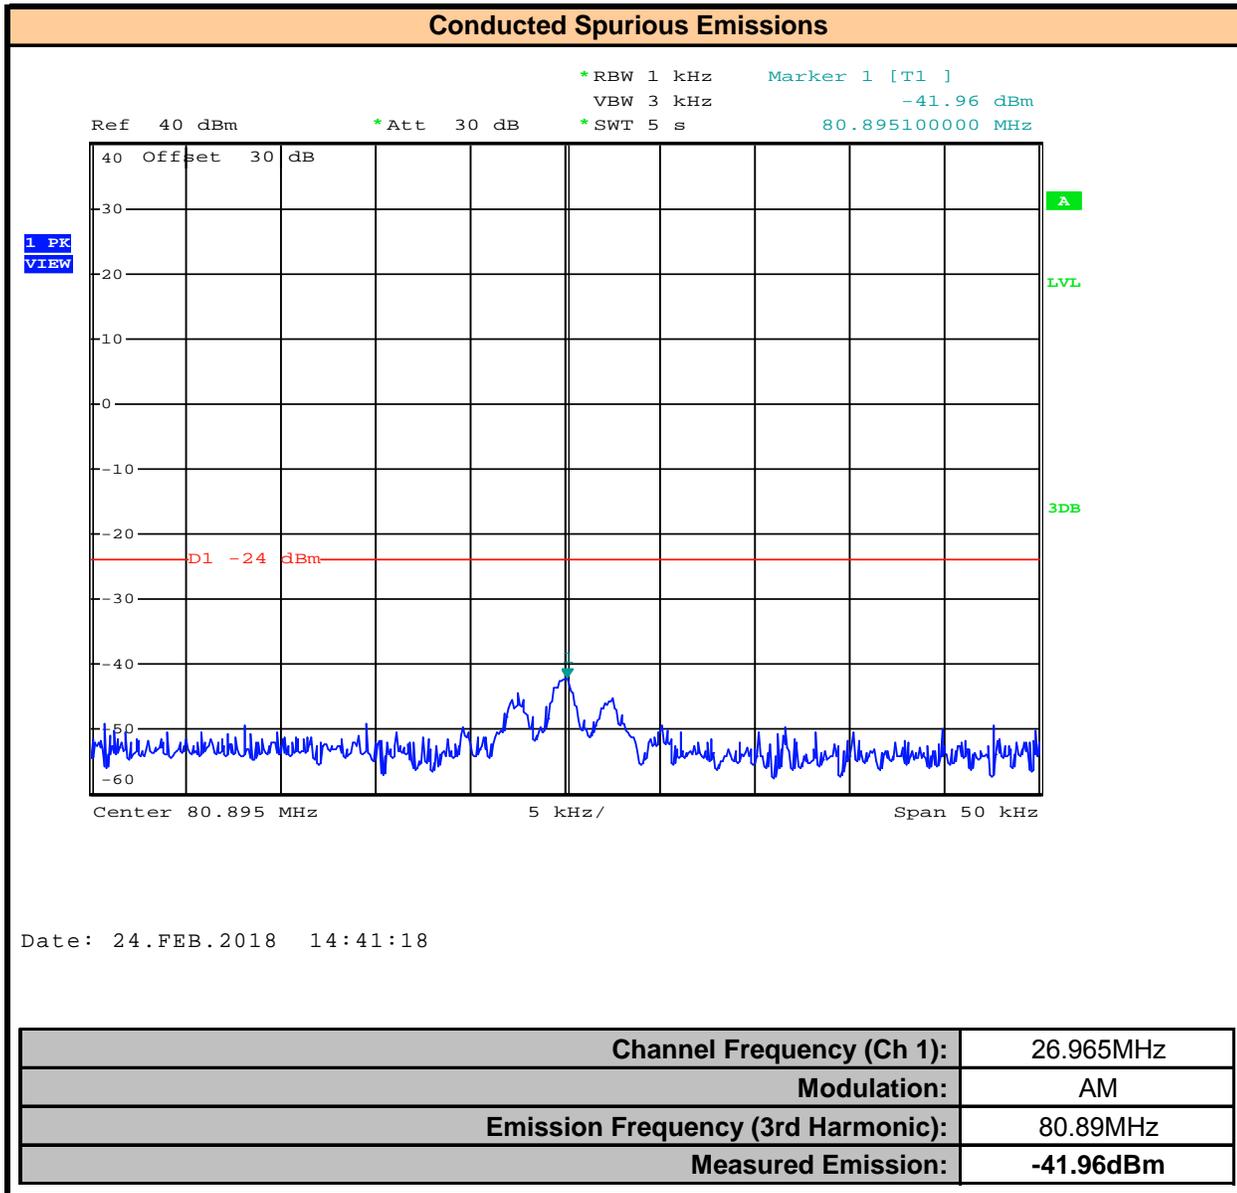


**Plot 10.4 – Conducted Out of Band Emissions, 30MHz – 300MHz, Channel 19**

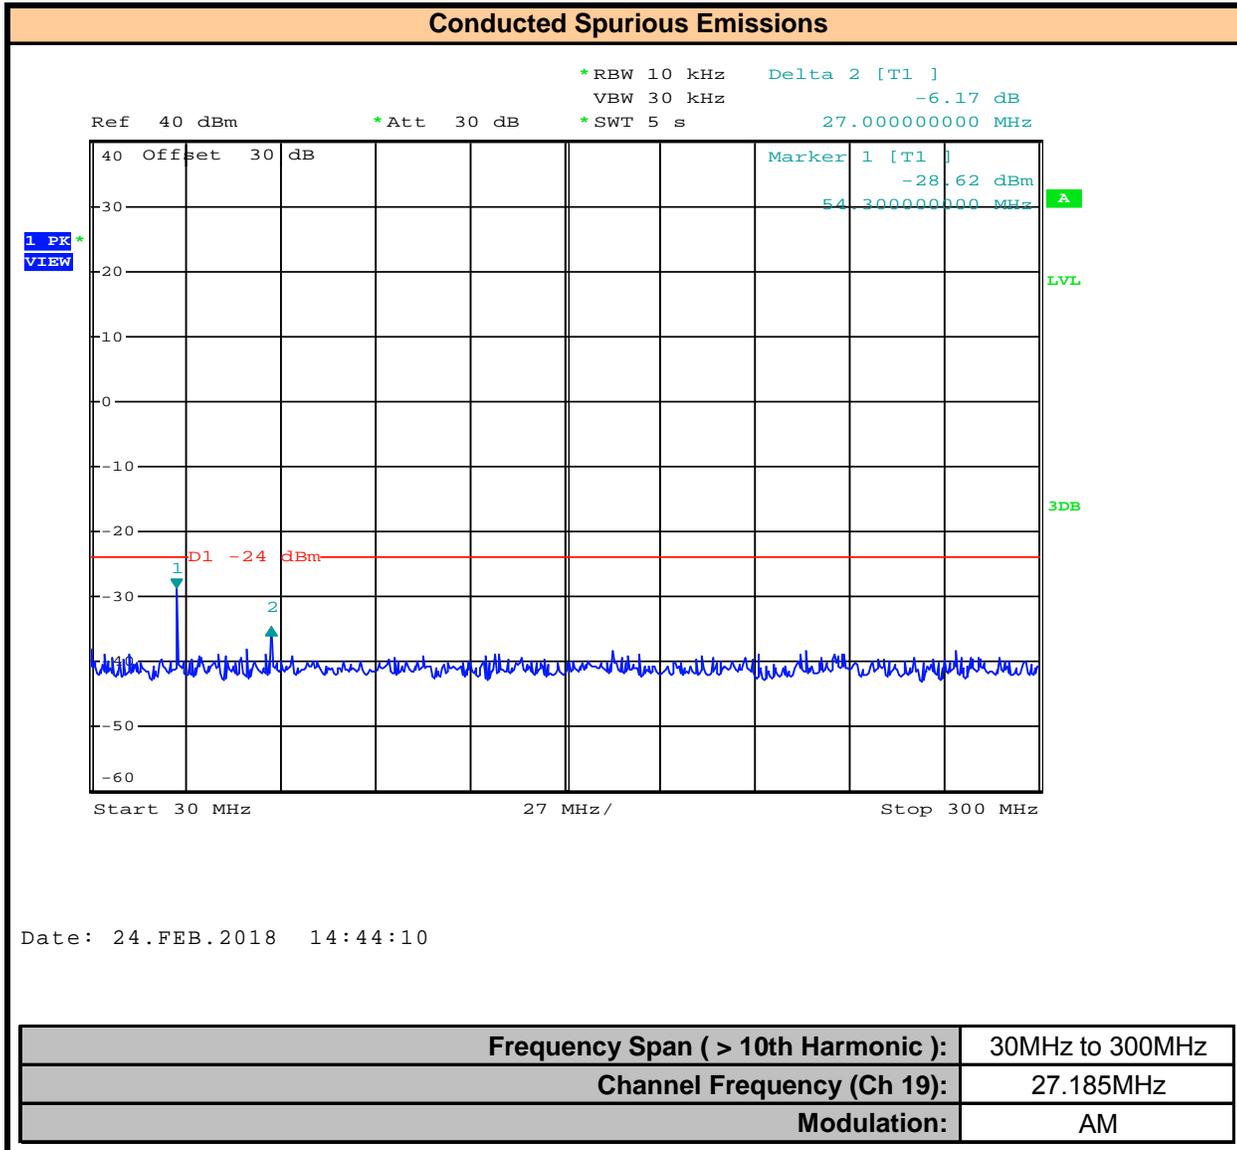


**Plot 10.5 – Conducted Out of Band Emissions, Channel 19, 2<sup>nd</sup> Harmonic**

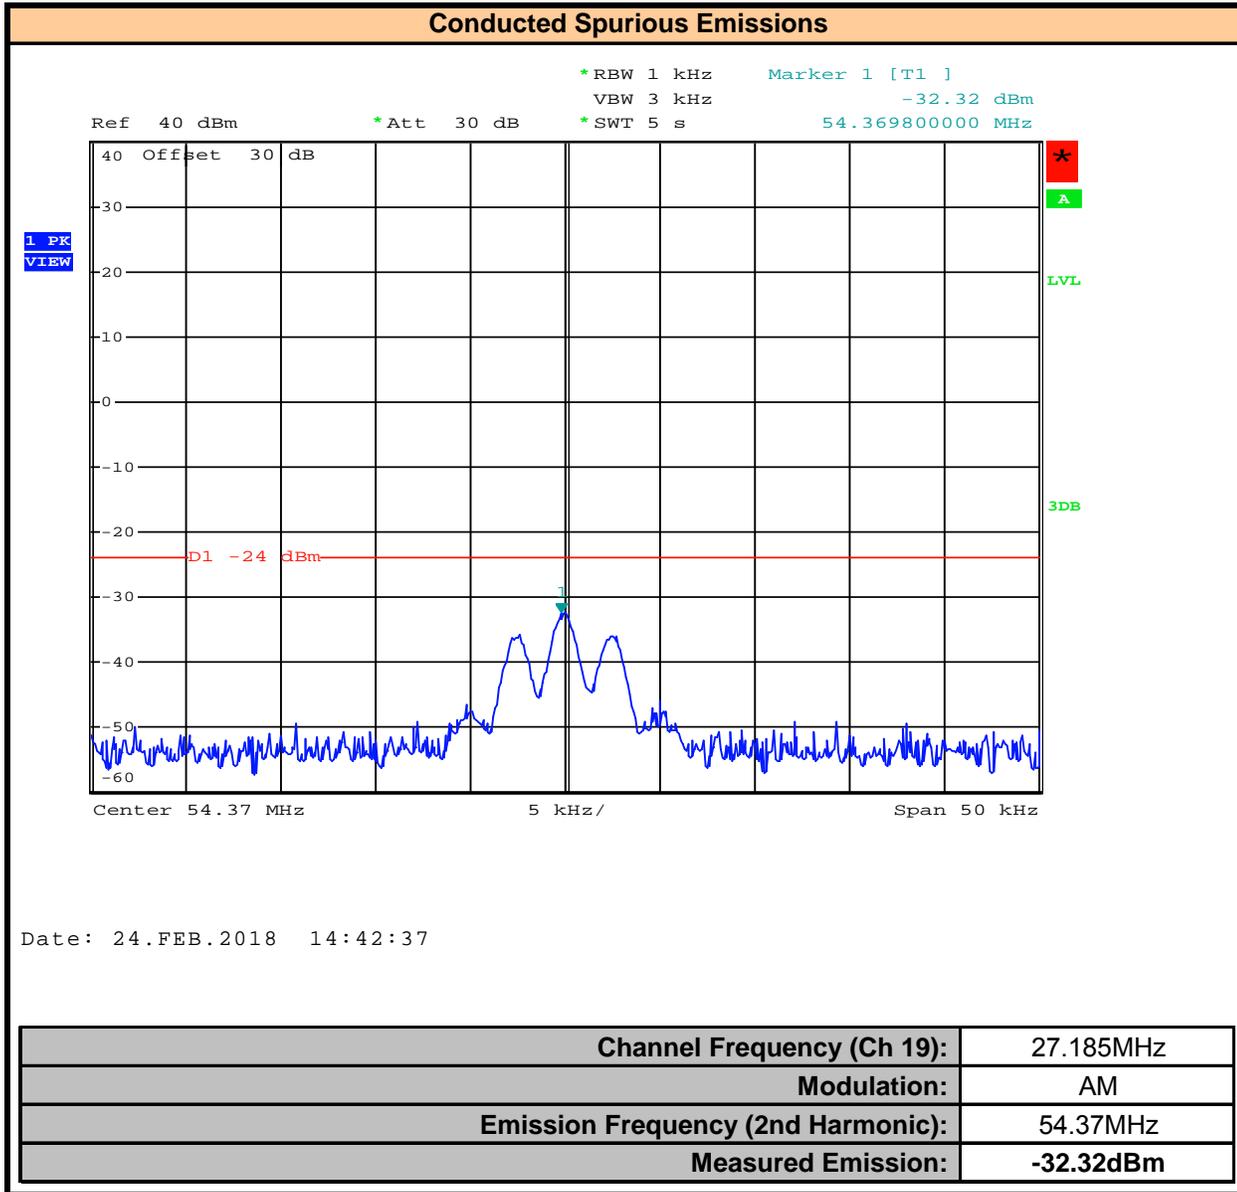


**Plot 10.6 – Conducted Out of Band Emissions, Channel 19, 3<sup>rd</sup> Harmonic**

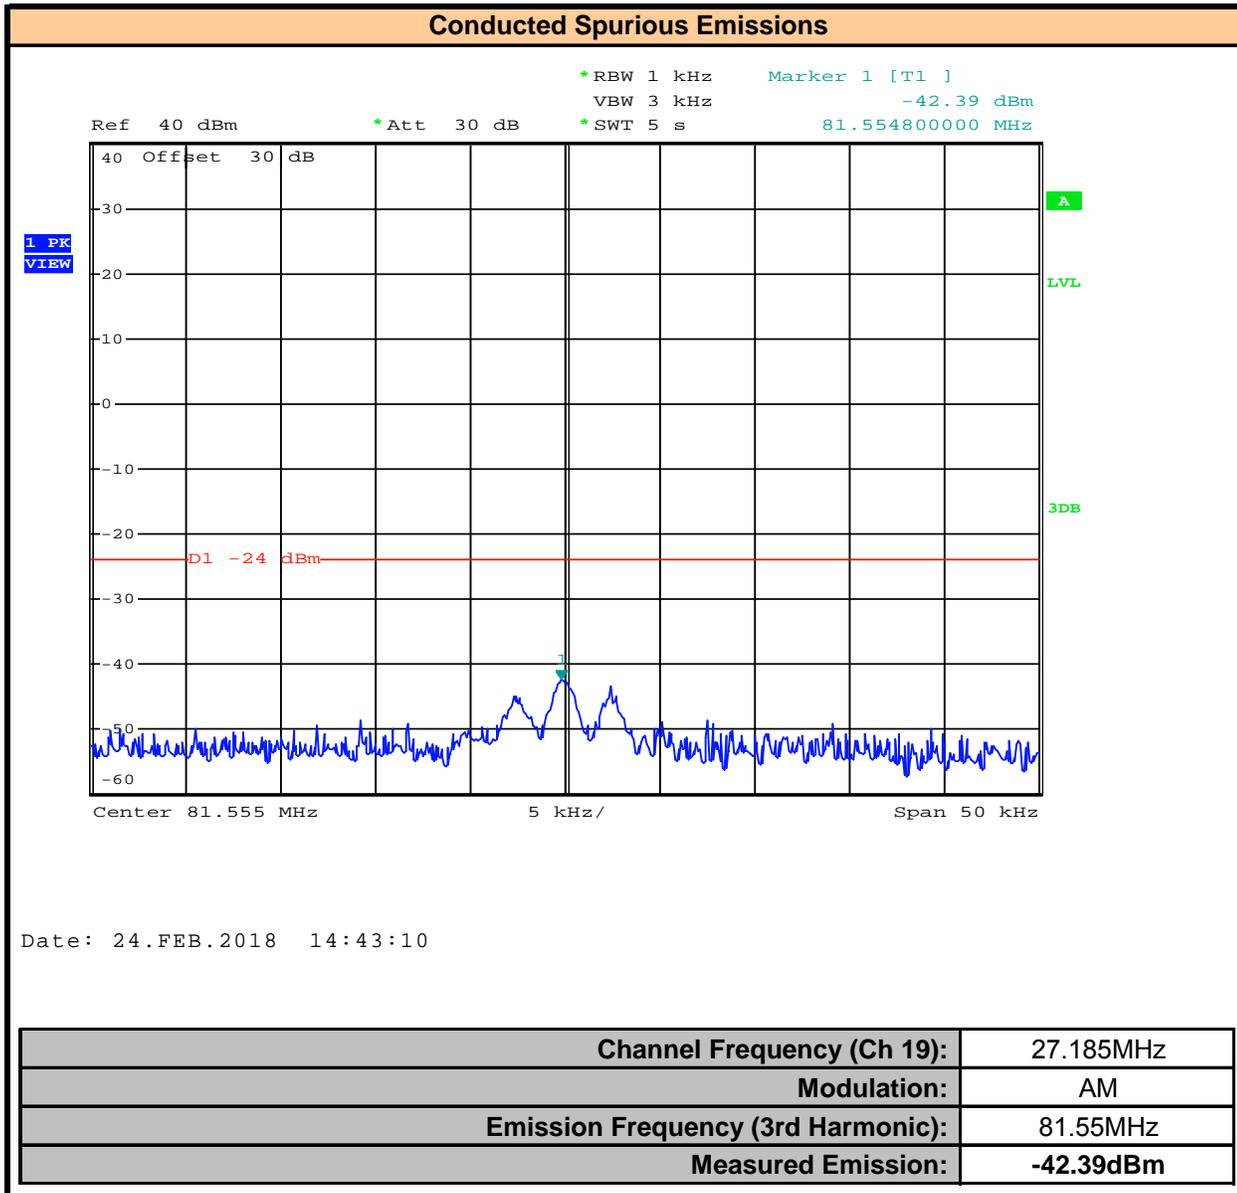


Plot 10.7 – Conducted Out of Band Emissions, 30MHz – 300MHz, Channel 40

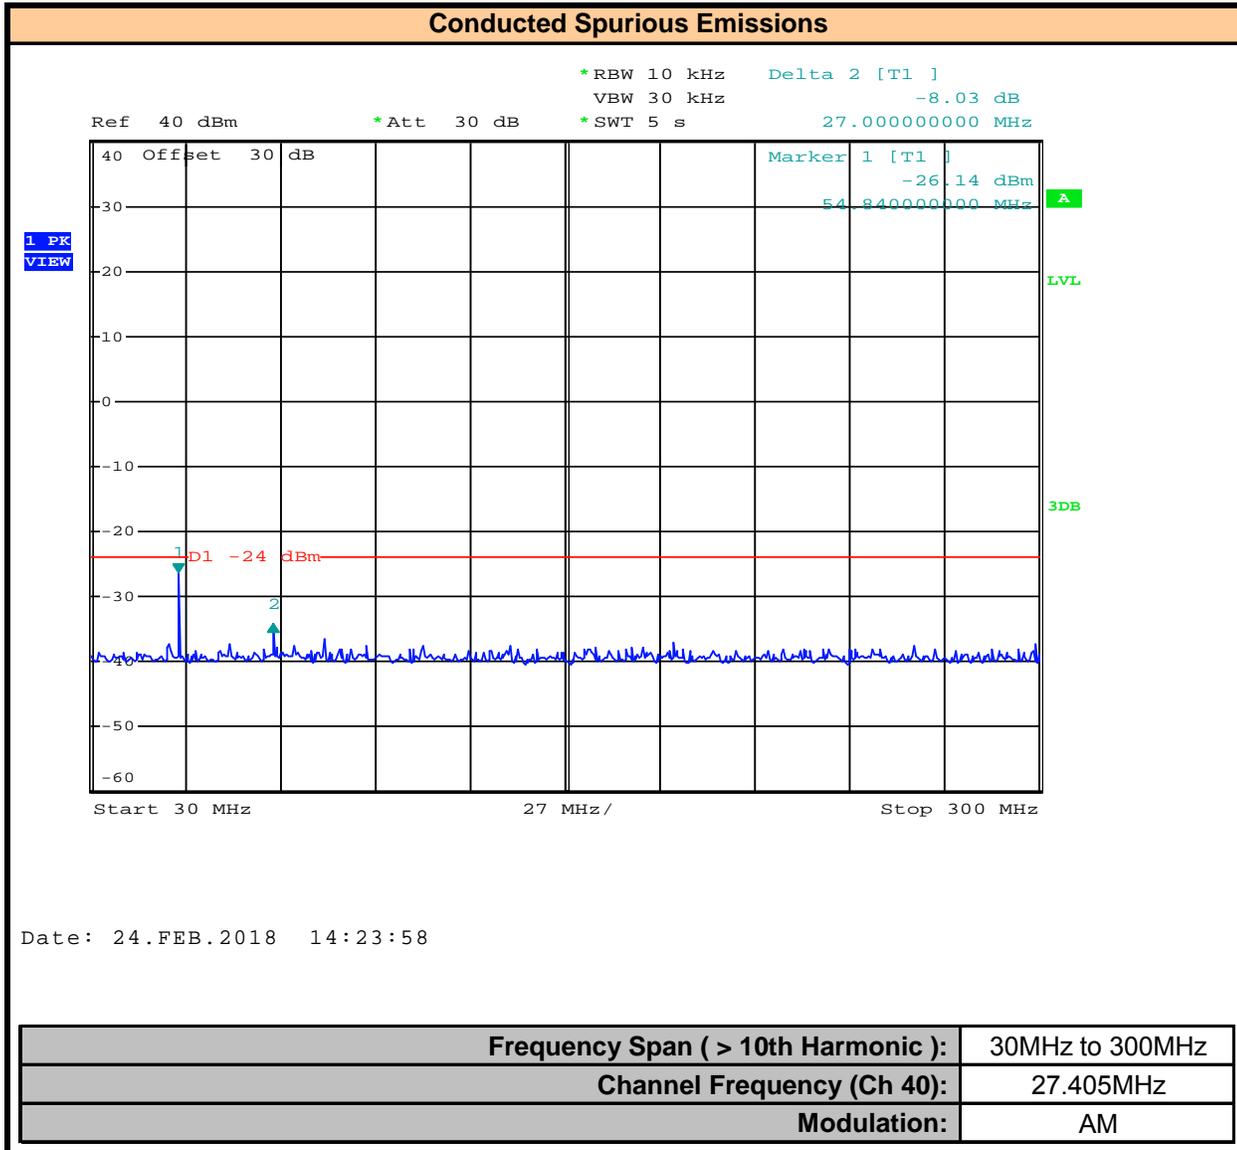

Plot 10.8 – Conducted Out of Band Emissions, Channel 40, 2<sup>nd</sup> Harmonic

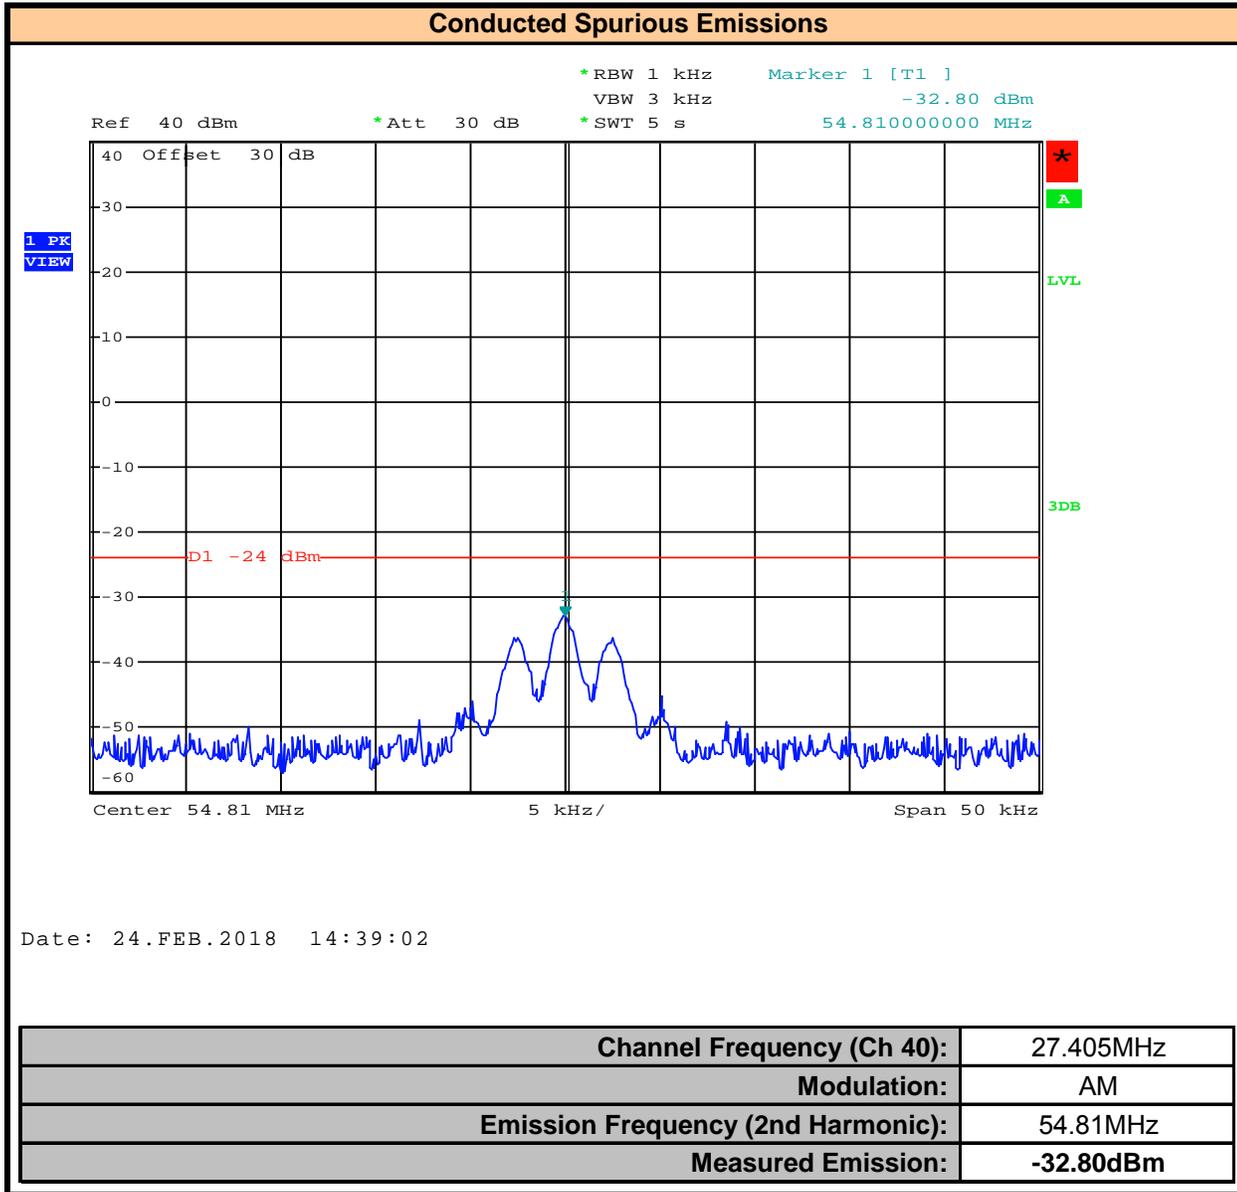

**Plot 10.9 – Conducted Out of Band Emissions, Channel 40, 3<sup>rd</sup> Harmonic**

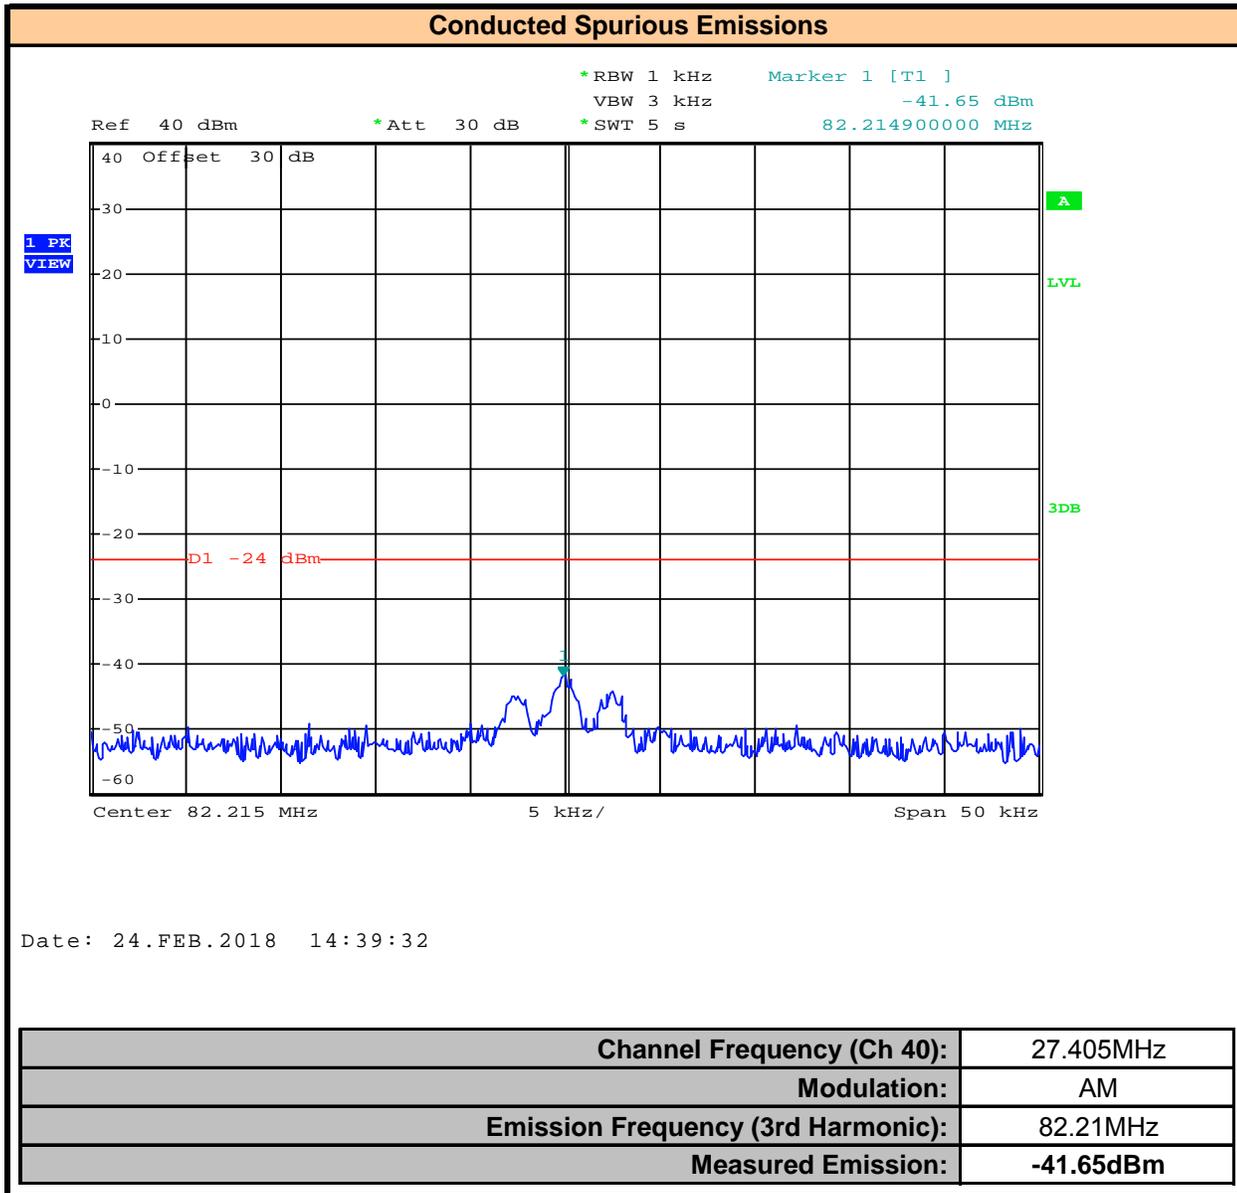

**Table 10.1 – Summary of Conducted Out of Band Emissions**

<b>Conducted Spurious Emissions</b>							
Channel Frequency (MHz)	Emission Frequency (MHz)	DUT Modulation	Fundamental Power [P] (dBm)	Out of Band Emission [P <sub>E</sub> ] (dBm)	Attenuation [dB]	Limit (dB)	Margin (dB)
26.965	53.93	AM	36.0	-31.1	67.1	60.0	7.12
	80.89		36.0	-42.0	78.0	60.0	17.96
27.185	54.37		36.0	-32.3	68.3	60.0	8.32
	81.55		36.0	-42.4	78.4	60.0	18.39
27.405	54.81		36.0	-32.8	68.8	60.0	8.80
	82.21		36.0	-41.7	77.7	60.0	17.65

Attenuation = P - P<sub>E</sub>  
Margin = Limit - Attenuation

<b>Result:</b>	<b>Complies</b>
----------------	-----------------

**Notes:**  
All Spurious Emissions were evaluated to the 10th harmonic (300MHz). No other emissions were observed.  
Data for fundamental and spurious emissions presented using a peak detector.

## 11.0 RADIATED SPURIOUS EMISSIONS

### Test Conditions

<b>Normative Reference</b>	<b>FCC 47 CFR §95.979, RSS-236</b>
----------------------------	------------------------------------

### Limits

47 CFR §95.979	<p>Each CBRS transmitter type must be designed to comply with the applicable unwanted emissions limits in this section.</p> <p>(a) Attenuation requirements. The power of unwanted emissions must be attenuated below the transmitter output power in Watts (P) as specified in the applicable paragraphs listed in the following table:</p> <p>For A3E (1), (3), (5), (6)</p> <p>(1) 25 dB (decibels) in the frequency band 4 kHz to 8 kHz removed from the channel center frequency;</p> <p>(3) 35 dB in the frequency band 8 kHz to 20 kHz removed from the channel center frequency;</p> <p>(5) 53 + 10 log (P) dB in any frequency band removed from the channel center frequency by more than 250% of the authorized bandwidth.</p> <p>(6) 60 dB in any frequency band centered on a harmonic (i.e., an integer multiple of two or more times) of the carrier frequency.</p>
RSS-236 4.4.4	<p>For A1D and A3E:</p> <p>_ At least 25 dB on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth.</p> <p>_ At least 35 dB on any frequency removed from the center of the authorized bandwidth by more than 100% up to and including 250% of the authorized bandwidth.</p> <p>_ At least 53 + 10 log<sub>10</sub> (T) dB on any frequency removed from the center of the authorized bandwidth by more than 250%.</p> <p>_ At least 60 dB on any frequency twice or greater than twice the fundamental frequency.</p>

### Test Setup

<b>Appendix A</b>	<b>Figure A.3</b>
-------------------	-------------------


### Measurement Procedure

#### TIA 382 22.2 Transmitter Radiated Spurious and Harmonic Emissions

The transmitter shall be terminated in a nonradiating dummy load and shall be keyed but not modulated.

For each spurious frequency, raise and lower the receiver antenna to obtain a maximum reading on the FIM with the antenna at horizontal polarity. Then the turntable should be rotated to further increase this maximum reading. Repeat this procedure of raising and lowering the antenna and rotating the turntable until the highest possible signal has been obtained. The effect of the simulated accessory connections shall be noted, so that the measurement series producing the maximum radiation level can be recorded.

Plot 11.1 – Radiated Spurious Emissions, 30MHz – 1000MHz, Vertical

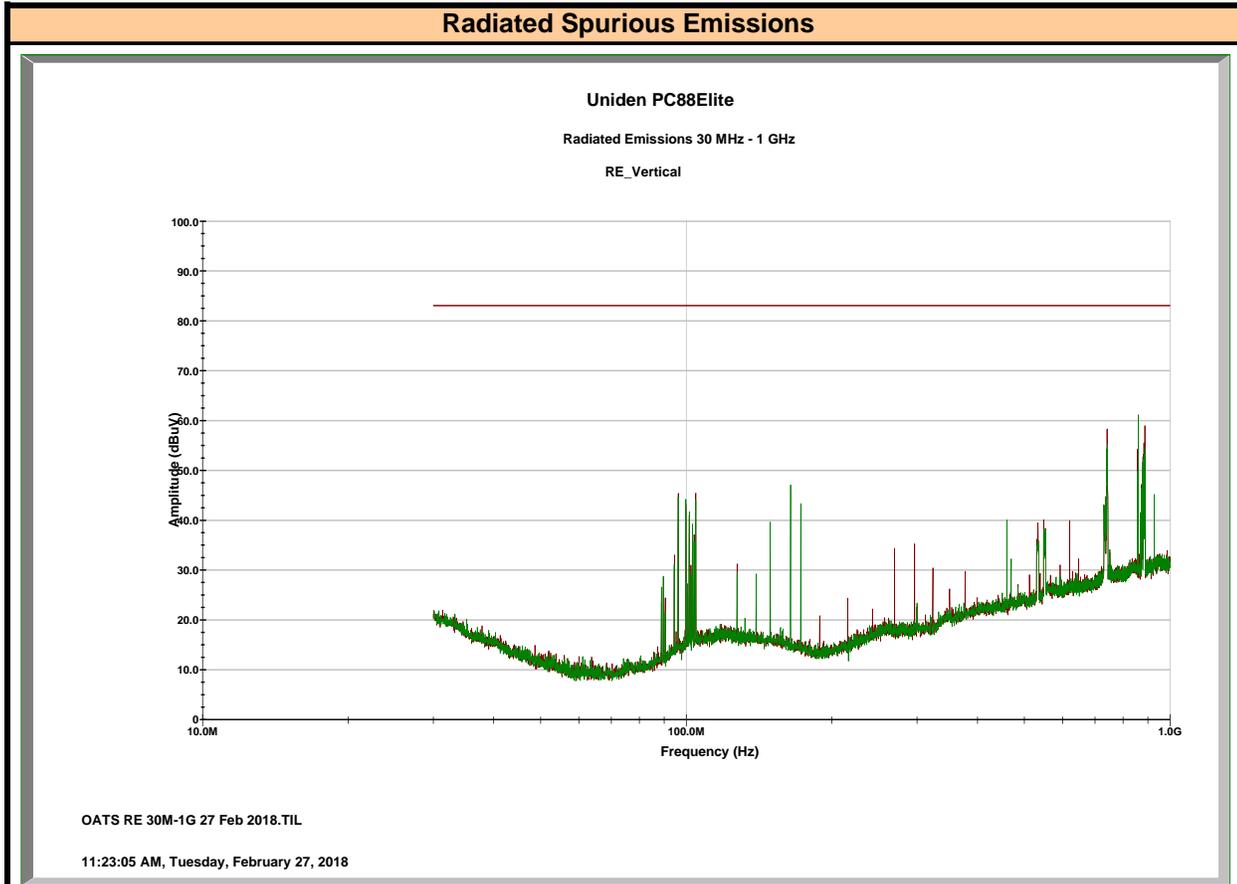


Trace 1 (Green): Ambient

Trace 2 (Red): DUT Emission

**No Emissions within 20dB of limit were observed.**

Frequency Span:	30MHz to 1000MHz
Channel Frequency (Ch 1):	26.965MHz
Modulation:	CW
Polarization:	Vertical

Plot 11.2 – Radiated Spurious Emissions, 30MHz – 1000MHz, Horizontal

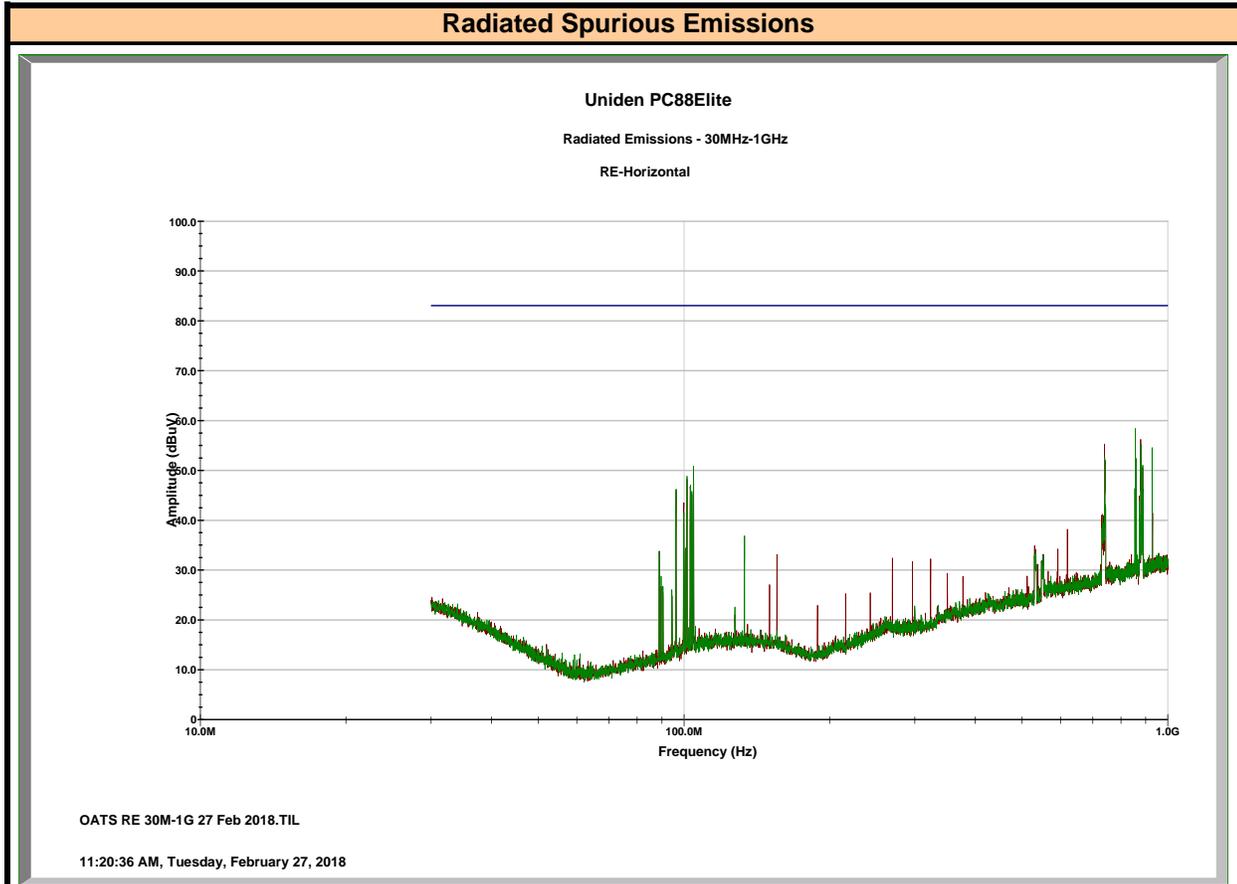

Trace 1 (Green): Ambient

Trace 2 (Red): DUT Emission

**No Emissions within 20dB of limit were observed.**

<b>Frequency Span:</b>	30MHz to 1000MHz
<b>Channel Frequency (Ch 1):</b>	26.965MHz
<b>Modulation:</b>	CW
<b>Polarization:</b>	Horizontal

**Table 11.1 – Summary of Radiated Spurious Emissions**

Radiated Spurious Emissions							
Channel Frequency (MHz)	Emission Frequency (MHz)	DUT Modulation	Fundamental Power [P] (dBm)	Out of Band Emission [P <sub>E</sub> ] (dBm)	Attenuation [dB]	Limit (dB)	Margin (dB)
26.965	n/a	CW	36.0	n/a	n/a	60.0	n/a
Attenuation = P - P <sub>E</sub>					Margin = Limit - Attenuation		
					<b>Result:</b>	<b>Complies</b>	
<p><b>Notes:</b></p> <p>No emissions within 20dB of the limit were observed.</p> <p>Data for fundamental and spurious emissions presented using a peak detector.</p>							

## 12.0 FREQUENCY STABILITY

### Test Conditions

<b>Normative Reference</b>	<b>FCC 47 CFR §2.1055, §95.965, RSS-Gen</b>
----------------------------	---

### Limits

47 CFR §95.965	Each CBRS transmitter type must be designed such that the transmit carrier frequency (or in the case of SSB transmissions, the reference frequency) remains within 50 parts-per-million of the channel center frequencies specified in §95.963 under all normal operating conditions.
----------------	---

### Test Setup

<b>Appendix A</b>	<b>Figure A.4</b>
-------------------	-------------------

### Measurement Procedure

#### 47 CFR §2.1055 Frequency Stability

(a) The frequency stability shall be measured with variation of ambient temperature as follows:


(1) From -30° to +50° centigrade for all equipment except that specified in paragraphs (a) (2) and (3) of this section.

(b) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10° centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement.

(d) The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

**Table 12.1 – Summary of Frequency Stability Results**

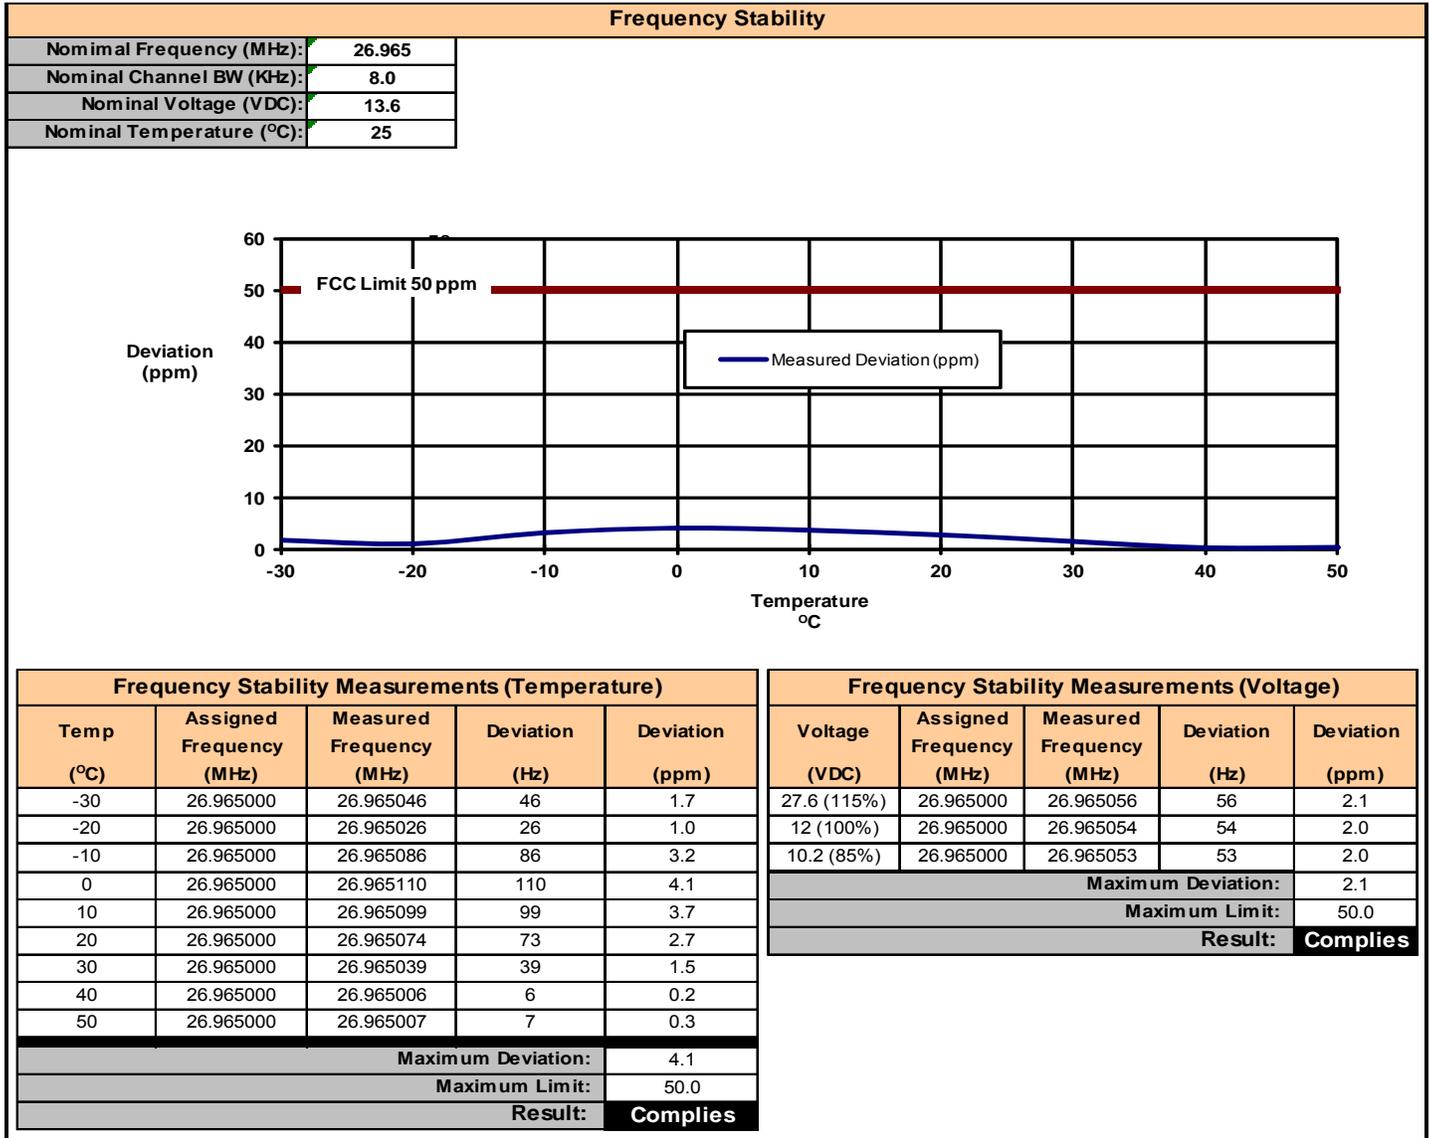

**13.0 RECEIVER RADIATED EMISSIONS - DOC**

**Test Conditions**


<b>Normative Reference</b>	<b>FCC 47 CFR §15.109, RSS-Gen</b>
----------------------------	------------------------------------

**Limits**

FCC §15.109	30-88MHz: 40dBuV/m 88-216MHz: 43.5dBuV/m 216-960MHz: 46dBuV/m > 960MHz: 54dBuV/m
-------------	---

<b>Test Setup</b>	<b>Appendix A</b>	<b>Figure A.3</b>
-------------------	-------------------	-------------------

**Plot 13.1 – Receiver Radiated Emissions - Vertical**

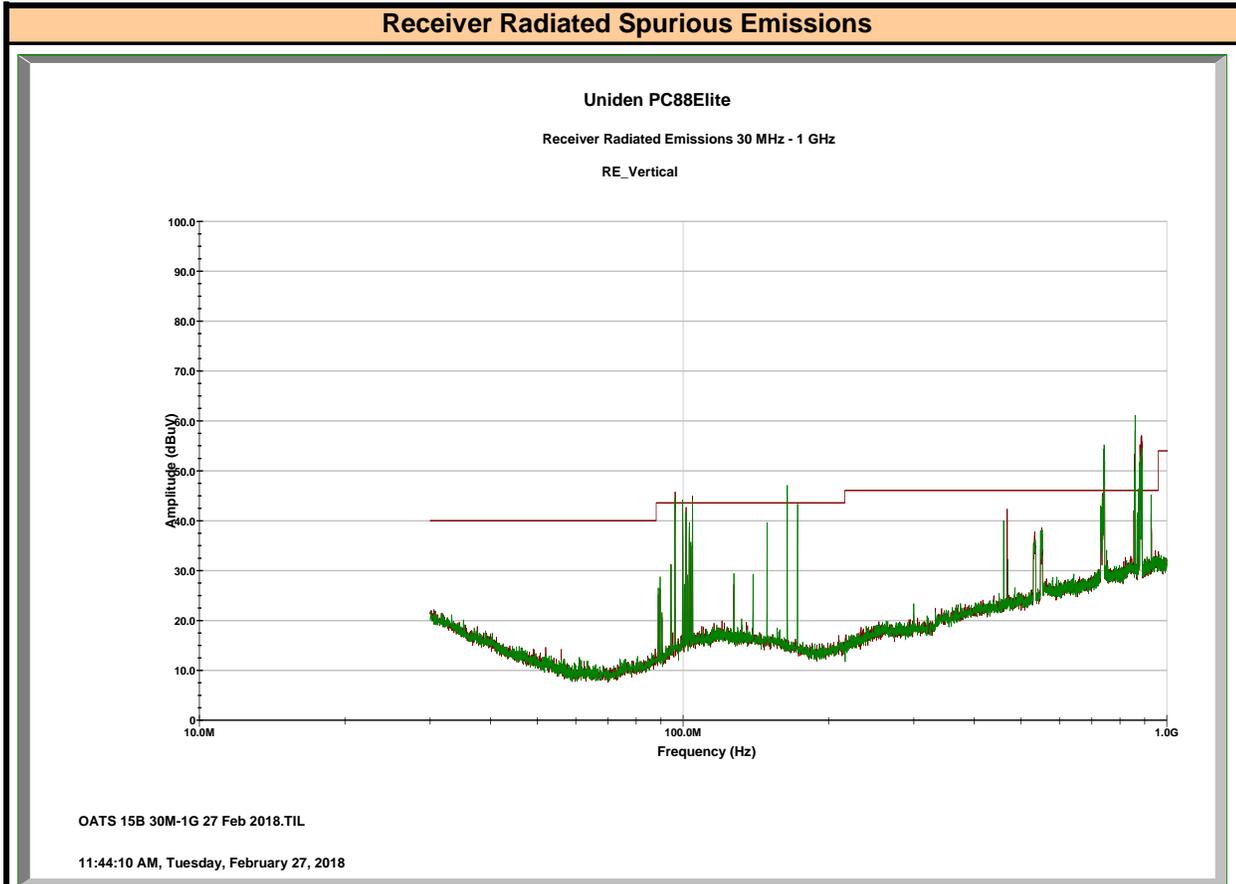


Trace 1 (Green): Ambient

Trace 2 (Red): DUT Emission

**No Emissions within 20dB of limit were observed.**

<b>Frequency Span:</b>	30MHz to 1000MHz
<b>Polarization:</b>	Vertical

**Plot 13.2 – Receiver Radiated Emissions - Horizontal**

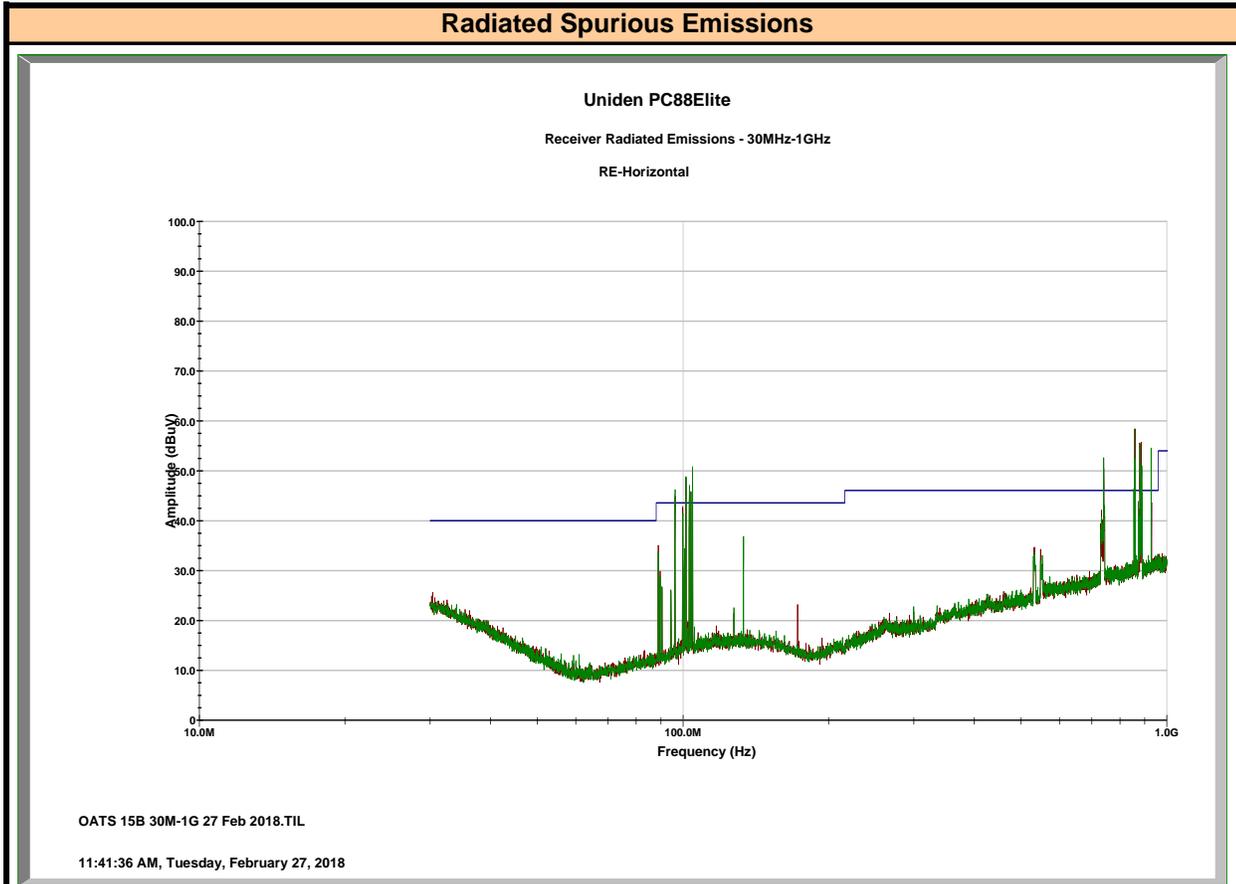

Trace 1 (Green): Ambient

Trace 2 (Red): DUT Emission

**No Emissions within 20dB of limit were observed.**

<b>Frequency Span:</b>	30MHz to 1000MHz
<b>Polarization:</b>	Horizontal

**Table 13.1 – Summary of Receiver Radiated Emissions**

<b>Receiver Radiated Spurious Emissions</b>							
<b>Channel Frequency (MHz)</b>	<b>Emission Frequency (MHz)</b>	<b>DUT Modulation</b>	<b>Fundamental Power [P] (dBm)</b>	<b>Out of Band Emission [P<sub>E</sub>] (dBm)</b>	<b>Attenuation [dB]</b>	<b>Limit (dB)</b>	<b>Margin (dB)</b>
n/a	n/a	n/a	n/a	n/a	n/a	See Mask	n/a
Attenuation = P - P <sub>E</sub> Margin = Limit - Attenuation							
					<b>Result:</b>	<b>Complies</b>	
<b>Notes:</b> No emissions within 20dB of the limit were observed. Data for fundamental and spurious emissions presented using a peak detector.							

**APPENDIX A – TEST SETUP DRAWINGS AND CONDITIONS**


**Table A.1 – Conducted Measurements Equipment and Environmental**

Environmental Conditions (Typical)			
Temperature	25°C		
Humidity	<60%		
Barometric Pressure	101 +/- 3kPa		

Equipment List			
Asset Number	Manufacturer	Model Number	Description
00241	R&S	FSU40	Spectrum Analyzer


**Figure A.1 – Test Setup Conducted Measurements**

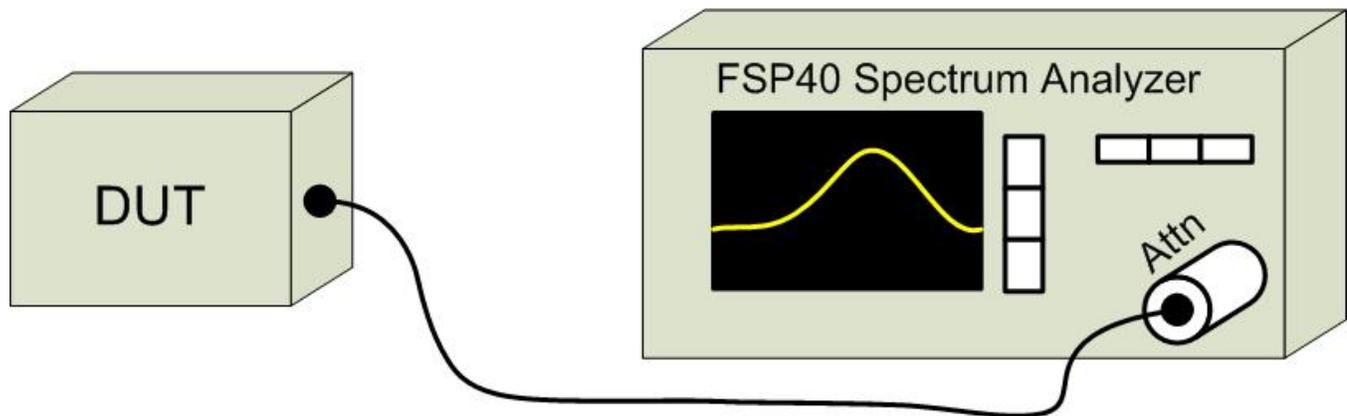

**Table A.2 – Audio Modulation Equipment and Environmental**

Environmental Conditions (Typical)			
Temperature	25°C		
Humidity	<60%		
Barometric Pressure	101 +/- 3kPa		
Equipment List			
Asset Number	Manufacturer	Model Number	Description
00028	HP	8901A	Modulation Analyzer
00027	HP	8903B	Audio Analyzer/Generator

**Figure A.2 – Test Setup Audio Modulation Response Measurements**

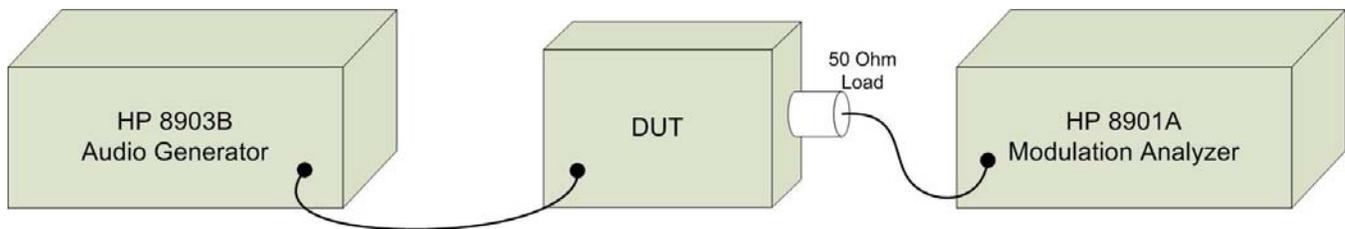


**Table A.3 – Radiated Emissions Equipment and Environmental**

Environmental Conditions (Typical)			
Temperature	3°C		
Humidity	<60%		
Barometric Pressure	101 +/- 3kPa		
Equipment List			
Asset Number	Manufacturer	Model Number	Description
00051	HP	8566B	Spectrum Analyzer
00049	HP	85650A	Quasi-peak Adapter
00047	HP	85685A	RF Preselector
00072	EMCO	2075	Mini-mast
00073	EMCO	2080	Turn Table
00071	EMCO	2090	Multi-Device Controller
00265	Miteq	JS32-00104000-58-5P	Microwave L/N Amplifier
00241	R&S	FSU40	Spectrum Analyzer
00050	Chase	CBL-6111A	Bilog Antenna
00275	Coaxis	LMR400	25m Cable
00276	Coaxis	LMR400	4m Cable
00278	TILE	34G3	TILE Test Software
00034	ETS	3115	Double Ridged Guide Horn

CNR: Calibration Not Required  
 COU: Calibrate On Use


**Figure A.3 – Test Setup Radiated Emissions Measurements**

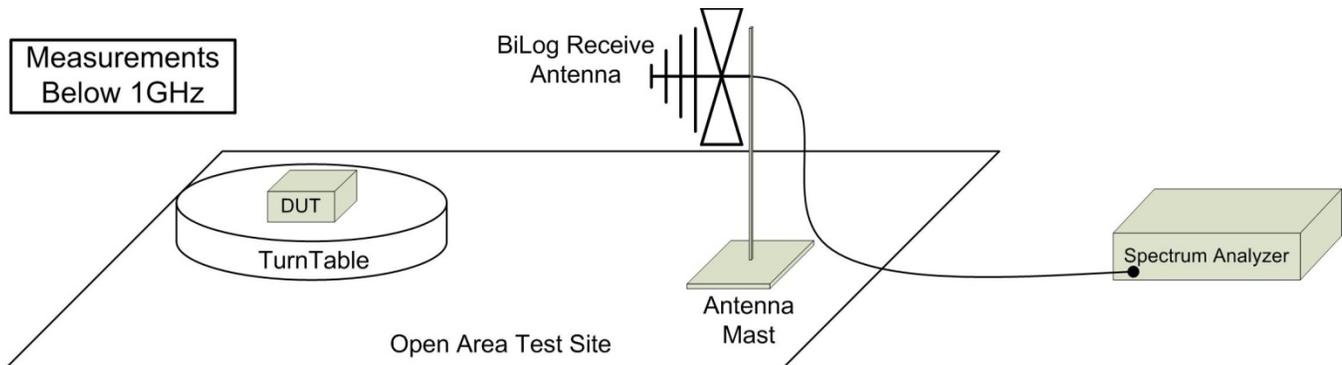

**Table A.4 – Frequency Stability Measurement Equipment and Environmental**

Test Conditions			
Temperature	-30°C to +50°C at 10°C Increments		
Humidity	<100% Non Condensating		
Voltage (VDC)	11.7VDC(85%) - 13.8VDC - 15.9VDC(115%)		
Equipment List			
Asset Number	Manufacturer	Model Number	Description
n/a	ESPEC	ECT-2	Environmental Chamber
00003	HP	53181A	Frequency Counter
n/a	HP	E3611A	Power Supply
00234	VWR	61161-378	Temp/Humidity Meter

**Figure A.4 – Test Setup Frequency Stability Measurements**

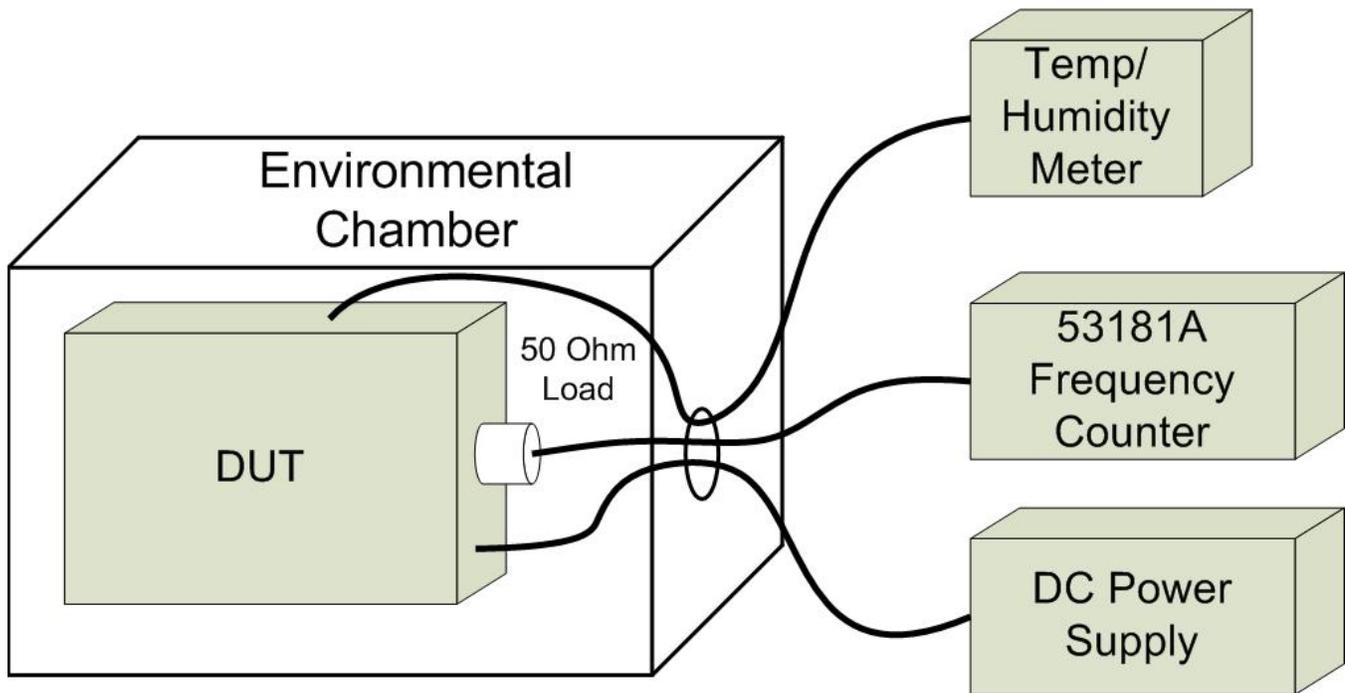

**APPENDIX B – EQUIPMENT LIST AND CALIBRATION**

Equipment List							
(*)	Asset Number	Manufacturer	Model Number	Serial Number	Description	Last Calibrated	Calibration Interval
*	00050	Chase	CBL-6111A	1607	Bilog Antenna	23 Jun 2017	Triennial
	00034	ETS	3115	6267	Double Ridged Guide Horn	02 Dec 2015	Triennial
	00035	ETS	3115	6276	Double Ridged Guide Horn	02 Dec 2015	Triennial
*	00047	HP	85685A	2837A00826	RF Preselector	23 Jun 2017	Triennial
*	00049	HP	85650A	2043A00162	Quasi-peak Adapter	23 Jun 2017	Triennial
*	00051	HP	8566B	2747A05510	Spectrum Analyzer	23 Jun 2017	Triennial
*	00223	HP	8901A	3749A07154	Modulation Analyzer	27 Dec 2017	Triennial
*	00224	HP	8903B	3729A18691	Audio Analyzer	28 Dec 2017	Triennial
*	00241	R&S	FSU40	100500	Spectrum Analyzer	23 Apr 2015	Triennial
	00005	HP	8648D	3847A00611	Signal Generator	21 Jun 2017	Triennial
	00006	R&S	SMR20	100104	Signal Generator	29 May 2017	Triennial
	00243	Rigol	DS1102E	DS1ET150502164	Oscilloscope	7 Nov 2017	Triennial
	00254	LeCroy	WM8600A	532	Oscilloscope	NCR	n/a
	00110	Gigatronics	8652A	1875801	Power Meter	29 Feb 2016	Triennial
	00237	Gigatronics	80334A	1837001	Power Sensor	23 Jun 2014	Triennial
	00232	ETS Lindgren	HI-6005	91440	Isotropic E-Field Probe	18 Dec 2017	Triennial
*	00003	HP	53181A	3736A05175	Frequency Counter	21 Jun 2017	Triennial
	00257	Com-Power	LI-215A	191934	LISN	5 Jan 2018	Triennial
	00041	AR	10W1000C	27887	Power Amplifier	NCR	n/a
	00106	AR	5SIG4	26235	Power Amplifier	NCR	n/a
	00280	AR	25A250AM6	22702	Power Amplifier	NCR	n/a
	00265	Miteq	JS32-00104000-58-5P	1939850	Microwave L/N Amplifier	COU	n/a
	00071	EMCO	2090	9912-1484	Multi-Device Controller	n/a	n/a
	00072	EMCO	2075	0001-2277	Mini-mast	n/a	n/a
	00073	EMCO	2080	0002-1002	Turn Table	n/a	n/a
*	00081	ESPEC	ECT-2	0510154-B	Environmental Chamber	CNR	n/a
*	00234	VWR	61161-378	140320430	Temp/Humidity Meter	New	Triennial
	00236	Nokia	-	236	ESD Table	NCR	n/a
	00255	Expert ESD	A4001	A4001-155	ESD Target	COU	n/a
	00064	NARDA	3020A	n/a	Bi-Directional Coupler	COU	n/a
	00263	Koaxis	KP10-1.00M-TD	263	1m Armoured Cable	COU	n/a
*	00263B	Koaxis	KP10-1.00M-TD	263B	1m Armoured Cable	COU	n/a
	00264	Koaxis	KP10-7.00M-TD	264	1m Armoured Cable	COU	n/a
	00275	TMS	LMR400	n/a	25m Cable	COU	n/a
*	00276	TMS	LMR400	n/a	4m Cable	COU	n/a
	00277	TMS	LMR400	n/a	4m Cable	COU	n/a
*	00278	TILE	34G3	n/a	TILE Test Software	NCR	n/a
Rented Equipment							

\* Used during the course of this investigation

CNR: Calibration Not Required

COU: Calibrate On Use

**APPENDIX C – MEASUREMENT INSTRUMENT UNCERTAINTY**

<b>CISPR 16-4 Measurement Uncertainty ( <math>U_{LAB}</math> )</b>	
This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence interval using a coverage factor of k=2	
<b>30MHz - 200MHz</b>	
$U_{LAB} = 5.14dB$ $U_{CISPR} = 6.3dB$	
<b>200MHz - 1000MHz</b>	
$U_{LAB} = 5.90dB$ $U_{CISPR} = 6.3dB$	
<b>1GHz - 6GHz</b>	
$U_{LAB} = 4.80dB$ $U_{CISPR} = 5.2dB$	
<b>6GHz - 18GHz</b>	
$U_{LAB} = 5.1dB$ $U_{CISPR} = 5.5dB$	
If the calculated uncertainty $U_{lab}$ is <b>less</b> than $U_{CISPR}$ then:	
1	Compliance is deemed to occur if <b>NO</b> measured disturbance exceeds the disturbance limit
2	Non-Compliance is deemed to occur if <b>ANY</b> measured disturbance <b>EXCEEDS</b> the disturbance limit
If the calculated uncertainty $U_{lab}$ is <b>greater</b> than $U_{CISPR}$ then:	
3	Compliance is deemed to occur if <b>NO</b> measured disturbance, increased by ( $U_{lab} - U_{CISPR}$ ), exceeds the disturbance limit
4	Non-Compliance is deemed to occur if <b>ANY</b> measured disturbance, increased by ( $U_{lab} - U_{CISPR}$ ), <b>EXCEEDS</b> the disturbance limit