



Test Report Serial Number:

45461497 R1.0

Test Report Date:

27 April 2019

Project Number:

1447

EMC Test Report - New Filing

Applicant:

Uniden®

**Uniden America Corporation
3001 Gateway Drive
Suite 130
Irving, Tx, 75063, USA**

FCC ID:

AMWUT421

Product Model Number / HVIN

PRO505XL

IC Registration Number

513C-UT421

Product Name / PMN

PRO505XL

In Accordance With:

FCC 47 CFR Part 95 Subpart D

Licensed Non-Broadcast Station Transmitter (TNB)

RSS-GEN, RSS-236 Issue 1

Citizen Band (26.960 to 27.410 MHz)

Approved By:

Ben Hewson, President

Celltech Labs Inc.
21-364 Lougheed Rd.
Kelowna, BC, V1X 7R8
Canada



**Industry
Canada**



Test Lab Certificate: 2470.01

IC Registration 3874A-1

FCC Registration: CA3874

This report shall not be reproduced in any form without the expressed written consent of Celltech Labs Inc.

© 2019 Celltech Labs Inc.

Table of Contents

1.0 DOCUMENT CONTROL.....	5
2.0 CLIENT AND DUT INFORMATION	6
3.0 SCOPE.....	7
4.0 TEST RESULT SUMMARY	8
5.0 NORMATIVE REFERENCES.....	9
6.0 FACILITIES AND ACCREDITATIONS	10
7.0 CONDUCTED POWER.....	11
8.0 MODULATION RESPONSE	16
9.0 OCCUPIED BANDWIDTH AND EMISSION MASKS	19
10 CONDUCTED OUT OF BAND SPURIOUS EMISSIONS	27
11.0 RADIATED SPURIOUS EMISSIONS.....	38
12.0 FREQUENCY STABILITY.....	60
APPENDIX A – TEST SETUP DRAWINGS AND EQUIPMENT	62
APPENDIX B – EQUIPMENT LIST AND CALIBRATION.....	66
APPENDIX C – MEASUREMENT INSTRUMENT UNCERTAINTY.....	67

Table of Figures

Figure A.1 – Test Setup Conducted Measurements.....	62
Figure A.2 – Test Setup Audio Modulation Response Measurements.....	63
Figure A.3 – Test Setup Radiated Emissions Measurements	64
Figure A.4 – Test Setup Frequency Stability Measurements	65

Table of Plots

Plot 7.1 – Conducted Output Power – Channel 1	12
Plot 7.2 – Conducted Output Power – Channel 19.....	13
Plot 7.3 – Conducted Output Power – Channel 40.....	14
Plot 8.1 – Audio Frequency and Low Pass Filter Response.....	17
Plot 8.2 – Modulation Limiting Response.....	18
Plot 9.1 – Occupied Bandwidth Channel 1	20
Plot 9.2 – Occupied Bandwidth Channel 19	21
Plot 9.3 – Occupied Bandwidth Channel 40	22
Plot 9.4 – Emissions Mask Channel 1	23
Plot 9.5 – Emissions Mask Channel 19	24
Plot 9.6 – Emissions Mask Channel 40	25
Plot 10.1 – Conducted Out of Band Emissions, 30MHz – 300MHz, Channel 1	28
Plot 10.2 – Conducted Out of Band Emissions, Channel 1, 2 nd Harmonic	29
Plot 10.3 – Conducted Out of Band Emissions, Channel 1, 8th Harmonic.....	30
Plot 10.4 – Conducted Out of Band Emissions, 30MHz – 300MHz, Channel 19	31
Plot 10.5 – Conducted Out of Band Emissions, Channel 19, 2 nd Harmonic	32
Plot 10.6 – Conducted Out of Band Emissions, Channel 19, 8th Harmonic.....	33
Plot 10.7 – Conducted Out of Band Emissions, 30MHz – 300MHz, Channel 40	34
Plot 10.8 – Conducted Out of Band Emissions, Channel 40, 2 nd Harmonic	35
Plot 10.9 – Conducted Out of Band Emissions, Channel 40, 8th Harmonic.....	36
Plot 11.1 – Radiated Spurious Emissions Pre-Scan, 30MHz – 1000MHz, Horizontal	39
Plot 11.2 – Radiated Spurious Emissions Pre-Scan, 30MHz – 1000MHz, Vertical.....	40
Plot 11.3 – Radiated Spurious Emissions OATS, 2 nd Harmonic, Horizontal	41
Plot 11.4 – Radiated Spurious Emissions OATS, 3 rd Harmonic, Horizontal	42
Plot 11.5 – Radiated Spurious Emissions OATS, 4 th Harmonic, Horizontal	43
Plot 11.6 – Radiated Spurious Emissions OATS, 5 th Harmonic, Horizontal	44
Plot 11.7 – Radiated Spurious Emissions OATS, 6 th Harmonic, Horizontal	45
Plot 11.8 – Radiated Spurious Emissions OATS, 7 th Harmonic, Horizontal	46
Plot 11.9 – Radiated Spurious Emissions OATS, 8 th Harmonic, Horizontal	47
Plot 11.10 – Radiated Spurious Emissions OATS, 9 th Harmonic, Horizontal	48
Plot 11.11 – Radiated Spurious Emissions OATS, 10 th Harmonic, Horizontal	49
Plot 11.12 – Radiated Spurious Emissions OATS, 2 nd Harmonic, Vertical.....	50
Plot 11.13 – Radiated Spurious Emissions OATS, 3 rd Harmonic, Vertical	51
Plot 11.14 – Radiated Spurious Emissions OATS, 4 th Harmonic, Vertical	52
Plot 11.15 – Radiated Spurious Emissions OATS, 5 th Harmonic, Vertical	53
Plot 11.16 – Radiated Spurious Emissions OATS, 6 th Harmonic, Vertical	54
Plot 11.17 – Radiated Spurious Emissions OATS, 7 th Harmonic, Vertical	55
Plot 11.18 – Radiated Spurious Emissions OATS, 8 th Harmonic, Vertical	56
Plot 11.19 – Radiated Spurious Emissions OATS, 9 th Harmonic, Vertical	57
Plot 11.20 – Radiated Spurious Emissions OATS, 10 th Harmonic, Vertical	58

Table of Tables

Table 7.1 – Summary of Conducted Power Measurements (RMS).....	15
Table 7.2 – Compliance to §2.1033(c)(8)	15
Statement - Compliance to §95.977	16
Table 9.1 - Summary of Occupied Bandwidth and Emission Mask Results.....	26
Table 10.1 – Summary of Conducted Out of Band Emissions	37
Table 11.1 – Summary of Radiated Spurious Emissions	59
Table 12.1 – Summary of Frequency Stability Results.....	61
Table A.1 – Setup - Conducted Measurements Equipment	62
Table A.2 – Setup - Audio Modulation Equipment.....	63
Table A.3 – Setup - Radiated Emissions Equipment.....	64
Table A.4 – Setup - Frequency Stability Measurement Equipment.....	65

1.0 DOCUMENT CONTROL

Revision History				
Samples Tested By:		Art Voss, P.Eng.		Date(s) of Evaluation:
Report Prepared By:		Art Voss, P.Eng.		Report Reviewed By:
Report Revision		Description of Revision		Revision Date
1.0		Initial Release		27 April 2019

2.0 CLIENT AND DUT INFORMATION

Client Information	
Applicant Name	Uniden America Corporation
Applicant Address	3001 Gateway Drive
	Irving, TX, 75063
	USA
DUT Information	
Device Identifier(s):	FCC ID: AWMUT421
	IC: 513C-UT421
Device Type:	Mobile CB Radio Transceiver
Type of Equipment:	Analog AM CB Transceiver
Device Model(s) / HVIN:	PRO505XL
Device Marketing Name / PMN:	PRO505XL
Firmware Version ID Number / FVIN:	n/a
Host Marketing Name / HMN:	n/a
Test Sample Serial No.:	T/A Sample - Identical Prototype
Transmit Frequency Range:	26.965 - 27.405 MHz (Chan. 1-40)
Number of Channels:	40
Manuf. Max. Rated Output Power:	4.0W AM
Manuf. Max. Rated BW/Data Rate:	8kHz
Antenna Make and Model:	n/a
Antenna Type and Gain:	External Whip, 0dBi nominal (3dBi maximum).
Modulation:	AM
Mode:	n/a
Emission Designator:	5K40A3E
DUT Power Source:	12 VDC External
Deviation(s) from standard/procedure:	None
Modification of DUT:	None

3.0 SCOPE

This Certification Report was prepared on behalf of:

Uniden America Corporation

„(the 'Applicant'), in accordance with the applicable Federal Communications Commission (FCC) CFR 47 and Innovation, Scientific and Economic Development (ISED) Canada rules parts and regulations (the 'Rules'). The scope of this investigation was limited to only the equipment, devices and accessories (the 'Equipment') supplied by the Applicant. The tests and measurements performed on this Equipment were only those set forth in the applicable Rules and/or the Test and Measurement Standards they reference. The Rules applied and the Test and Measurement Standards used during this evaluation appear in the Normative References section of this report. The limits set forth in the technical requirements of the applicable Rules were applied to the measurement results obtained during this evaluation and, unless otherwise noted, these limits were used as the Pass/Fail criteria. The Pass/Fail statements made in this report apply to only the tests and measurements performed on only the Equipment tested during this evaluation. Where applicable and permissible, information including test and measurement data and/or results from previous evaluations of same or similar equipment, devices and/or accessories may be cited in this report.

As per FCC 47 CFR Part §2.1091 and §2.1093, an RF Exposure evaluation report is required for this Equipment and the results of the RF Exposure evaluation appear in a separate exhibit from this report.

The Receiver of this Equipment is subject to Equipment Certification or Supplier's Declaration of Conformity (SDoC) in accordance with 47 CFR Part §15.101. The Receiver was evaluated in accordance with 47 CFR Part §15 Subpart B and ICES-003. A statement of the application the SDoC procedure appears in a separate exhibit from this report.

Application: This is an application for a new FCC and ISED certification.

I attest that the data reported herein is true and accurate within the tolerance of the Measurement Instrument Uncertainty; that all tests and measurements were performed in accordance with accepted practices or procedures; and that all tests and measurements were performed by me or by trained personnel under my direct supervision. The results of this investigation are based solely on the test sample(s) provided by the client which were not adjusted, modified or altered in any manner whatsoever, except as required to carry out specific tests or measurements. This test report has been completed in accordance with ISO/IEC 17025.



Art Voss, P.Eng.
Technical Manager
Celltech Labs Inc.

27 April 2019

Date



4.0 TEST RESULT SUMMARY

TEST SUMMARY						
Referenced Standard(s):		FCC CFR Title 47 Parts 2, 95D, 15B, ISED RSS-Gen, RSS-236				
Section	Description of Test	Procedure Reference	Applicable Rule Part(s) FCC	Applicable Rule Part(s) ISEDC	Test Date	Result
7.0	Conducted Power (Fundamental)	ANSI/TIA/EIA-382-A	§2.1046	RSS-Gen	27 April 2019	Complies
		ANSI C63.4:2014	§2.1033(c)(8) §95.967	RSS-236 5.2		
8.0	Modulation Response	ANSI/TIA/EIA-382-A	§2.1047	RSS-Gen	26 April 2019	Complies
		ANSI C63.4:2014	§95.975 §95.977			
9.0	Occupied Bandwidth	ANSI/TIA/EIA-382-A	§2.1049	RSS-Gen	27 April 2019	Complies
	Emission Mask	ANSI C63.4:2014	§95.973	RSS-236 5.3.2		
10.0	Conducted TX Spurious Emissions	ANSI/TIA/EIA-382-A	§2.1049	RSS-Gen	27 April 2019	Complies
		ANSI C63.4:2014	§95.979	RSS-236 5.4.4		
11.0	Radiated TX Spurious Emissions	ANSI/TIA/EIA-382-A	§2.1051	RSS-Gen	25 April 2019	Complies
		ANSI C63.4:2014	§2.1053 §95.979	RSS-236 5.4.4		
12.0	Frequency Stability	ANSI/TIA/EIA-382-A	§2.1055	RSS-Gen	27 April 2019	Complies
		ANSI C63.4:2014	§95.965			

Test Station Day Log					
Date	Ambient Temp (°C)	Relative Humidity (%)	Barometric Pressure (kPa)	Test Station	Tests Performed Section(s)
25 Apr 2019	22.6	16	102.5	EMC	11,13
25 Apr 2019	18.9	18	102.5	OATS	11
26 Apr 2019	22.0	16	101.5	EMC	8
27 Apr 2019	21.9	17	101.3	EMC	7, 9, 10
27 Apr 2019	21.0	19	103.5	TC	12

EMC - EMC Test Bench
OATS - Open Area Test Site
LISN - LISN Test Area
IMM - Immunity Test Area

SAC - Semi-Anechoic Chamber
TC - Temperature Chamber
ESD - ESD Test Bench
RI - Radiated Immunity Chamber


5.0 NORMATIVE REFERENCES

Normative References	
ISO/IEC 17025:2017	General requirements for the competence of testing and calibration laboratories
IEEE/ANSI C63.4:2014	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI/EIA/TIA-382-A-1989	Minimum Standards - Citizens Band Radio Service Amplitude Modulated (AM) Transceivers Operating in the 27MHz Band
CFR	Code of Federal Regulations Title 47: Telecommunication Part 2: Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
CFR	Code of Federal Regulations Title 47: Telecommunication Part 95: Personal Radio Service Subpart D: Citizens Band Radio Service (CBRS)
ISED	Innovation, Science and Economic Development Canada Spectrum Management and Telecommunications Radio Standards Specification RSS-Gen Issue 5: General Requirements and Information for the Certification of Radiocommunication Equipment
ISED	Innovation, Science and Economic Development Canada Spectrum Management and Telecommunications Radio Standards Specification RSS-236 Issue 1: General Radio Service Equipment Operating in the Band 26.960 to 27.410 MHz (Citizens Band)

6.0 FACILITIES AND ACCREDITATIONS

Facility and Accreditation:

The facilities used to evaluate this device outlined in this report are located at 21-364 Lougheed Road, Kelowna, British Columbia, Canada V1X 7R8. The radiated emissions site (OATS) conforms to the requirements set forth in ANSI C63.4 and is filed and listed with the FCC under Test Firm Registration Number CA3874A-1 and Industry Canada under Test Site File Number IC 3874A-1. Celltech is accredited to ISO 17025, through accrediting body A2LA and with certificate 2470.01.

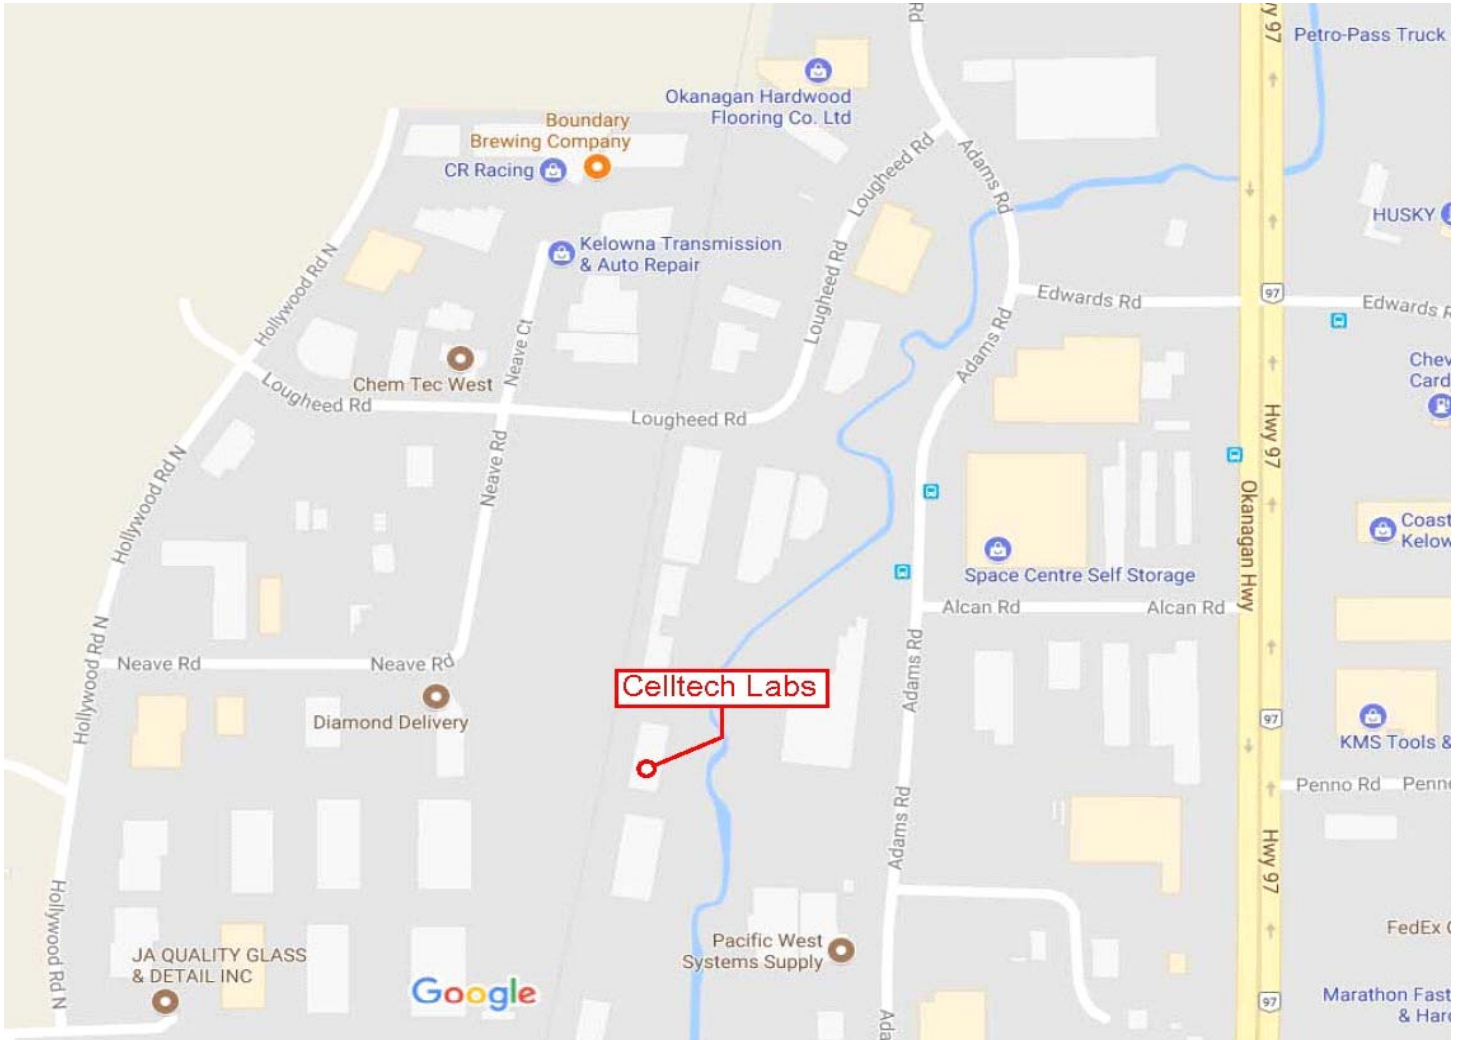

7.0 CONDUCTED POWER

Test Procedure

Normative Reference	FCC 47 CFR §2.1046, §2.1033(c)(8), §95.967, RSS-236 EIA/TIA-382-A
----------------------------	---

Limits

47 CFR §95.967	Each CBRS transmitter type must be designed such that the transmitter power can not exceed the following limits: (1) 4 W Carrier power when transmitting emission type A1D or A3E;
RSS-236 5.2	The transmitter output power shall not exceed 4.0 watts for a DSB mode of operations.

General Procedure

EIA/TIA-382-A	19. TRANSMITTER CARRIER POWER OUTPUT Transmitter Carrier Power Output for this service is the power (rms) available at the output terminals of the transmitter when the output terminals are connected to a standard output load. This measurement shall be performed without modulation, at standard test. conditions.
---------------	---


Test Setup

Appendix A - Figure A.1


Measurement Procedure

The DUT was connected to a Spectrum Analyzer (SA) via a 30dB attenuator connected to the DUT's antenna port. The SA was configured as an RMS detector with an RBW of 30kHz. The output power of the DUT was set to the manufacturer's highest output power setting on channels 1, 19 and 40. The DUT was set to transmit unmodulated. The SA was set to Max Hold and the Marker set to Peak. The maximum power was recorded as the Marker Peak value.

Plot 7.1 – Conducted Output Power – Channel 1

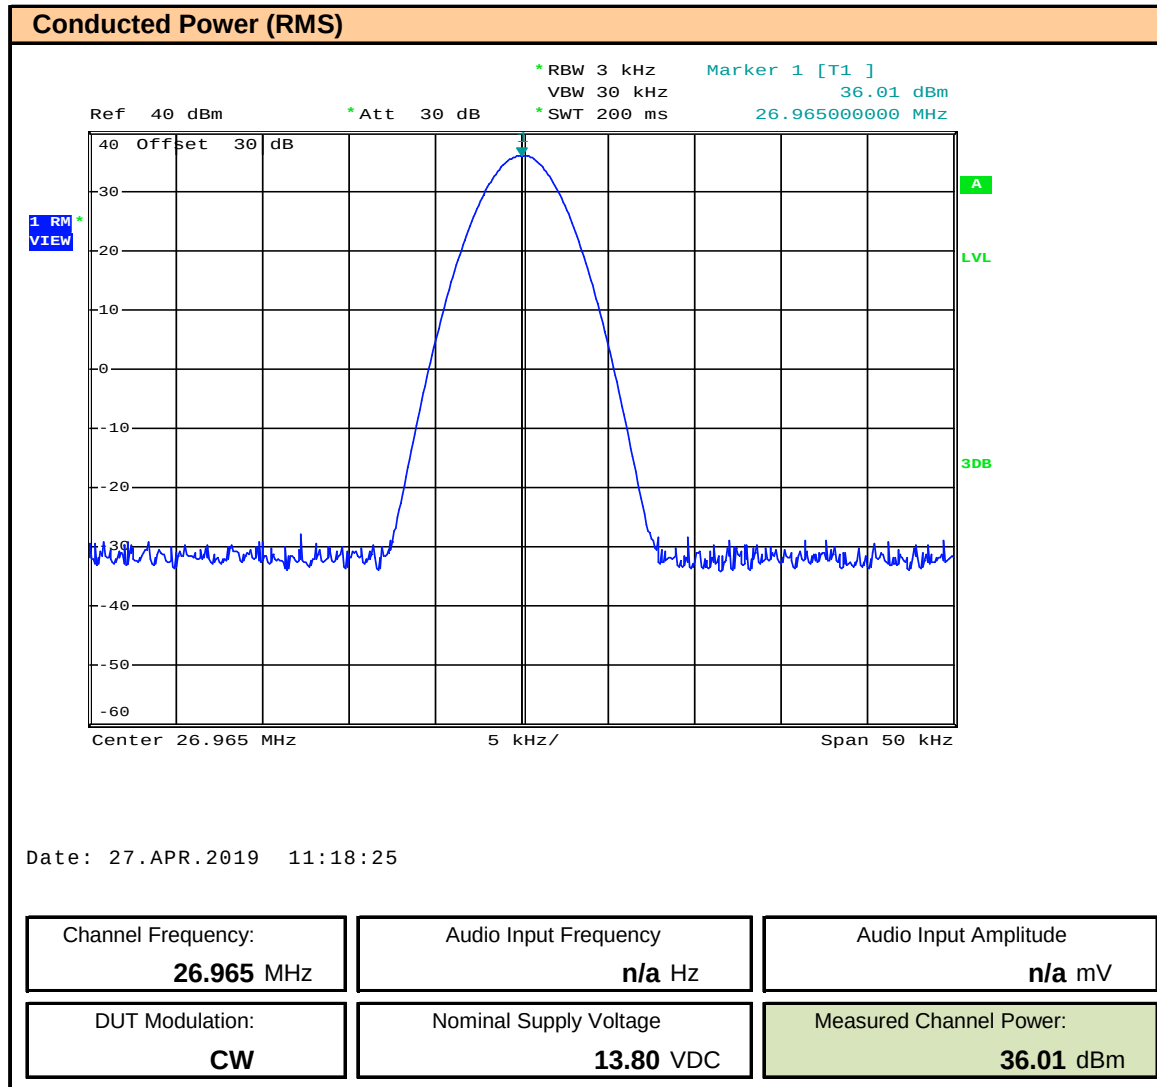

Plot 7.2 – Conducted Output Power – Channel 19

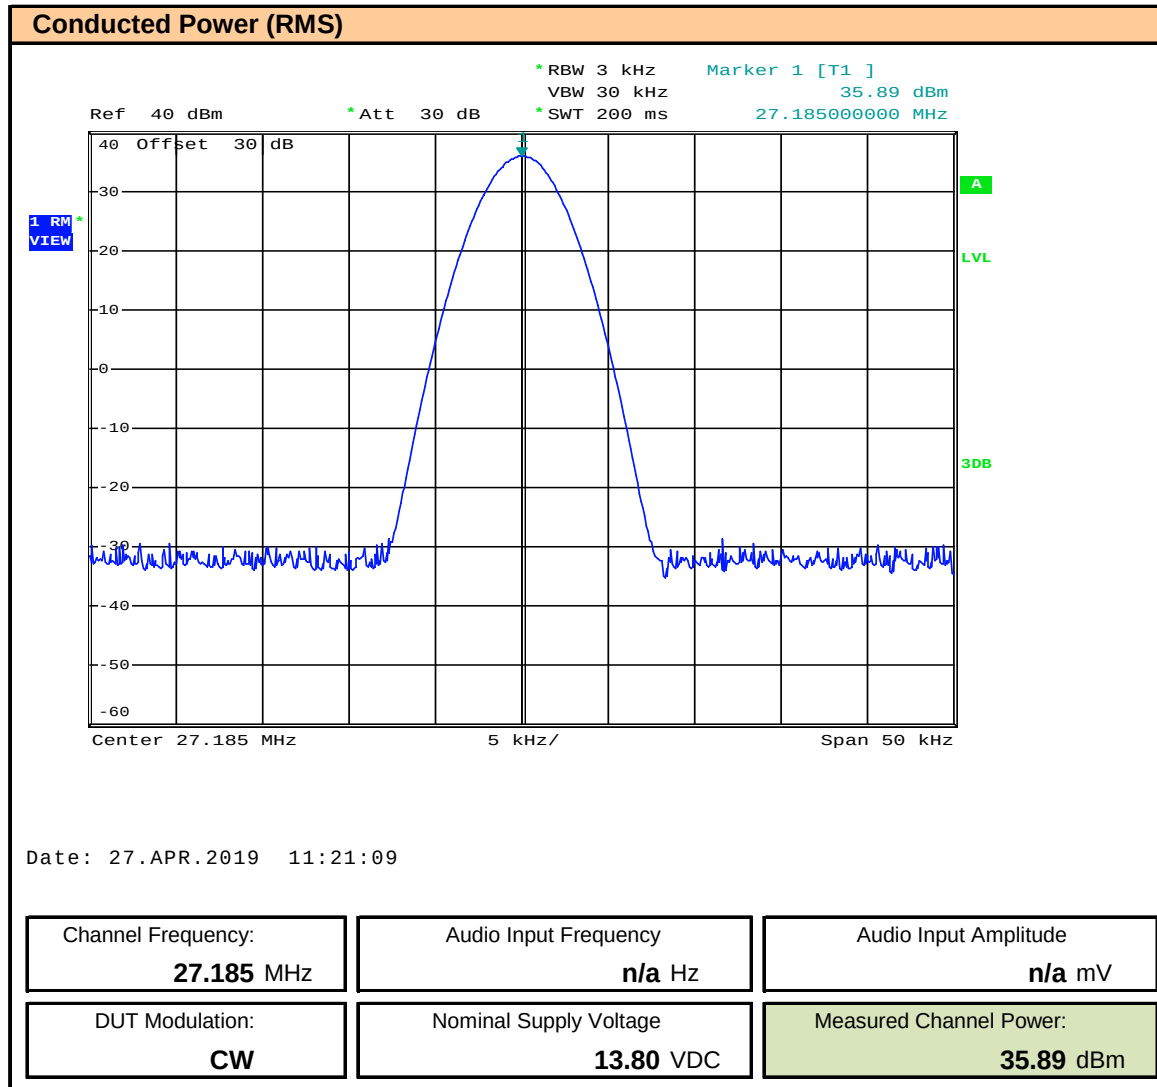

Plot 7.3 – Conducted Output Power – Channel 40

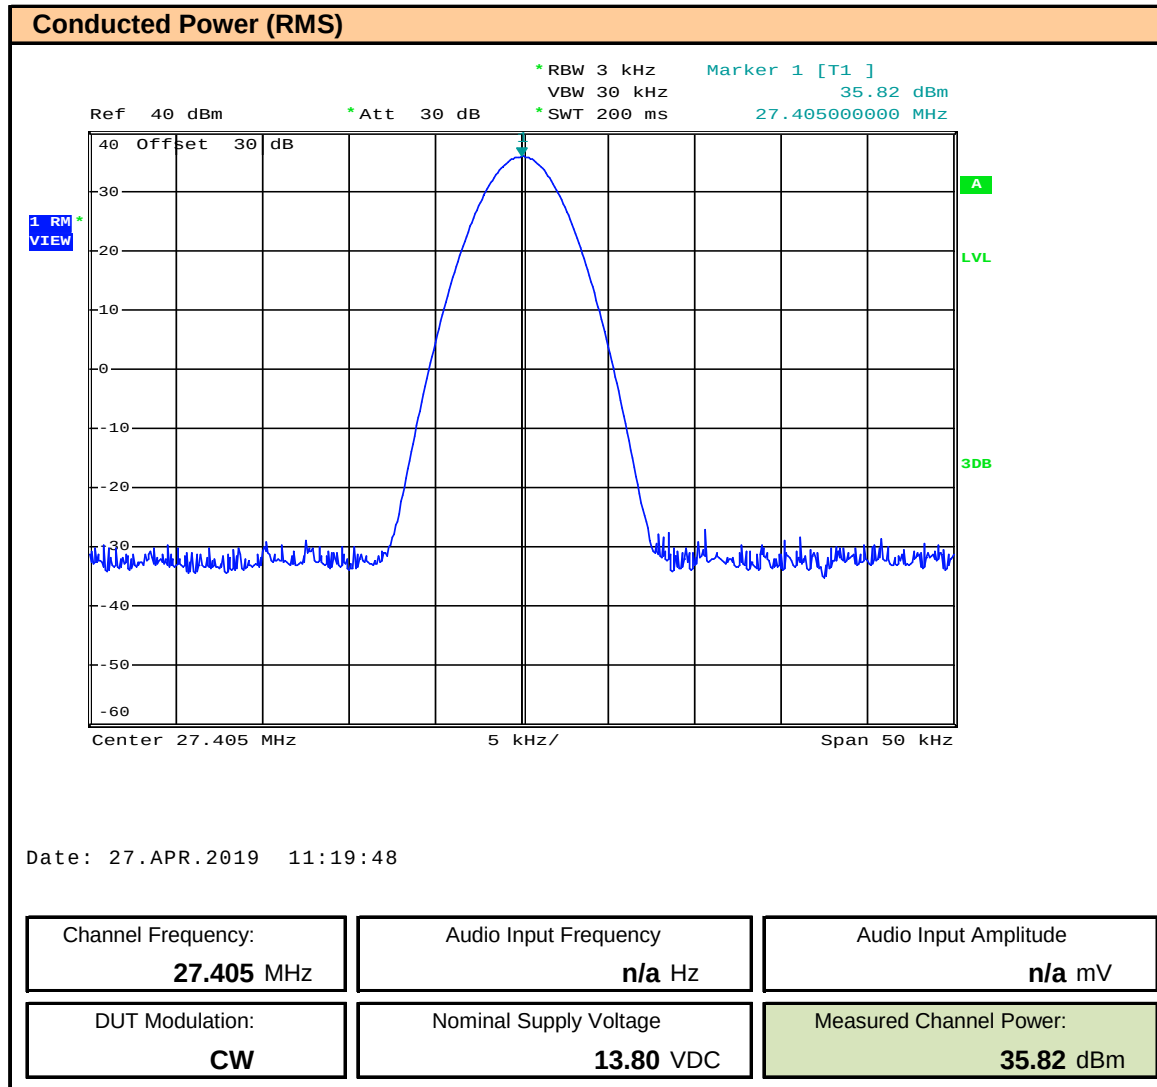


Table 7.1 – Summary of Conducted Power Measurements (RMS)

Conducted Power Measurement Results							
Channel	Frequency (MHz)	Modulation	Nominal Input Voltage (VDC)	Measured Power [E _{Meas}] (dBm)	Measured Power [E _{Meas}] (W)	Limit (W)	Margin (dB)
1	26.965	CW	13.8	36.01	3.99	4.0	0.0
19	27.185			35.89	3.88		0.1
40	27.405			35.82	3.82		0.2
Result:						Complies	

(1) The output power is factory set to maximum
Margin = $10 \cdot \log(\text{Limit} / E_{\text{meas}})$

Table 7.2 – Compliance to §2.1033(c)(8)

FCC CFR 47 §2.1033(c)(8): Power to Transmitter:	
Measured Receiver Current:	IRx = 0.10A
Measured Total Current:	ITx = 1.18A
Transmitter Current (ITx - IRx):	IXmitter = 1.08A
Power to Transmitter:	(13.8VDC)(1.08) = 14.90W
Result:	Complies

8.0 MODULATION RESPONSE

Test Conditions

Normative Reference	FCC 47 CFR §2.1047, §95.975, RSS-236 5.3.2
----------------------------	---

Limits

47 CFR §2.1047	a) Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted.
47 CFR §95.975	Each CBRS transmitter type must be designed such that the modulation characteristics are in compliance with the rules in this section. (a) When emission type A3E is transmitted with voice modulation, the modulation percentage must be at least 85%, but not more than 100%. (b) When emission type A3E is transmitted by a CBRS transmitter having a transmitter output power of more than 2.5 W, the transmitter must contain a circuit that automatically prevents the modulation percentage from exceeding 100%.
RSS-236	5.3.2) When emission type A3E is transmitted by a CB transmitter having a total power of greater than 2.5 W, the CB transmitter must automatically prevent the modulation from exceeding 100%.

Measurement Procedure

TIA 382 25.2 Transmitter Audio Frequency Response

Operate the transmitter under standard test conditions and monitor the output with a modulation monitor or calibrated test receiver. The audio input signal applied through a suitable impedance matching network, as specified by the manufacturer, shall be adjusted to obtain 50% modulation at the maximum audio frequency response of the transmitter, and this point shall be taken as the 0 dB reference level. Vary the modulating frequency from 100 Hz to 10,000 Hz and record the input levels necessary to maintain a constant 50% modulation.

Graph the audio level in dB relative to the 0 dB reference level as a function of the modulating frequency. Record any audio frequency where it is impossible to perform the measurement.

TIA 382 24.2.2 Transmitter Modulation Limiting

The transmitter is modulated by a sinusoidal audio signal applied to the microphone input jack. First the audio input frequency is adjusted to deliver 50% modulation at the audio frequency that produces the maximum modulation level. Record the modulation input level (mV) and use this level as 0 dB for plotting modulation limiting. Increment the audio signal level to 40 dB above the reference level. Record the modulation level (%). Repeat the measurements using a 400 Hz and a 2500 Hz sinusoidal audio signal. Record the modulation level (%). Perform for both positive and negative modulation.

Test Setup	Appendix A	Figure A.2
-------------------	-------------------	-------------------


Statement - Compliance to §95.977

§95.977 CBRS tone transmissions.

In addition to the tones permitted under §95.377, CBRS transmitter types may be designed to transmit brief tones to indicate the beginning or end of a transmission.


This device is capable of transmitting a brief (less than one second) audio tone, "Roger Beep", when the PTT button is released on the microphone indicating end of transmission. This function is user selectable and complies with the requirements of §95.377. See User's Manual page 11.

Plot 8.1 – Audio Frequency and Low Pass Filter Response

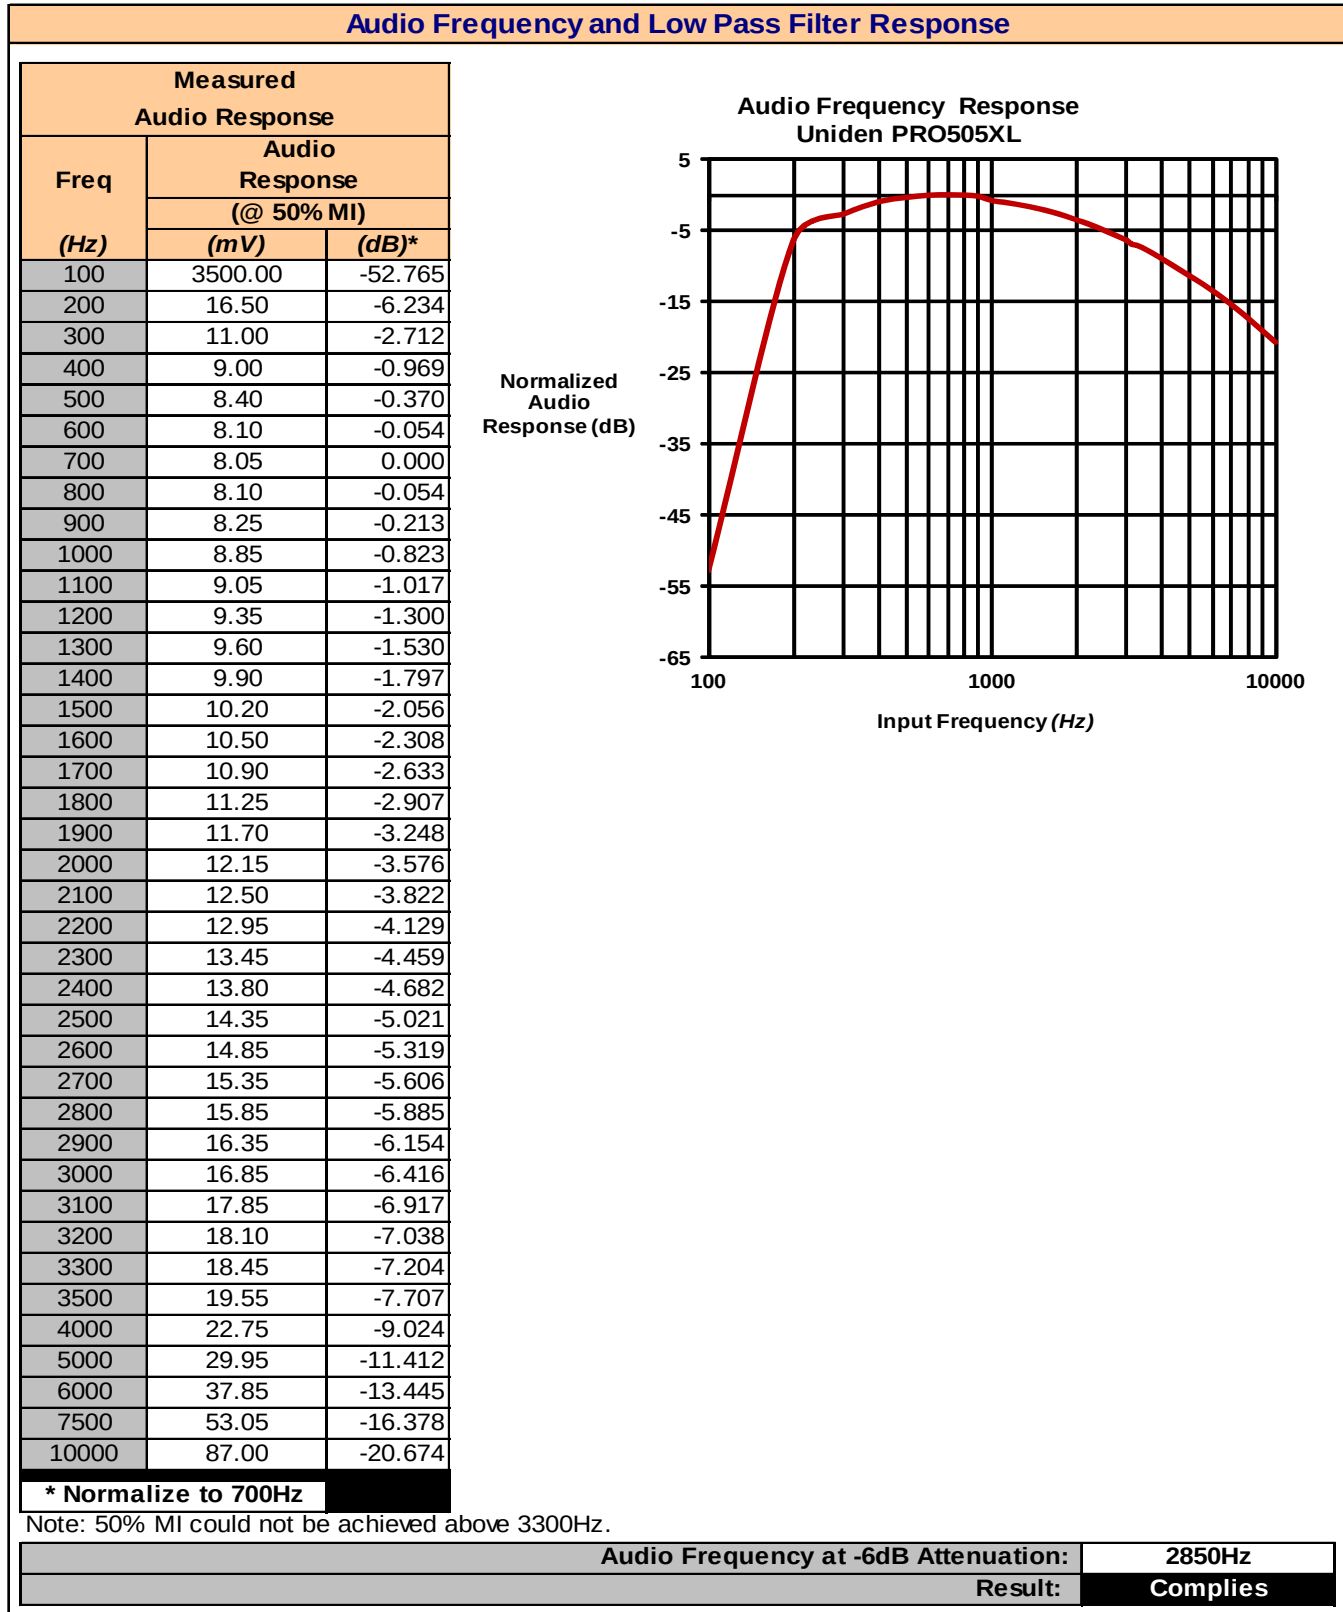

Plot 8.2 – Modulation Limiting Response

Modulation Limiting Response

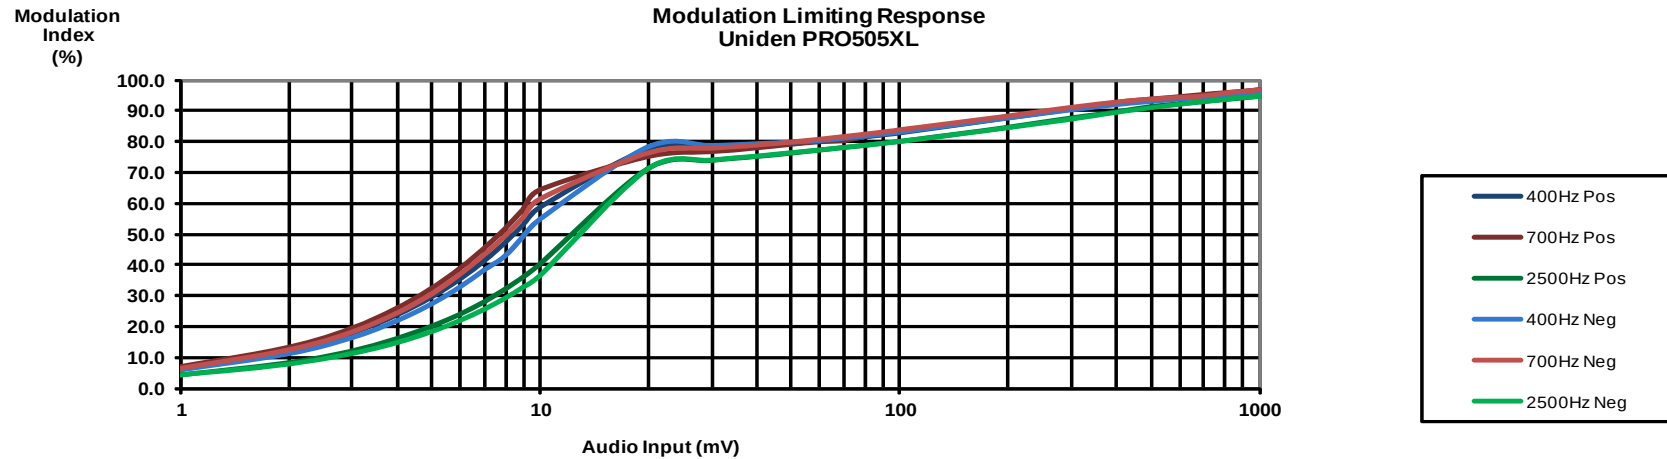

Measured Modulation Response [Modulation Index (%)]

Freq (Hz)	Audio Input (mV)																												
	1	2	3	4	5	6	7	8	9	10	20	30	40	50	60	70	80	90	100	200	300	400	500	600	700	800	900	1000	Deviation
400	6.3	12.0	17.8	23.6	29.4	35.3	41.2	47.0	52.9	58.5	77.5	77.8	78.5	79.1	80.0	80.5	81.3	82.0	82.6	87.5	90.3	92.3	93.3	94.0	94.8	95.5	96.0	96.6	Positive
700	6.9	13.2	19.4	25.9	32.3	38.8	45.3	51.6	58.0	64.2	75.0	76.5	77.8	78.9	79.8	80.1	81.5	82.2	83.0	87.8	90.5	92.5	93.6	94.4	95.1	95.7	96.1	96.6	
2500	4.5	8.5	12.3	16.3	20.3	24.2	28.2	32.3	36.3	40.4	71.4	74.0	75.3	76.4	77.4	78.2	78.9	79.6	80.2	84.8	87.8	89.8	91.5	92.4	93.1	93.8	94.3	94.8	
400	6.0	11.3	16.5	22.0	27.5	33.0	38.5	43.0	49.5	55.0	78.5	78.9	79.5	80.0	80.5	81.3	82.0	82.6	83.3	87.9	90.5	92.2	93.3	94.0	94.6	95.3	95.8	96.5	Negative
700	6.5	12.5	18.3	24.5	30.6	37.1	43.4	49.5	55.6	61.5	76.5	78.0	79.0	80.0	81.0	81.8	82.6	83.3	84.0	88.5	91.3	93.0	94.0	94.5	95.0	96.0	96.5	97.0	
2500	4.2	7.7	11.2	14.7	18.3	21.9	25.5	29.1	32.8	36.4	71.2	74.0	75.3	76.4	77.3	78.1	78.8	79.5	80.0	84.5	87.3	89.5	91.0	92.2	93.0	93.7	94.3	94.7	
Audio Frequency @ Maximum Deviation:																			700Hz										
Audio Input @ Maximum Deviation:																			1000mV										
Audio Input @ 0dB Reference:																			8.5mV										
Audio Input @ 40dB above 0dB Reference:																			805mV										
Maximum Measured Modulation Index:																			97%										
Result:																			Complies										

9.0 OCCUPIED BANDWIDTH AND EMISSION MASKS

Test Conditions

Normative Reference	FCC 47 CFR §2.1049, §95.973, RSS-236
----------------------------	---

Limits

47 CFR §95.973	Each CBRS transmitter type must be designed such that the occupied bandwidth does not exceed the authorized bandwidth for the emission type under test. (a) AM. The authorized bandwidth for emission type A3E is 8 kHz.
RSS-236 5.3.2	The authorized bandwidth for emission type A1D or A3E is 8 kHz.
47 CFR §95.979	Each CBRS transmitter type must be designed to comply with the applicable unwanted emissions limits in this section. (a) Attenuation requirements. The power of unwanted emissions must be attenuated below the transmitter output power in Watts (P) as specified in the applicable paragraphs listed in the following table: For A3E (1), (3), (5), (6) (1) 25 dB (decibels) in the frequency band 4 kHz to 8 kHz removed from the channel center frequency; (3) 35 dB in the frequency band 8 kHz to 20 kHz removed from the channel center frequency; (5) $53 + 10 \log(P)$ dB in any frequency band removed from the channel center frequency by more than 250% of the authorized bandwidth. (6) 60 dB in any frequency band centered on a harmonic (i.e., an integer multiple of two or more times) of the carrier frequency.
RSS-236 4.4.4	For A1D and A3E: _ At least 25 dB on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth. _ At least 35 dB on any frequency removed from the center of the authorized bandwidth by more than 100% up to and including 250% of the authorized bandwidth. _ At least $53 + 10 \log_{10}(T)$ dB on any frequency removed from the center of the authorized bandwidth by more than 250%. _ At least 60 dB on any frequency twice or greater than twice the fundamental frequency.

Measurement Procedure

TIA 382 23.2 Transmitter Modulation Occupied Bandwidth


The transmitter is modulated by a sinusoidal audio signal applied to the microphone input jack. First, the frequency is adjusted to deliver 50% modulation at the highest audio response level (minimum applied audio level). Then the audio signal level is increased 16 dB and the audio frequency is readjusted to 2500 Hz. The analyzer is adjusted to display each of the discrete modulation sidebands and their respective harmonic products within +/- 50 kHz of the carrier frequency.

Test Setup

Appendix A


Figure A.1

Plot 9.1 – Occupied Bandwidth Channel 1

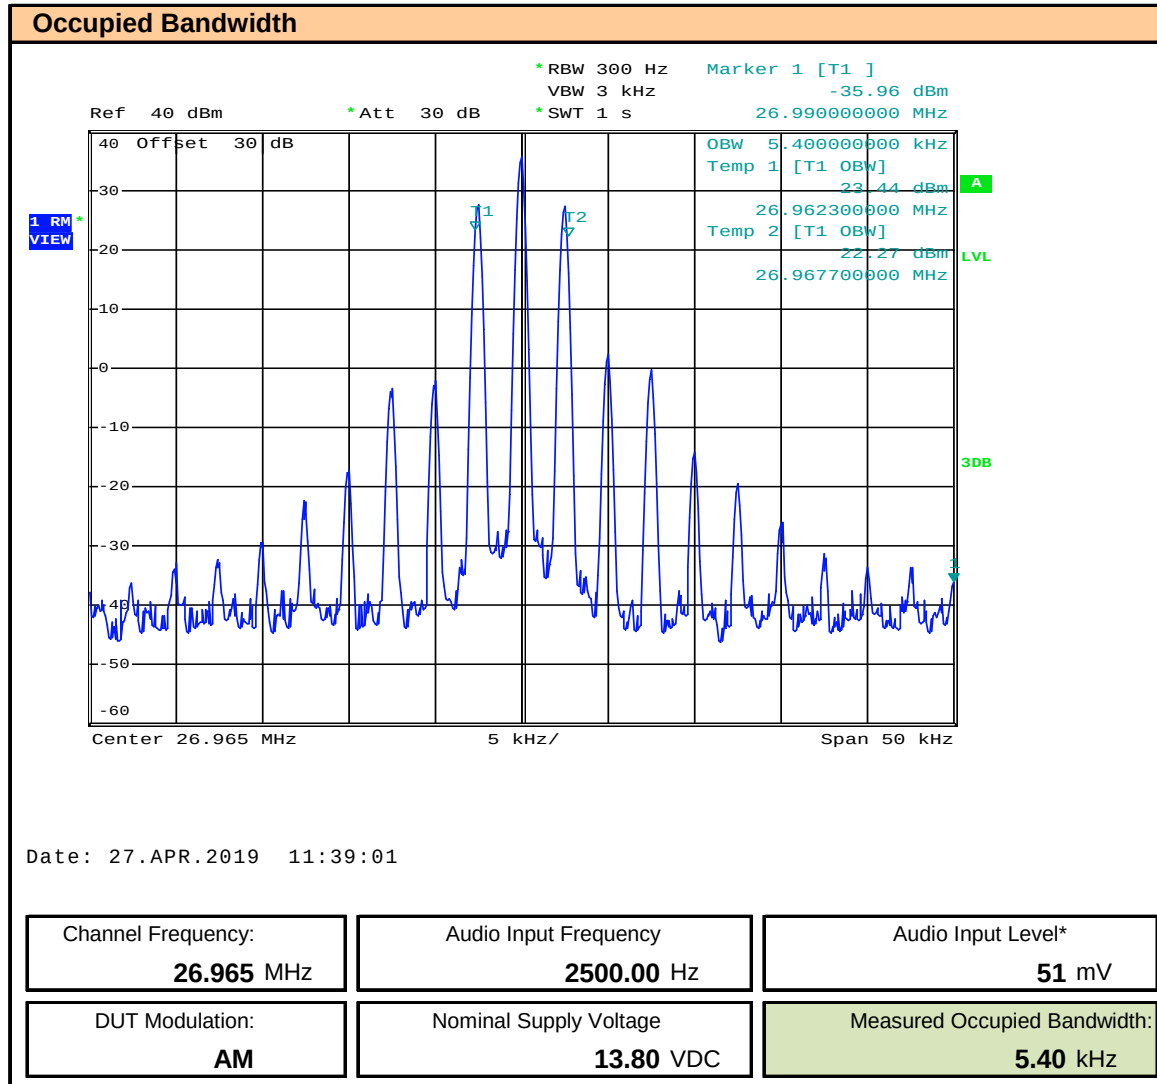


* Audio Input Level > 16dB of Level Required for 50% Modulation Index

Plot 9.2 – Occupied Bandwidth Channel 19

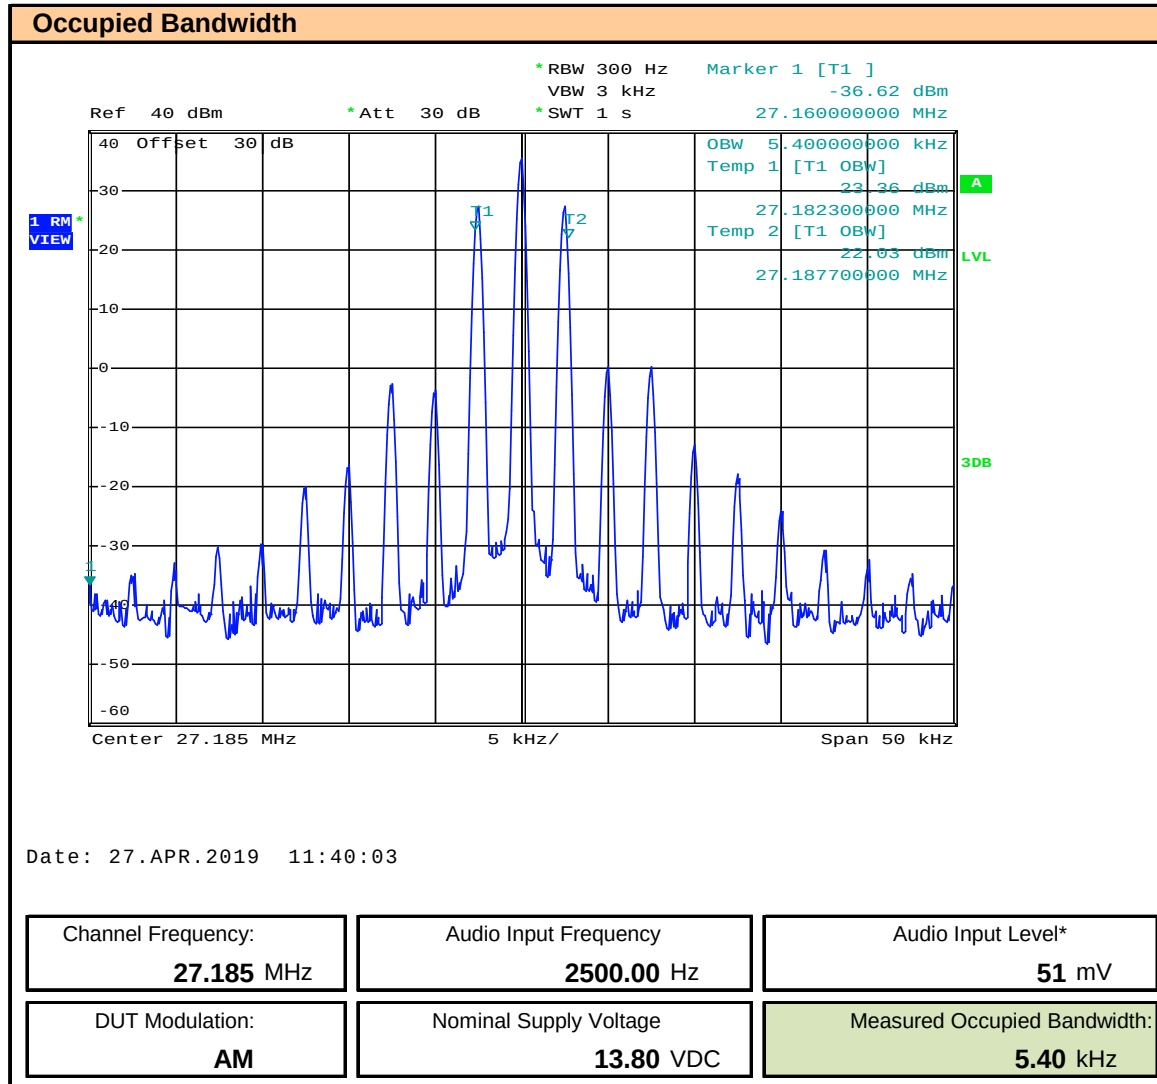


* Audio Input Level > 16dB of Level Required for 50% Modulation Index

Plot 9.3 – Occupied Bandwidth Channel 40

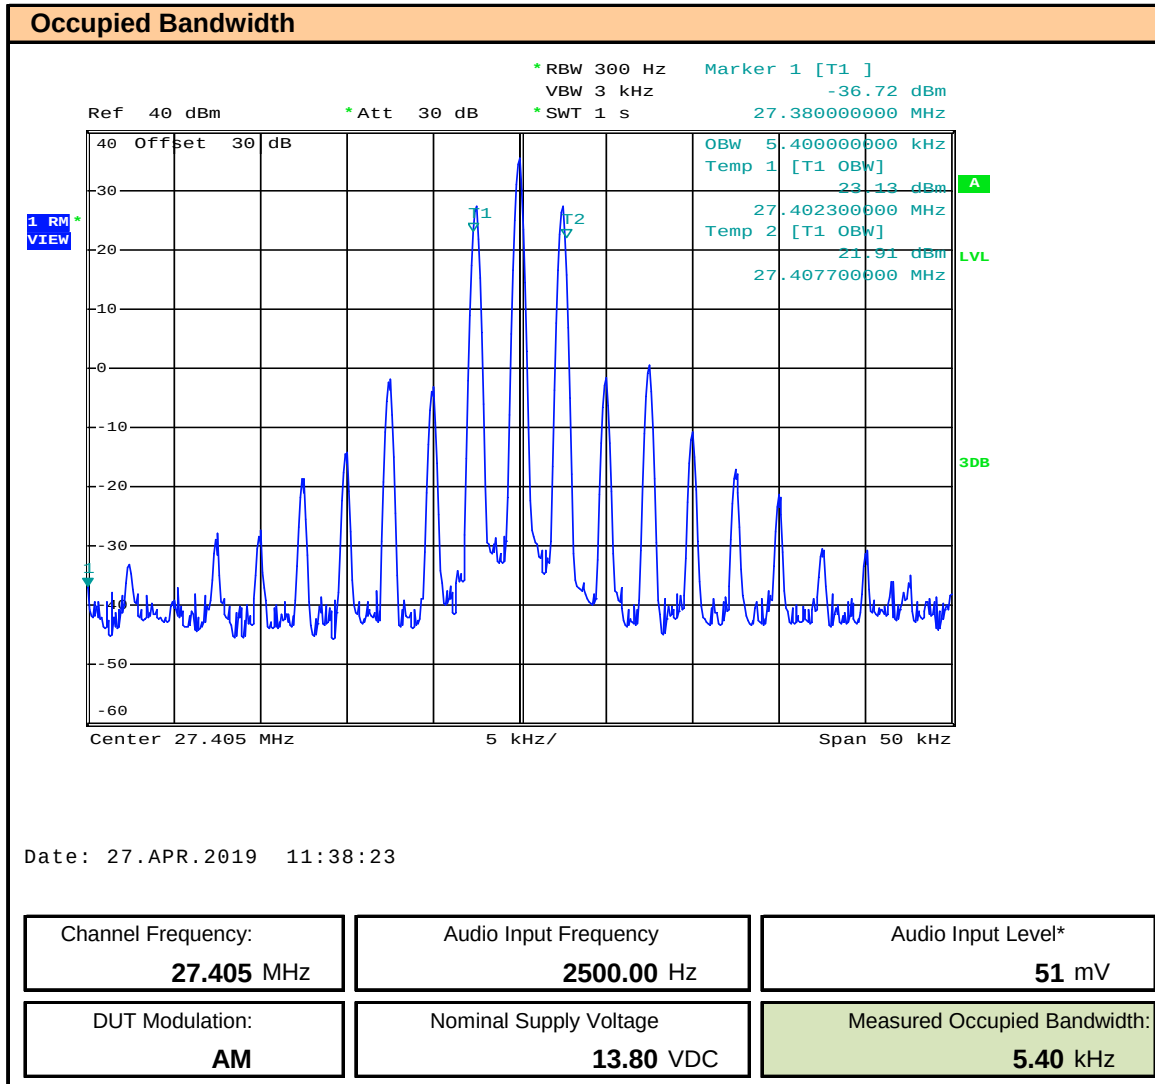


* Audio Input Level > 16dB of Level Required for 50% Modulation Index

Plot 9.4 – Emissions Mask Channel 1

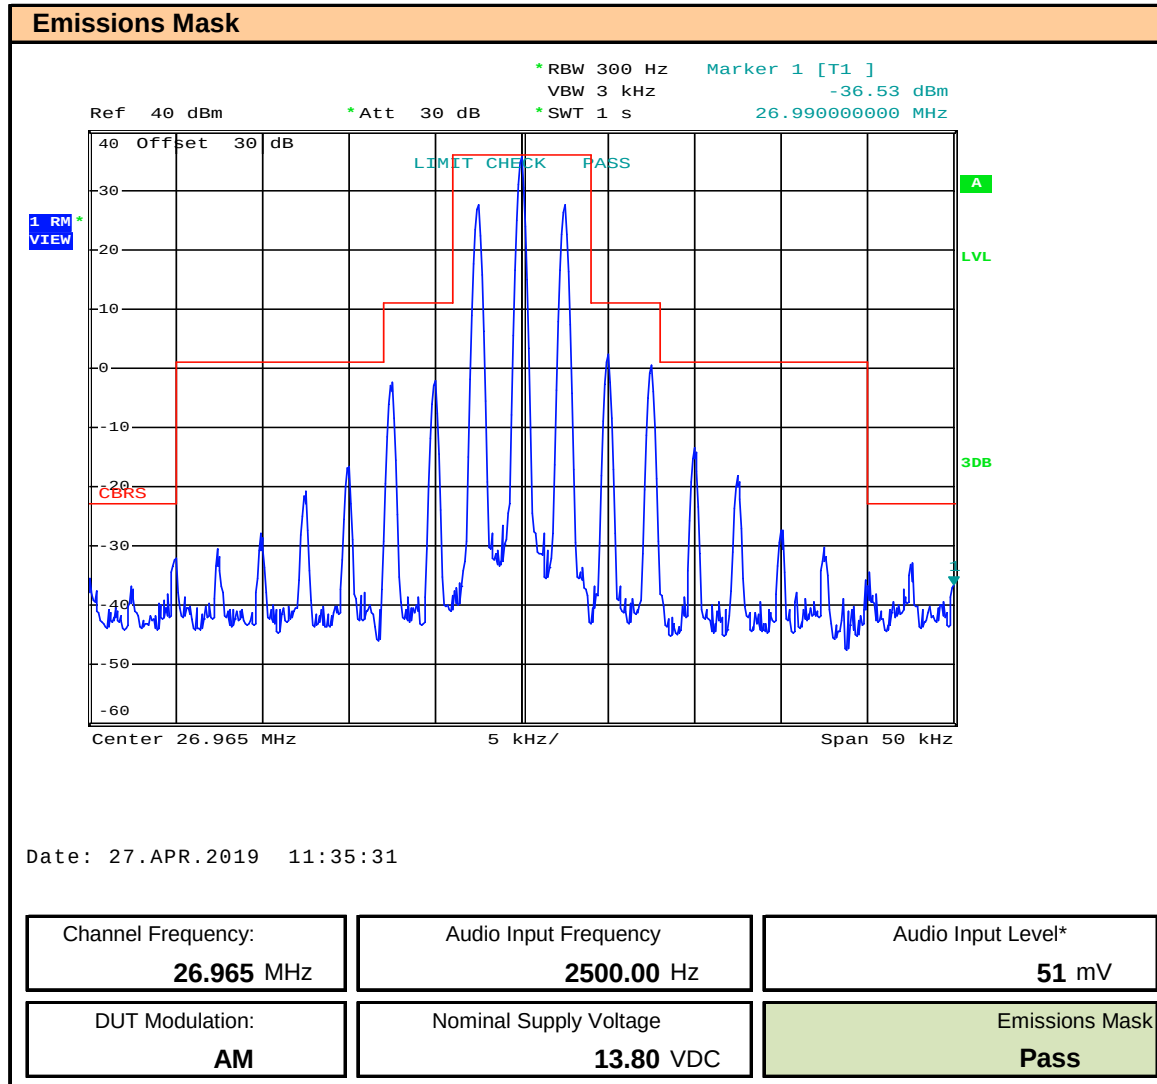


* Audio Input Level > 16dB of Level Required for 50% Modulation Index

Plot 9.5 – Emissions Mask Channel 19

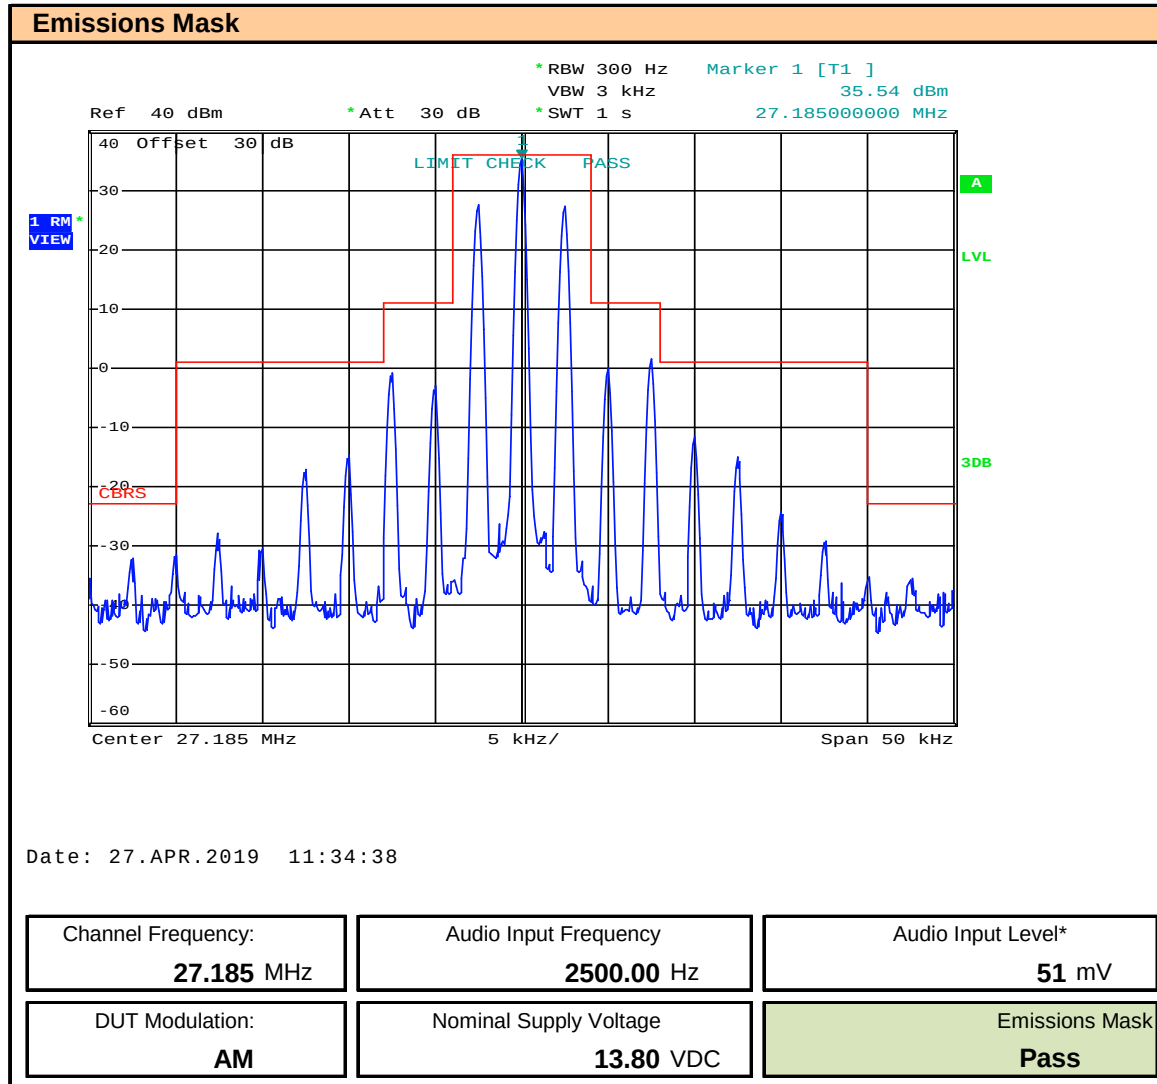

* Audio Input Level > 16dB of Level Required for 50% Modulation Index

Plot 9.6 – Emissions Mask Channel 40

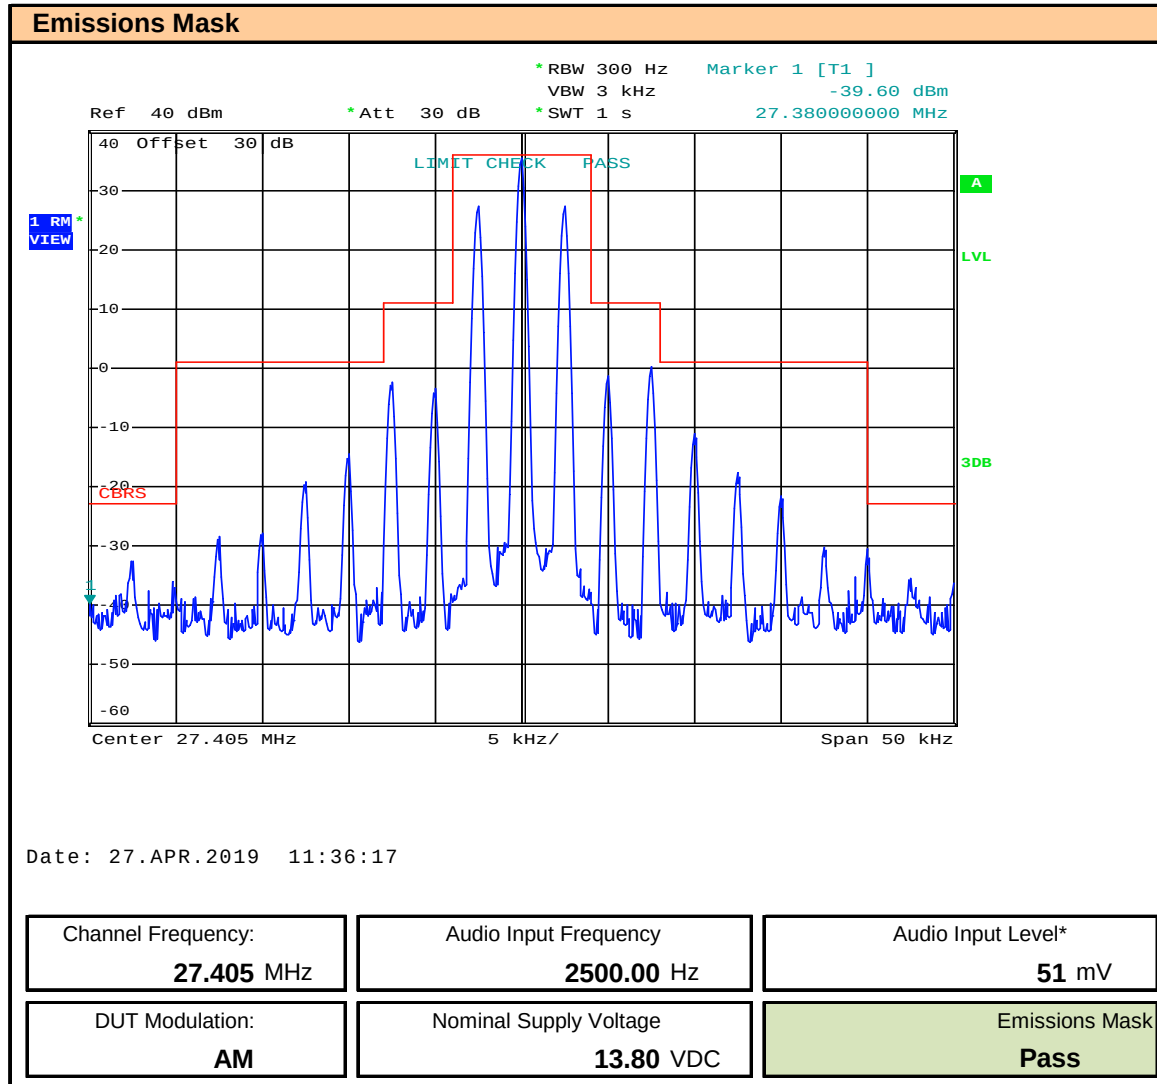

* Audio Input Level > 16dB of Level Required for 50% Modulation Index

Table 9.1 - Summary of Occupied Bandwidth and Emission Mask Results

Occupied Bandwidth Measurement Results							
Channel	Frequency (MHz)	DUT Modulation	Measured Occupied Bandwidth (kHz)	Authorized Bandwidth (kHz)	Margin (kHz)	Emission Mask	Emission Designator
1	26.965	AM	5.4	8.0	2.6	PASS	5K40A3E
19	27.185		5.4		2.6	PASS	5K40A3E
40	27.405		5.4		2.6	PASS	5K40A3E
Margin = Authorized BW - Measured BW							
Result:						Complies	
§95.971 CBRS emission types.							
Each CBRS transmitter type must be designed such that its capabilities are in compliance with the emission type rules in this section.							
(a) Permitted emission types. CBRS transmitter types may transmit only AM voice emission type A3E and SSB voice							
This device only transmits AM voice emission type A3E							
Result:						Complies	

10 CONDUCTED OUT OF BAND SPURIOUS EMISSIONS

Test Conditions

Normative Reference	FCC 47 CFR §95.979, RSS-236
----------------------------	-----------------------------

Limits

47 CFR §95.979	Each CBRS transmitter type must be designed to comply with the applicable unwanted emissions limits in this section. (a) Attenuation requirements. The power of unwanted emissions must be attenuated below the transmitter output power in Watts (P) as specified in the applicable paragraphs listed in the following table: For A3E (1), (3), (5), (6) (1) 25 dB (decibels) in the frequency band 4 kHz to 8 kHz removed from the channel center frequency; (3) 35 dB in the frequency band 8 kHz to 20 kHz removed from the channel center frequency; (5) $53 + 10 \log (P)$ dB in any frequency band removed from the channel center frequency by more than 250% of the authorized bandwidth. (6) 60 dB in any frequency band centered on a harmonic (i.e., an integer multiple of two or more times) of the carrier frequency.
RSS-236 4.4.4	For A1D and A3E: _ At least 25 dB on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth. _ At least 35 dB on any frequency removed from the center of the authorized bandwidth by more than 100% up to and including 250% of the authorized bandwidth. _ At least $53 + 10 \log_{10} (T)$ dB on any frequency removed from the center of the authorized bandwidth by more than 250%. _ At least 60 dB on any frequency twice or greater than twice the fundamental frequency.


Measurement Procedure

TIA 382 21.2 Transmitter Conducted Spurious and Harmonic Emissions


The transmitter RF output shall be connected to the standard nonradiating output load. The output shall be sampled and displayed using spectrum analysis techniques. 2500 Hz modulation shall be applied at a level 16 dB above that required to produce 50% modulation at the frequency of maximum response. The sampled output shall be analyzed from the lowest frequency generated in the equipment to the 10th harmonic of the fundamental signal and the levels of all spurious outputs attenuated not more than 20 dB below the maximum required attenuation shall be recorded.

Test Setup	Appendix A	A.1
-------------------	------------	-----


Plot 10.1 – Conducted Out of Band Emissions, 30MHz – 300MHz, Channel 1

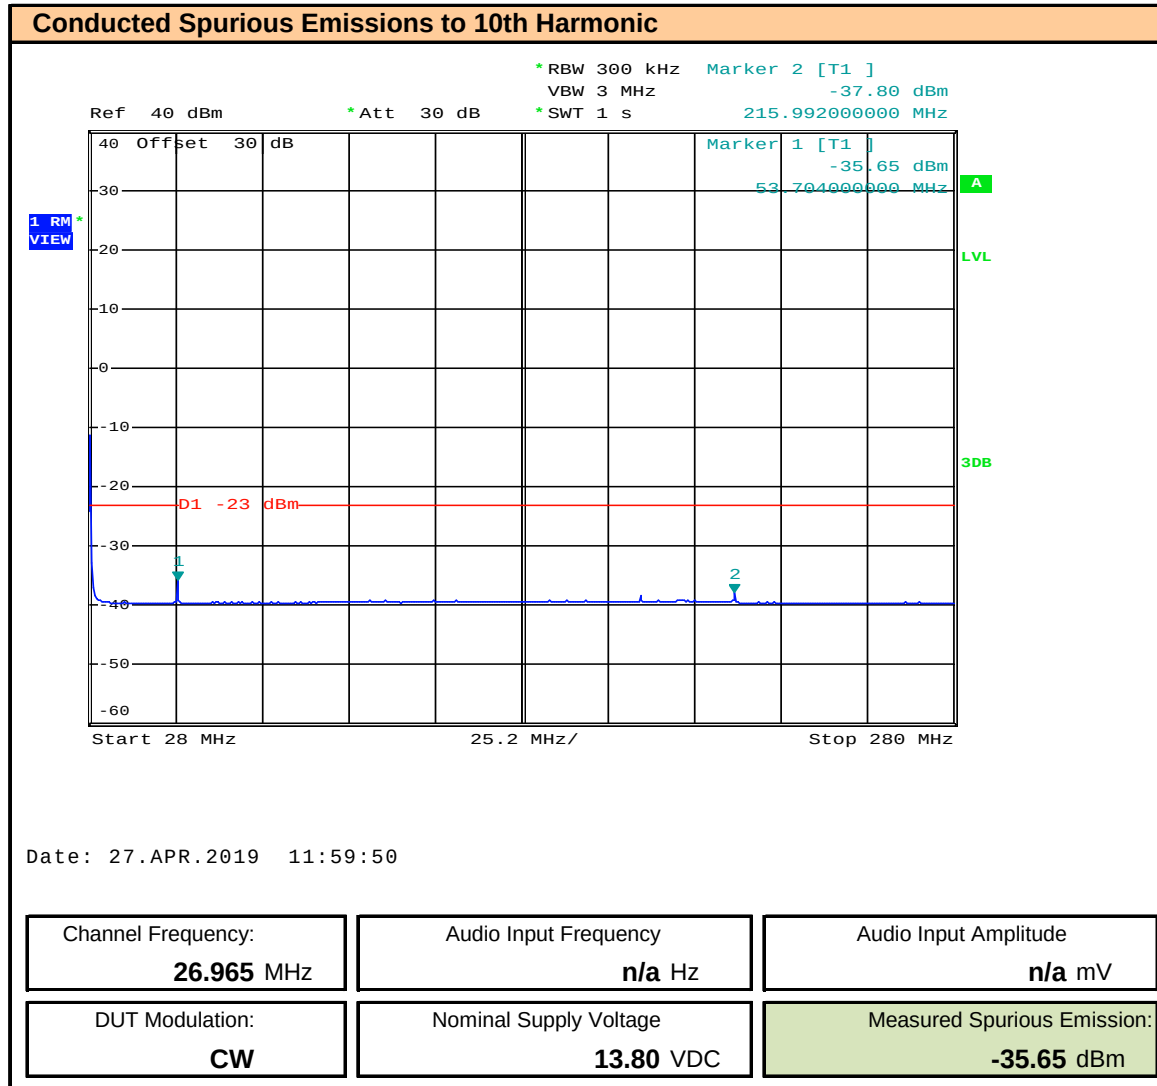


Plot 10.2 – Conducted Out of Band Emissions, Channel 1, 2nd Harmonic

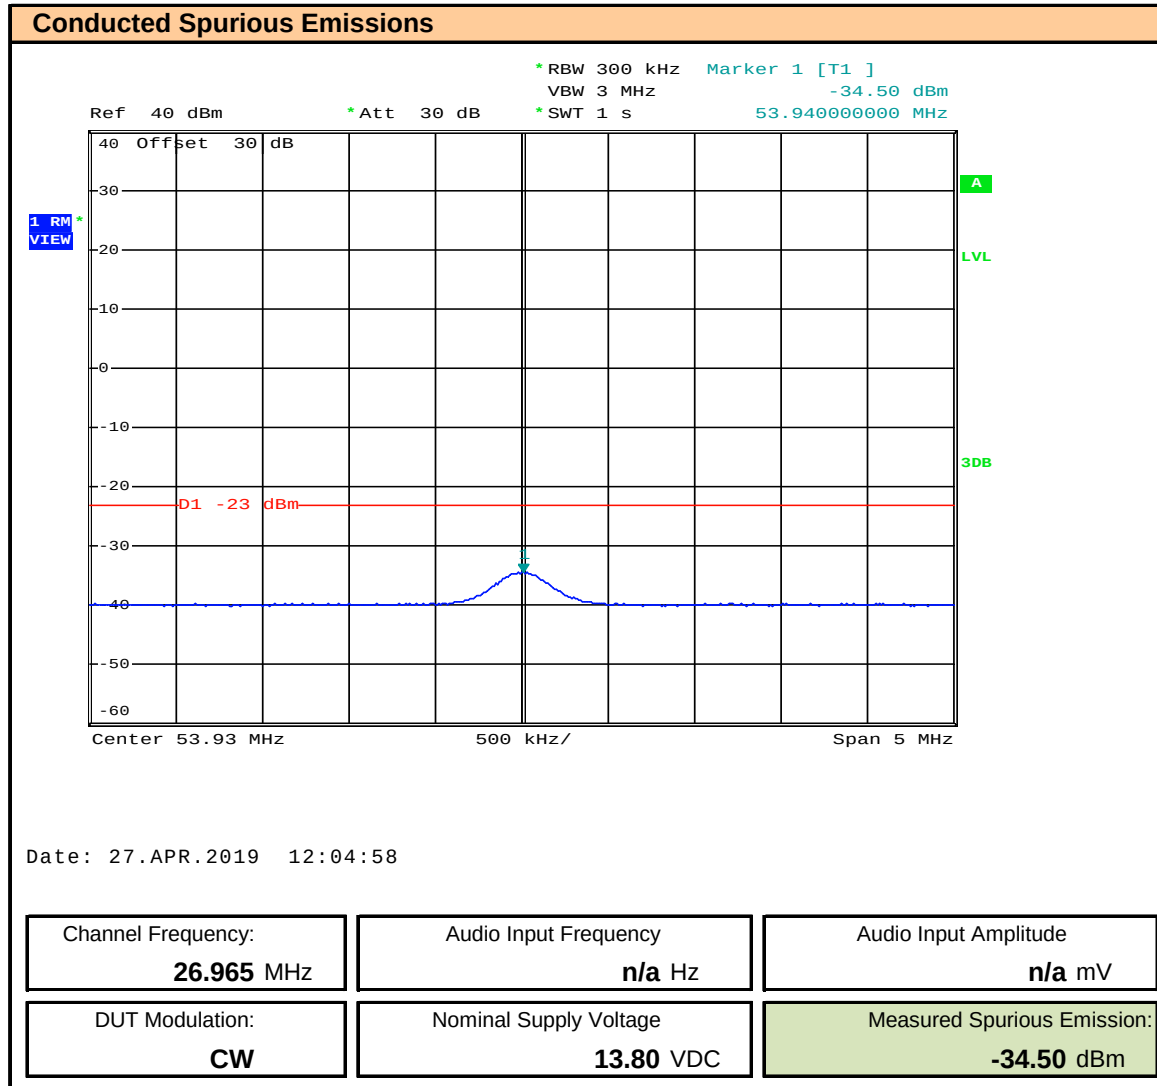


Plot 10.3 – Conducted Out of Band Emissions, Channel 1, 8th Harmonic

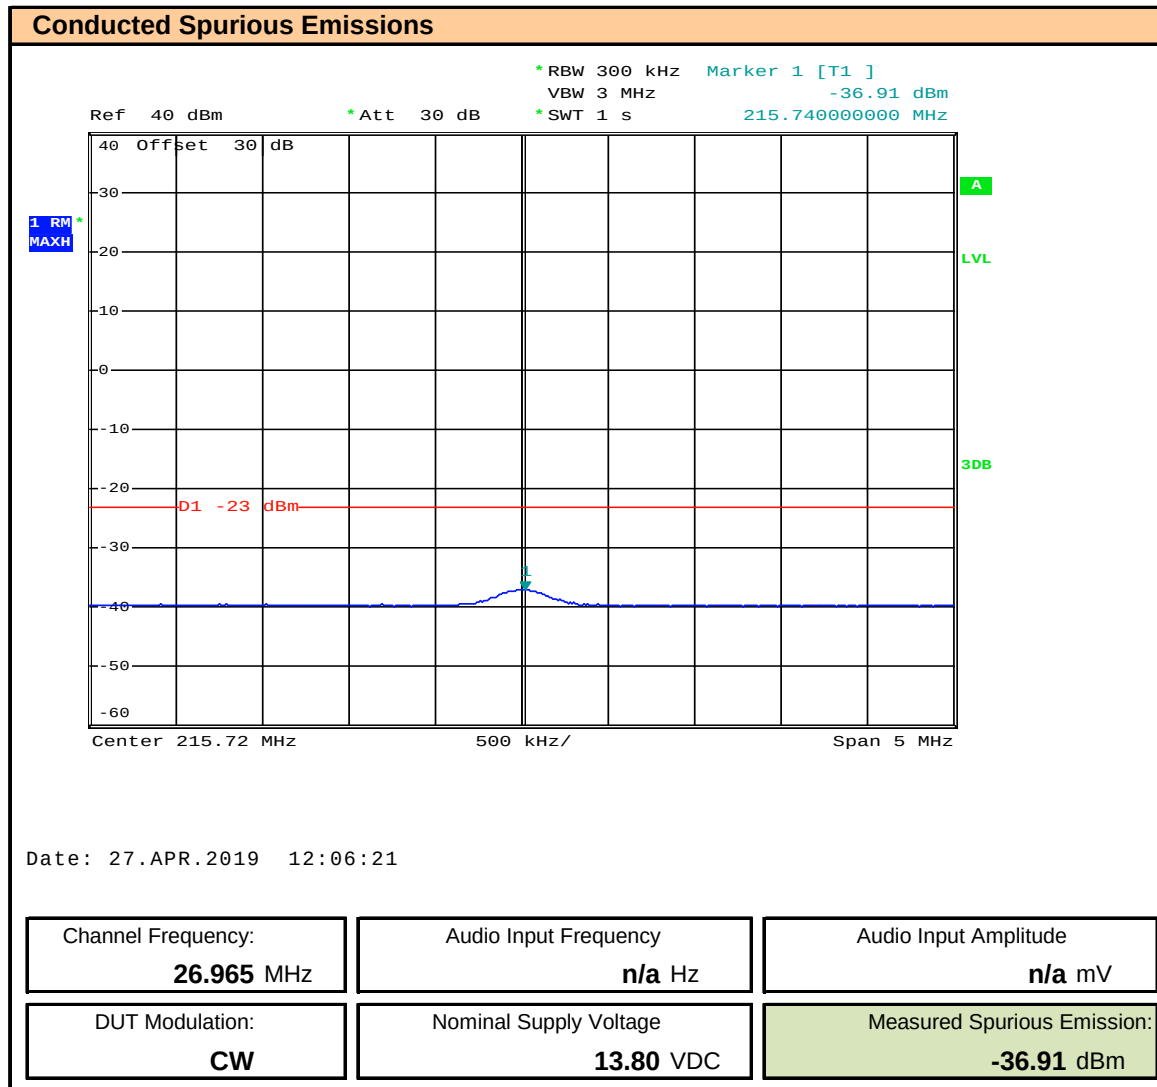


Plot 10.4 – Conducted Out of Band Emissions, 30MHz – 300MHz, Channel 19

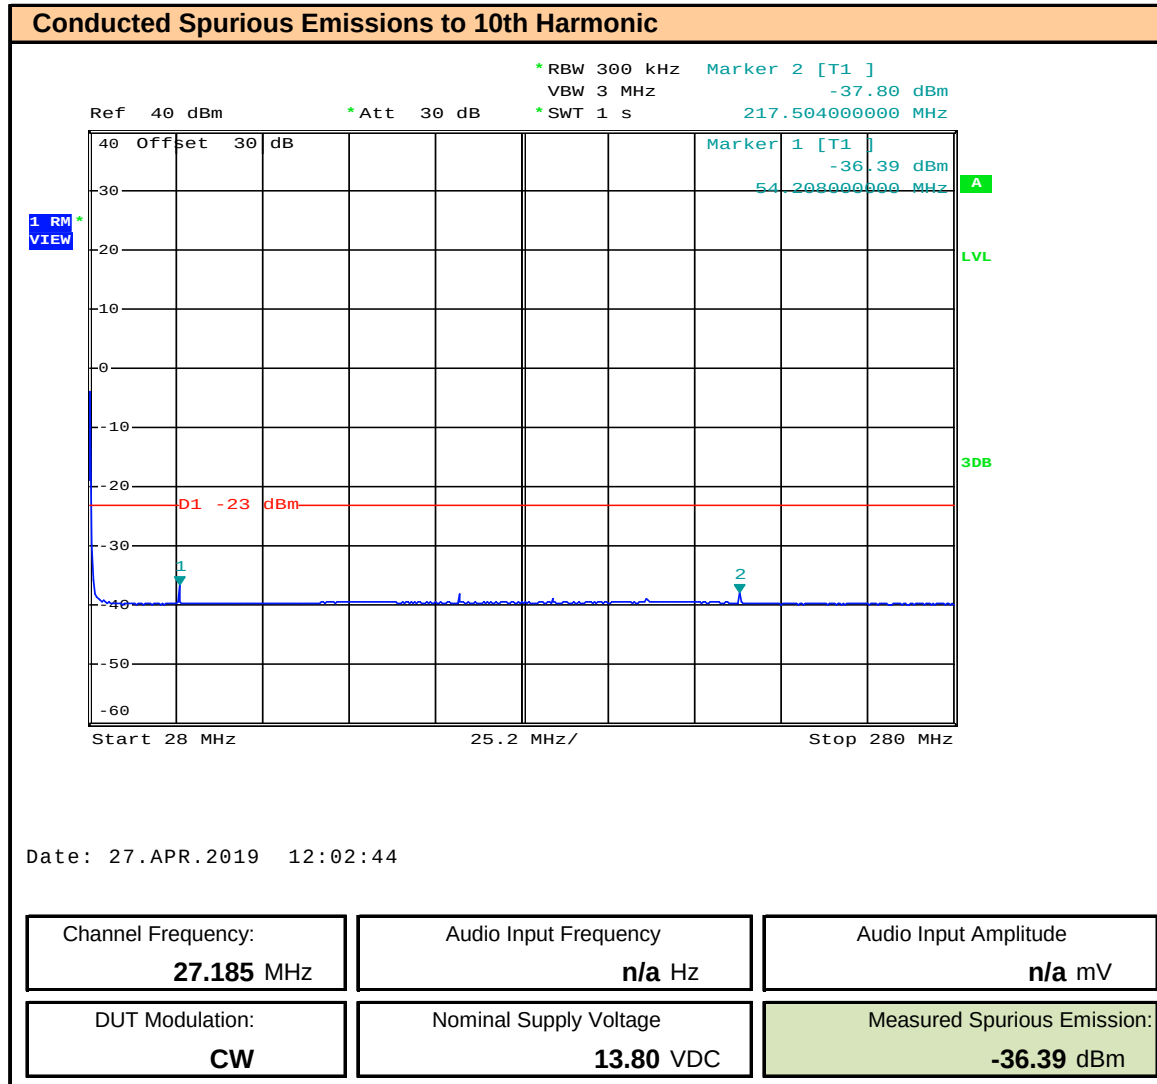


Plot 10.5 – Conducted Out of Band Emissions, Channel 19, 2nd Harmonic

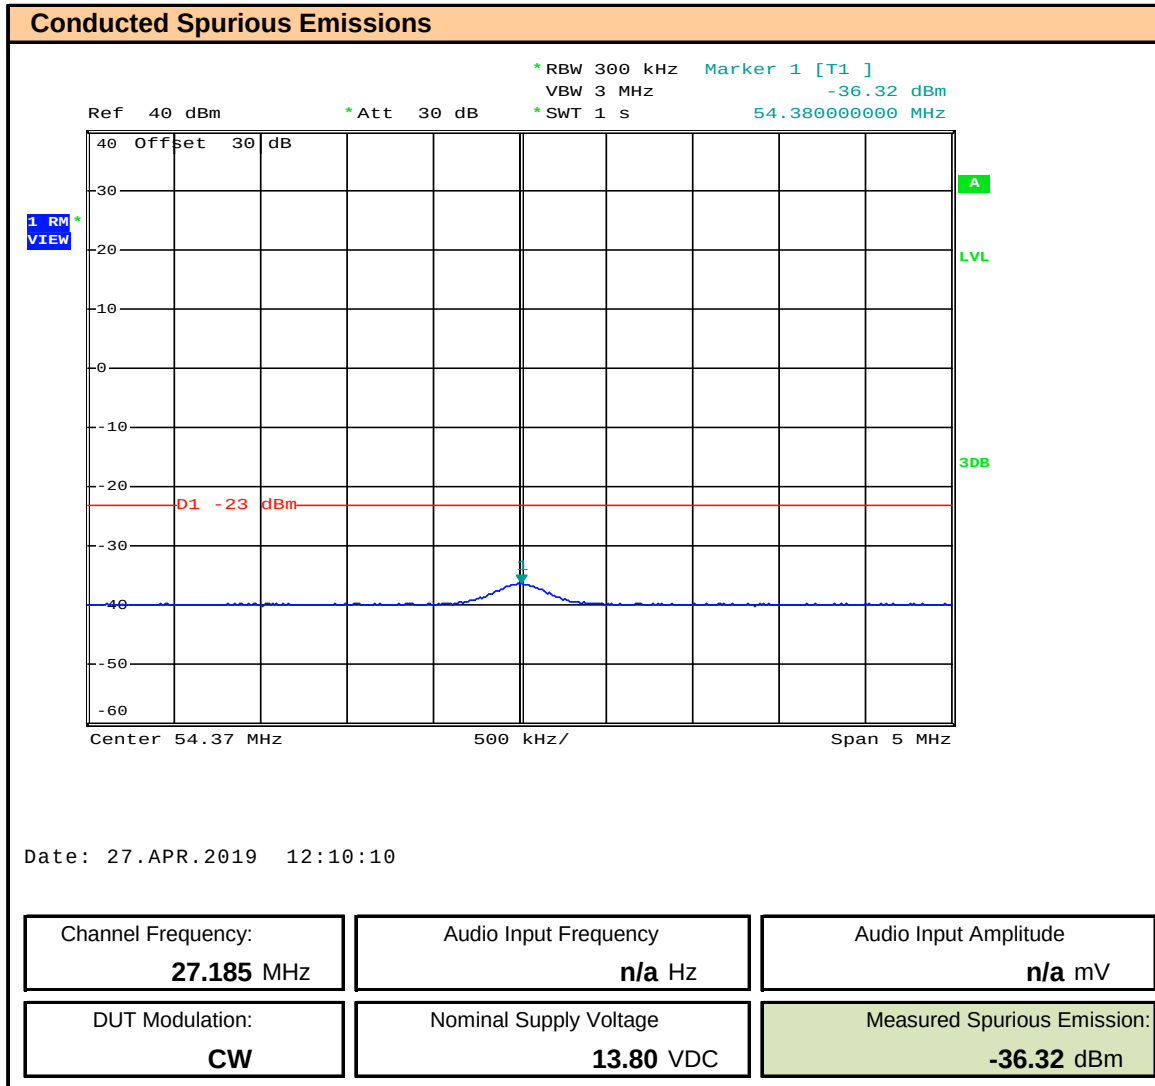


Plot 10.6 – Conducted Out of Band Emissions, Channel 19, 8th Harmonic

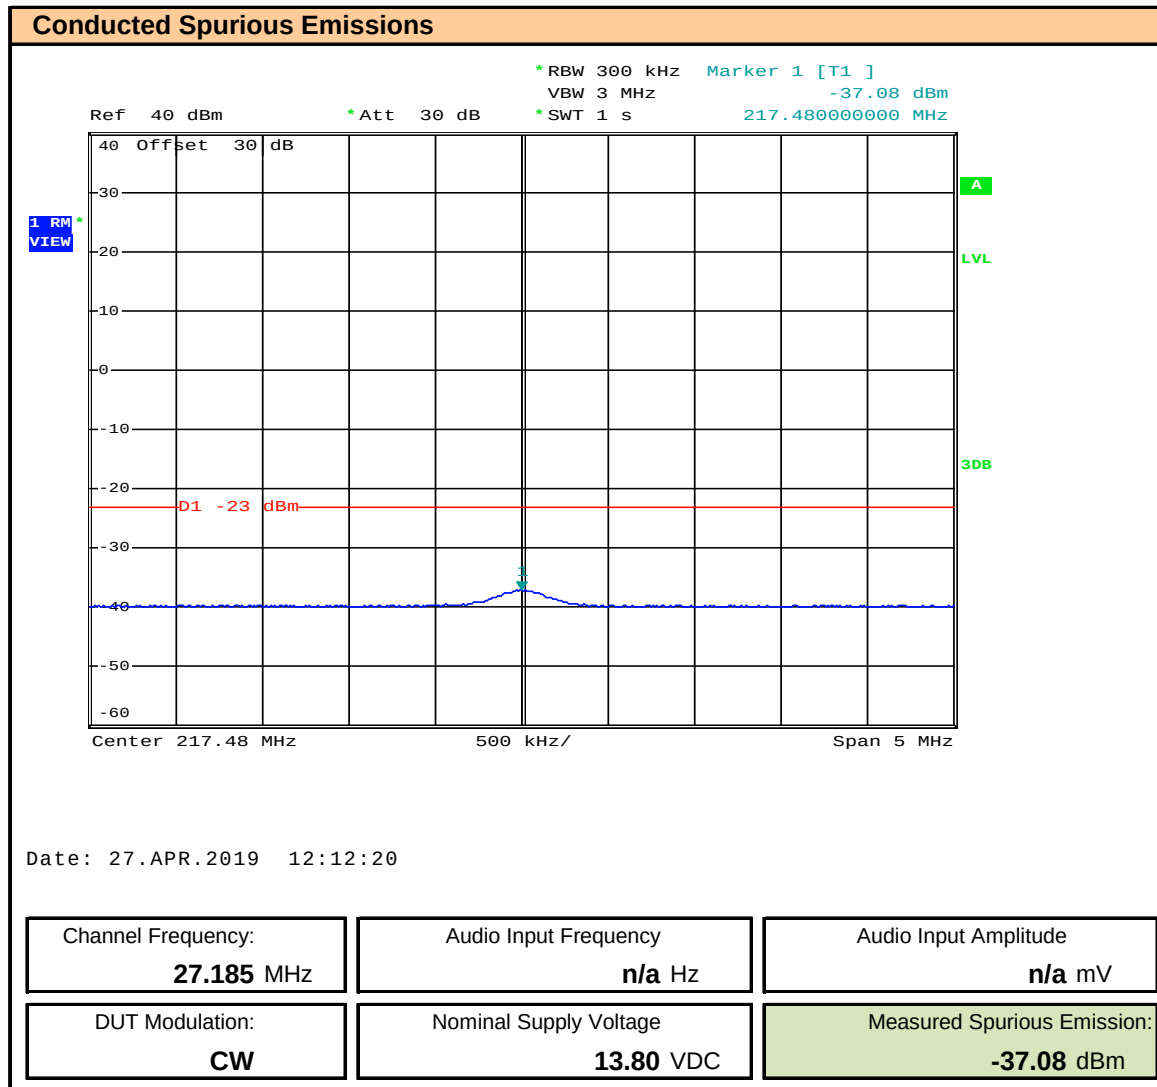

Plot 10.7 – Conducted Out of Band Emissions, 30MHz – 300MHz, Channel 40

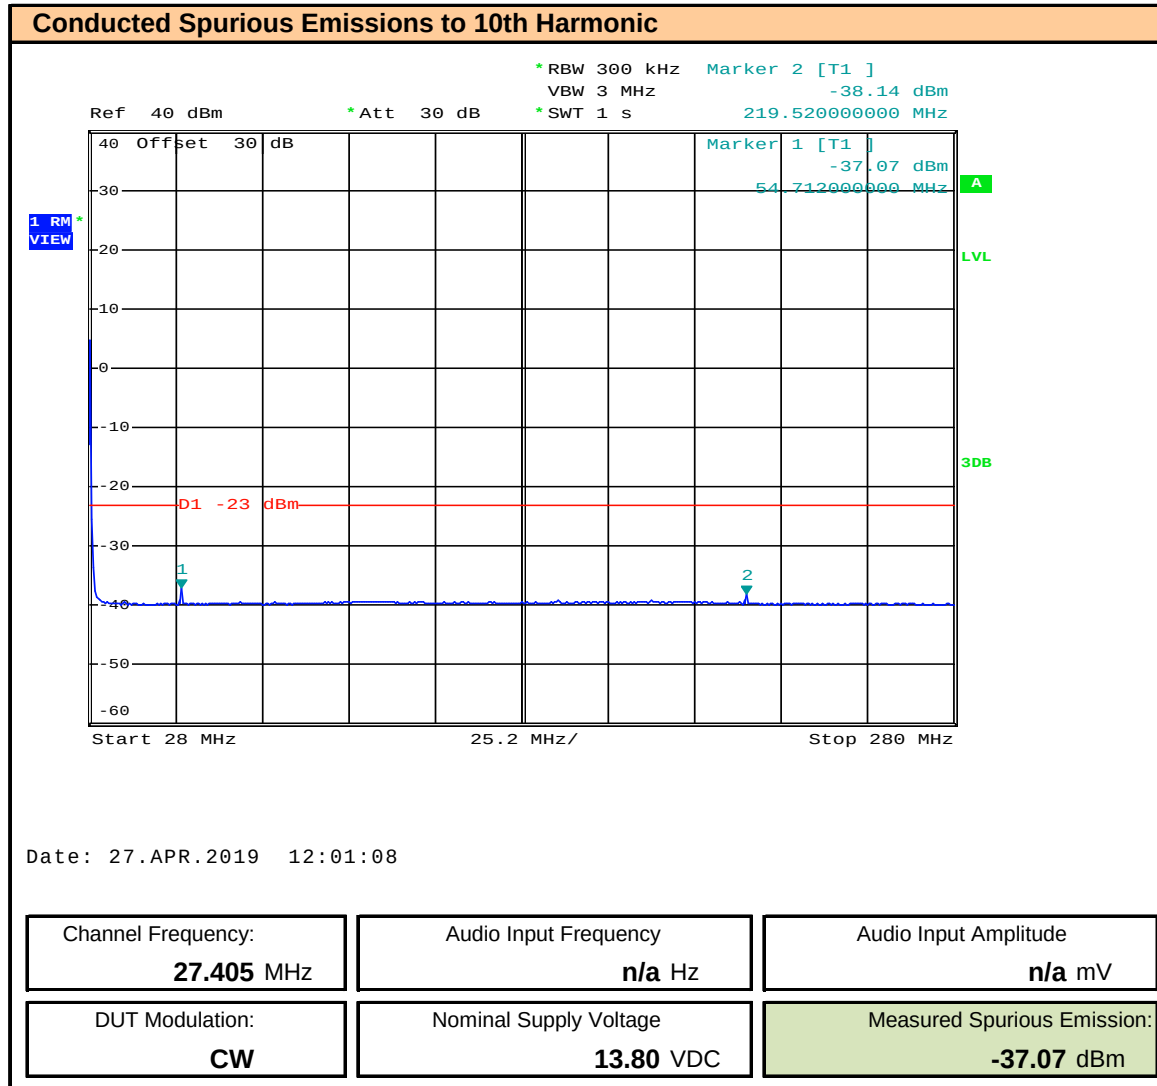

Plot 10.8 – Conducted Out of Band Emissions, Channel 40, 2nd Harmonic

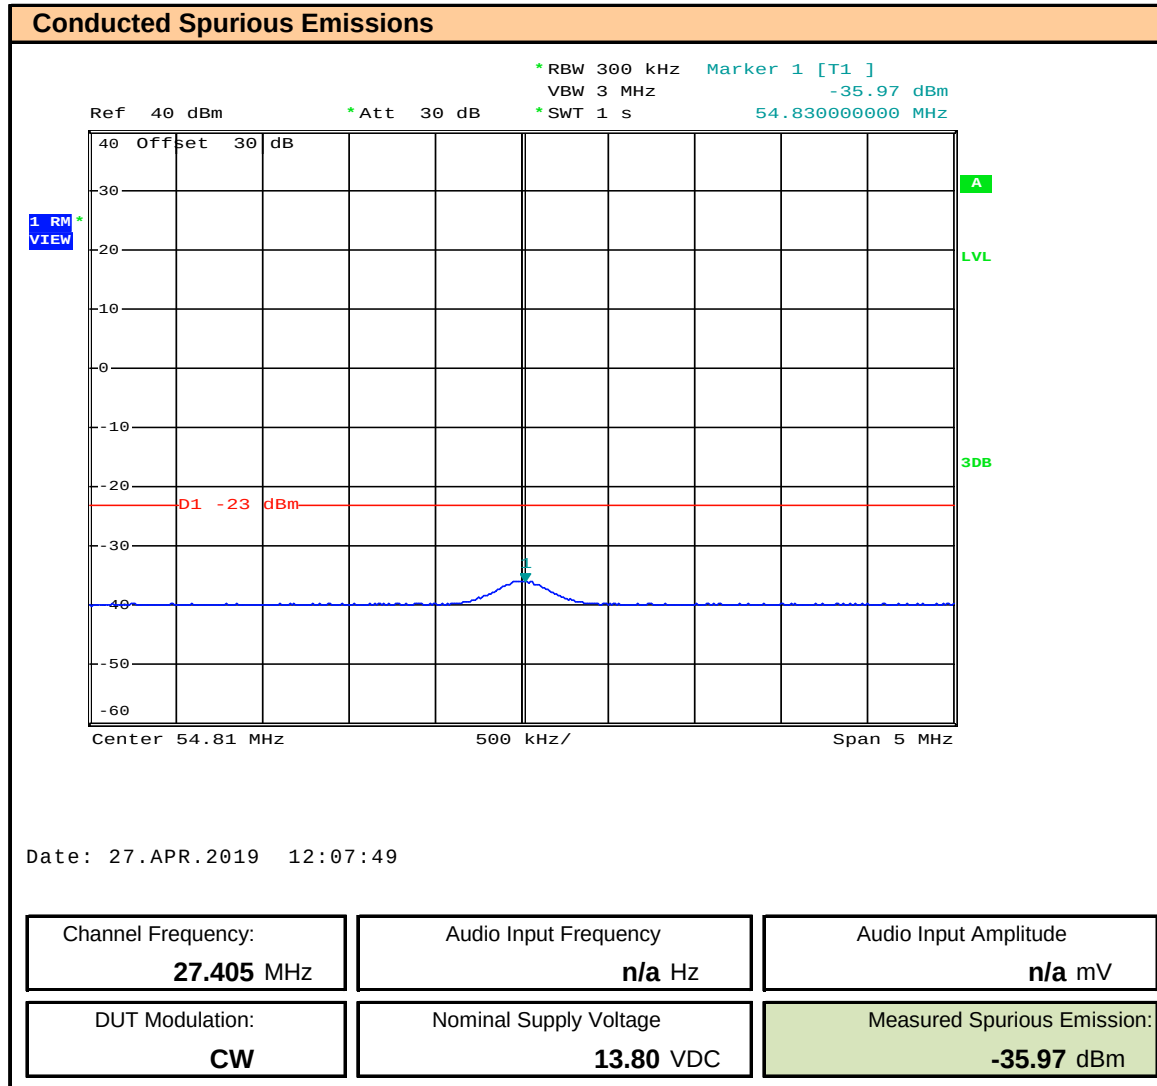

Plot 10.9 – Conducted Out of Band Emissions, Channel 40, 8th Harmonic

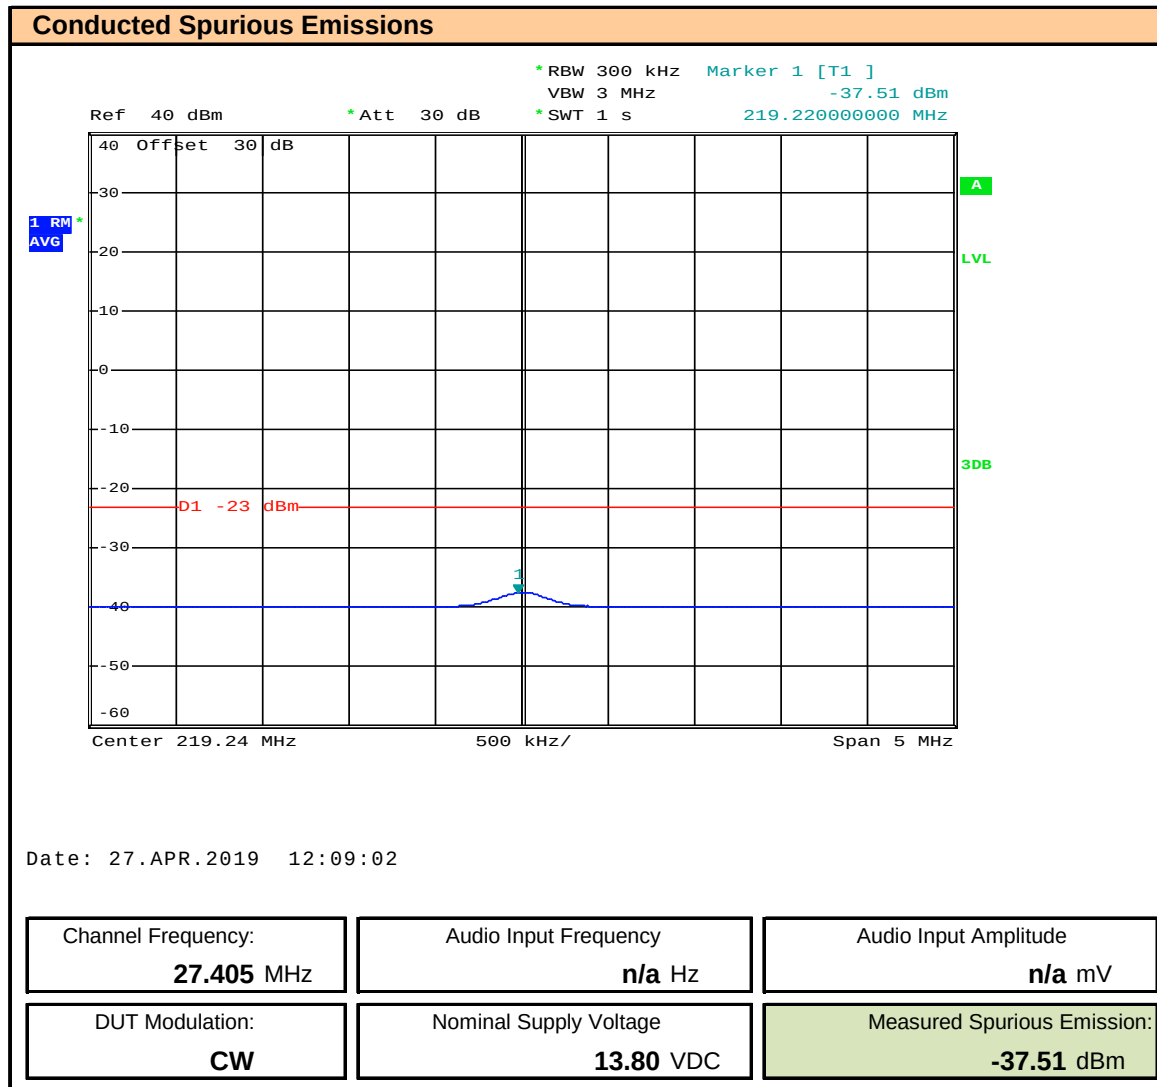


Table 10.1 – Summary of Conducted Out of Band Emissions

Conducted Spurious Emissions							
Channel Frequency (MHz)	Emission Frequency (MHz)	DUT Modulation	Fundamental Power [P] (dBm)	Out of Band Emission [P _E] (dBm)	Attenuation [dB]	Limit (dB)	Margin (dB)
26.965	53.93	CW	36.0	-31.5	67.5	60.0	7.51
	215.74		36.0	-36.9	72.9		12.92
27.185	54.38		35.9	-36.3	72.2		12.21
	217.48		35.9	-37.1	73.0		12.97
27.405	54.83		35.9	-36.0	71.8		11.82
	219.22		35.9	-37.5	73.4		13.36
Attenuation = P - P _E							
Margin = Limit - Attenuation							
Result:						Complies	
All Spurious Emissions were evaluated to the 10th harmonic (280MHz). No other emissions were observed.							
Data for fundamental and spurious emissions presented using an RMS detector.							

11.0 RADIATED SPURIOUS EMISSIONS

Test Conditions

Normative Reference	FCC 47 CFR §95.979, RSS-236
----------------------------	-----------------------------

Limits

47 CFR §95.979	Each CBRS transmitter type must be designed to comply with the applicable unwanted emissions limits in this section. (a) Attenuation requirements. The power of unwanted emissions must be attenuated below the transmitter output power in Watts (P) as specified in the applicable paragraphs listed in the following table: For A3E (1), (3), (5), (6) (1) 25 dB (decibels) in the frequency band 4 kHz to 8 kHz removed from the channel center frequency; (3) 35 dB in the frequency band 8 kHz to 20 kHz removed from the channel center frequency; (5) $53 + 10 \log(P)$ dB in any frequency band removed from the channel center frequency by more than 250% of the authorized bandwidth. (6) 60 dB in any frequency band centered on a harmonic (i.e., an integer multiple of two or more times) of the carrier frequency.
RSS-236 4.4.4	For A1D and A3E: _ At least 25 dB on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth. _ At least 35 dB on any frequency removed from the center of the authorized bandwidth by more than 100% up to and including 250% of the authorized bandwidth. _ At least $53 + 10 \log_{10}(T)$ dB on any frequency removed from the center of the authorized bandwidth by more than 250%. _ At least 60 dB on any frequency twice or greater than twice the fundamental frequency.

Measurement Procedure


TIA 382 22.2 Transmitter Radiated Spurious and Harmonic Emissions

The transmitter shall be terminated in a nonradiating dummy load and shall be keyed but not modulated.


For each spurious frequency, raise and lower the receiver antenna to obtain a maximum reading on the FIM with the antenna at horizontal polarity. Then the turntable should be rotated to further increase this maximum reading. Repeat this procedure of raising and lowering the antenna and rotating the turntable until the highest possible signal has been obtained. The effect of the simulated accessory connections shall be noted, so that the measurement series producing the maximum radiation level can be recorded.

Test Setup	Appendix A	Figure A.3
-------------------	-------------------	-------------------


Plot 11.1 – Radiated Spurious Emissions Pre-Scan, 30MHz – 1000MHz, Horizontal

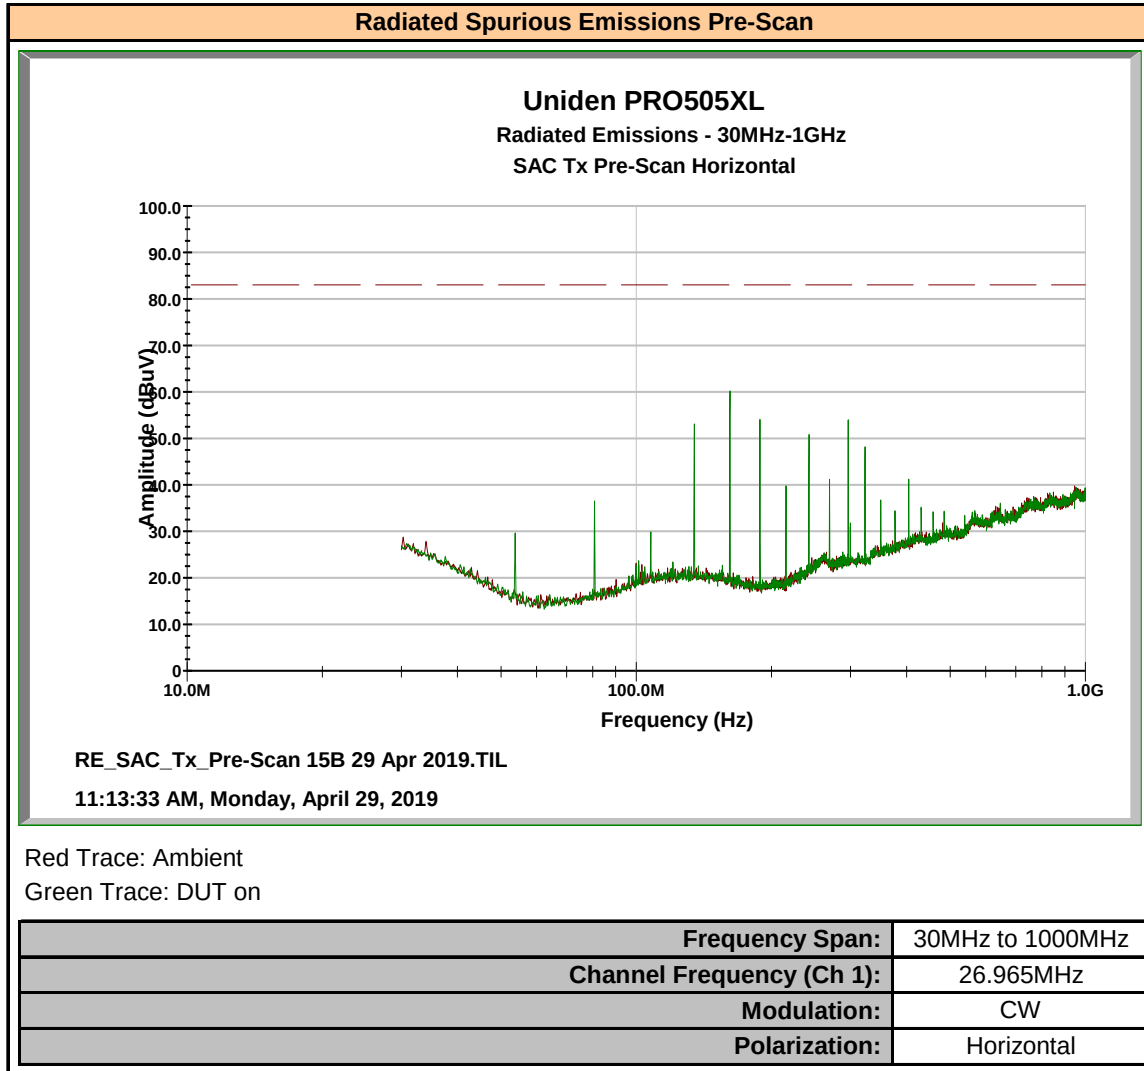


Plot 11.2 – Radiated Spurious Emissions Pre-Scan, 30MHz – 1000MHz, Vertical

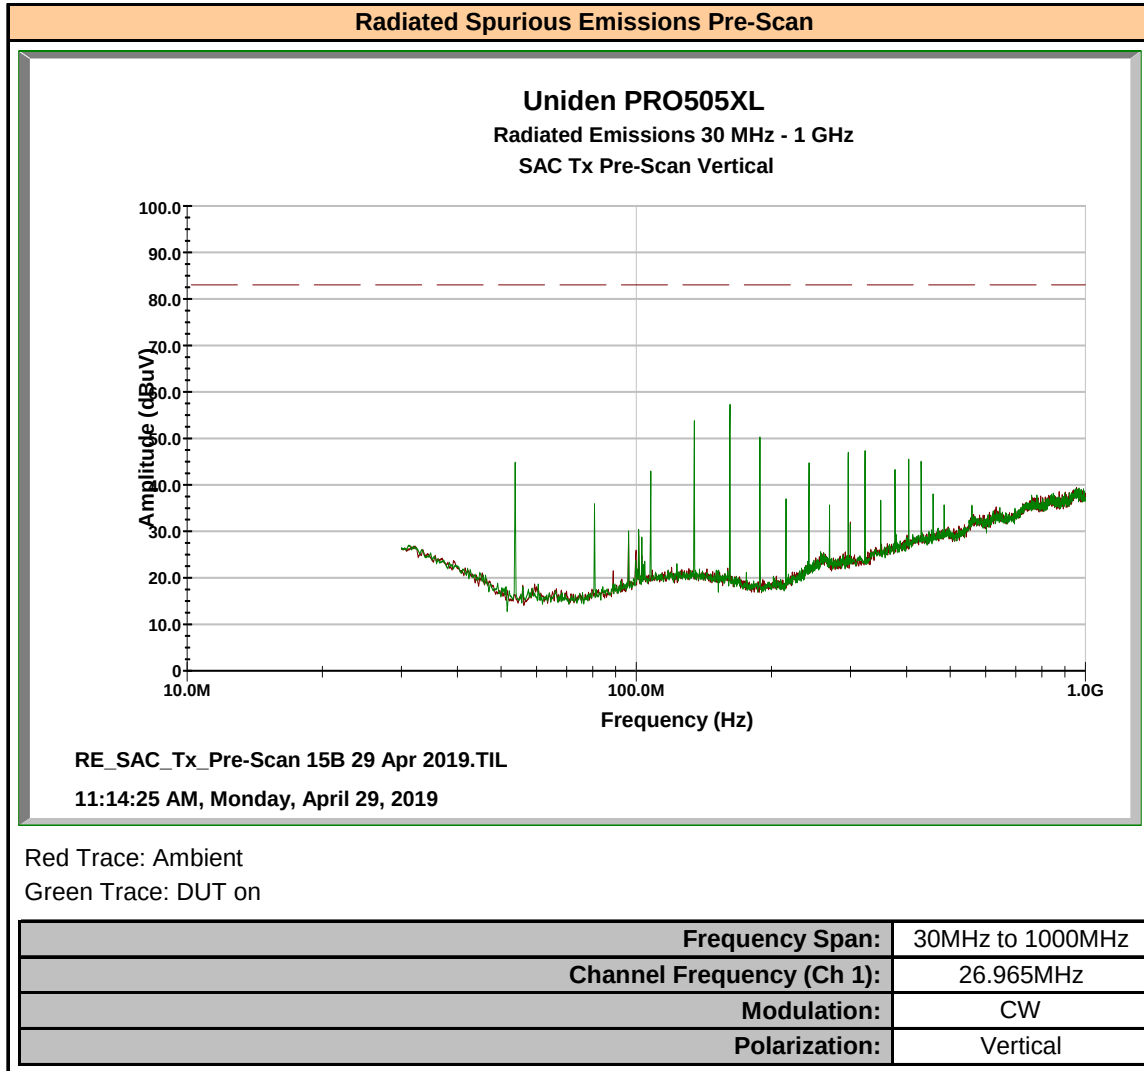


Plot 11.3 – Radiated Spurious Emissions OATS, 2nd Harmonic, Horizontal

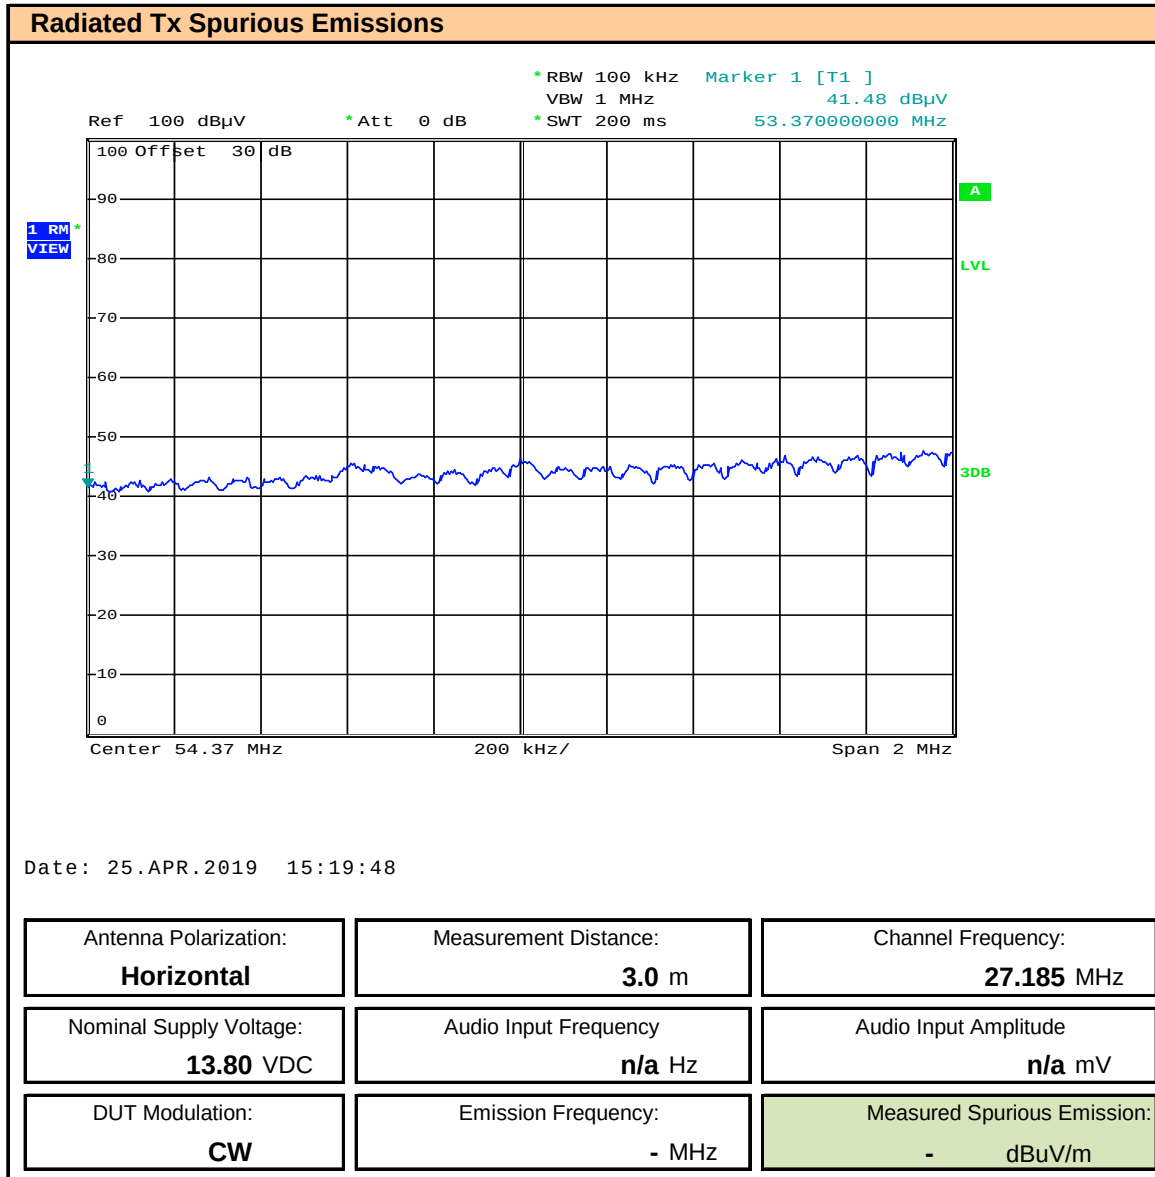


Plot 11.4 – Radiated Spurious Emissions OATS, 3rd Harmonic, Horizontal

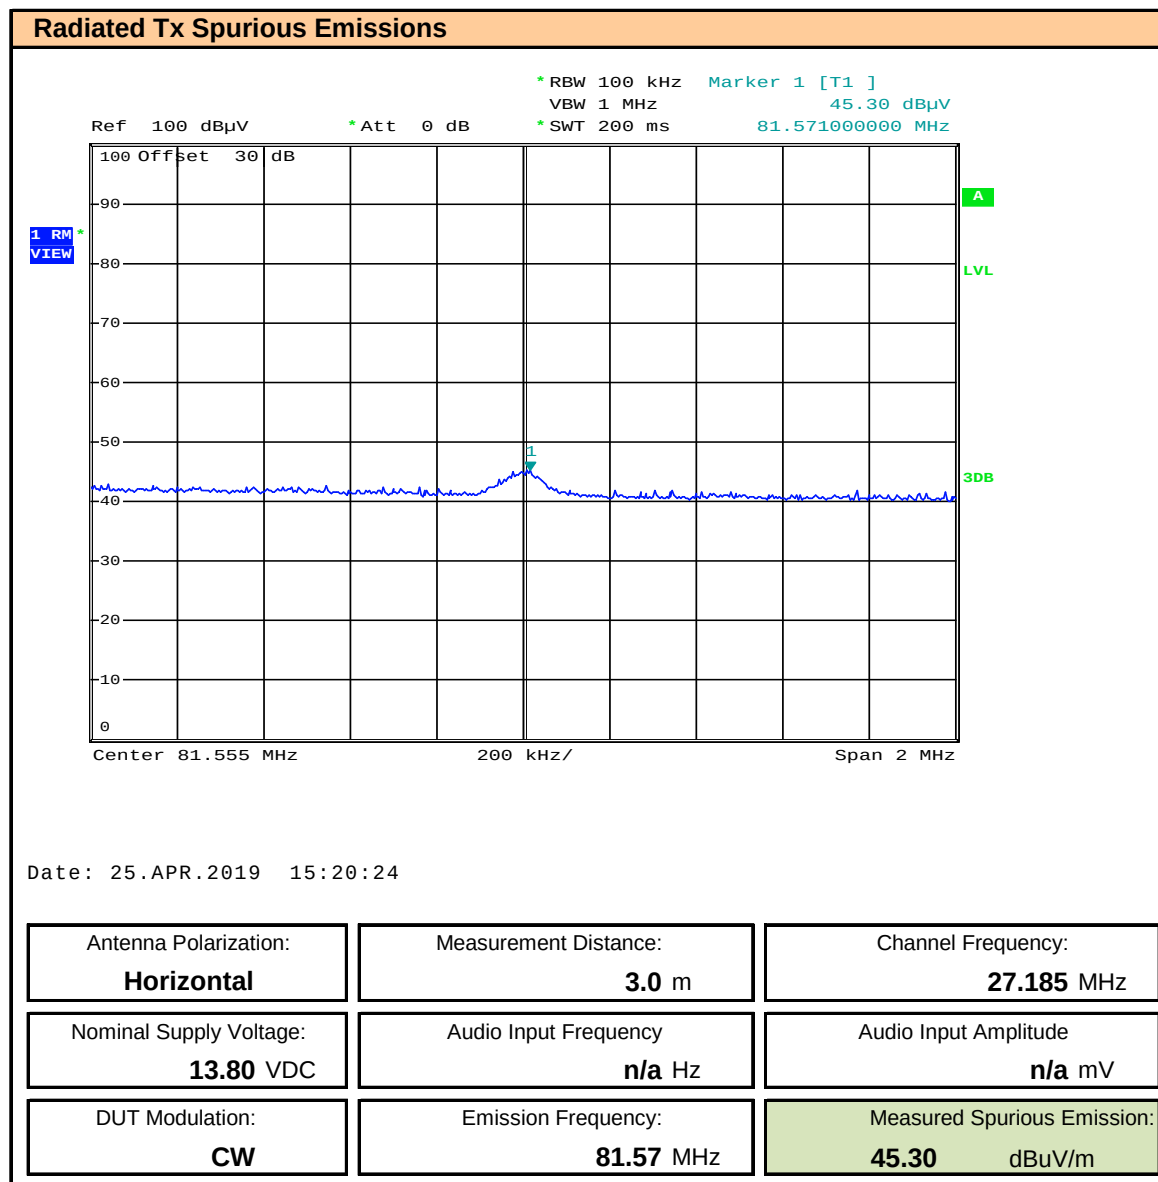

Plot 11.5 – Radiated Spurious Emissions OATS, 4th Harmonic, Horizontal

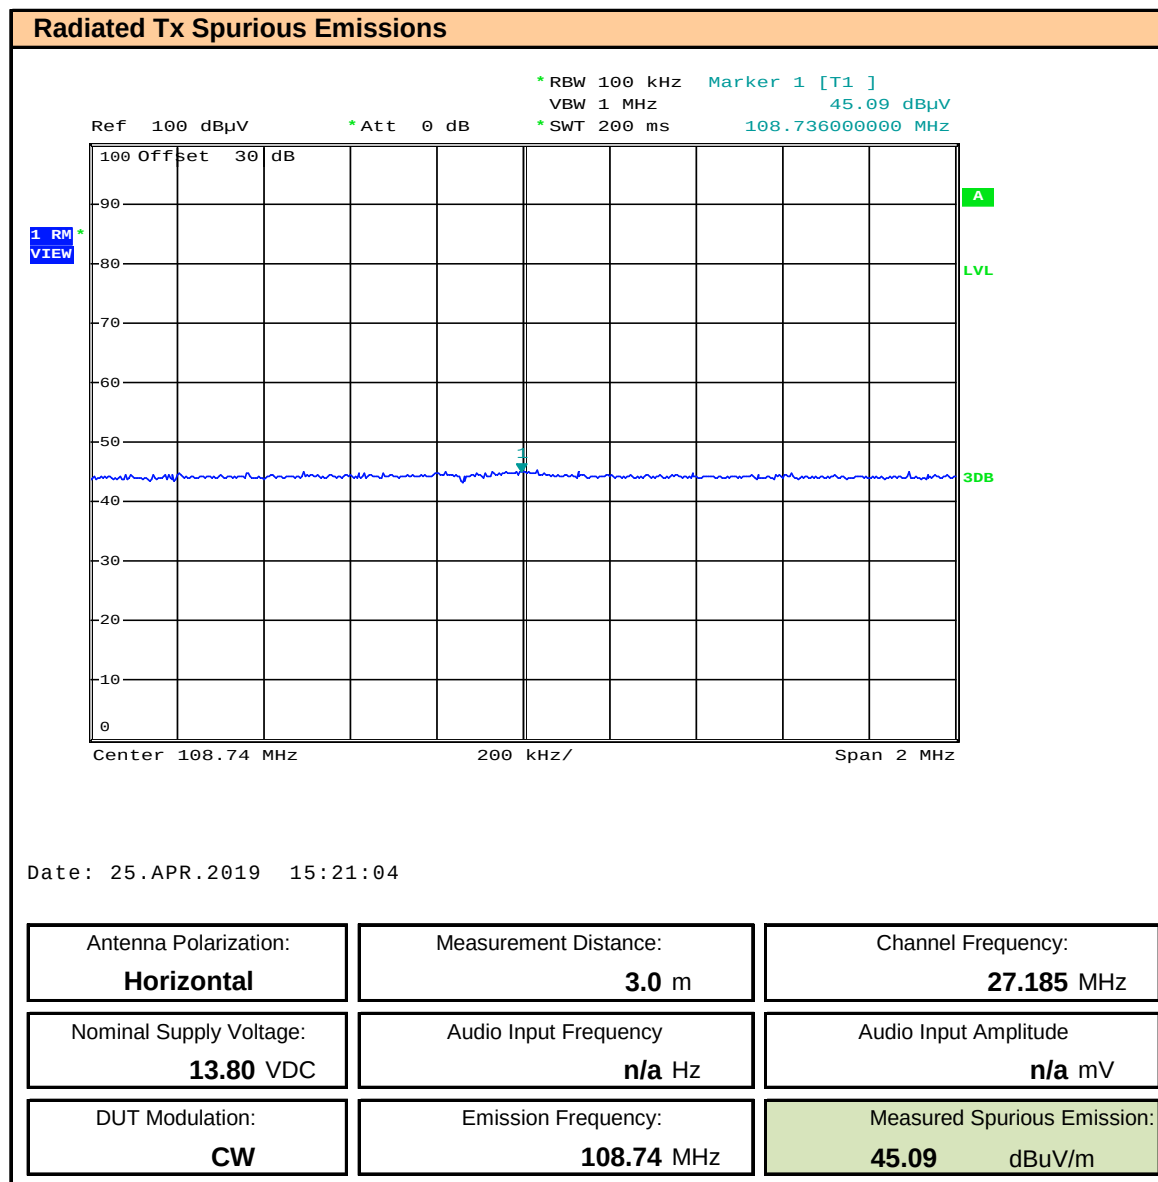


Plot 11.6 – Radiated Spurious Emissions OATS, 5th Harmonic, Horizontal

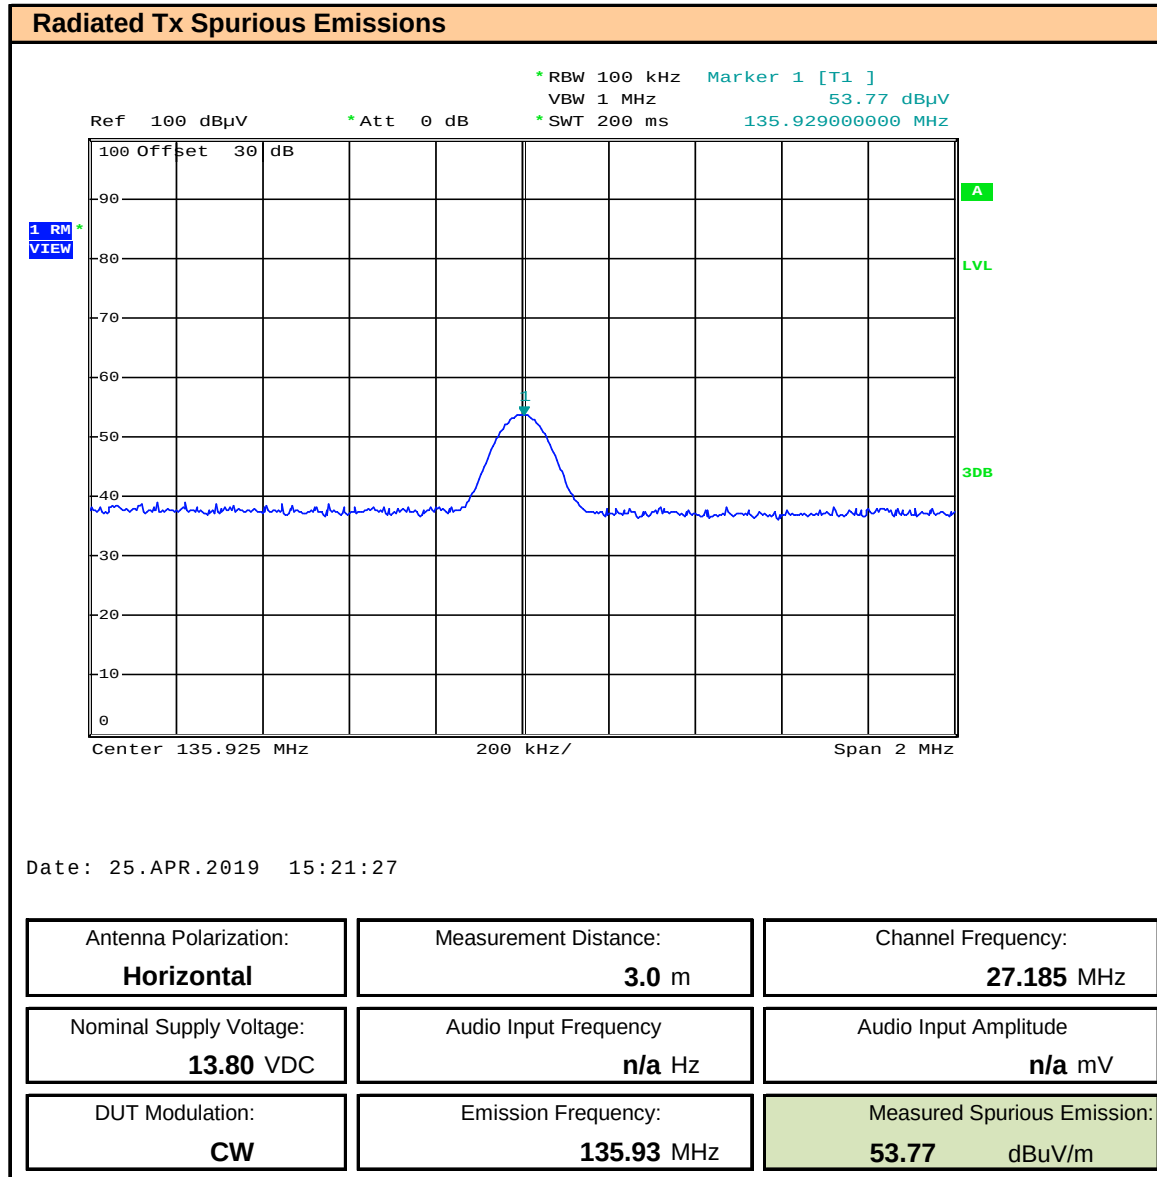


Date: 25.APR.2019 15:21:27

Antenna Polarization: Horizontal	Measurement Distance: 3.0 m	Channel Frequency: 27.185 MHz
Nominal Supply Voltage: 13.80 VDC	Audio Input Frequency n/a Hz	Audio Input Amplitude n/a mV
DUT Modulation: CW	Emission Frequency: 135.93 MHz	Measured Spurious Emission: 53.77 dBuV/m

Plot 11.7 – Radiated Spurious Emissions OATS, 6th Harmonic, Horizontal

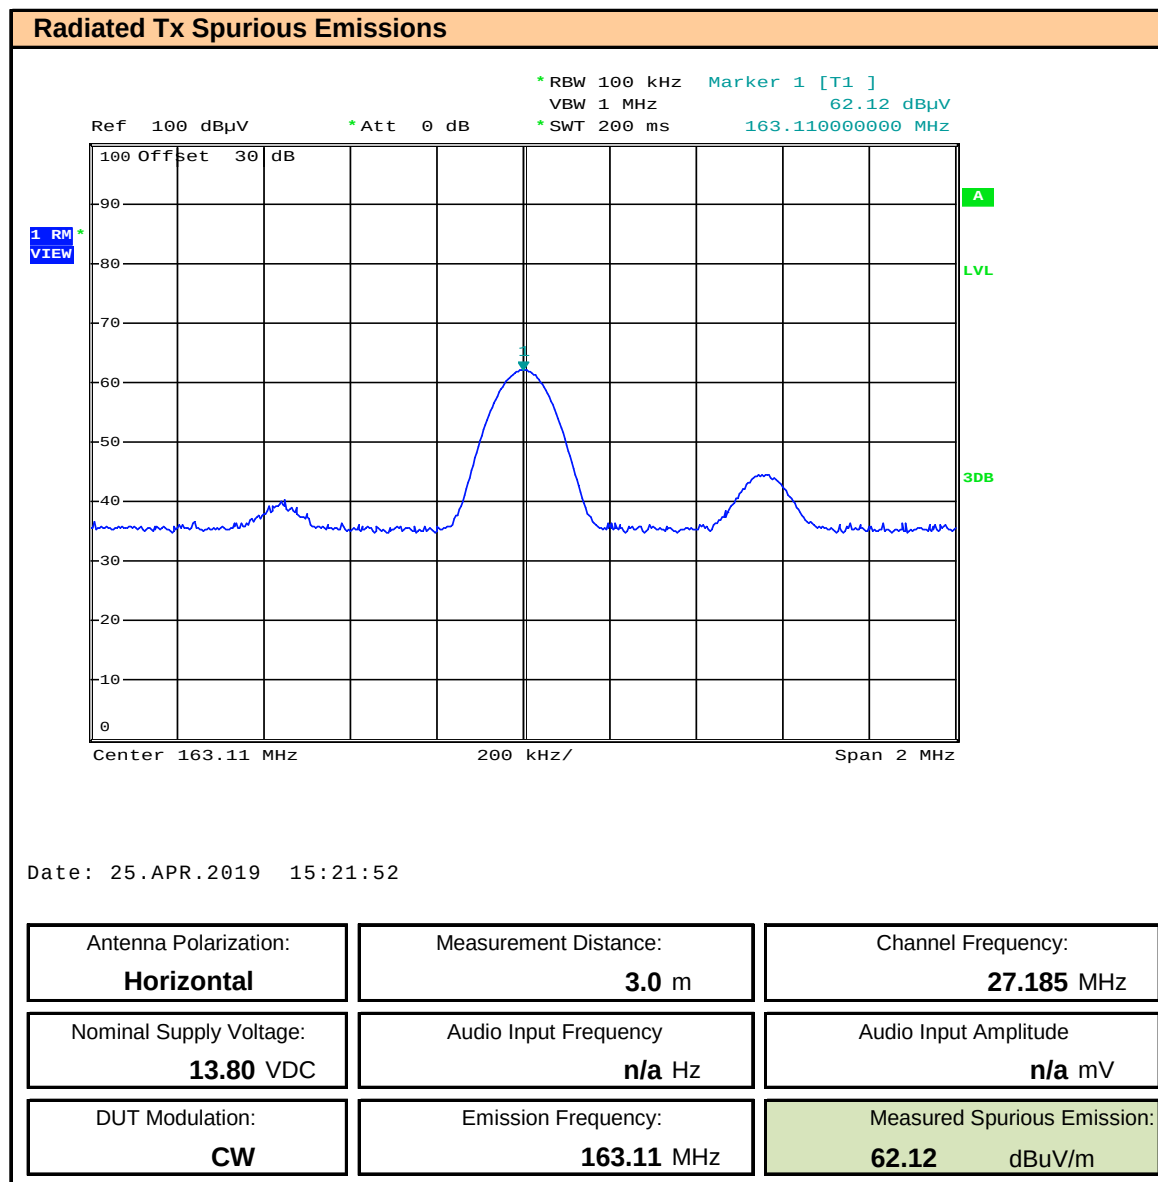


Plot 11.8 – Radiated Spurious Emissions OATS, 7th Harmonic, Horizontal

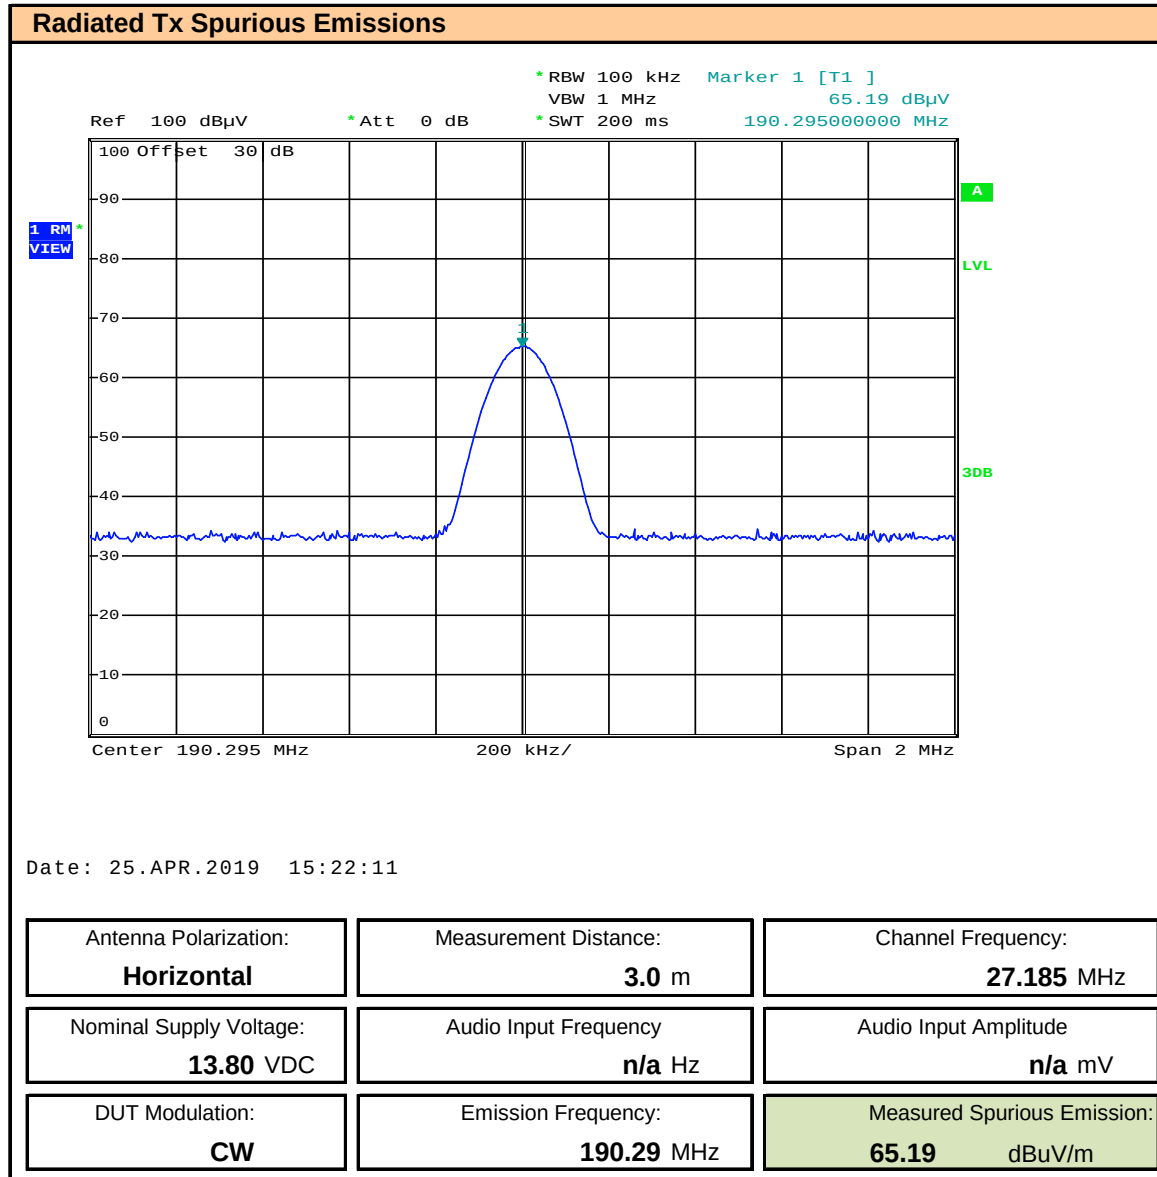


Date: 25.APR.2019 15:22:11

Antenna Polarization: Horizontal	Measurement Distance: 3.0 m	Channel Frequency: 27.185 MHz
Nominal Supply Voltage: 13.80 VDC	Audio Input Frequency n/a Hz	Audio Input Amplitude n/a mV
DUT Modulation: CW	Emission Frequency: 190.29 MHz	Measured Spurious Emission: 65.19 dBuV/m


Plot 11.9 – Radiated Spurious Emissions OATS, 8th Harmonic, Horizontal

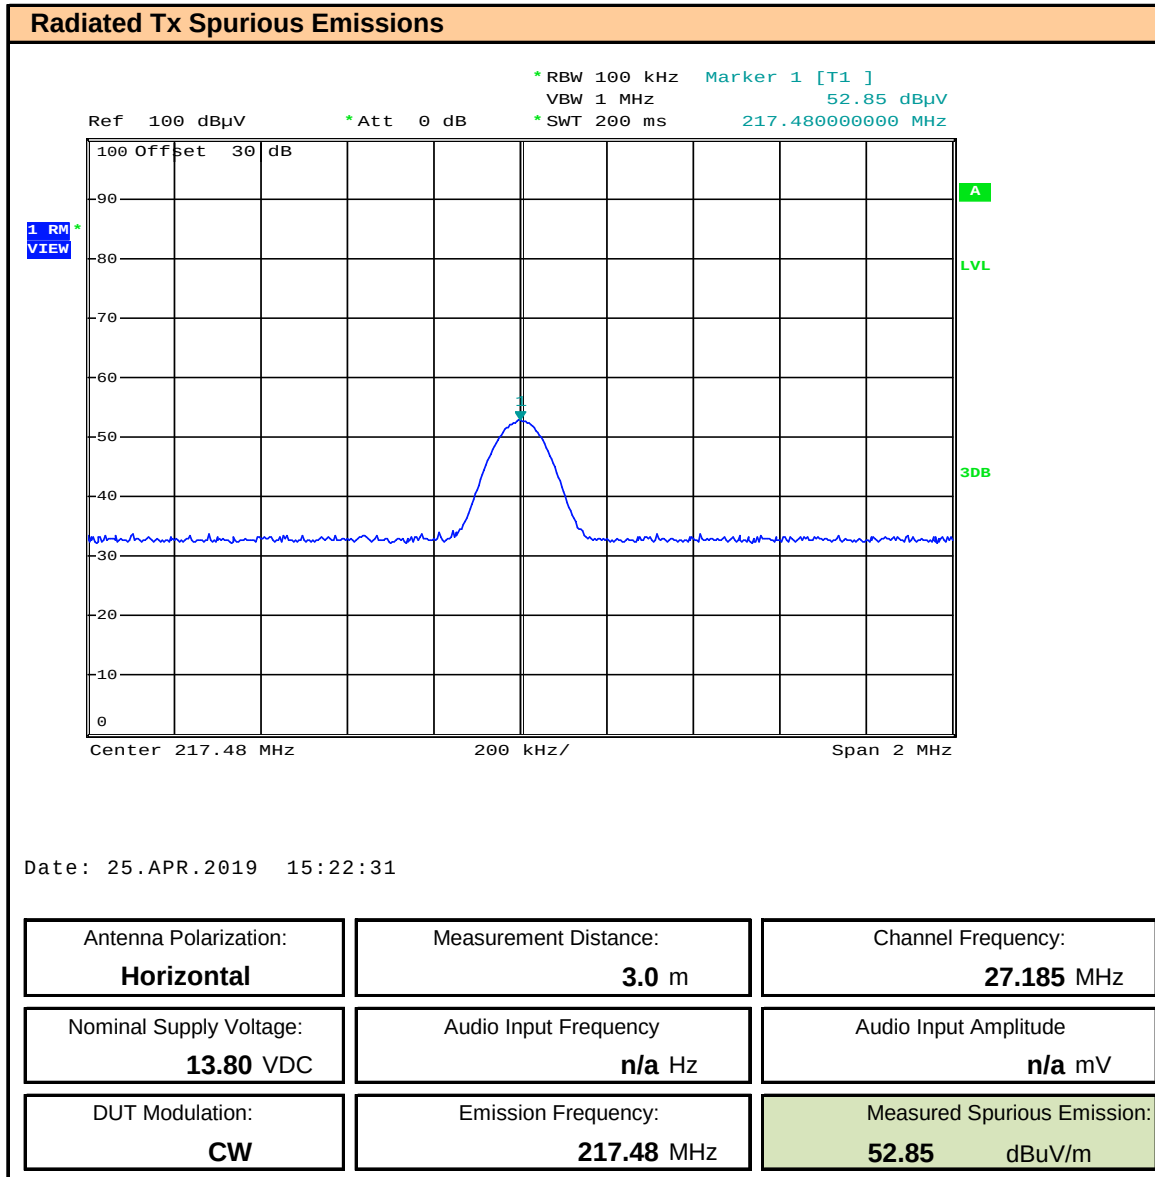

Plot 11.10 – Radiated Spurious Emissions OATS, 9th Harmonic, Horizontal

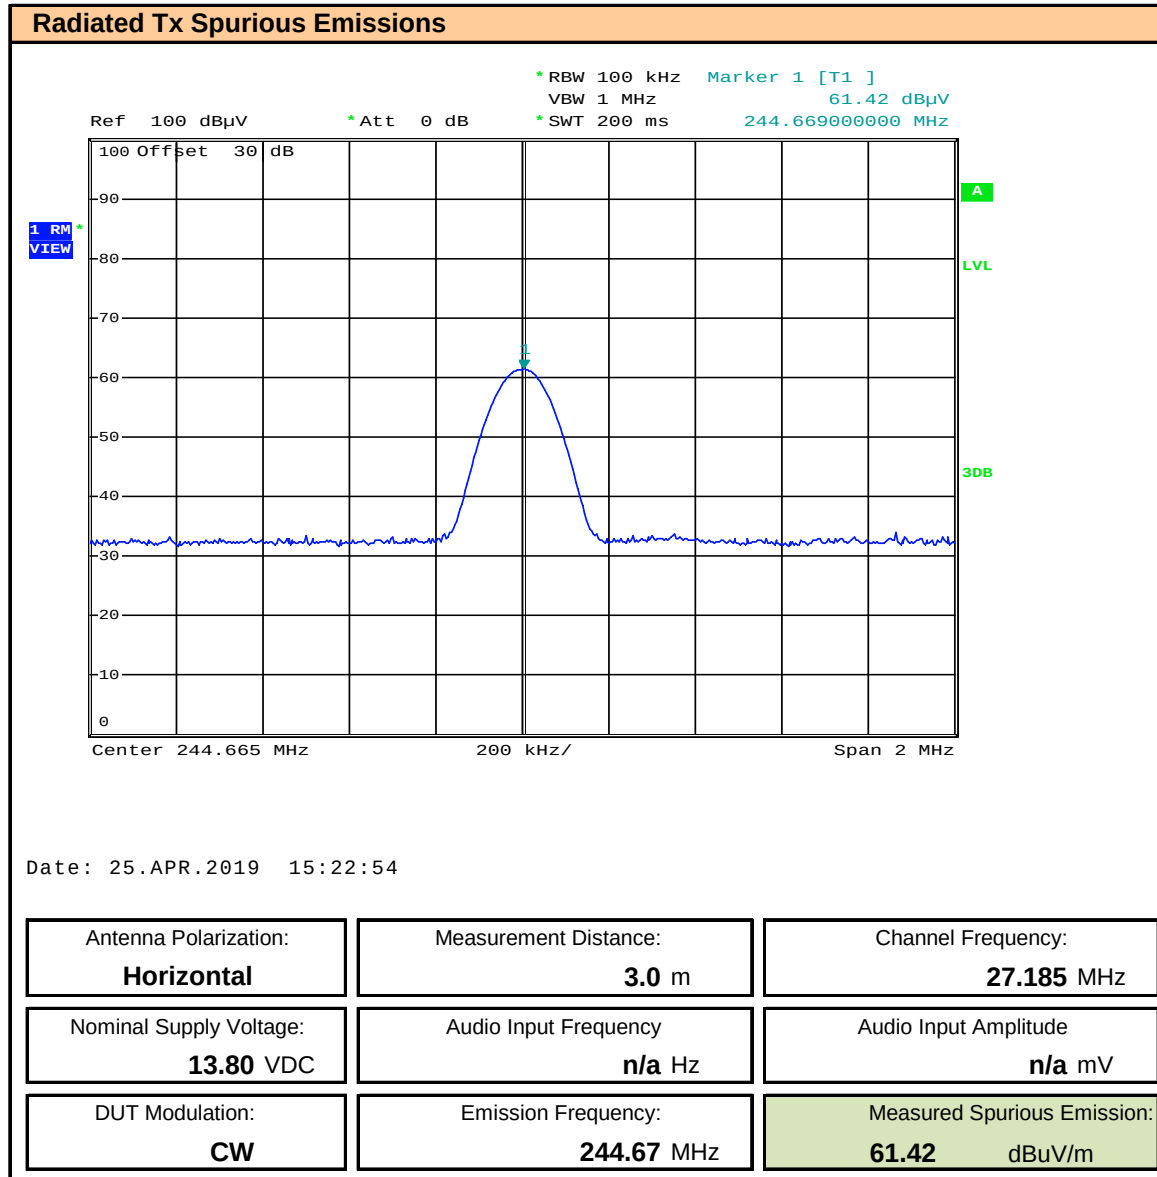


Plot 11.11 – Radiated Spurious Emissions OATS, 10th Harmonic, Horizontal

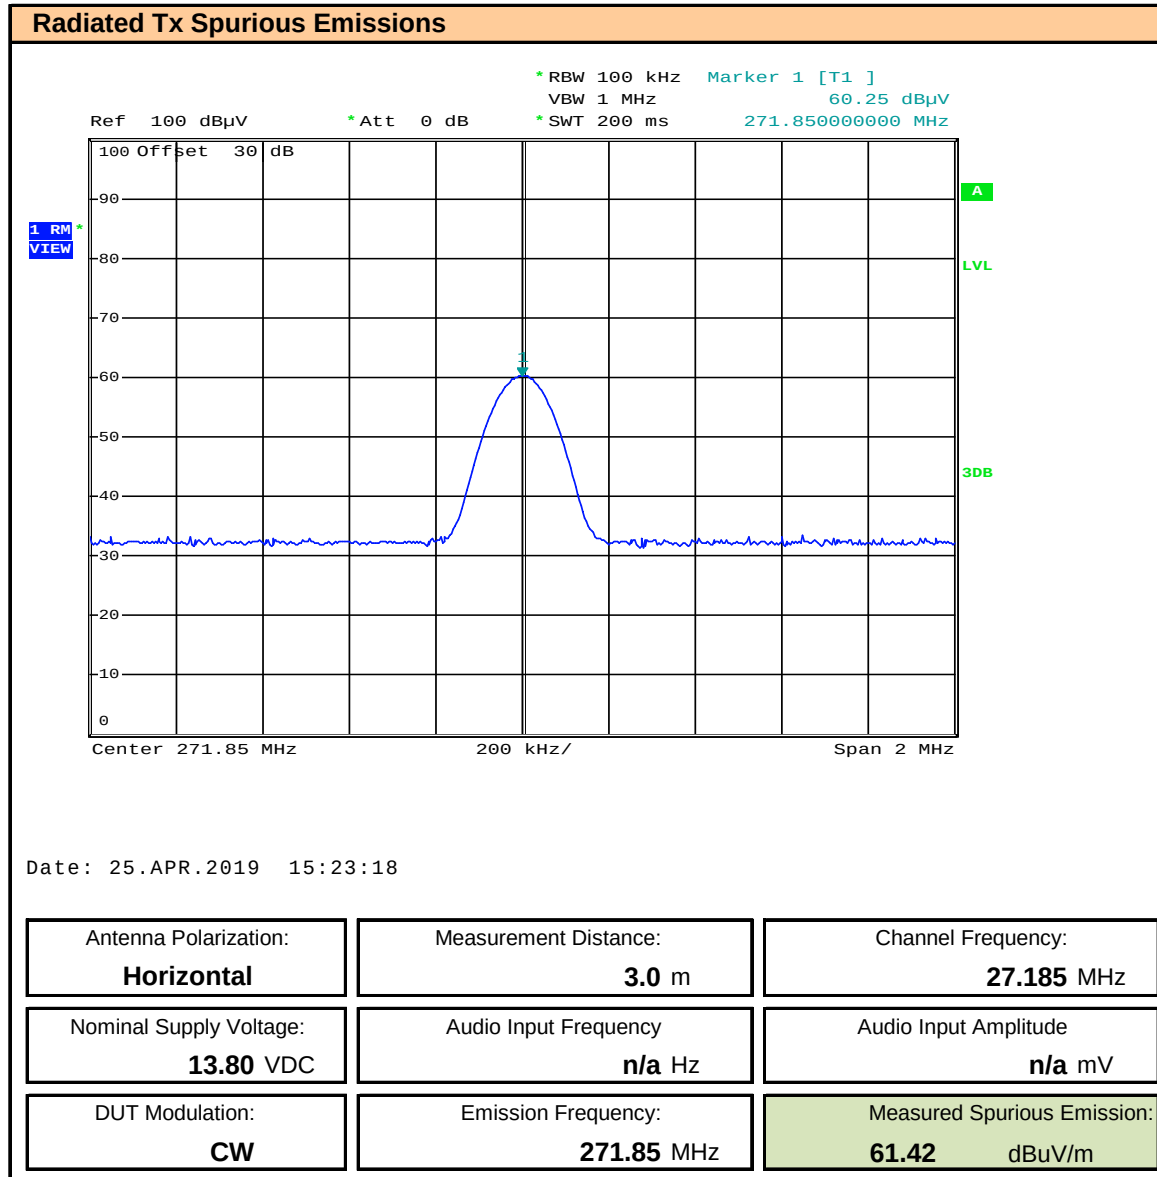


Date: 25.APR.2019 15:23:18

Antenna Polarization: Horizontal	Measurement Distance: 3.0 m	Channel Frequency: 27.185 MHz
Nominal Supply Voltage: 13.80 VDC	Audio Input Frequency n/a Hz	Audio Input Amplitude n/a mV
DUT Modulation: CW	Emission Frequency: 271.85 MHz	Measured Spurious Emission: 61.42 dBuV/m


Plot 11.12 – Radiated Spurious Emissions OATS, 2nd Harmonic, Vertical

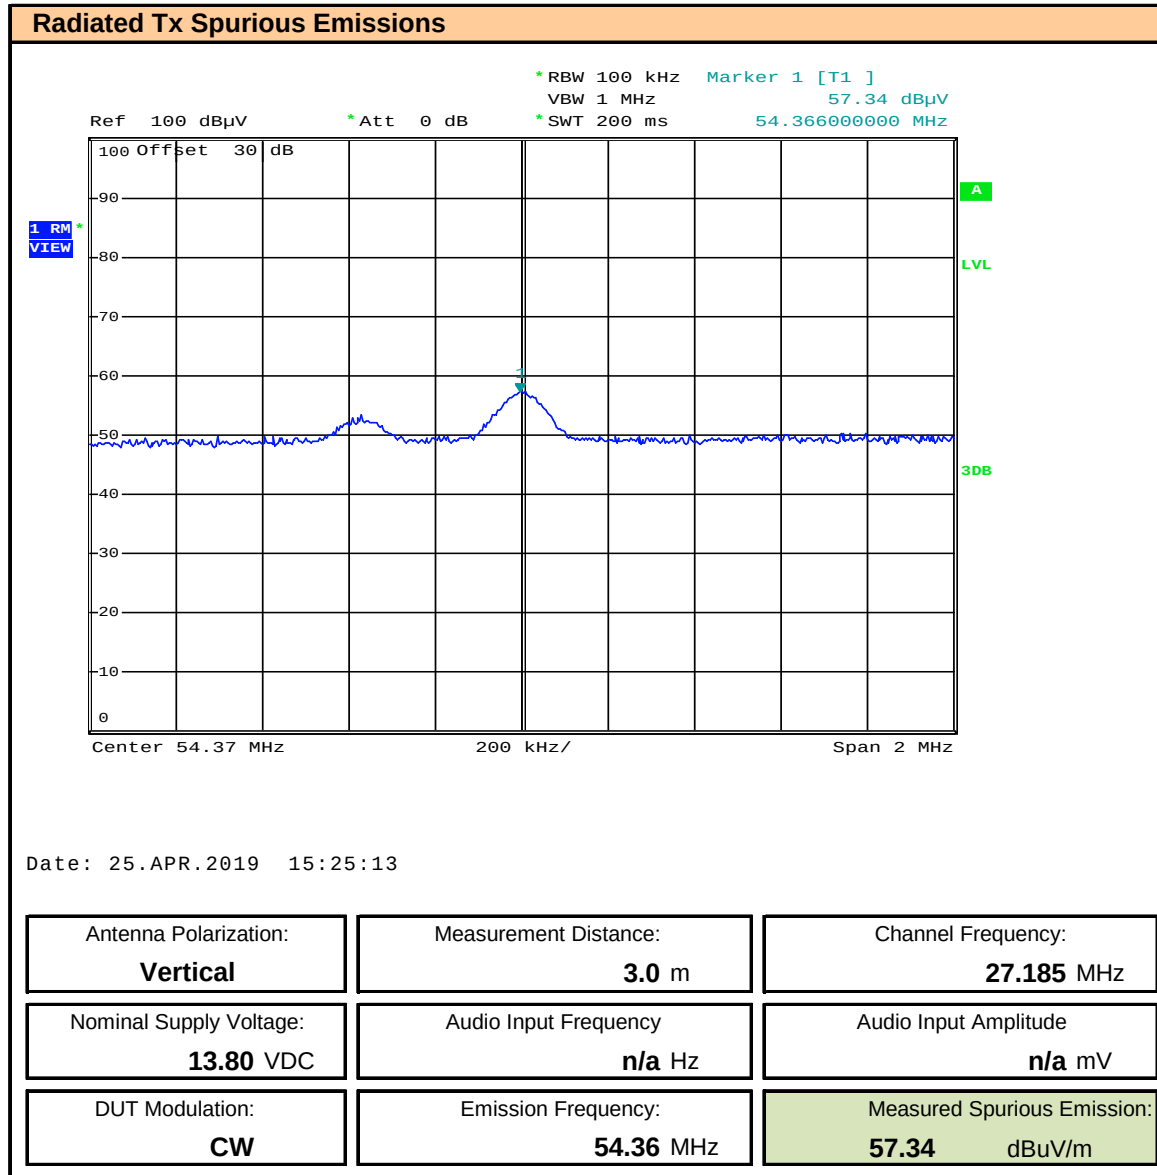

Plot 11.13 – Radiated Spurious Emissions OATS, 3rd Harmonic, Vertical

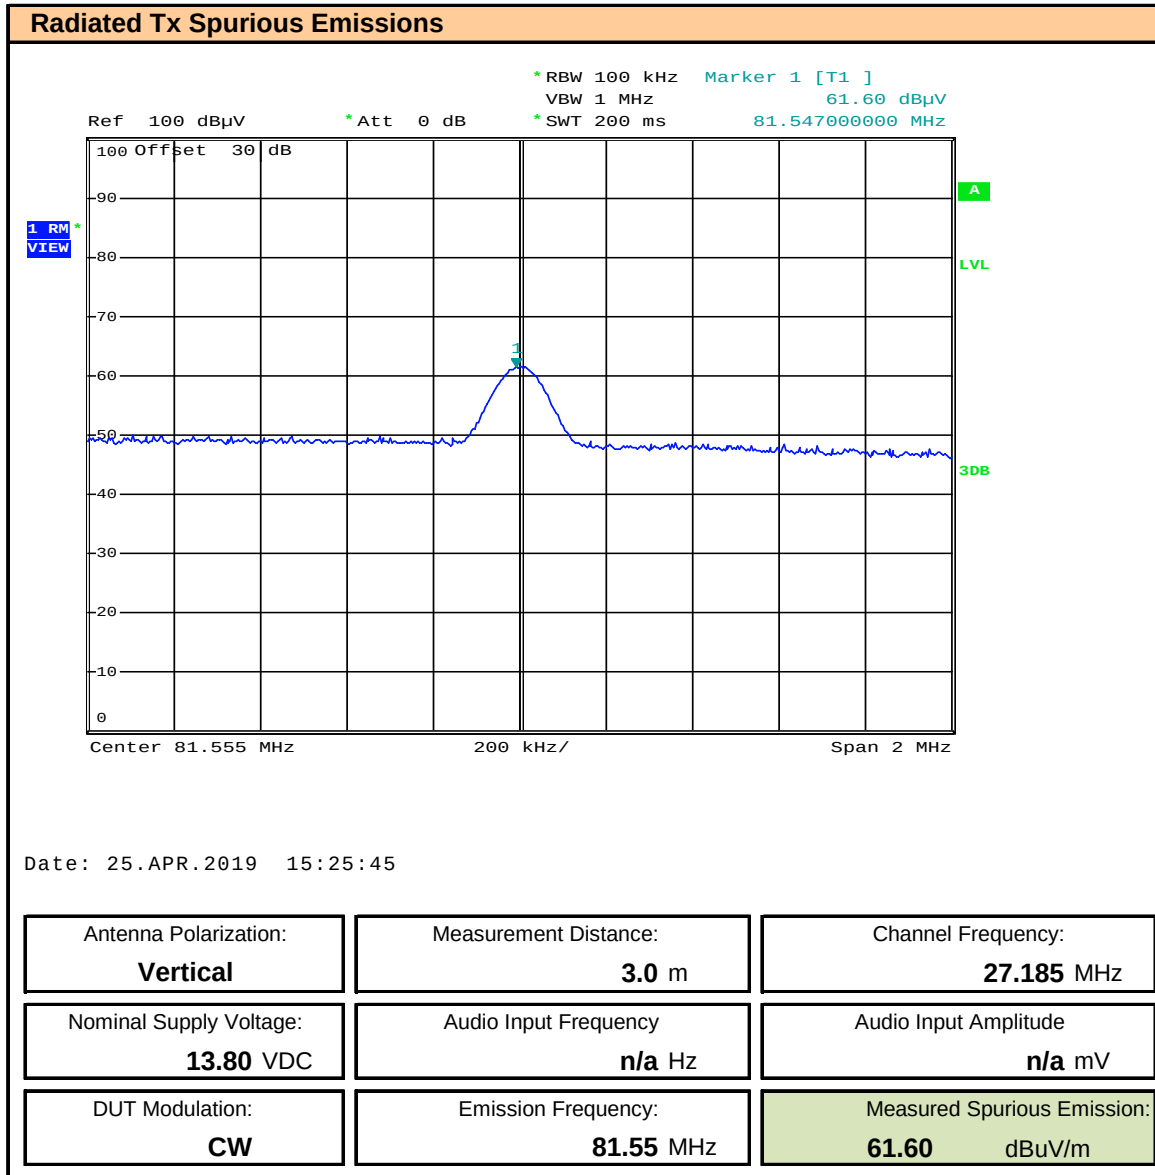


Plot 11.14 – Radiated Spurious Emissions OATS, 4th Harmonic, Vertical

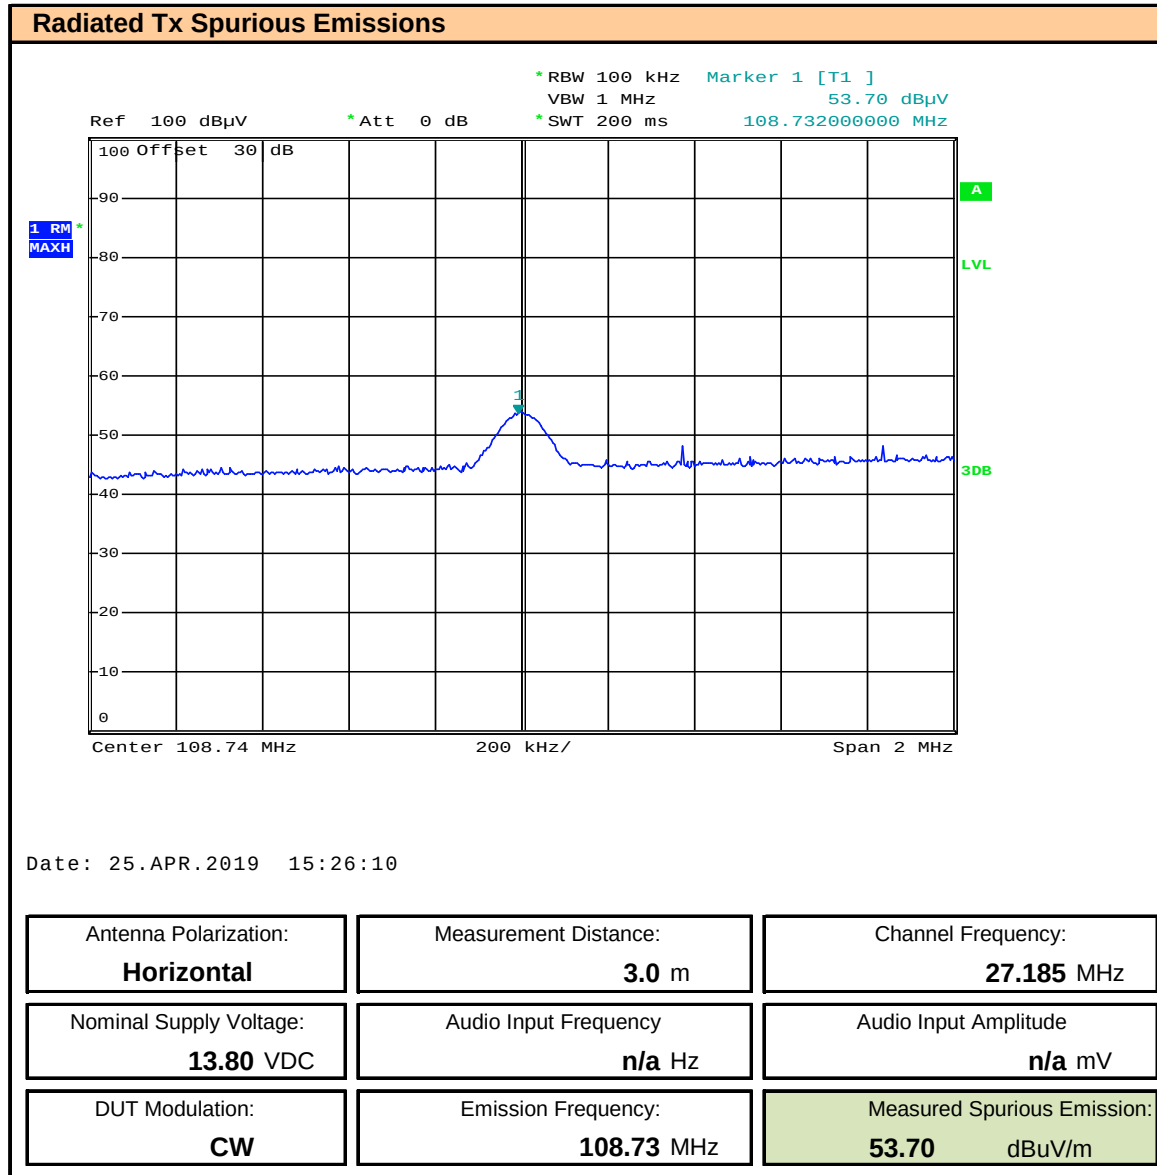

Date: 25.APR.2019 15:26:10

Antenna Polarization: Horizontal	Measurement Distance: 3.0 m	Channel Frequency: 27.185 MHz
Nominal Supply Voltage: 13.80 VDC	Audio Input Frequency n/a Hz	Audio Input Amplitude n/a mV
DUT Modulation: CW	Emission Frequency: 108.73 MHz	Measured Spurious Emission: 53.70 dBuV/m


Plot 11.15 – Radiated Spurious Emissions OATS, 5th Harmonic, Vertical

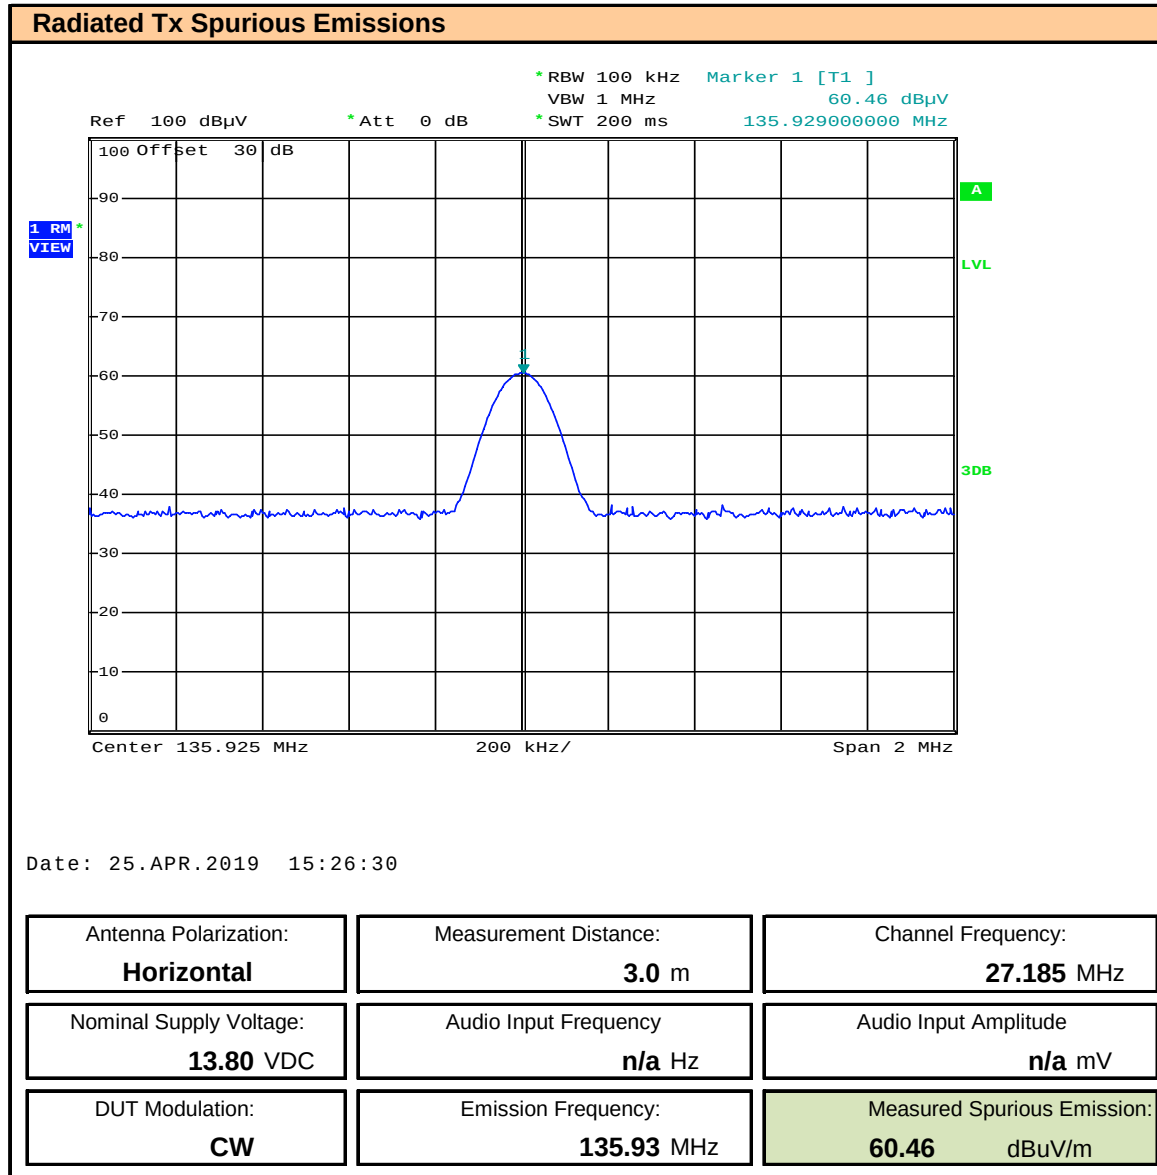

Date: 25.APR.2019 15:26:30


Antenna Polarization: Horizontal	Measurement Distance: 3.0 m	Channel Frequency: 27.185 MHz
Nominal Supply Voltage: 13.80 VDC	Audio Input Frequency n/a Hz	Audio Input Amplitude n/a mV
DUT Modulation: CW	Emission Frequency: 135.93 MHz	Measured Spurious Emission: 60.46 dBuV/m

Plot 11.16 – Radiated Spurious Emissions OATS, 6th Harmonic, Vertical

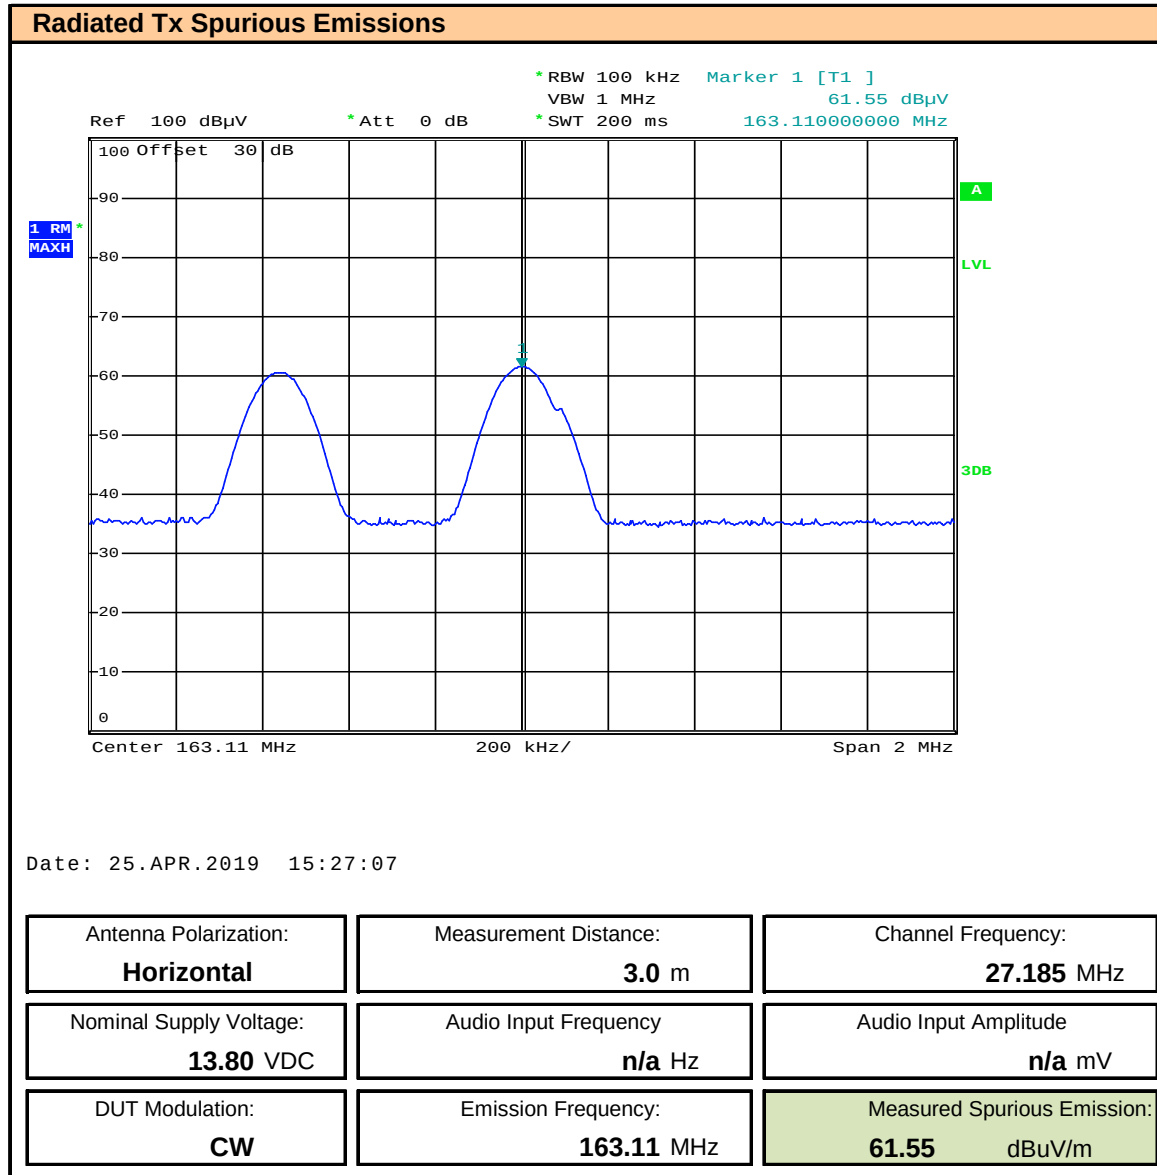


Date: 25.APR.2019 15:27:07


Plot 11.17 – Radiated Spurious Emissions OATS, 7th Harmonic, Vertical

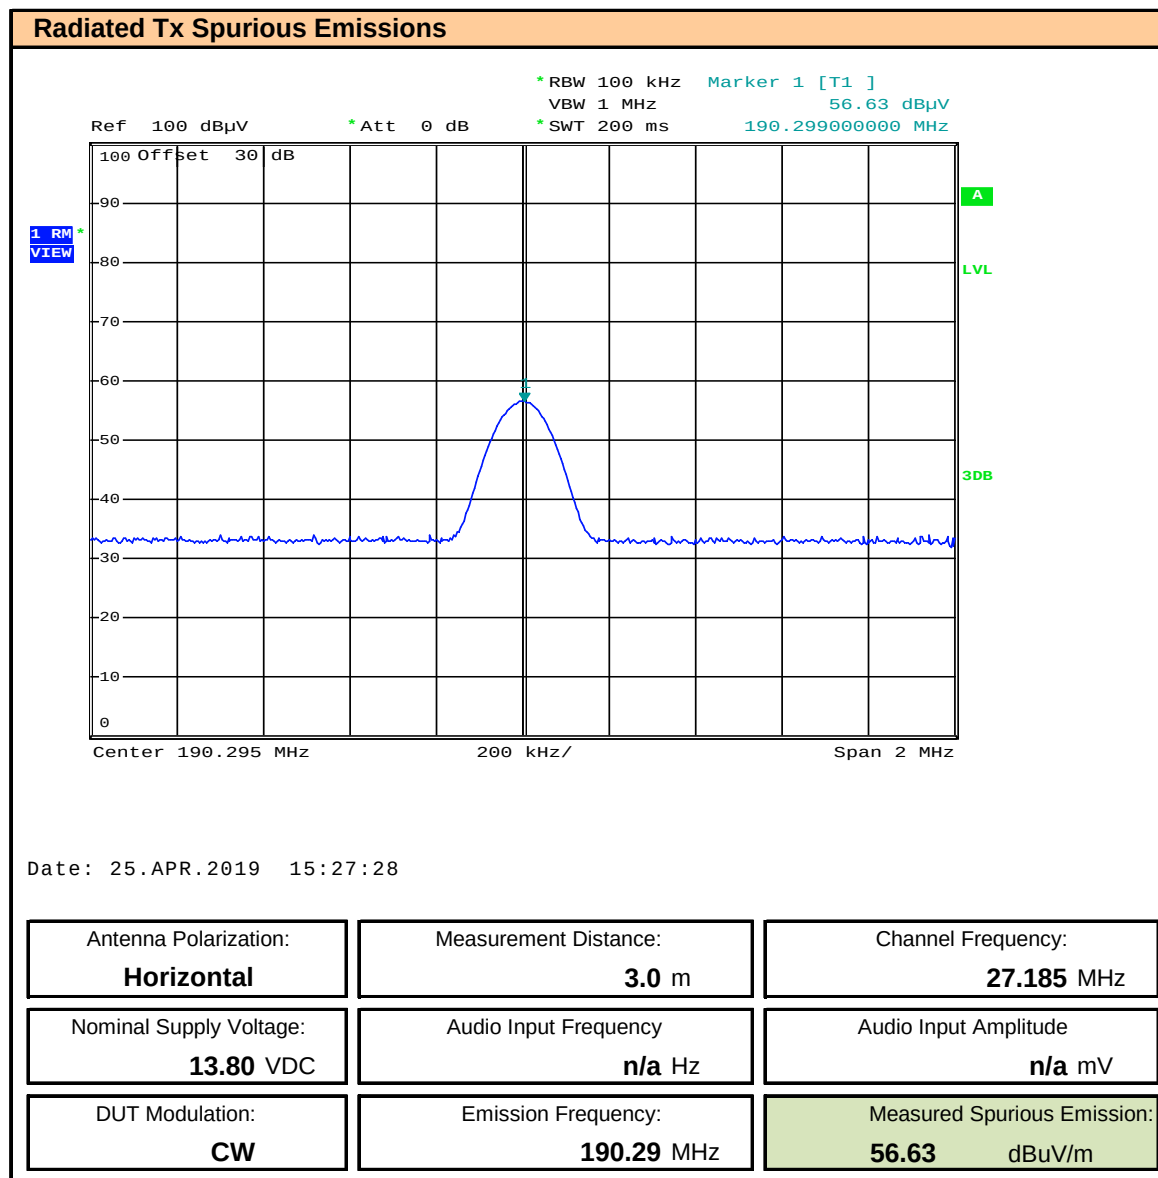

Plot 11.18 – Radiated Spurious Emissions OATS, 8th Harmonic, Vertical

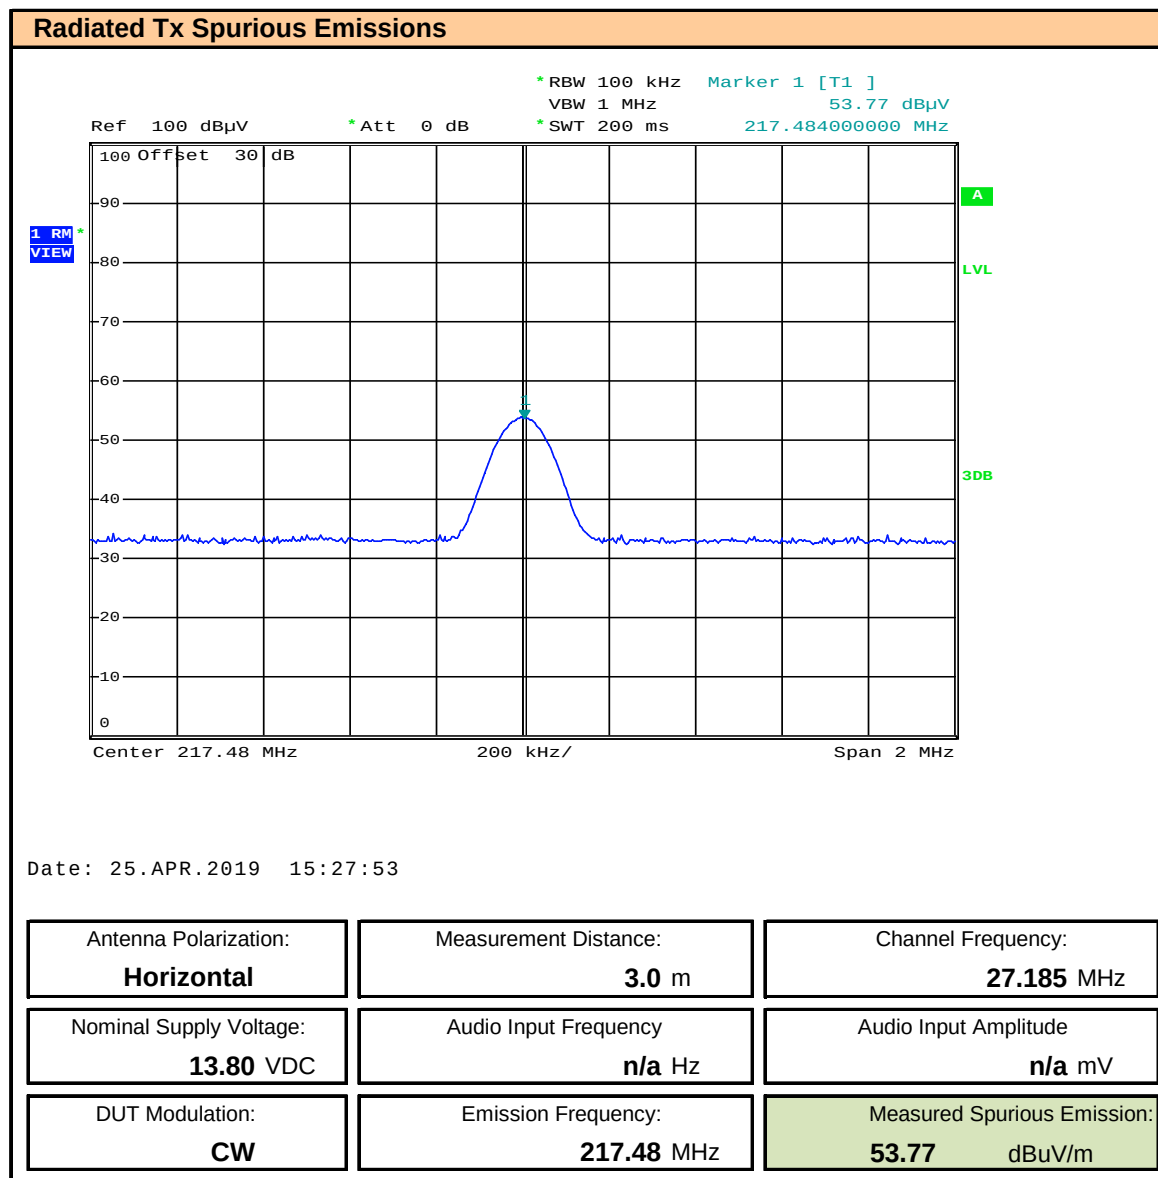

Plot 11.19 – Radiated Spurious Emissions OATS, 9th Harmonic, Vertical

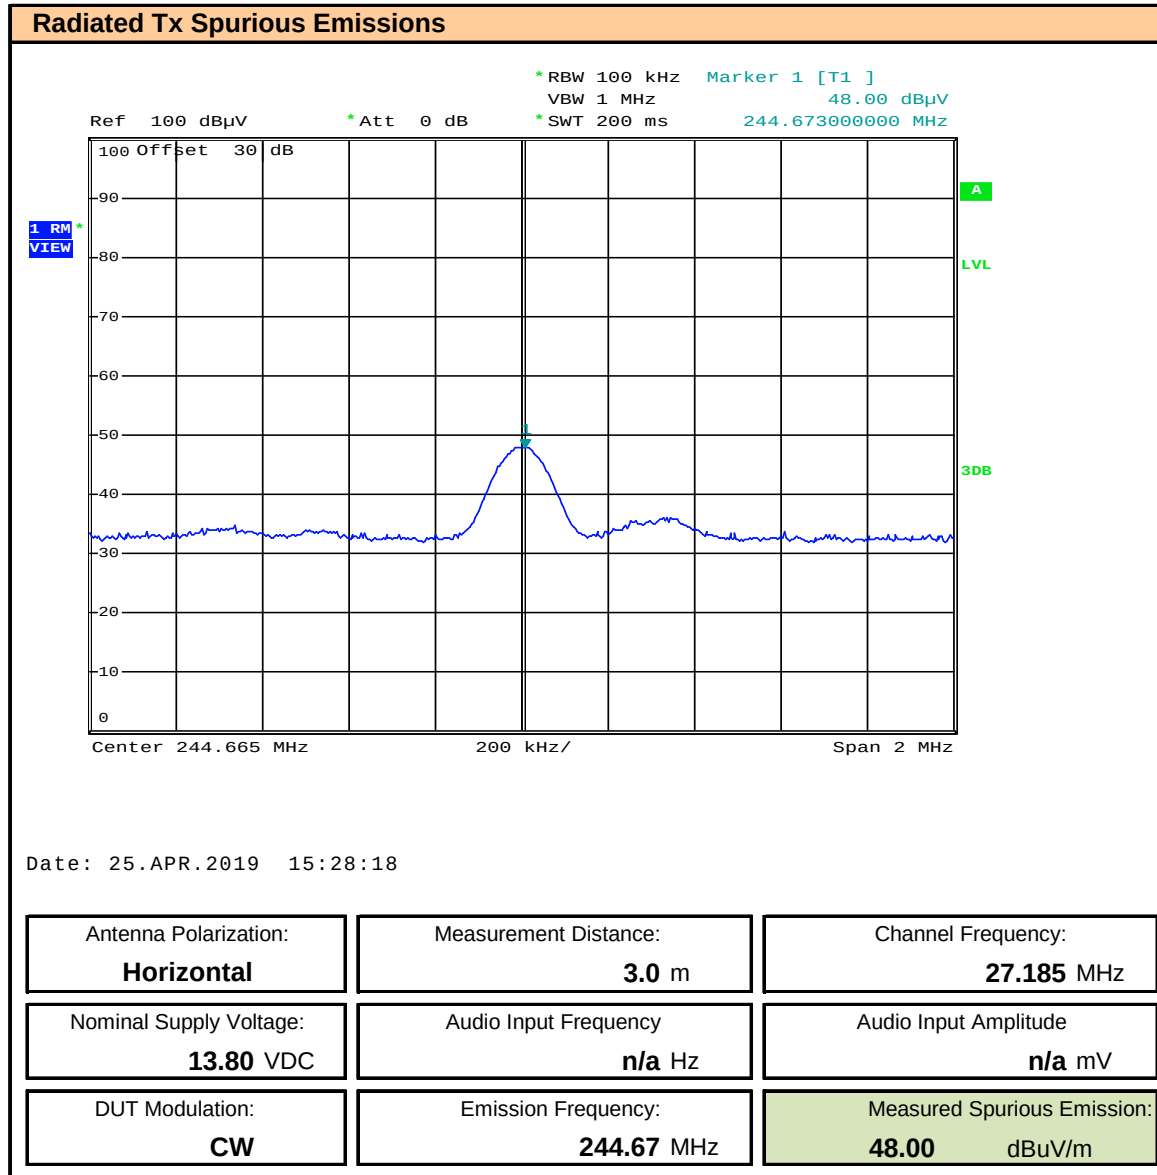

Plot 11.20 – Radiated Spurious Emissions OATS, 10th Harmonic, Vertical

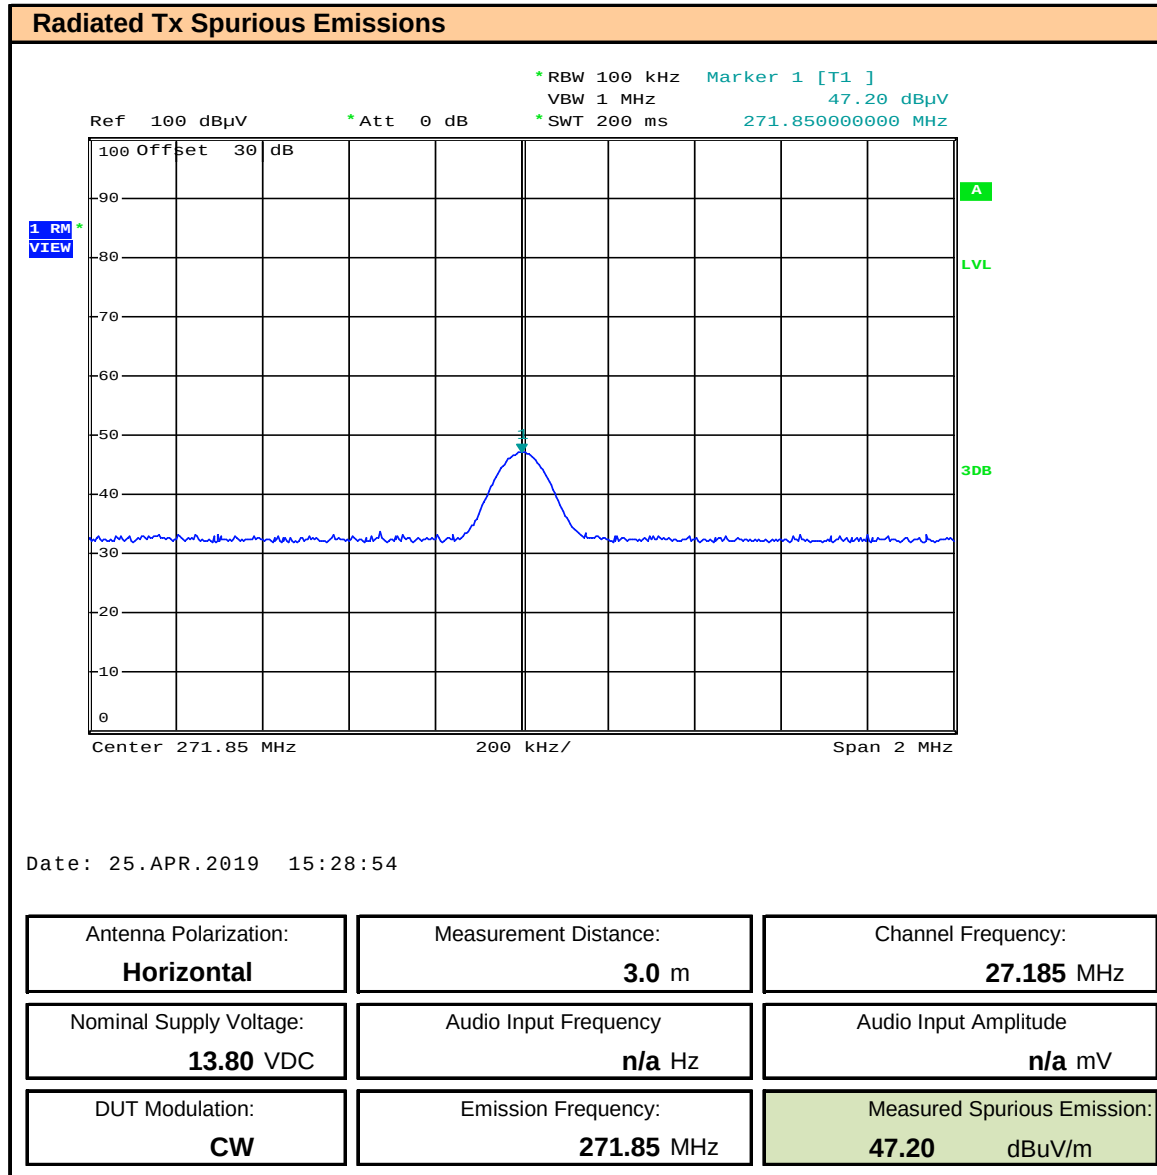


Table 11.1 – Summary of Radiated Spurious Emissions

Radiated Spurious Emissions																	
Channel Frequency (MHz)	Emission Frequency (MHz)	Antenna Polarization	DUT Modulation	Fundemental Power [P] (dBm)	Out of Band Emission [E _{Meas}] (dBuV)	Receive Antenna [ACF] (dB)	Cable Loss [L _c] (dB)	Corrected Emission [E] (dBuV/m)	ERP (dBm)	Attenuation [dB]	Limit (dB)	Margin (dB)					
27.185	54.37	Horizontal	CW	36.0	45.0	11.5	0.8	57.3	-49.7	85.7	60.0	25.65					
	81.57				45.3	12.6		58.7	-48.3	84.3	60.0	24.25					
	108.74				45.1	16.0		61.9	-45.1	81.1	60.0	21.06					
	135.93				53.8	16.6		71.2	-35.8	71.8	60.0	11.78					
	163.11				62.1	15.2		78.1	-28.8	64.8	60.0	4.83					
	190.29				65.2	13.7		79.7	-27.3	63.3	60.0	3.26					
	217.48				52.9	14.1		67.8	-39.2	75.2	60.0	15.20					
	244.67				61.4	16.9		79.1	-27.8	63.8	60.0	3.83					
	271.85				61.4	17.8		80.0	-27.0	63.0	60.0	2.95					
	54.37	Vertical			57.3	11.5		69.6	-37.3	73.3	60.0	13.31					
	81.57				61.6	12.6		75.0	-32.0	68.0	60.0	7.95					
	108.74				53.7	16.0		70.5	-36.5	72.5	60.0	12.45					
	135.93				60.5	16.6		77.9	-29.1	65.1	60.0	5.09					
	163.11				61.6	15.2		77.6	-29.4	65.4	60.0	5.40					
	190.29				56.6	13.7		71.1	-35.8	71.8	60.0	11.82					
	217.48				53.8	14.1		68.7	-38.3	74.3	60.0	14.28					
	244.67				48.0	16.9		65.7	-41.3	77.3	60.0	17.25					
	271.85				47.2	17.8		65.8	-41.2	77.2	60.0	17.15					
	E(dBuV/m) = E _{Meas} + L _c + ACF																
	ERP(dBm) = [E] - 104.8 - 2.15 + 20LogD*																
*ACF Calibrated at measurement distance.																	
Attenuation = P - P _E																	
Margin = Limit - Attenuation																	
										Result:	Complies						
Peak Detector compared to QP limits. No emissions within 20dB of the limit were observed.																	
Data for spurious emissions presented using a peak detector.																	

12.0 FREQUENCY STABILITY

Test Conditions

Normative Reference	FCC 47 CFR §2.1055, §95.965, RSS-Gen
----------------------------	--------------------------------------

Limits

47 CFR §95.965	Each CBRS transmitter type must be designed such that the transmit carrier frequency (or in the case of SSB transmissions, the reference frequency) remains within 50 parts-per-million of the channel center frequencies specified in §95.963 under all normal operating conditions.
----------------	---

Measurement Procedure

47 CFR §2.1055 Frequency Stability

(a) The frequency stability shall be measured with variation of ambient temperature as follows:

(1) From -30° to +50° centigrade for all equipment except that specified in paragraphs (a) (2) and (3) of this section.

(b) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10° centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement.


(d) The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

Test Setup

Appendix A	Figure A.4
------------	------------

Table 12.1 – Summary of Frequency Stability Results

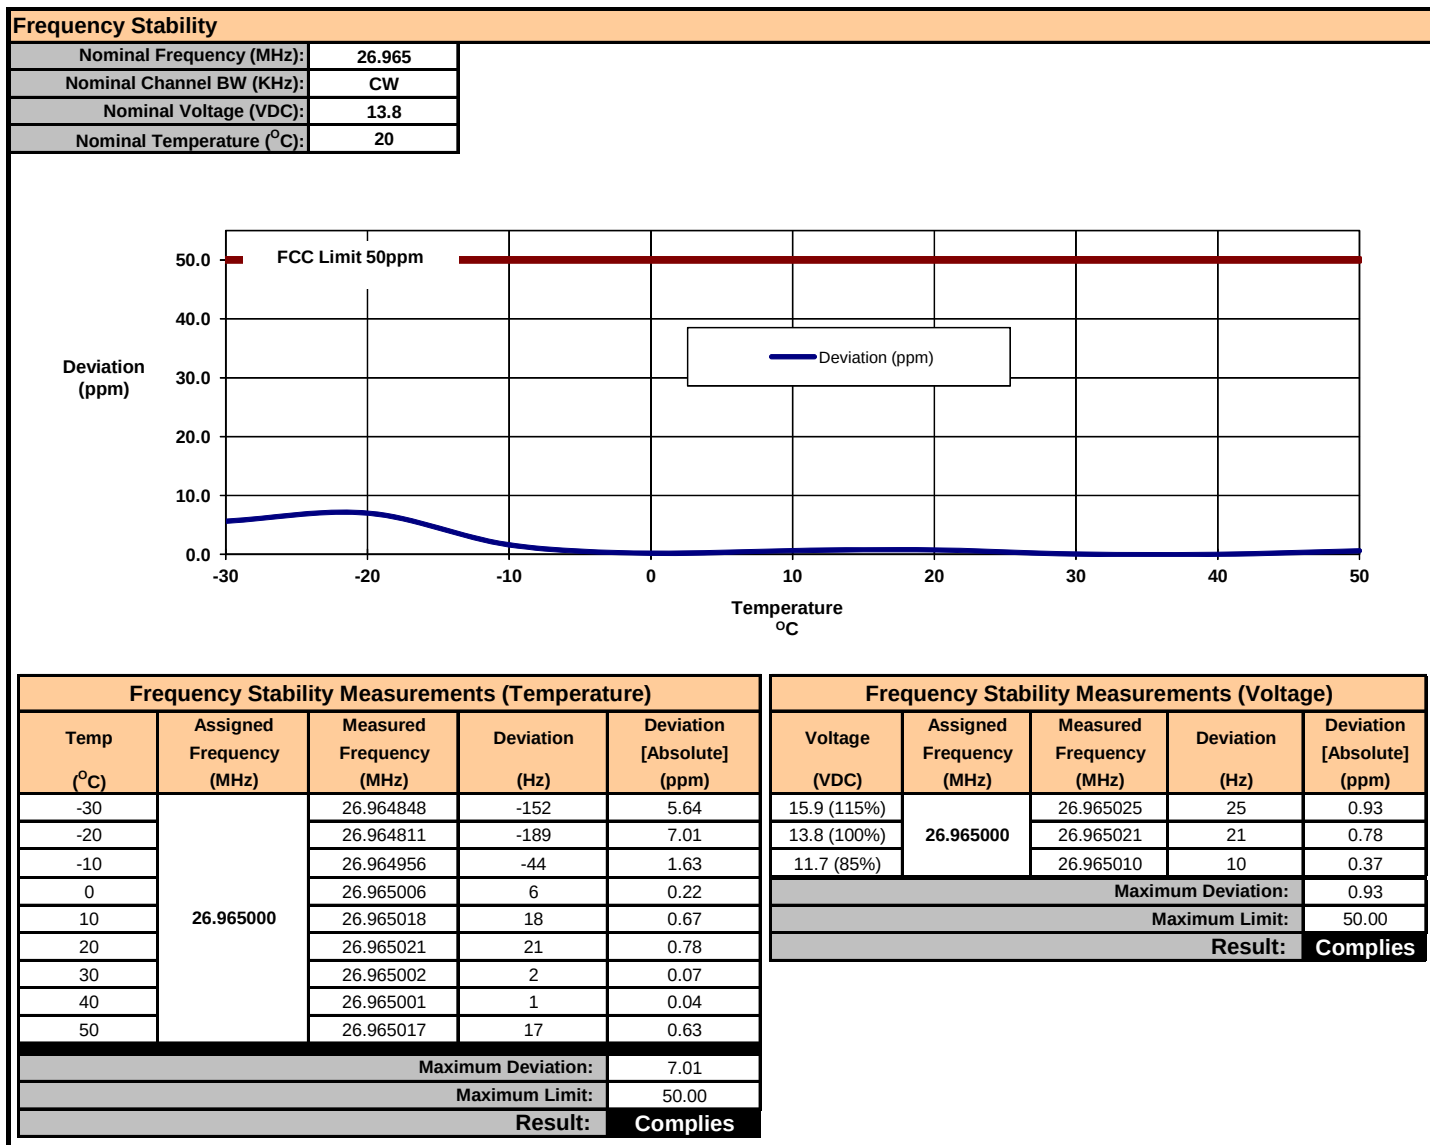

APPENDIX A – TEST SETUP DRAWINGS AND EQUIPMENT

Table A.1 – Setup - Conducted Measurements Equipment

Equipment List			
Asset Number	Manufacturer	Model Number	Description
00241	R&S	FSU40	Spectrum Analyzer

Figure A.1 – Test Setup Conducted Measurements

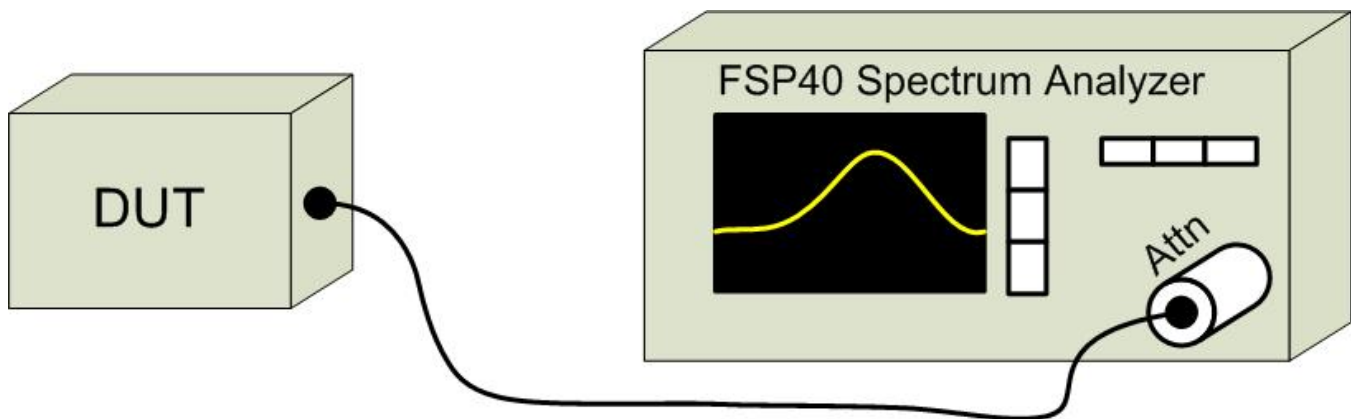


Table A.2 – Setup - Audio Modulation Equipment

Equipment List			
Asset Number	Manufacturer	Model Number	Description
00028	HP	8901A	Modulation Analyzer
00027	HP	8903B	Audio Analyzer/Generator

Figure A.2 – Test Setup Audio Modulation Response Measurements

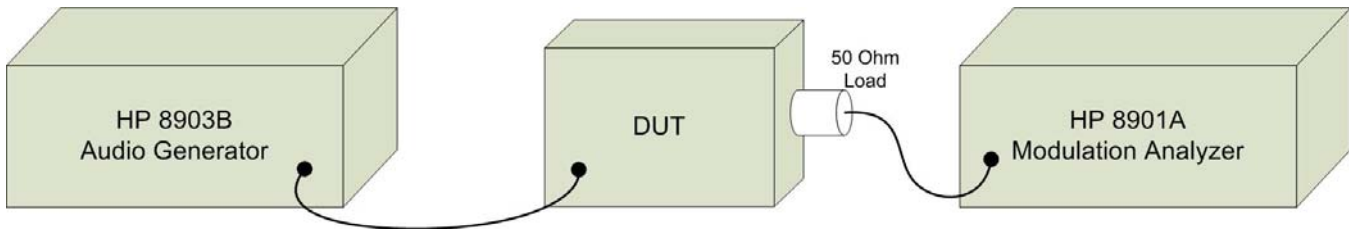


Table A.3 – Setup - Radiated Emissions Equipment

Equipment List			
Asset Number	Manufacturer	Model Number	Description
00051	HP	8566B	Spectrum Analyzer
00049	HP	85650A	Quasi-peak Adapter
00047	HP	85685A	RF Preselector
00072	EMCO	2075	Mini-mast
00073	EMCO	2080	Turn Table
00071	EMCO	2090	Multi-Device Controller
00265	Miteq	JS32-00104000-58-5P	Microwave L/N Amplifier
00241	R&S	FSU40	Spectrum Analyzer
00050	Chase	CBL-6111A	Bilog Antenna
00275	Coaxis	LMR400	25m Cable
00276	Coaxis	LMR400	4m Cable
00278	TILE	34G3	TILE Test Software
00034	ETS	3115	Double Ridged Guide Horn

CNR: Calibration Not Required
COU: Calibrate On Use

Figure A.3 – Test Setup Radiated Emissions Measurements


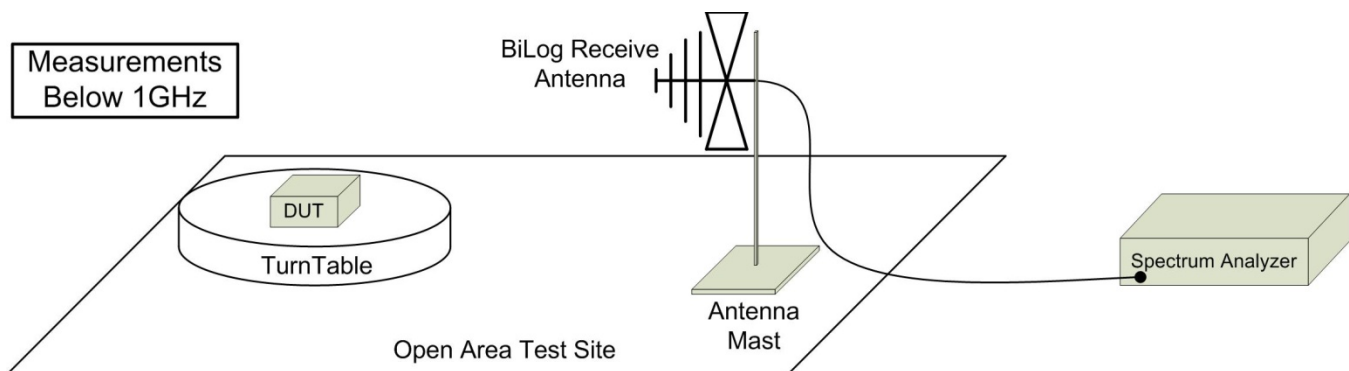


Table A.4 – Setup - Frequency Stability Measurement Equipment

Equipment List			
Asset Number	Manufacturer	Model Number	Description
n/a	ESPEC	ECT-2	Environmental Chamber
00003	HP	53181A	Frequency Counter
n/a	HP	E3611A	Power Supply
00234	VWR	61161-378	Temp/Humidity Meter

Figure A.4 – Test Setup Frequency Stability Measurements

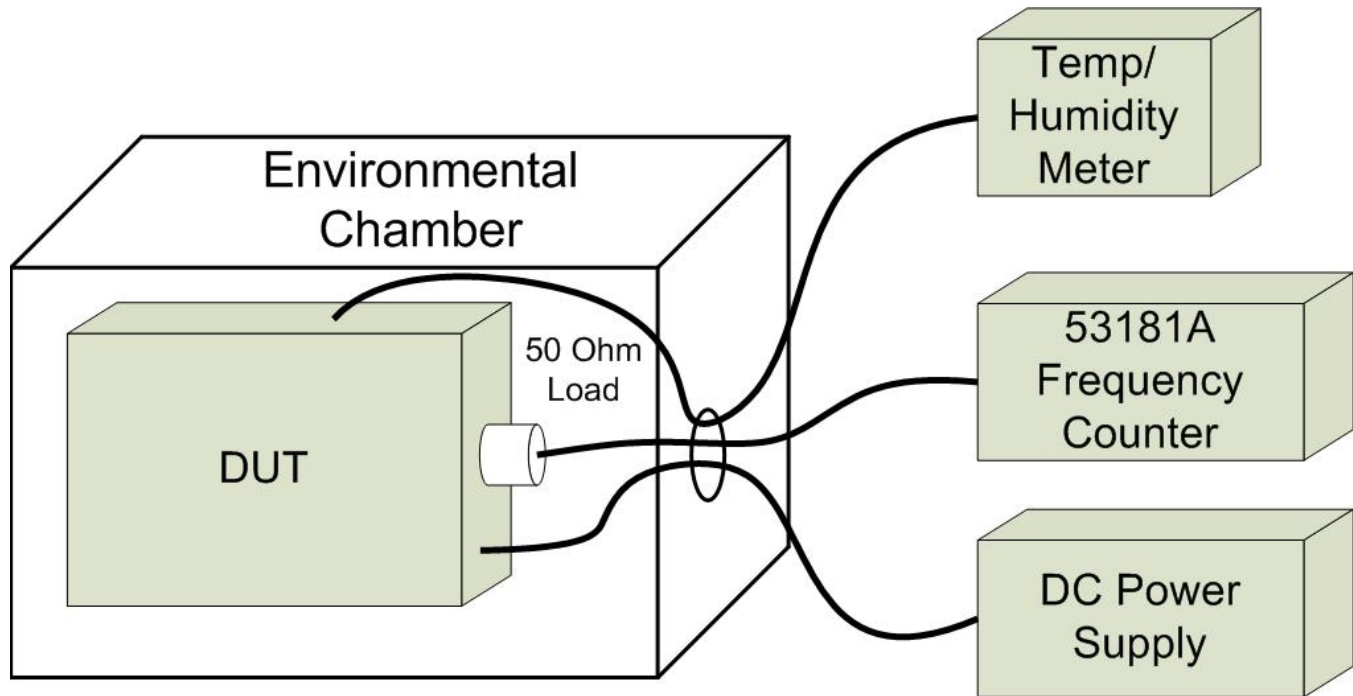

APPENDIX B – EQUIPMENT LIST AND CALIBRATION

Equipment List								
(*)	Asset Number	Manufacturer	Model Number	Serial Number	Description	Last Calibrated	Calibration Interval	Calibration Due
*	00050	Chase	CBL-6111A	1607	Bilog Antenna	3 Jan 2019	Triennial	3 Jan 2022
*	00034	ETS	3115	6267	Double Ridged Guide Horn	26 Nov 2018	Triennial	26 Nov 2021
	00035	ETS	3115	6276	Double Ridged Guide Horn	2 Dec 2015	Triennial	2 Dec 2018
	00085	EMCO	6502	9203-2724	Loop Antenna	8 Jun 2016	Triennial	8 Jun 2019
*	00047	HP	85685A	2837A00826	RF Preselector	23 Jun 2017	Triennial	23 Jun 2020
*	00049	HP	85650A	2043A00162	Quasi-peak Adapter	23 Jun 2017	Triennial	23 Jun 2020
*	00051	HP	8566B	2747A05510	Spectrum Analyzer	23 Jun 2017	Triennial	23 Jun 2020
	00223	HP	8901A	3749A07154	Modulation Analyzer	27 Dec 2017	Triennial	27 Dec 2020
	00224	HP	8903B	3729A18691	Audio Analyzer	28 Dec 2017	Triennial	28 Dec 2020
*	00241	R&S	FSU40	100500	Spectrum Analyzer	15 May 2018	Triennial	15 May 2021
*	00005	HP	8648D	3847A00611	Signal Generator	21 Jun 2017	Triennial	21 Jun 2020
	00006	R&S	SMR20	100104	Signal Generator	29 May 2017	Triennial	29 May 2020
	00243	Rigol	DS1102E	DS1ET150502164	Oscilloscope	7 Nov 2017	Triennial	7 Nov 2020
	00254	LeCroy	WM8600A	532	Oscilloscope	NCR	n/a	NCR
	00110	Gigatronics	8652A	1875801	Power Meter	29 Feb 2016	Triennial	29 Feb 2019
	00237	Gigatronics	80334A	1837001	Power Sensor	23 Jun 2014	Triennial	23 Jun 2017
	00232	ETS Lindgren	HI-6005	91440	Isotropic E-Field Probe	18 Dec 2017	Triennial	18 Dec 2020
	00003	HP	53181A	3736A05175	Frequency Counter	21 Jun 2017	Triennial	21 Jun 2020
	00257	Com-Power	LI-215A	191934	LISN	5 Jan 2018	Triennial	5 Jan 2021
	00041	AR	10W1000C	27887	Power Amplifier	NCR	n/a	NCR
	00106	AR	5SIG4	26235	Power Amplifier	NCR	n/a	NCR
	00280	AR	25A250AM6	22702	Power Amplifier	NCR	n/a	NCR
	00265	Miteq	JS32-00104000-58-5P	1939850	Microwave L/N Amplifier	COU	n/a	COU
	00071	EMCO	2090	9912-1484	Multi-Device Controller	n/a	n/a	n/a
*	00072	EMCO	2075	0001-2277	Mini-mast	n/a	n/a	n/a
*	00073	EMCO	2080	0002-1002	Turn Table	n/a	n/a	n/a
	00081	ESPEC	ECT-2	0510154-B	Environmental Chamber	CNR	n/a	CNR
	00234	VWR	61161-378	140320430	Temp/Humidity Meter	New	Triennial	New
	00236	Nokia	-	236	ESD Table	NCR	n/a	NCR
	00255	Expert ESD	A4001	A4001-155	ESD Target	COU	n/a	COU
	00064	NARDA	3020A	n/a	Bi-Directional Coupler	COU	n/a	COU
	00263	Koaxis	KP10-1.00M-TD	263	1m Armoured Cable	COU	n/a	COU
*	00263B	Koaxis	KP10-1.00M-TD	263B	1m Armoured Cable	COU	n/a	COU
*	00264	Koaxis	KP10-7.00M-TD	264	7m Armoured Cable	COU	n/a	COU
*	00275	TMS	LMR400	n/a	25m Cable	COU	n/a	COU
*	00276	TMS	LMR400	n/a	4m Cable	COU	n/a	COU
*	00277	TMS	LMR400	n/a	4m Cable	COU	n/a	COU
*	00278	TILE	34G3	n/a	TILE Test Software	NCR	n/a	NCR
Rented Equipment								

* Used during the course of this investigation

CNR: Calibration Not Required

COU: Calibrate On Use

APPENDIX C – MEASUREMENT INSTRUMENT UNCERTAINTY

CISPR 16-4 Measurement Uncertainty (U_{LAB})	
This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence interval using a coverage factor of k=2	
30MHz - 200MHz	
$U_{LAB} = 5.14\text{dB}$ $U_{CISPR} = 6.3\text{dB}$	
200MHz - 1000MHz	
$U_{LAB} = 5.90\text{dB}$ $U_{CISPR} = 6.3\text{dB}$	
1GHz - 6GHz	
$U_{LAB} = 4.80\text{dB}$ $U_{CISPR} = 5.2\text{dB}$	
6GHz - 18GHz	
$U_{LAB} = 5.1\text{dB}$ $U_{CISPR} = 5.5\text{dB}$	
If the calculated uncertainty U_{lab} is less than U_{CISPR} then:	
1	Compliance is deemed to occur if NO measured disturbance exceeds the disturbance limit
2	Non-Compliance is deemed to occur if ANY measured disturbance EXCEEDS the disturbance limit
If the calculated uncertainty U_{lab} is greater than U_{CISPR} then:	
3	Compliance is deemed to occur if NO measured disturbance, increased by ($U_{lab} - U_{CISPR}$), exceeds the disturbance limit
4	Non-Compliance is deemed to occur if ANY measured disturbance, increased by ($U_{lab} - U_{CISPR}$), EXCEEDS the disturbance limit