



Elliott Laboratories Inc.
www.elliottlabs.com

684 West Maude Avenue
Sunnyvale, CA 94086-3518

408-245-7800 Phone
408-245-3499 Fax

December 23, 2002

American TCB
6731 Whittier Ave.
Suite C110
McLean, VA. 22101

Gentlemen:

The enclosed documents constitute a formal submittal and application for a Grant of Equipment Authorization pursuant to Subpart C of Part 15 of FCC Rules (CFR 47) regarding intentional radiators. Data within this report demonstrates that the equipment tested complies with the FCC limits for intentional radiators.

This application is for a limited modular approval. As the device operates under two sections of the FCC's rules, it is considered a composite device. This application and report covers the operation of the device under part 15.247 for the frequency bands 2412-2462 MHz.

Elliott Laboratories, as duly authorized agent prepared this submittal. A copy of the letter of our appointment as agent is enclosed.

If there are any questions or if further information is needed, please contact Elliott Laboratories for assistance.

Sincerely,

A handwritten signature in black ink that reads "Juan Martinez".

Juan Martinez
Sr. EMC Engineer

JM/bab

***Electromagnetic Emissions Test Report
and
Application for Grant of Equipment Authorization
pursuant to
FCC Part 15, Subpart C Specifications for an
Intentional Radiator on the
Intel Corporation
Model: WM3B2100 in ThinkPad X30 Series IBM Laptop***

FCC ID: ANO20020201CLK
IC: 349E-WM3B2100


MANUFACTURER: Intel Corporation
2300 Corporate Center Drive
Thousand Oaks, CA. 91320

GRANTEE: International Business Machines Corporation
New Orchard Road
Armonk, NY 10504

TEST SITE: Elliott Laboratories, Inc.
684 W. Maude Avenue
Sunnyvale, CA 94086

REPORT DATE: December 23, 2002

FINAL TEST DATE: December 18, 2002

AUTHORIZED SIGNATORY: 
Juan Martinez
Sr. EMC Engineer



Elliott Laboratories, Inc. is accredited by the A2LA, certificate number 2016-01, to perform the test(s) listed in this report. This report shall not be reproduced, except in its entirety, without the written approval of Elliott Laboratories, Inc.

TABLE OF CONTENTS

TABLE OF CONTENTS.....	2
DECLARATIONS OF COMPLIANCE.....	3
SCOPE.....	4
OBJECTIVE.....	4
STATEMENT OF COMPLIANCE.....	4
OPERATION IN THE 2400-2483.5MHZ BAND	5
MEASUREMENT UNCERTAINTIES.....	6
EQUIPMENT UNDER TEST (EUT) DETAILS	7
GENERAL.....	7
ENCLOSURE.....	7
MODIFICATIONS.....	7
SUPPORT EQUIPMENT.....	7
EXTERNAL I/O CABLING.....	7
TEST SOFTWARE	7
TEST SITE.....	8
GENERAL INFORMATION.....	8
CONDUCTED EMISSIONS CONSIDERATIONS	8
RADIATED EMISSIONS CONSIDERATIONS.....	8
MEASUREMENT INSTRUMENTATION.....	9
INSTRUMENT CONTROL COMPUTER.....	9
LINE IMPEDANCE STABILIZATION NETWORK (LISN)	9
POWER METER.....	10
FILTERS/ATTENUATORS.....	10
ANTENNAS.....	10
ANTENNA MAST AND EQUIPMENT TURNTABLE	10
INSTRUMENT CALIBRATION.....	10
TEST PROCEDURES	11
EUT AND CABLE PLACEMENT.....	11
CONDUCTED EMISSIONS.....	11
RADIATED EMISSIONS.....	11
CONDUCTED EMISSIONS FROM ANTENNA PORT	12
SPECIFICATION LIMITS AND SAMPLE CALCULATIONS	13
CONDUCTED EMISSIONS SPECIFICATION LIMITS, SECTION 15.207	13
RADIATED EMISSIONS SPECIFICATION LIMITS, SECTION 15.209.....	13
SAMPLE CALCULATIONS - CONDUCTED EMISSIONS	14
SAMPLE CALCULATIONS - RADIATED EMISSIONS.....	15
EXHIBIT 1: Test Equipment Calibration Data	1
EXHIBIT 2: Test Data Log Sheets.....	2

DECLARATIONS OF COMPLIANCE

Equipment Name and Model:

Manufacturer:

Intel Corporation
2300 Corporate Center Drive
Thousand Oaks, CA 91320


Tested to applicable standards:

RSS-210, Issue 4, December 2000 (Low Power License-Exempt Radiocommunication Devices)
FCC Part 15 Subpart C (DTS)

Measurement Facility Description Filed With Department of Industry:

Departmental Acknowledgement Number: IC2845 **SV4** Dated July 19, 2001

I declare that the testing was performed or supervised by me; that the test measurements were made in accordance with the above mentioned departmental standards (through the use of ANSI C63.4 as detailed in section 5.3 of RSS-210, Issue 4); and that the equipment performed in accordance with the data submitted in this report.

Signature	
Name	Juan Martinez
Title	Sr. EMC Engineer
Company	Elliott Laboratories Inc.
Address	684 W. Maude Ave Sunnyvale, CA 94086 USA

Date: December 24, 2002

Maintenance of compliance with the above standards is the responsibility of the manufacturer. Any modification of the product which may result in increased emissions should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing or I/O cable changes, etc.).

SCOPE

An electromagnetic emissions test has been performed on the Intel model WM3B2100 in ThinkPad X30 Series IBM Laptop pursuant to Subpart C of Part 15 of FCC Rules for intentional radiators. Conducted and radiated emissions data has been collected, reduced, and analyzed within this report in accordance with measurement guidelines set forth in ANSI C63.4-1992 as outlined in Elliott Laboratories test procedures.

The intentional radiator above has been tested in a simulated typical installation to demonstrate compliance with the relevant FCC performance and procedural standards.

Final system data was gathered in a mode that tended to maximize emissions by varying orientation of EUT, orientation of power and I/O cabling, antenna search height, and antenna polarization.

Every practical effort was made to perform an impartial test using appropriate test equipment of known calibration. All pertinent factors have been applied to reach the determination of compliance.

The test results recorded herein are based on a single type test of the Intel model WM3B2100 in ThinkPad X30 Series IBM Laptop and therefore apply only to the tested sample. The sample was selected and prepared by Jim Baer of Intel Corporation.

OBJECTIVE

The primary objective of the manufacturer is compliance with Subpart C of Part 15 of FCC Rules for the radiated and conducted emissions of intentional radiators. Certification of these devices is required as a prerequisite to marketing as defined in Part 2 the FCC Rules.

Certification is a procedure where the manufacturer or a contracted laboratory makes measurements and submits the test data and technical information to the FCC. The FCC issues a grant of equipment authorization upon successful completion of their review of the submitted documents. Once the equipment authorization has been obtained, the label indicating compliance must be attached to all identical units which are subsequently manufactured.

STATEMENT OF COMPLIANCE

The tested sample of Intel Corporation model WM3B2100 in ThinkPad X30 Series IBM Laptop complied with the requirements of Subpart C of Part 15 of the FCC Rules for low power intentional radiators.

Maintenance of FCC compliance is the responsibility of the manufacturer. Any modification of the product which may result in increased emissions should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing or I/O cable changes, etc.).

OPERATION IN THE 2400-2483.5MHz BAND

FCC Part 15 Section	RSS 210 Section	Description	Measured Value	Comments	Result
15.247(a)	6.6.2(o)	Digital Modulation	Systems uses Direct Sequence Spread Spectrum techniques	System must utilize a digital transmission technology	Complies
-	6.6.2 (o) (b)	Processing Gain	As per communication from Industry Canada, this requirement has been withdrawn		
15.247 (a) (2)	-	6dB Bandwidth	13.3 MHz	Minimum allowed is 500kHz	Complies
15.247 (b) (3) 15.247 b(4) (i)	-	Output Power	17.3 dBm (0.0537 Watts)	Multi-point applications: Maximum permitted is 1Watt, with EIRP limited to 4 Watts.	Complies
-	6.2.2(o)(b)	Output Power	17.3 dBm (0.0537 Watts)	Maximum permitted is 1Watt. EIRP must not exceed 4 Watts for unlicensed use.	Complies
15.247(d)	6.2.2 (o)(b)	Power Spectral Density	-4.5 dBm / MHz	Maximum permitted is 8dBm/3kHz	Complies
-	6.2.2(o) (d)	Power Spectral Density	4.03mW / MHz	For unlicensed use in the 2400-2450MHz band, use is restarted to indoor use only with spectral density limited to 50mW / MHz (calculated from output power divided by bandwidth)	Complies
15.247(c)	6.2.2(e) (1)	Spurious Emissions – Antenna Conducted 30MHz – 25GHz	All spurious emissions < -20dBc	All spurious emissions < -20dBc. Emissions in restricted bands must meet the radiated emissions limits detailed in 15.207	Complies
15.247(c) / 15.209	6.2.2(e) (1)	Radiated Spurious Emissions 30MHz – 25GHz	41.7 dBuV/m @ 7232.791 MHz (-12.3 dB)		Complies
15.207	6.6	AC Conducted Emissions	41.4 dBuV @ 0.1948 MHz (-12.4 dB)	Conducted emissions from the AC power port must meet the limits set forth in RSS210 and 15.207	Complies
15.247 (b) (5)		RF Exposure Requirements	MPE		
15.203	6.2.2(o) (e2)	RF Connector	Antenna and connector is integral to the host device	Integral antenna or specialized connector required	Complies

EIRP calculated using antenna gain of .62dBi (1.6) in the 2.4 GHz band

MEASUREMENT UNCERTAINTIES

ISO Guide 25 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level and were calculated in accordance with NAMAS document NIS 81.

Measurement Type	Frequency Range (MHz)	Calculated Uncertainty (dB)
Conducted Emissions	0.15 to 30	± 2.4
Radiated Emissions	30 to 1000	± 3.2

EQUIPMENT UNDER TEST (EUT) DETAILS**GENERAL**

The Intel model WM3B2100 in ThinkPad X30 Series IBM Laptop is a mini PCI Card single band (802.11b) transceiver, which is designed to be installed into a laptop PC and connect to antennas mounted in the screen of the laptop. The host laptop was treated as table-top equipment during testing to simulate the end user environment. The electrical rating of the laptop is 120/240 V, 50/60 Hz, 0.5 Amps.

The sample was received on December 13, 2002 and tested on December 18, 2002. The EUT consisted of the following component(s):

Manufacturer/Model/Description	Serial Number	FCC ID Number
Intel Corporation WM3B2100 MPCI Card	00042346750A	ANO20020201CLK
IBM/ThinkPad X30 Series 2/Laptop	ZZ-00063	DoC

ENCLOSURE

The EUT has no enclosure. It is designed to be installed within the enclosure of a host computer.

MODIFICATIONS

N/A

SUPPORT EQUIPMENT

No support equipment was used during the test.

EXTERNAL I/O CABLING

No external cables.

TEST SOFTWARE

The radio was transmitting at full power on the specified channels and at a data rate of 1 and 11 Mb/s. The channels were selected since they are at the top, center and bottom of the allocated bands.

TEST SITE**GENERAL INFORMATION**

Final test measurements were taken on December 18, 2002 at the Elliott Laboratories Open Area Test Site #4 located at 684 West Maude Avenue, Sunnyvale, California. The test site contains separate areas for radiated and conducted emissions testing. Pursuant to section 2.948 of the Rules, construction, calibration, and equipment data has been filed with the Commission.

The FCC recommends that ambient noise at the test site be at least 6 dB below the allowable limits. Ambient levels are below this requirement with the exception of predictable local TV, radio, and mobile communications traffic. The test site contains separate areas for radiated and conducted emissions testing. Considerable engineering effort has been expended to ensure that the facilities conform to all pertinent FCC requirements.

CONDUCTED EMISSIONS CONSIDERATIONS

Conducted emissions testing is performed in conformance with ANSI C63.4-1992. Measurements are made with the EUT connected to the public power network through a nominal, standardized RF impedance, which is provided by a line impedance stabilization network, known as a LISN. A LISN is inserted in series with each current-carrying conductor in the EUT power cord.

RADIATED EMISSIONS CONSIDERATIONS

The FCC has determined that radiation measurements made in a shielded enclosure are not suitable for determining levels of radiated emissions. Radiated measurements are performed in an open field environment. The test site is maintained free of conductive objects within the CISPR defined elliptical area incorporated in ANSI C63.4 guidelines.

MEASUREMENT INSTRUMENTATION**RECEIVER SYSTEM**

An EMI receiver as specified in CISPR 16-1 is used for emissions measurements. The receivers used can measure over the frequency range of 9 kHz up to 2000 MHz. These receivers allow both ease of measurement and high accuracy to be achieved. The receivers have Peak, Average, and CISPR (Quasi-peak) detectors built into their design so no external adapters are necessary. The receiver automatically sets the required bandwidth for the CISPR detector used during measurements.

For measurements above the frequency range of the receivers, a spectrum analyzer is utilized because it provides visibility of the entire spectrum along with the precision and versatility required to support engineering analysis. Average measurements above 1000MHz are performed on the spectrum analyzer using the linear-average method with a resolution bandwidth of 1 MHz and a video bandwidth of 10 Hz.

INSTRUMENT CONTROL COMPUTER

The receivers utilize either a Rohde and Schwarz EZM Spectrum Monitor/Controller or contain an internal Spectrum Monitor/Controller to view and convert the receiver measurements to the field strength at an antenna or voltage developed at the LISN measurement port, which is then compared directly with the appropriate specification limit. This provides faster, more accurate readings by performing the conversions described under Sample Calculations within the Test Procedures section of this report. Results are printed in a graphic and/or tabular format, as appropriate. A personal computer is used to record all measurements made with the receivers.

The Spectrum Monitor provides a visual display of the signal being measured. In addition, the controller or a personal computer run automated data collection programs which control the receivers. This provides added accuracy since all site correction factors, such as cable loss and antenna factors are added automatically.

LINE IMPEDANCE STABILIZATION NETWORK (LISN)

Line conducted measurements utilize a fifty microhenry Line Impedance Stabilization Network as the monitoring point. The LISN used also contains a 250 uH CISPR adapter. This network provides for calibrated radio frequency noise measurements by the design of the internal low pass and high pass filters on the EUT and measurement ports, respectively.

POWER METER

A power meter and thermister mount are used for all direct output power measurements from transmitters as they provide a broadband indication of the power output.

FILTERS/ATTENUATORS

External filters and precision attenuators are often connected between the receiving antenna or LISN and the receiver. This eliminates saturation effects and non-linear operation due to high amplitude transient events.

ANTENNAS

A biconical antenna is used to cover the range from 30 MHz to 300 MHz and a log periodic antenna is utilized from 300 MHz to 1000 MHz. Narrowband tuned dipole antennas are used over the entire 30 to 1000 MHz range for precision measurements of field strength. Above 1000 MHz, a horn antenna is used. The antenna calibration factors are included in site factors programmed into the test receivers.

ANTENNA MAST AND EQUIPMENT TURNTABLE

The antennas used to measure the radiated electric field strength are mounted on a non-conductive antenna mast equipped with a motor drive to vary the antenna height.

ANSI C63.4 specifies that the test height above ground for table-mounted devices shall be 80 centimeters. Floor mounted equipment shall be placed on the ground plane if the device is normally used on a conductive floor or separated from the ground plane by insulating material from 3 to 12 mm if the device is normally used on a non-conductive floor. During radiated measurements, the EUT is positioned on a motorized turntable in conformance with this requirement.

INSTRUMENT CALIBRATION

All test equipment is regularly checked to ensure that performance is maintained in accordance with the manufacturer's specifications. All antennas are calibrated at regular intervals with respect to tuned half-wave dipoles. An exhibit of this report contains the list of test equipment used and calibration information.

TEST PROCEDURES**EUT AND CABLE PLACEMENT**

The FCC requires that interconnecting cables be connected to the available ports of the unit and that the placement of the unit and the attached cables simulate the worst case orientation that can be expected from a typical installation, so far as practicable. To this end, the position of the unit and associated cabling is varied within the guidelines of ANSI C63.4, and the worst case orientation is used for final measurements.

CONDUCTED EMISSIONS

Conducted emissions are measured at the plug end of the power cord supplied with the EUT. Excess power cord length is wrapped in a bundle between 30 and 40 centimeters in length near the center of the cord. Preliminary measurements are made to determine the highest amplitude emission relative to the specification limit for all the modes of operation. Placement of system components and varying of cable positions are performed in each mode. A final peak mode scan is then performed in the position and mode for which the highest emission was noted on all current carrying conductors of the power cord.

RADIATED EMISSIONS

Radiated emissions measurements are performed in two phases as well. A preliminary scan of emissions is conducted in which all significant EUT frequencies are identified with the system in a nominal configuration. At least two scans are performed from 30 MHz up to the frequency required by the regulation specified on page 1. One or more of these is with the antenna polarized vertically while the one or more of these is with the antenna polarized horizontally. During the preliminary scans, the EUT is rotated through 360°, the antenna height is varied and cable positions are varied to determine the highest emission relative to the limit.

A speaker is provided in the receiver to aid in discriminating between EUT and ambient emissions. Other methods used during the preliminary scan for EUT emissions involve scanning with near field magnetic loops, monitoring I/O cables with RF current clamps, and cycling power to the EUT.

Final maximization is a phase in which the highest amplitude emissions identified in the spectral search are viewed while the EUT azimuth angle is varied from 0 to 360 degrees relative to the receiving antenna. The azimuth which results in the highest emission is then maintained while varying the antenna height from one to four meters. The result is the identification of the highest amplitude for each of the highest peaks. Each recorded level is corrected in the receiver using appropriate factors for cables, connectors, antennas, and preamplifier gain. Emissions which have values close to the specification limit may also be measured with a tuned dipole antenna to determine compliance.

CONDUCTED EMISSIONS FROM ANTENNA PORT

? Direct measurements are performed with the antenna port of the EUT connected to either the power meter or spectrum analyzer via a suitable attenuator and/or filter. These are used to ensure that the front end of the measurement instrument is not overloaded by the fundamental transmission.

SPECIFICATION LIMITS AND SAMPLE CALCULATIONS

The limits for conducted emissions are given in units of microvolts, and the limits for radiated emissions are given in units of microvolts per meter at a specified test distance. Data is measured in the logarithmic form of decibels relative to one microvolt, or dB microvolts (dBuV). For radiated emissions, the measured data is converted to the field strength at the antenna in dB microvolts per meter (dBuV/m). The results are then converted to the linear forms of uV and uV/m for comparison to published specifications.

For reference, converting the specification limits from linear to decibel form is accomplished by taking the base ten logarithm, then multiplying by 20. These limits in both linear and logarithmic form are as follows:

CONDUCTED EMISSIONS SPECIFICATION LIMITS, SECTION 15.207

Frequency (MHz)	Average Limit (dBuV)	Quasi Peak Limit (dBuV)
0.150 to 0.500	Linear decrease on logarithmic frequency axis between 56.0 and 46.0	Linear decrease on logarithmic frequency axis between 66.0 and 56.0
0.500 to 5.000	46.0	56.0

RADIATED EMISSIONS SPECIFICATION LIMITS, SECTION 15.209

Frequency Range (MHz)	Limit (uV/m @ 3m)	Limit (dBuV/m @ 3m)
0.009-0.490	$2400/F_{\text{KHz}} @ 300\text{m}$	$67.6-20*\log_{10}(F_{\text{KHz}}) @ 300\text{m}$
0.490-1.705	$24000/F_{\text{KHz}} @ 30\text{m}$	$87.6-20*\log_{10}(F_{\text{KHz}}) @ 30\text{m}$
1.705 to 30	30 @ 30m	29.5 @ 30m
30 to 88	100	40
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

SAMPLE CALCULATIONS - CONDUCTED EMISSIONS

Receiver readings are compared directly to the conducted emissions specification limit (decibel form) as follows:

$$R_T - B = C$$

and

$$C - S = M$$

where:

R_T = Receiver Reading in dBuV

B = Broadband Correction Factor*

C = Corrected Reading in dBuV

S = Specification Limit in dBuV

M = Margin to Specification in +/- dB

* Broadband Level - Per ANSI C63.4, 13 dB may be subtracted from the quasi-peak level if it is determined that the emission is broadband in nature. If the signal level in the average mode is six dB or more below the signal level in the peak mode, the emission is classified as broadband.

SAMPLE CALCULATIONS - RADIATED EMISSIONS

Receiver readings are compared directly to the specification limit (decibel form). The receiver internally corrects for cable loss, preamplifier gain, and antenna factor. The calculations are in the reverse direction of the actual signal flow, thus cable loss is added and the amplifier gain is subtracted. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements. A distance factor, when used for electric field measurements, is calculated by using the following formula:

$$F_d = 20 * \text{LOG}_{10} (D_m/D_s)$$

where:

$$F_d = \text{Distance Factor in dB}$$

$$D_m = \text{Measurement Distance in meters}$$

$$D_s = \text{Specification Distance in meters}$$

Measurement Distance is the distance at which the measurements were taken and Specification Distance is the distance at which the specification limits are based. The antenna factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

The margin of a given emission peak relative to the limit is calculated as follows:

$$R_c = R_r + F_d$$

and

$$M = R_c - L_s$$

where:

$$R_r = \text{Receiver Reading in dBuV/m}$$

$$F_d = \text{Distance Factor in dB}$$

$$R_c = \text{Corrected Reading in dBuV/m}$$

$$L_s = \text{Specification Limit in dBuV/m}$$

$$M = \text{Margin in dB Relative to Spec}$$

EXHIBIT 1:Test Equipment Calibration Data

1 Page

Radiated Emissions, 1 - 25,000 GHz, 24-Dec-02**Engineer: jmartinez**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Assett #</u>	<u>Cal interval</u>	<u>Last Calibrated</u>	<u>Cal Due</u>
EMCO	Horn Antenna, D. Ridge 1-18GHz	3115	487	12	4/22/2002	4/22/2003
Hewlett Packard	Spectrum Analyzer 9KHz - 26GHz, non programable	8563E	284	12	3/21/2002	3/21/2003
Miteq	Preamplifier, 1-18GHz	AFS44	1346	12	1/7/2002	1/7/2003

Antenna Conducted Measurements, 24-Dec-02**Engineer: jmartinez**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Assett #</u>	<u>Cal interval</u>	<u>Last Calibrated</u>	<u>Cal Due</u>
Hewlett Packard	Microwave EMI test system (SA40, 9Hz - 40GHz), system 2	84125C	1410	12	4/2/2002	4/2/2003

Peak Power Measurement, 24-Dec-02**Engineer: jmartinez**

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Assett #</u>	<u>Cal interval</u>	<u>Last Calibrated</u>	<u>Cal Due</u>
Rohde & Schwarz	Power Meter	NRVS	1422	12	9/6/2002	9/6/2003
Rohde & Schwarz	Power Sensor 100uW - 2 Watts	NRV-Z32	1423	12	9/6/2002	9/6/2003

EXHIBIT 2:Test Data Log Sheets

ELECTROMAGNETIC EMISSIONS

TEST LOG SHEETS

AND

MEASUREMENT DATA

T49708_Radio 23 Pages



EMC Test Data

Client:	IBM	Job Number:	J49652
Model:	Intel 802.11b (M/N: WM3B2100) in	T-Log Number:	T49708
	ThinkPad X30 Series IBM Laptop	Proj Eng:	
Contact:	Robert Paxman		
Emissions Spec:	Part 15.247	Class:	DSSS
Immunity Spec:		Environment:	

EMC Test Data

For The

IBM

Model

**Intel 802.11b (M/N: WM3B2100) in
ThinkPad X30 Series IBM Laptop**



EMC Test Data

Client:	IBM	Job Number:	J49652
Model:	Intel 802.11b (M/N: WM3B2100) in	T-Log Number:	T49708
	ThinkPad X30 Series IBM Laptop	Proj Eng:	
Contact:	Robert Paxman		
Emissions Spec:	Part 15.247	Class:	DSSS
Immunity Spec:		Environment:	

EUT INFORMATION

General Description

The EUT is a mini PCI Card single band (802.11b) transceiver which is designed to be installed into a laptop PC and connect to antennas mounted in the screen of the laptop. The host laptop was treated as table-top equipment during testing to simulate the end user environment. The electrical rating of the laptop is 120/240 V, 50/60 Hz, 0.5 Amps.

Equipment Under Test

Manufacturer	Model	Description	Serial Number	FCC ID
Intel Corporation	WM3B2100	MPCI Card	00042346750A	ANO20020201CLK
IBM	X30 Series	Laptop	ZZ-00063	DoC

Other EUT Details

Antenna

The EUT uses an integral antenna with a gain of .62 dBi.

The antenna connector used is non-standard antenna (connector description here) to meet the requirements of FCC Part 15.203 and RSS-210. Antennas will be installed inside at the topside of the display screen of the Laptop. The Laptop vendors will professionally install antennas.

EUT Enclosure

The EUT does not have an enclosure as it is designed to be installed within the enclosure of a host computer.

Modification History

Mod. #	Test	Date	Modification
1	-	-	-

Modifications applied are assumed to be used on subsequent tests unless otherwise stated as a further modification.



EMC Test Data

Client:	IBM	Job Number:	J49652
Model:	Intel 802.11b (M/N: WM3B2100) in ThinkPad X30 Series IBM Laptop	T-Log Number:	T49708
Contact:	Robert Paxman	Proj Eng:	
Emissions Spec:	Part 15.247	Class:	DSSS
Immunity Spec:		Environment:	

Test Configuration #1

Local Support Equipment

Manufacturer	Model	Description	Serial Number	FCC ID
Logitech	M-BD58	Mouse	LNA20956433	-

Remote Support Equipment

Manufacturer	Model	Description	Serial Number	FCC ID
None				

Interface Cabling and Ports

Port	Connected To	Cable(s)		
		Description	Shielded or Unshielded	Length(m)
PS/2	Mouse	Multiwire	Shielded	1.5

Note: During the radio test no printer or serial were connected as this is not required by ANSI 63.4/1992 when testing the transmitter portion.

EUT Operation During Emissions

The radio was transmitting at full power on the specified channels and at a data rate of 1 and 11 Mb/s. The channels were selected since they are at the top, center and bottom of the allocated bands.



EMC Test Data

Client:	IBM	Job Number:	J49652
Model:	Intel 802.11b (M/N: WM3B2100) in ThinkPad X30 Series IBM Laptop	T-Log Number:	T49708
Contact:	Robert Paxman	Proj Eng:	Enter on cover sheet
Spec:	Part 15.247	Class:	N/A

Radiated Emissions

Test Specifics

Objective: The objective of this test session is to perform engineering evaluation testing of the EUT with respect to the specification listed above.

Date of Test: 12/18/2002
Test Engineer: mfaustino/Vishal
Test Location: SVOATS #4

Config. Used: 1
Config Change: None
EUT Voltage: 120V/60Hz

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing.

For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

When measuring the conducted emissions from the EUT's antenna port, the antenna port of the EUT was connected to the spectrum analyzer or power meter via a suitable attenuator to prevent overloading the measurement system. All measurements are corrected to allow for the external attenuators used.

Ambient Conditions: Temperature: 12°C
Rel. Humidity: 67%

Summary of Results

Run #	Test Performed	Limit	Result	Margin
1a-1c	RE, 30 - 25,000 MHz - Spurious Emissions In Restricted Bands	FCC Part 15.209 / 15.247(c)	Pass	-12.3dB @ 7232.8 MHz
2a-2c	RE, 30 - 25,000 MHz - Spurious Emissions In Restricted Bands	FCC Part 15.209 / 15.247(c)	Pass	-15.2dB @ 7235.4 MHz
3a-3b	6dB Bandwidth	15.247(a)	Pass	13.3 MHz
4	Output Power	15.247(b)	Pass	17.3 dBm
5a-5b	Power Spectral Density (PSD)	15.247(d)	Pass	-4.5 dBm/MHz
6a-6b	Out-of-Band	15.247(d)	Pass	Refer to plots



EMC Test Data

Client:	IBM	Job Number:	J49652
Model:	Intel 802.11b (M/N: WM3B2100) in ThinkPad X30 Series IBM Laptop	T-Log Number:	T49708
Contact:	Robert Paxman	Proj Eng:	Enter on cover sheet
Spec:	Part 15.247	Class:	N/A





Modifications Made During Testing:

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Run# 1: Bandedge Measurement (1Mb/s)

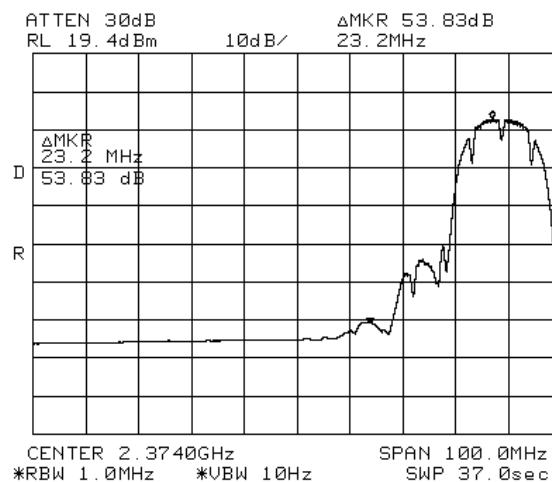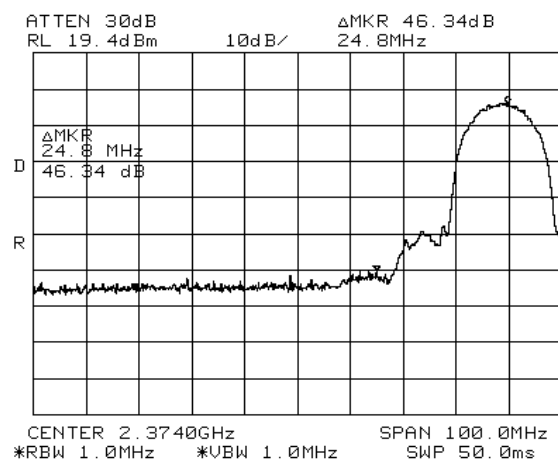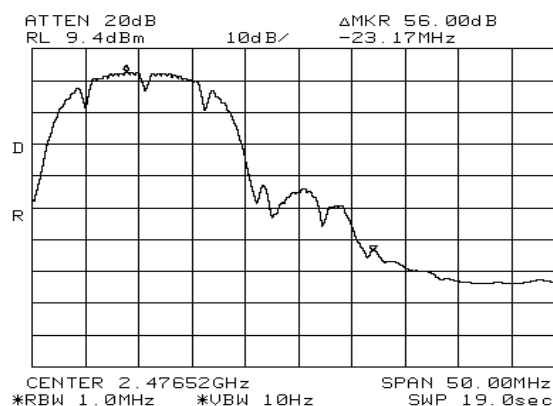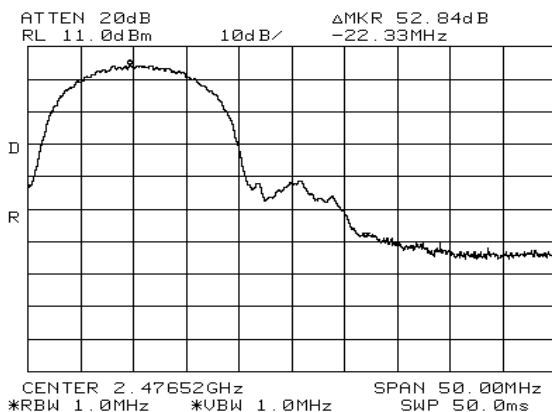



EMC Test Data

Client:	IBM	Job Number:	J49652
Model:	Intel 802.11b (M/N: WM3B2100) in ThinkPad X30 Series IBM Laptop	T-Log Number:	T49708
Contact:	Robert Paxman	Proj Eng:	Enter on cover sheet
Spec:	Part 15.247	Class:	N/A

Run #1a: Radiated Spurious Emissions, 30-25,000 MHz. Low Channel @ 2412 MHz

CH 1, Scale 10, Bias 34, Gain 0

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBμV/m	V/H	Limit	Margin	Pk/QP/Avg	degrees	meters	
2412.104	104.3	V	-	-	Pk	-	-	
2411.165	100.5	V	-	-	Avg	-	-	
2412.039	108.2	H	-	-	Pk	-	-	
2411.132	104.4	H	-	-	Avg	-	-	
7232.791	41.7	V	54.0	-12.3	Avg	0	1.0	
7235.095	39.8	H	54.0	-14.2	Avg	0	1.0	
4823.990	32.9	V	54.0	-21.1	Avg	0	1.0	
7235.973	51.5	H	74.0	-22.5	Pk	0	1.0	
7232.171	51.0	V	74.0	-23.0	Pk	0	1.0	
4823.961	27.7	H	54.0	-26.3	Avg	0	1.0	
4823.811	43.4	V	74.0	-30.6	Pk	0	1.0	
4823.822	40.2	H	74.0	-33.8	Pk	0	1.0	

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 20dB below the level of the fundamental.

Note 2: Check up to the No harmonics measureable above the third harmonic close to 20-dB of the limit.

Run #1b: Radiated Spurious Emissions, 30-25,000 MHz. Low Channel @ 2437 MHz

CH 1, Scale 12, Bias 35, Gain 2

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBμV/m	V/H	Limit	Margin	Pk/QP/Avg	degrees	meters	
7306.785	37.3	V	54.0	-16.7	Avg	0	1.0	
7306.800	34.6	H	54.0	-19.4	Avg	0	1.0	
4869.805	30.6	H	54.0	-23.4	Avg	0	1.0	
4873.979	30.1	V	54.0	-23.9	Avg	0	1.0	
7308.132	48.1	V	74.0	-25.9	Pk	0	1.0	
7307.078	47.1	H	74.0	-26.9	Pk	0	1.0	
4870.955	42.8	H	74.0	-31.2	Pk	0	1.0	
4873.794	40.4	V	74.0	-33.6	Pk	0	1.0	

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 20dB below the level of the fundamental.

Note 2: Check up to the No harmonics measureable above the third harmonic close to 20-dB of the limit.



EMC Test Data

Client:	IBM	Job Number:	J49652
Model:	Intel 802.11b (M/N: WM3B2100) in ThinkPad X30 Series IBM Laptop	T-Log Number:	T49708
Contact:	Robert Paxman	Proj Eng:	Enter on cover sheet
Spec:	Part 15.247	Class:	N/A

Run #1c: Radiated Spurious Emissions, 30-25,000 MHz. Low Channel @ 2462 MHz

CH 1, Scale 12, Bias 35, Gain 2

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBuV/m	V/H	Limit	Margin	Pk/QP/Avg	degrees	meters	
2462.921	104.1	V	-	-	Pk	-	-	
2462.848	100.4	V	-	-	Avg	-	-	
2459.522	108.8	H	-	-	Pk	-	-	
2459.268	105.7	H	-	-	Avg	-	-	
4923.991	39.1	V	54.0	-14.9	Avg	0	1.0	
7385.444	34.2	V	54.0	-19.8	Avg	0	1.0	
7385.266	34.0	H	54.0	-20.0	Avg	0	1.0	
4924.034	33.6	H	54.0	-20.4	Avg	0	1.0	
4924.053	46.9	V	74.0	-27.1	Pk	0	1.0	
7385.623	46.4	V	74.0	-27.6	Pk	0	1.0	
7386.225	46.0	H	74.0	-28.0	Pk	0	1.0	
4924.003	44.1	H	74.0	-29.9	Pk	0	1.0	

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 20dB below the level of the fundamental.

Note 2: Check up to the No harmonics measureable above the third harmonic close to 20-dB of the limit.

Bandedge Measurements

Spurious Signal	Fundamental Level	Detector	Spurious Level		Limit	Margin	Comments
MHz	(dBuV/m @3m)	Pk/Avg	-dBc	dBuV/m	dBuV/m	dB	
2385.98	108.4	Pk	46.3	62.1	74.0	-11.9	
2385.98	104.4	Avg	53.8	50.6	54.0	-3.4	
2484.04	108.8	Pk	52.8	56.0	74.0	-18.0	
2484.04	105.7	Avg	56.0	49.7	54.0	-4.3	

Note 1: EUT operating on the lowest channel available in the 2390 - 2412 MHz band. Signal level calculated using the relative measurements in run #1, of CE spreadsheet (46.34 dBc for peak and 53.83 dBc for average) applied to the highest peak and average field strength measurements of the fundamental signal level.





Note 2: EUT operating on highest channel available in the 2462 - 2483.5 MHz band. Signal level calculated using the relative measurements in run #1, of CE spreadsheet (52.84 dBc for peak and 56.00 dBc for average) applied to the highest peak and average field strength measurements of the fundamental signal level.



EMC Test Data

Client:	IBM	Job Number:	J49652
Model:	Intel 802.11b (M/N: WM3B2100) in ThinkPad X30 Series IBM Laptop	T-Log Number:	T49708
Contact:	Robert Paxman	Proj Eng:	Enter on cover sheet
Spec:	Part 15.247	Class:	N/A

Run# 2: Bandedge Measurement (11Mb/s)

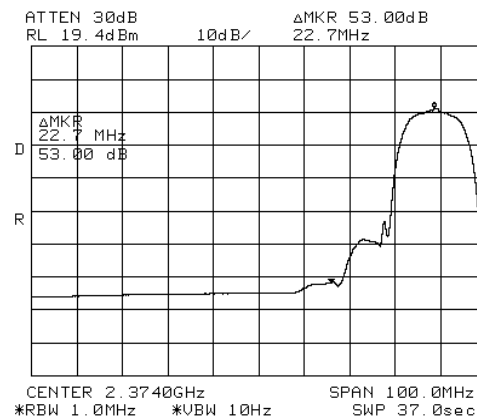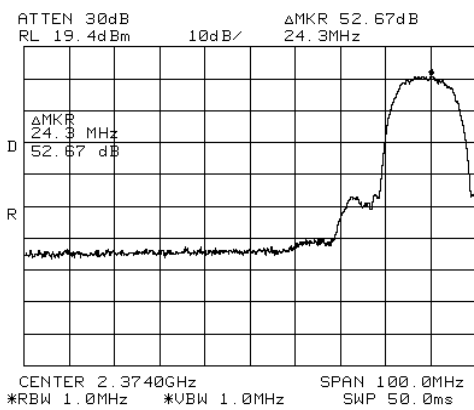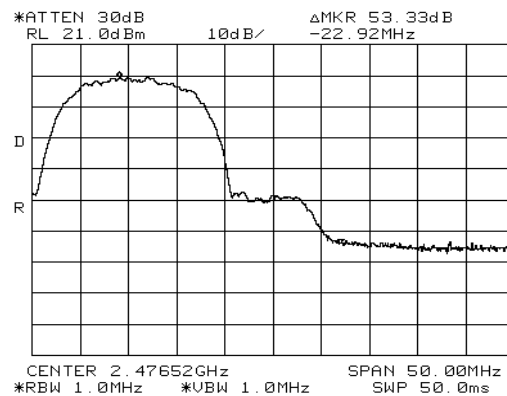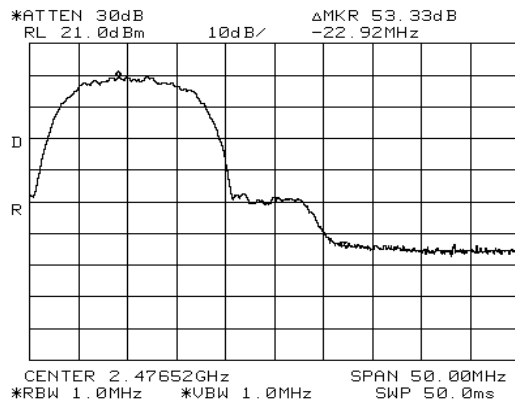



EMC Test Data

Client:	IBM	Job Number:	J49652
Model:	Intel 802.11b (M/N: WM3B2100) in ThinkPad X30 Series IBM Laptop	T-Log Number:	T49708
Contact:	Robert Paxman	Proj Eng:	Enter on cover sheet
Spec:	Part 15.247	Class:	N/A

Run #2a: Radiated Spurious Emissions, 30-25,000 MHz. Low Channel @ 2412 MHz

CH 11, Scale 10, Bias 34, Gain 0

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBμV/m	V/H	Limit	Margin	Pk/QP/Avg	degrees	meters	
2413.679	106.3	V	-	-	Pk	-	-	
2413.117	97.5	V	-	-	Avg	-	-	
2411.472	112.6	H	-	-	Pk	-	-	
2411.922	104.4	H	-	-	Avg	-	-	
7235.441	38.8	V	54.0	-15.2	Avg	0	1.0	
7235.237	38.1	H	54.0	-15.9	Avg	0	1.0	
4823.973	31.6	V	54.0	-22.4	Avg	0	1.0	
7236.595	50.2	V	74.0	-23.8	Pk	0	1.0	
4824.170	30.2	H	54.0	-23.8	Avg	0	1.0	
7236.007	48.9	H	74.0	-25.1	Pk	0	1.0	
4823.800	43.3	V	74.0	-30.7	Pk	0	1.0	
4824.065	43.1	H	74.0	-30.9	Pk	0	1.0	

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 20dB below the level of the fundamental.

Note 2: Check up to the No harmonics measureable above the third harmonic close to 20-dB of the limit.

Run #2b: Radiated Spurious Emissions, 30-25,000 MHz. Low Channel @ 2437 MHz

CH 11, Scale 12, Bias 35, Gain 2

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBμV/m	V/H	Limit	Margin	Pk/QP/Avg	degrees	meters	
7307.425	35.1	V	54.0	-18.9	Avg	0	1.0	
7306.832	34.4	H	54.0	-19.6	Avg	0	1.0	
4873.955	31.4	V	54.0	-22.6	Avg	0	1.0	
4870.361	30.2	H	54.0	-23.8	Avg	0	1.0	
7307.013	47.4	V	74.0	-26.6	Pk	0	1.0	
7307.112	47.3	H	74.0	-26.7	Pk	0	1.0	
4873.916	43.1	V	74.0	-30.9	Pk	0	1.0	
4870.063	42.4	H	74.0	-31.6	Pk	0	1.0	

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 20dB below the level of the fundamental.

Note 2: Check up to the No harmonics measureable above the third harmonic close to 20-dB of the limit.



EMC Test Data

Client:	IBM	Job Number:	J49652
Model:	Intel 802.11b (M/N: WM3B2100) in ThinkPad X30 Series IBM Laptop	T-Log Number:	T49708
Contact:	Robert Paxman	Proj Eng:	Enter on cover sheet
Spec:	Part 15.247	Class:	N/A

Run #2c: Radiated Spurious Emissions, 30-25,000 MHz. Low Channel @ 2462 MHz

CH 11, Scale 12, Bias 35, Gain 2

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBuV/m	V/H	Limit	Margin	Pk/QP/Avg	degrees	meters	
2463.153	112.6	H	-	-	Pk	-	-	
2462.461	104.6	H	-	-	Avg	-	-	
2463.156	108.7	V	-	-	Pk	-	-	
2462.226	100.4	V	-	-	Avg	-	-	
7386.081	34.0	V	54.0	-20.0	Avg	0	1.0	
7385.578	34.0	H	54.0	-20.0	Avg	0	1.0	
4923.970	32.3	V	54.0	-21.7	Avg	0	1.0	
4923.634	31.8	H	54.0	-22.2	Avg	0	1.0	
7386.353	46.8	V	74.0	-27.2	Pk	0	1.0	
7385.758	45.9	H	74.0	-28.1	Pk	0	1.0	
4923.733	44.4	V	74.0	-29.6	Pk	0	1.0	
4923.420	43.4	H	74.0	-30.6	Pk	0	1.0	

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 20dB below the level of the fundamental.

Note 2: Check up to the No harmonics measureable above the third harmonic close to 20-dB of the limit.

Bandedge Measurements

Spurious Signal	Fundamental Level	Detector	Spurious Level		Limit	Margin	Comments
MHz	(dBuV/m @3m)	Pk/Avg	-dBc	dBuV/m	dBuV/m	dB	
2385.98	112.6	Pk	53.3	59.3	74.0	-14.7	
2385.98	104.4	Avg	53.3	51.1	54.0	-2.9	
2484.04	112.6	Pk	52.7	59.9	74.0	-14.1	
2484.04	104.6	Avg	53.0	51.6	54.0	-2.4	

Note 1: EUT operating on the lowest channel available in the 2390 - 2412 MHz band. Signal level calculated using the relative measurements in run #2, of CE spreadsheet (53.33 dBc for peak and 53.33 dBc for average) applied to the highest peak and average field strength measurements of the fundamental signal level.

Note 2: EUT operating on highest channel available in the 2462 - 2483.5 MHz band. Signal level calculated using the relative measurements in run #2, of CE spreadsheet (52.67 dBc for peak and 53.00 dBc for average) applied to the highest peak and average field strength measurements of the fundamental signal level.



EMC Test Data


Client:	IBM	Job Number:	J49652
Model:	Intel 802.11b (M/N: WM3B2100) in ThinkPad X30 Series IBM Laptop	T-Log Number:	T49708
Contact:	Robert Paxman	Proj Eng:	Enter on cover sheet
Spec:	Part 15.247	Class:	N/A

Run #3a: Signal Bandwidth (11Mb/s)

Channel	Frequency (MHz)	Resolution Bandwidth	6dB Signal Bandwidth (MHz)	Graph reference #
Low	2412	100kHz	11.90	Refer to plots below
Mid	2437	100kHz	12.00	Refer to plots below
High	2462	100kHz	11.20	Refer to plots below

Note 1: Add note here



Note 2:

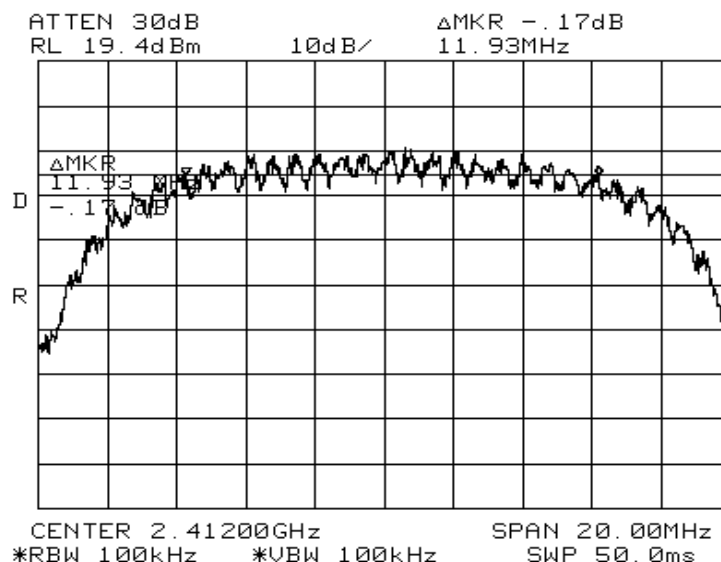



EMC Test Data

Client:	IBM	Job Number:	J49652
Model:	Intel 802.11b (M/N: WM3B2100) in ThinkPad X30 Series IBM Laptop	T-Log Number:	T49708
Contact:	Robert Paxman	Proj Eng:	Enter on cover sheet
Spec:	Part 15.247	Class:	N/A

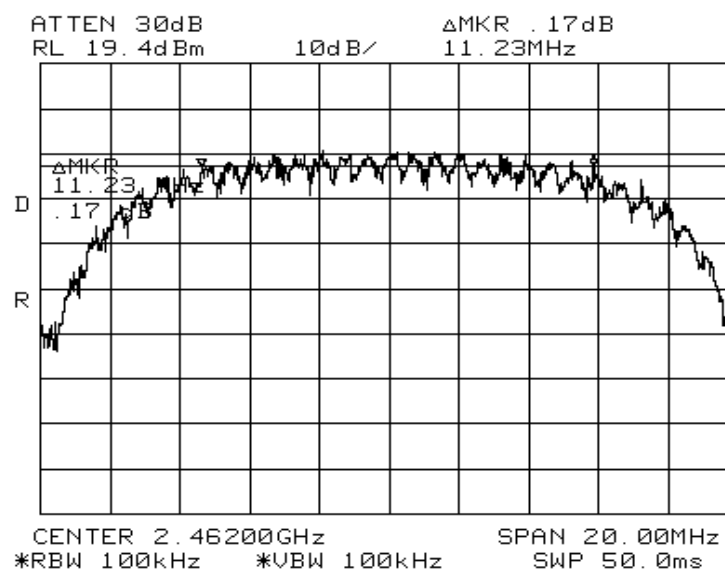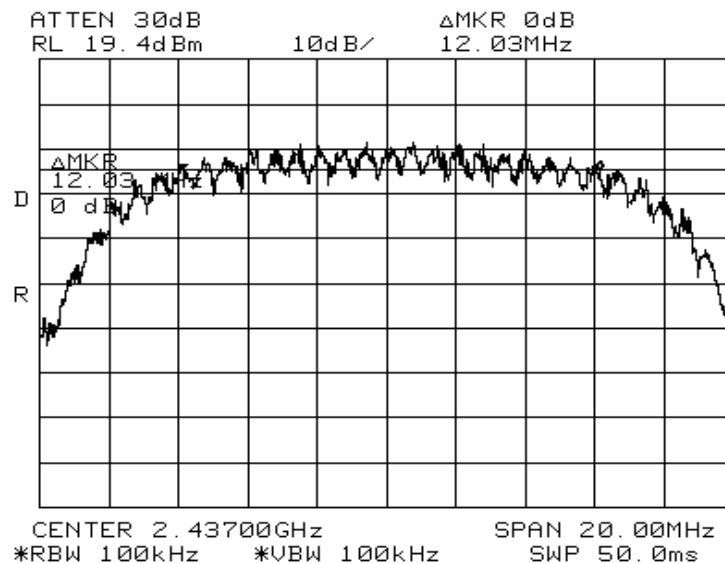



EMC Test Data


Client:	IBM	Job Number:	J49652
Model:	Intel 802.11b (M/N: WM3B2100) in ThinkPad X30 Series IBM Laptop	T-Log Number:	T49708
Contact:	Robert Paxman	Proj Eng:	Enter on cover sheet
Spec:	Part 15.247	Class:	N/A

Run #3b: Signal Bandwidth (1Mb/s)

Channel	Frequency (MHz)	Resolution Bandwidth	6dB Signal Bandwidth (MHz)	Graph reference #
Low	2412	100kHz	13.30	Refer to plots below
Mid	2437	100kHz	13.10	Refer to plots below
High	2462	100kHz	12.93	Refer to plots below

Note 1: Add note here



Note 2:

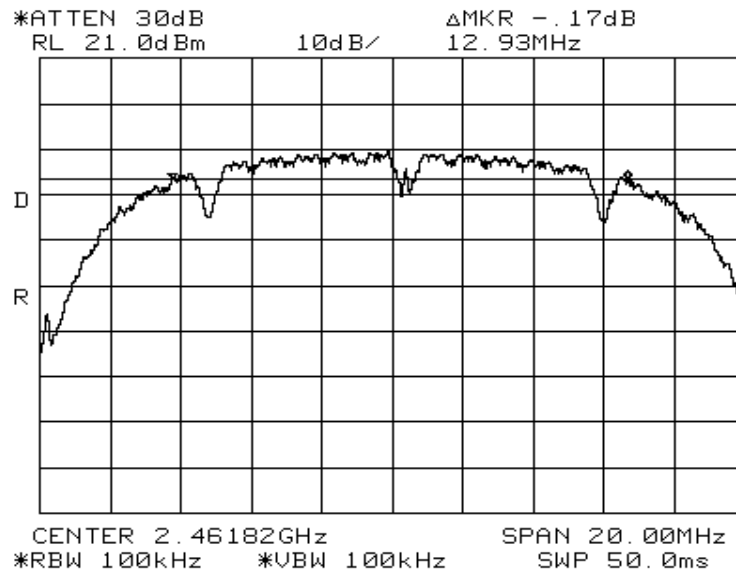



EMC Test Data

Client:	IBM	Job Number:	J49652
Model:	Intel 802.11b (M/N: WM3B2100) in ThinkPad X30 Series IBM Laptop	T-Log Number:	T49708
Contact:	Robert Paxman	Proj Eng:	Enter on cover sheet
Spec:	Part 15.247	Class:	N/A

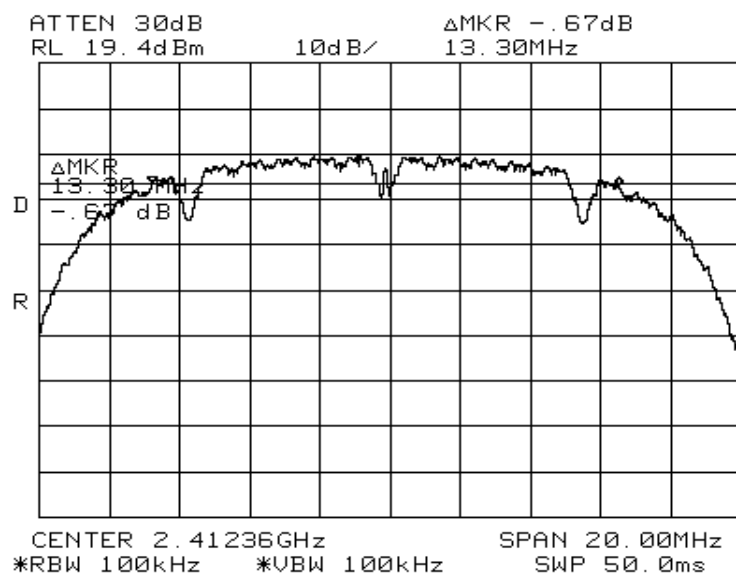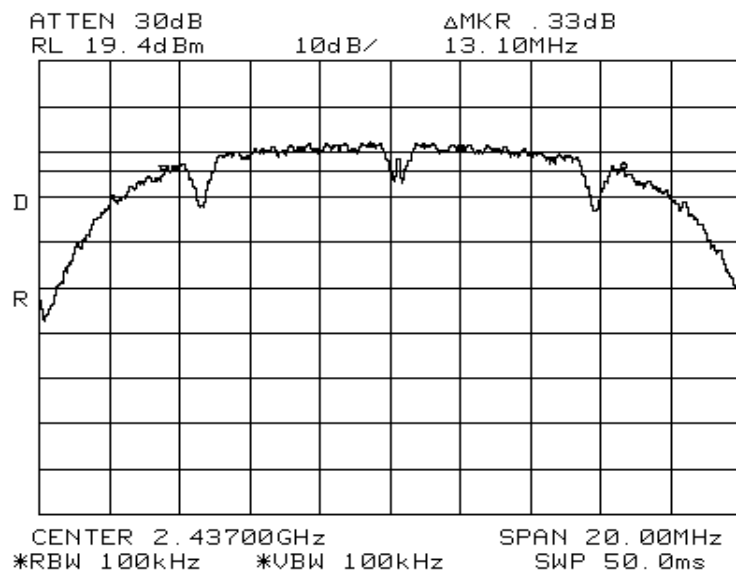



EMC Test Data

Client:	IBM	Job Number:	J49652
Model:	Intel 802.11b (M/N: WM3B2100) in ThinkPad X30 Series IBM Laptop	T-Log Number:	T49708
Contact:	Robert Paxman	Proj Eng:	Enter on cover sheet
Spec:	Part 15.247	Class:	N/A

Run #4: Output Power

Unit S/N #	Freq		Power		Settings			
	Ch.	MHz	dBm	Bias	Data Rate	Scales	Gain	Step
	1	2412	16.92	34	1 (1Mb/s)	10	0	0
	6	2437	17.30	35	1 (1Mb/s)	11	2	0
	11	2462	17.30	35	1 (1Mb/s)	12	2	0

Unit S/N #	Freq		Power		Settings			
	Ch.	MHz	dBm	Bias	Data Rate	Scales	Gain	Step
	1	2412	16.94	34	5 (5.5Mb/s)	10	0	0
	6	2437	17.28	35	5 (5.5Mb/s)	11	2	0
	11	2462	17.30	35	5 (5.5Mb/s)	12	2	0

Unit S/N #	Freq		Power		Settings			
	Ch.	MHz	dBm	Bias	Data Rate	Scales	Gain	Step
	1	2412	16.75	34	11 (11Mb/s)	10	0	0
	6	2437	17.03	35	11 (11Mb/s)	11	2	0
	11	2462	17.16	35	11 (11Mb/s)	12	2	0

Note 1:	Preliminary power measurements demonstrated that the output power was slightly higher when the unit operated at a data rate of 1Mb/s when compared to the output power at data rates of 11Mb/s.
---------	---




EMC Test Data

Client:	IBM	Job Number:	J49652
Model:	Intel 802.11b (M/N: WM3B2100) in ThinkPad X30 Series IBM Laptop	T-Log Number:	T49708
Contact:	Robert Paxman	Proj Eng:	Enter on cover sheet
Spec:	Part 15.247	Class:	N/A

Run #5a: Power Spectral Density (11 Mbps)



Channel	Frequency (MHz)	Res BW	P.S.D. dBm (averaged over 1 second in a 3kHz bandwidth)	Graph reference #
Low	2412	3kHz	-4.7	301
Mid	2437	3kHz	-8.8	302
High	2462	3kHz	-4.5	303

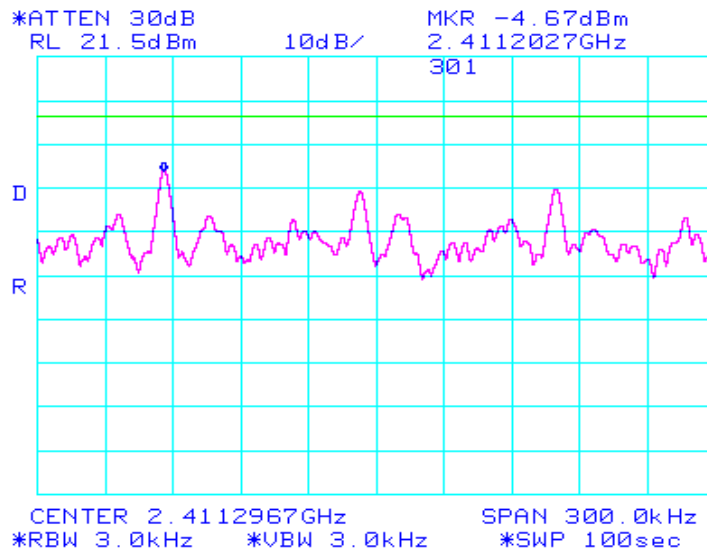



EMC Test Data

Client:	IBM	Job Number:	J49652
Model:	Intel 802.11b (M/N: WM3B2100) in ThinkPad X30 Series IBM Laptop	T-Log Number:	T49708
Contact:	Robert Paxman	Proj Eng:	Enter on cover sheet
Spec:	Part 15.247	Class:	N/A

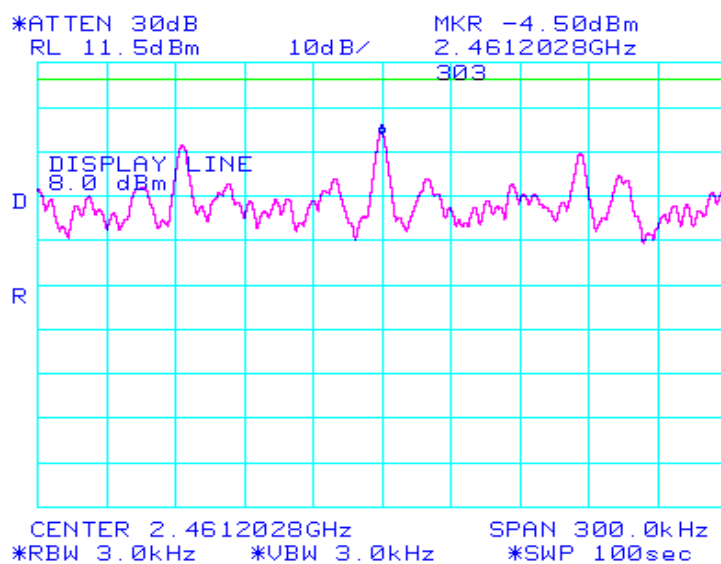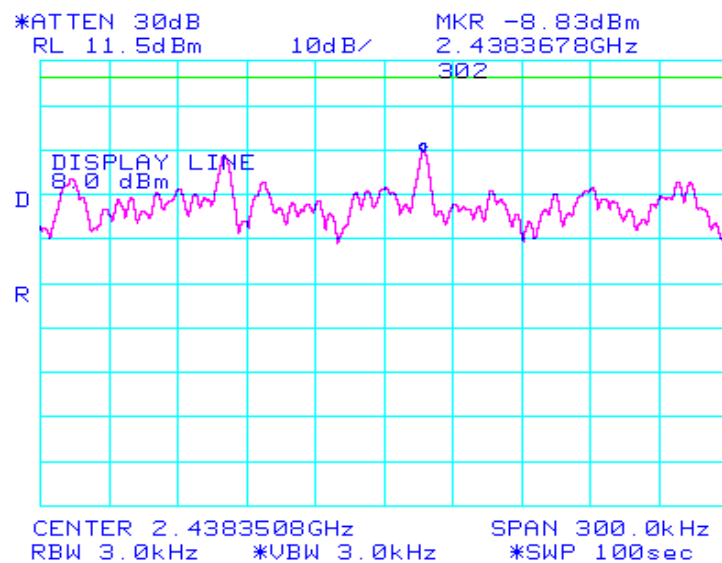




EMC Test Data

Client:	IBM	Job Number:	J49652
Model:	Intel 802.11b (M/N: WM3B2100) in ThinkPad X30 Series IBM Laptop	T-Log Number:	T49708
Contact:	Robert Paxman	Proj Eng:	Enter on cover sheet
Spec:	Part 15.247	Class:	N/A

Run #5b: Power Spectral Density (1 Mbps)



Channel	Frequency (MHz)	Res BW	P.S.D. dBm (averaged over 1 second in a 3kHz bandwidth)	Graph reference #
Low	2412	3kHz	-18.9	Refer to plots below
Mid	2437	3kHz	-16.4	Refer to plots below
High	2462	3kHz	-17.7	Refer to plots below

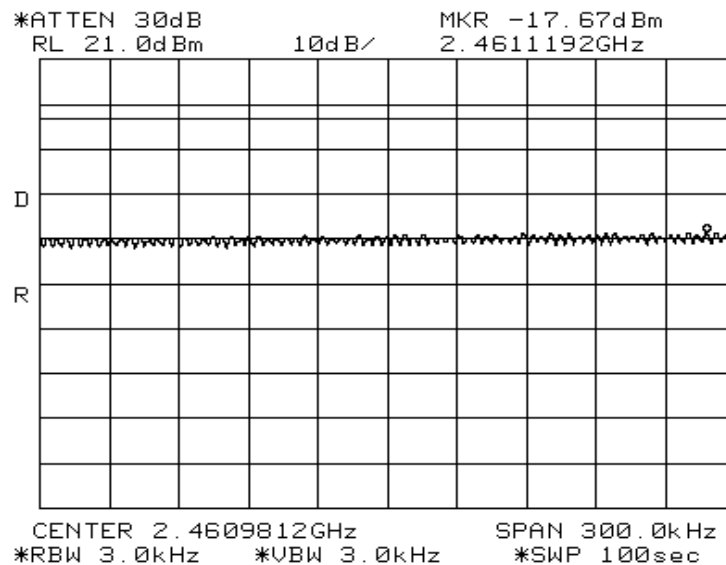



EMC Test Data

Client:	IBM	Job Number:	J49652
Model:	Intel 802.11b (M/N: WM3B2100) in ThinkPad X30 Series IBM Laptop	T-Log Number:	T49708
Contact:	Robert Paxman	Proj Eng:	Enter on cover sheet
Spec:	Part 15.247	Class:	N/A

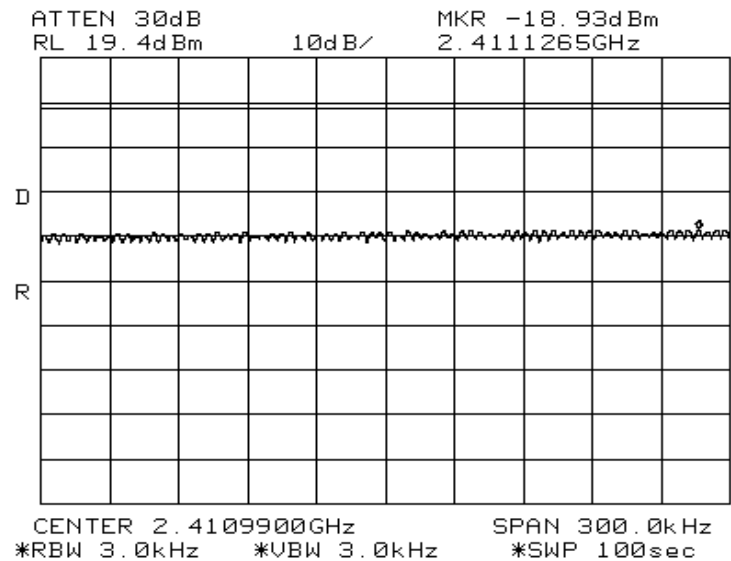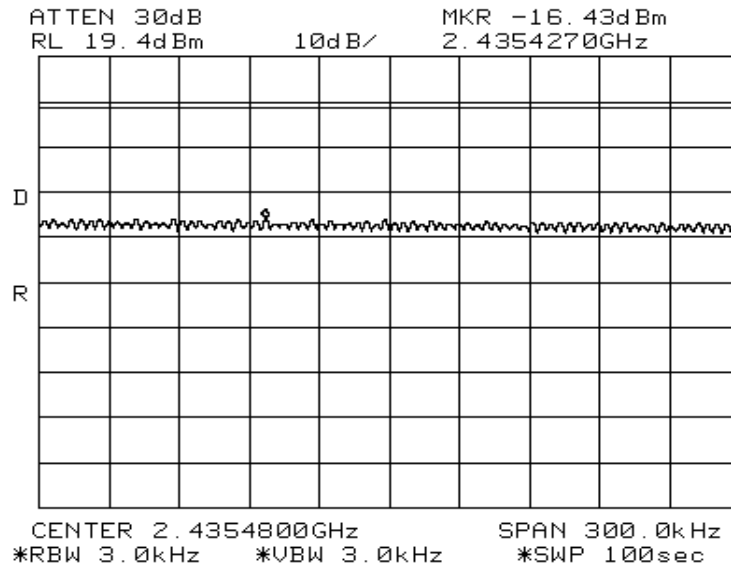




EMC Test Data

Client:	IBM	Job Number:	J49652
Model:	Intel 802.11b (M/N: WM3B2100) in ThinkPad X30 Series IBM Laptop	T-Log Number:	T49708
Contact:	Robert Paxman	Proj Eng:	Enter on cover sheet
Spec:	Part 15.247	Class:	N/A

Run# 6a: Out-of-Band (11Mb/s)

High Channel

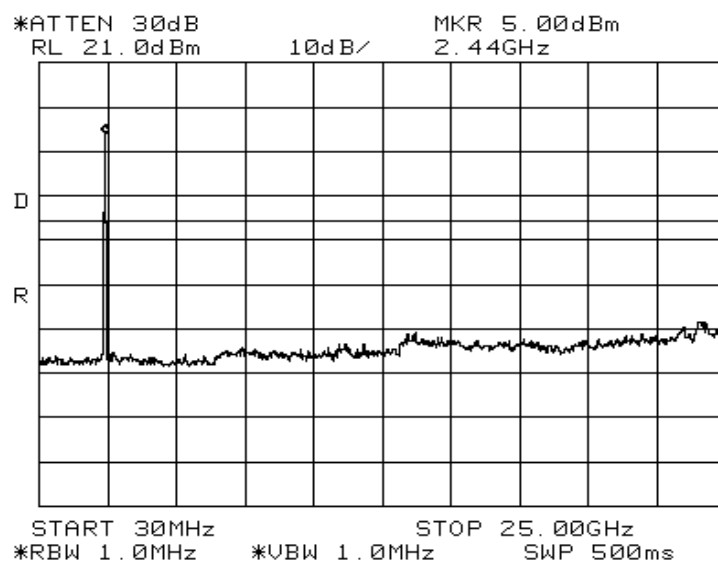





EMC Test Data

Client:	IBM	Job Number:	J49652
Model:	Intel 802.11b (M/N: WM3B2100) in ThinkPad X30 Series IBM Laptop	T-Log Number:	T49708
Contact:	Robert Paxman	Proj Eng:	Enter on cover sheet
Spec:	Part 15.247	Class:	N/A

Middle Channel

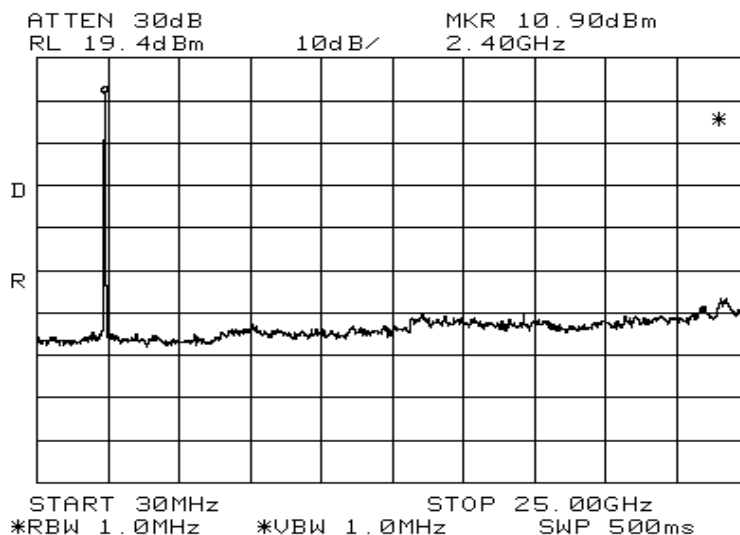

Low channel

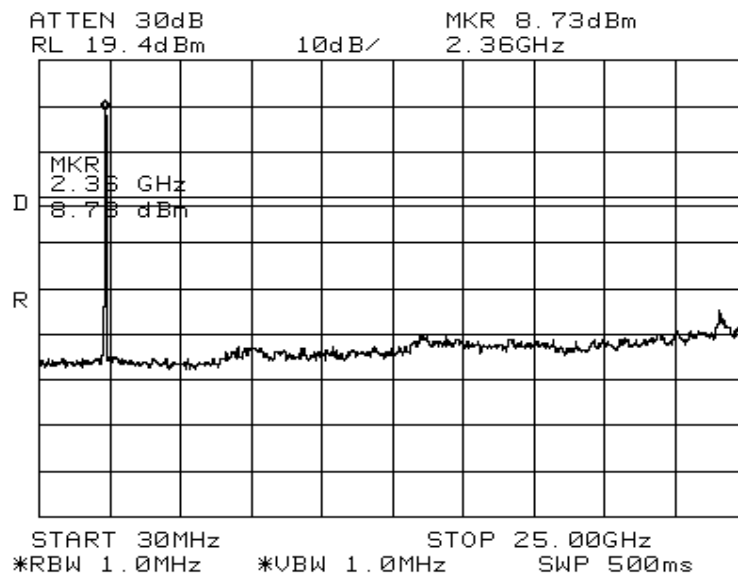




EMC Test Data

Client:	IBM	Job Number:	J49652
Model:	Intel 802.11b (M/N: WM3B2100) in ThinkPad X30 Series IBM Laptop	T-Log Number:	T49708
Contact:	Robert Paxman	Proj Eng:	Enter on cover sheet
Spec:	Part 15.247	Class:	N/A

Run# 6b: Out-of-Band (1Mb/s)

Low channel

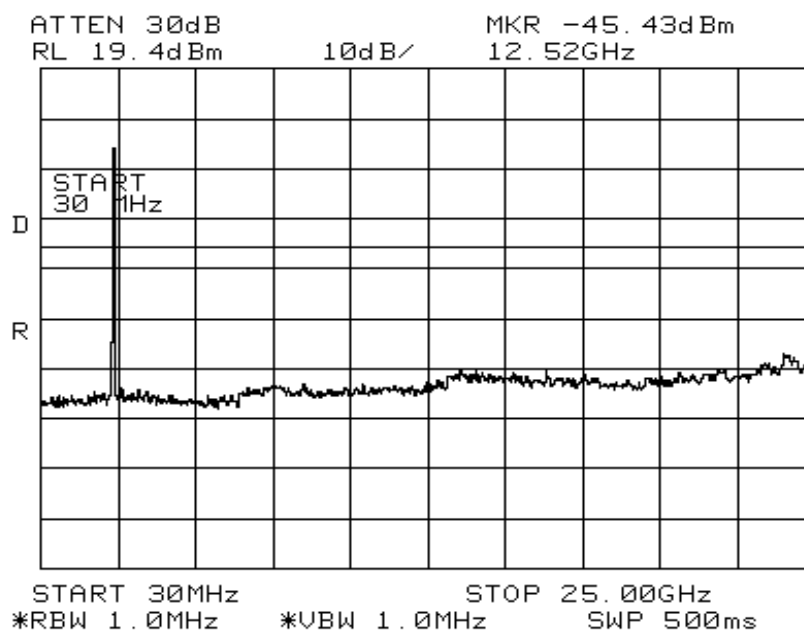




EMC Test Data

Client:	IBM	Job Number:	J49652
Model:	Intel 802.11b (M/N: WM3B2100) in ThinkPad X30 Series IBM Laptop	T-Log Number:	T49708
Contact:	Robert Paxman	Proj Eng:	Enter on cover sheet
Spec:	Part 15.247	Class:	N/A

Middle Channel

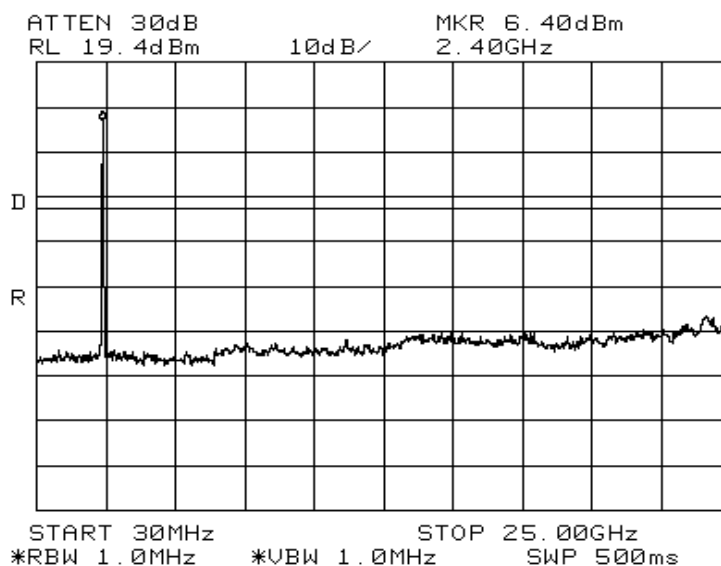

High Channel

