

Emission Test Report

Standard: FCC Part 15 Subpart E / IC RSS-210

Document Number : FCC 19-0222-0

Product: IBM 11a/b/g Wireless LAN Mini PCI Adapter


measured with IBM ThinkPad R40 Series

FCC ID: ANO20030400LEG
IC: 349E-PH12127E

May 29, 2003

Prepared:
EMC R&D Staff Engineer


Takeshi Asano

Signature: 
IBM Japan, Ltd.
EMC Engineering
LAB-S59

1623-14, Shimotsuruma,
Yamato-shi Kanagawa-ken 242, Japan
Phone: +81-46-215-4779
Fax: +81-46-273-7420
E-Mail: asano@jp.ibm.com

Reviewed and Checked:
EMC R&D Staff Engineer

Toshiya Murota

Signature: 
IBM Japan, Ltd.
EMC Engineering
LAB-S59

1623-14, Shimotsuruma,
Yamato-shi Kanagawa-ken 242, Japan
Phone: +81-46-215-6574
Fax: +81-46-273-7420
E-Mail: murota@jp.ibm.com

Approved:
Manager, EMC Engineering
/ NVLAP signatory

Akihisa Sakurai

Signature: 
IBM Japan, Ltd.
EMC Engineering
LAB-S59

1623-14, Shimotsuruma,
Yamato-shi Kanagawa-ken 242, Japan
Phone: +81-46-215-2613
Fax: +81-46-273-7420
E-Mail: akihisa@jp.ibm.com

Note :

The measurements in this test report was performed for the previous submission of the following device.

FCC ID: ANO20020300D3L (Granted date: Jan/21/2003)

IC: 349E-PH11107E (Approval date: Jan/03/2003, TAC number: 17312)

However, the PCB and RF components of the applying transmitter module supplied by Philips Components are the same as the previous ones, therefore there is no change on the RF characteristics. So the measurement results are valid for the applying device.

Refer to the attestation of the Philips Components in the "Submittal Outline" exhibit.

The following is the comparison of the measurement results to prove the equivalence between the previous and the applying device.

26dB Bandedge (24Mb/s)

center Frequency (MHz)	submittal results (MHz)	sampling results tested with the new adapter (MHz)
5180 (ch. 36)	28.46	28.46
5260 (ch. 52)	35.27	35.47
5320 (ch. 64)	28.26	28.46

Peak conducted transmission output power (24Mb/s)

center Frequency (MHz)	submittal results (dBm)	sampling results tested with the new adapter (dBm)
5180 (ch. 36)	14.4	14.37
5260 (ch. 52)	17.4	17.36
5320 (ch. 64)	14.6	14.52

MEASUREMENT / TECHNICAL REPORT – Part 15 Subpart E
(Intentional Radiator)**IBM 11a/b/g Wireless LAN Mini PCI Adapter**
with
IBM ThinkPad R40 Series
(Machine type : 2681, 2682, 2683, 2722, 2723, 2724, 2892, 2893, 2898, 2899)**FCC ID : ANO20030400LEG****May 29, 2003**

This report concerns: (check one)	
Original Grant	☒
Class I change	☐
Class II change	☐
Equipment type: <u>Wireless LAN device</u>	
This report shall not be reproduced except in full, without the written permission of this test lab.	
The measurement results contained in this report relate only to the item which was tested.	
Measurement procedure used is ANSI C63.4-2000 unless otherwise specified.	
Other test procedure: _____	
The FCC has issued provisional acceptance of this test laboratory for Declaration of Conformity testing per letter dated 1997.	
APPLICANT ANTI-DRUG ABUSE CERTIFICATION: By checking yes, the applicant certifies that, in the case of an individual applicant, he or she is not subject to a denial of federal benefits, that includes FCC benefits, pursuant to Section 5301 of the Anti-Drug Abuse of 1988, 21 U.S.C. 853(a), or, in the case of a non-individual applicant (e.g. corporation, partnership or other unincorporated association), no party to the application is subject to a denial of federal benefits, that includes FCC benefits, pursuant to that section. For the definition of a "party" for these purposes, see 47 CFR 1.2002(b). ☒ Yes or No	
"Report shall not be reproduced except in full, without the written approval of the laboratory" "the report must not be used by the client to claim product endorsement by NVLAP or any agency of the US government"	
Prepared by: Takeshi Asano IBM Japan Corporation, Yamato EMC Engineering LAB-S59, 1623-14, Shimotsuruma, Yamato-shi Kanagawa-ken 242-8502, Japan Tel: +81-46-215-4779 Fax: +81-46-273-7420	

- Index -

A. GENERAL INFORMATION	6
A.1 Test Methodology	6
A.2 Test Facility / NVLAP Accreditation	6
A.3 EUT details	6
B. SUMMARY OF TEST RESULTS	7
C. TEST INSTRUMENTS	8
D. OPERATION MODE OF EUT	10
E. JUSTIFICATION	11
F. MEASUREMENT UNCERTAINTY	11
G. TEMPERATURE AND HUMIDITY	11
H. RELATED SUBMITTAL(S)/GRANT(S)/NOTES	11
1. BANDWIDTH AT 26 DB BELOW / BANDEDGE	12
1.1 Test Procedure	12
1.2 Measurement Results	12
1.3 Trace Data	13
2. PEAK CONDUCTED TRANSMIT OUTPUT POWER	16
2.1 Test Procedure	16
2.2 Measurement Results	17
2.3 Trace Data	18
3. PEAK POWER SPECTRAL DENSITY	21
3.1 Test Procedure	21
3.2 Measurement Results	21
3.3 Trace Data	22
4. PEAK EXCURSION RATIO	28
4.1 Test Procedure	28
4.2 Measurement Results	28
4.3 Trace Data	29
5. AC WIRELINE CONDUCTED EMISSIONS (450KHZ – 30MHZ)	32
5.1 Test Procedure	32
5.2 Test Instruments and Measurement Setup	32
5.3 Measurement Results	33
6. RESTRICTED BANDS RADIATIONS (30MHZ – 1GHZ)	34
6.1 Test Procedure	34
6.2 Test Instruments and Measurement Setup	34
6.3 Field Strength Calculation	36
6.4 Measurement Results	37
7. RESTRICTED BANDS RADIATIONS (1GHZ – 40GHZ)	38
7.1 Test Procedure	38
7.2 Test Instruments and Measurement Setup	38
7.3 Field Strength Calculation	40
7.4 Measurement Results	41
7.5 Measurement plots of adjacent restricted band	43

8. AC WIRELINE CONDUCTED EMISSIONS (150KHZ – 30MHZ, CISPR 22) 49

<u>8.1</u>	<u>Test Procedure</u>	49
<u>8.2</u>	<u>Test Instruments and Measurement Setup</u>	49
<u>8.3</u>	<u>Powerline Voltage Calculation</u>	50
<u>8.4</u>	<u>Measurement Results</u>	51

A. General Information

APPLICANT : IBM Japan, Ltd.
 TEST SITE : IBM Japan, Ltd., Yamato Semi-anechoic chamber #1
 TEST SITE ADDRESS : 1623 – 14 Shimotsuruma, Yamato-shi, Kanagawa 242-8502 Japan
 Tel: +81-46-215-4779, Fax: +81-46-273-7420
 REGULATION : FCC Part 15 Subpart E
 Industry Canada RSS-210 (Issue No.5)
 MODEL NUMBER : 2682-NLU (ThinkPad R40 Series)
 FCC ID : ANO20030400LEG
 IC Certification Number : 349E-PH12127E
 SERIAL NUMBER : FX-00336
 PHYSICAL CONDITION : Preproduction
 KIND OF EQUIPMENT : Personal computer with a IEEE802.11a, 11b & 11g Wireless LAN
 Mini-PCI Combo Card ([Composite application](#))
 TESTED DATE : October 15, 17, 18, 21, 29 and November 13, 2002

A.1 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4-2000. Radiated testing was performed at an antenna to EUT distance of 3 meters.

A.2 Test Facility / NVLAP Accreditation

The semi-anechoic chamber #1 used to correct the data are located in Yamato Laboratory, IBM Japan.

- This facility has been fully described in a report dated September 1998, submitted to the FCC office, and accepted in a letter, dated Nov. 2, 1998(31040/SIT).
- IBM Yamato EMC Engineering is recognized under the National Voluntary Laboratory Accreditation Program for satisfactory compliance with Criteria established in Title 15, Part 285 Code of Federal Regulations.(NVLAP Lab code: 200198-0)
- This facility is accepted by **Industry Canada** in a letter dated March 19, 2001 as number **IC 349E** for chamber #2, and January 25, 2002 as number **IC 4221** for chamber #1.

A.3 EUT details

Table-A EUT details

Model and S/N	FCC ID IC Certification Number	Description
IBM 11a/b/g Wireless LAN Mini PCI Adapter (s/n A310037307)	FCC ID: ANO20030400LEG IC : 349E-PH12127E	Applying equipment IEEE802.11a/b/g Wireless LAN Mini-PCI Combo Card without antenna
ThinkPad R40 Series M/T 2682-NLU (s/n FX-00336)	N/A	IBM Notebook PC with built_in antenna CPU: Intel® Mobile Pentium® 4, 1.9GHz LCD: 15" XGA
P/N 02K6746	N/A	Universal AC adapter 72W, Unshielded power cord

B. Summary of Test Results

Table-B presents the list of the measurement items for U-NII devices under FCC Part 15 Subpart E, and for LELAN devices under Industry Canada RSS-210.

The section numbers of upper portion are showing FCC codes, and the lower ones are for IC RSS-210.

Table-B List of the measurements

Section(s)	Test Items		Condition	Result
	Transmit mode (TX):			
15.407(a)(1), (2) 6.2.2 (q1)(i)(ii)	Bandwidth at 26 dB below	According to RSS-210 6.2.2q(iv)(b), 26 dB WB was taken for 99% BW.	Conducted	Pass
	Peak conducted transmit output power or EIRP for IC	5150-5250MHz: FCC: 50mW or (4+10logB)dBm IC : 200mW* or (10+10logB)dBm* *: EIRP 5250-5350MHz: FCC: 250mW or (11+10logB)dBm IC : 250mW or (11+10logB)dBm IC : 1W* or (17+10logB)dBm* *: EIRP B: 26dB BW in MHz		Pass
		Peak Power Spectral Density		5150-5250MHz: FCC: 4 dBm in any 1MHz IC : 10 dBm in any 1MHz (EIRP) 5250-5350MHz: FCC: 11 dBm in any 1MHz IC : 11 dBm in any 1MHz
	N/A 6.2.2 (q1)(iv)(b)	Peak Spectral Density		IC: 3 + 10logB dBm/MHz
15.407(a)(6) N/A	Peak Excursion	The ratio of the peak excursion of the modulation envelope to the peak transmit shall not exceed 13 dB across any 1 MHz .		Pass
15.207 / 407(b)(5) 6.2.2 (q1)(v) / 6.6	AC Wireline Conducted Emissions 450kHz- 30MHz	Class B: 250μV * ¹	Pass	
15.205 & 209 / 407(b)(1)(2)(5)(6) 6.2.1 / 6.2.2(q1)(i)(ii)(v)/ 6.3	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Shall not exceed the limits specified in FCC 15.209 or RSS-210 Table3.	Radiated (30MHz -1GHz)	Pass
			Radiated (1G -40GHz)	Pass

	Receive mode (RX):			
15.207 / 407(b)(5) 6.2.2(q1)(v) / 7.4	AC Wireline Conducted Emissions 450kHz - 30MHz	Class B: 250μV * ¹	Conducted	Pass
15.205 & 209 / 407(b)(1)(2)(5)(6) 6.2.1 / 6.2.2(q1)(i)(ii)(v)/ 7.3	General Field Strength Limits (Radiated Emission Limits)	Shall not exceed the limits specified in RSS-210.	Radiated (30MHz -1GHz)	Pass
			Radiated (1G - 40GHz)	Pass

*1: The additional test with **CISCR 22** limits was also performed. (Refer to the chapter 8.)

	Other general requirements		Result
15.407(a)(1)(2)	Antenna gain	Peak : 2.98 dBi	N/A
6.2.2(q1)(iv)(a)	Digital modulation	Applying equipment employs IEEE802.11a, 11g(OFDM) or 11b(CCK) digital modulation technology.	complies
15.407(c) 6.2.2(q1)(iv)(d)	Automatic link disconnection in no transaction state	Refer to “Circuitry Description” document.	complies
15.407(d) 6.2.2(q1)(i)	Integral antenna in the 5150M - 5250MHz band	Refer to “Confidential_BIOS_Lock” document.	complies
15.407(e) 6.2.2(q1)(i) (q1)(iv)(g)	Indoor use in the 5150M -5250MHz band, and interference from radars.	Refer to “Manual_Regulatory_Notice”.	complies
15.407(f) 6.2.2(q1)(iv)(g)	RF Exposure Requirement	Refer to “RF Exposure Evaluation” or “Exposure of Humans to Radio Frequency Fields” documents.	complies
15.407(g) 6.2.2(q1)(iv)(e)	Frequency stability	Refer to “Circuitry Description” document.	complies

C. Test Instruments

Table-C List of Measuring Instruments

Description	Model	Serial Number	Calibration Date	Calibration Interval
Computer	IBM 5551-L	#4	N/A	N/A
Computer	IBM 6589-13J	97-15613	N/A	N/A
Spectrum Analyzer (100Hz-1.5GHz)	HP 85680B	2601A02634	08/28/02	1 year
Spectrum Analyzer (100Hz-1.5GHz)	HP 85680B	3019A05155	02/15/02	1 year
Spectrum Analyzer (100Hz-1.5GHz)	HP 85680B	2841A04252	06/17/02	1 year
Spectrum Analyzer Display	HP 85662A	2542A12308	08/28/02	1 year
Spectrum Analyzer Display	HP 85662A	3026A19353	02/15/02	1 year
Spectrum Analyzer Display	HP 85662A	2816A16831	06/17/02	1 year
Quasi-Peak Adapter	HP 85650A	2043A00062	08/28/02	1 year
Quasi-Peak Adapter	HP 85650A	2811A01156	06/17/02	1 year
Quasi-Peak Adapter	HP 85650A	3033A01449	02/15/02	1 year
Amplifier (100KHz - 1.3GHz)				
- for 30-200MHz	HP 8447D	2805A02919	04/15/02	1 year
- for 200-1000MHz	HP 8447D	2944A03506	04/15/02	1 year
Amplifier (1 - 26.5GHz)	HP 8449B	3008A00582	06/13/02	1 year
Amplifier (26.5 - 40GHz)	Agilent 83051A	3950M00193	12/06/01	1 year
Spectrum Analyzer EMI Test Receiver	R&S ESI26	836119/003	07/18/02	1 year
Spectrum Analyzer	HP 8563E	3416A02248	08/14/02	1 year
Harmonic Mixer	Agilent 11970A	011269-001	12/06/01	1 year
Receiver (9kHz-30MHz)	R&S ESH3	891806/012	10/07/02	1 year


Receiver (20MHz-1.3GHz)	R&S ESVP	893202/018	02/06/02	1 year
Biconical Antenna (30-200MHz)	EMCO 3108	2309	05/06/02	1 year
Log-Periodic Antenna (200-1000MHz)	EMCO 3146	1585	05/06/02	1 year
Horn Antenna (1- 18GHz)	EMCO 3115	9903-5774	07/18/02	1 year
Horn Antenna (3.95- 5.85GHz)	EMCO 3160-5	1099	04/17/02	1 year
Horn Antenna (5.85- 8.20GHz)	EMCO 3160-6	9712-1044	04/17/02	1 year
Horn Antenna (8.2- 12.4GHz)	EMCO 3160-7	1156	04/17/02	1 year
Horn Antenna (12.4- 18GHz)	EMCO 3160-8	1143	04/17/02	1 year
Horn Antenna (18- 26.5GHz)	EMCO 3160-9	0004-1202	04/17/02	1 year
Horn Antenna (26.5- 40GHz)	EMCO 3160-10	1175	04/17/02	1 year
LISN	EMCO 3825/2	1426	09/01/02	1 year
Power Meter	HP 437B	3043U03437	10/23/01	1 year
Power Sensor	HP 8481A	US41030582	10/26/01	1 year
Switch/control unit	HP 3488A	2719A17226	N/A	N/A
		2719A17228	N/A	N/A
Plotter	HP 7550A	2631A33619	N/A	N/A
SF106 cables (1 – 18GHz):	Length:			
- Horn Ant <=> RF Amp.	6 m	- EM206SCO	09/05/02	1 year
- RF Amp.<=>Spectrum Analyzer	15m	- EM215SCO	09/05/02	1 year
SF102 cables (18 – 40GHz):				
- Horn Ant <=> RF Amp.	6m	- SF102-20165	09/05/02	1 year
- RF Amp.<=>Spectrum Analyzer	1m	- SF102-21105	09/05/02	1 year
N-Coax cables:				
- Bi-coni Ant <=> 10m Cable	9 m	- EM103L01	04/15/02	1 year
- 10m Cable <=> Shield Panel	10 m	- EM103L02	04/15/02	1 year
- Shield Panel <=> RF Amp	7 m	- EM103L03	04/15/02	1 year
- RF Amp <=> Power Splitter	0.5m	- EM103L04	04/15/02	1 year
- Log-peri Ant <=> 10m Cable	9 m	- EM103H01	04/15/02	1 year
- 10m Cable <=> Shield Panel	10 m	- EM103H02	04/15/02	1 year
- Shield Panel <=> RF Amp	7 m	- EM103H03	04/15/02	1 year
- RF Amp <=> Power Splitter	0.5m	- EM103H04	04/15/02	1 year
Coax cables:				
- Lisen-L <=> SW/Con.unit (SW100)	4 m	- EMIC-L	04/15/02	1 year
- Lisen-N <=> SW/Con.unit (SW101)	4 m	- EMIC-N	04/15/02	1 year
- SW/Con.unit <=> RCVR (Input)	1 m	- EMIC-R	04/15/02	1 year
- SW/Con.unit<=> Spe Ana.(Signal In)	1 m	- EMIC-S	04/15/02	1 year
- Power Splitter <=> SW/Con.unit (SW110)	1 m	- EM103L05	04/15/02	1 year
- Power Splitter <=> SW/Con.unit (SW300)	1 m	- EM103L06	04/15/02	1 year
- Power Splitter <=> SW/Con.unit (SW100)	1 m	- EM103H05	04/15/02	1 year
- Power Splitter <=> SW/Con.unit (SW301)	1 m	- EM103H06	04/15/02	1 year
- SW/Con.unit <=> Receiver (Input)	2 m	- EM1RCV	04/15/02	1 year
- SW/Con.unit <=> Spe Ana.(Signal In) for 30- 200MHz	2 m	- EM1SPL	04/15/02	1 year
- SW/Con.unit <=> Spe Ana.(Signal In) for 200-1000MHz	2 m	- EM1SPH	04/15/02	1 year

Notes.

- The above equipment calibration is traceable to National standards.
- HP: Hewlett Packard, R&S: Rohde & Schwarz

D. Operation mode of EUT

- All tests were performed using the “Atheros Radio Test” program. This tool supports the continuous transmission mode for the testing purpose as shown blow.

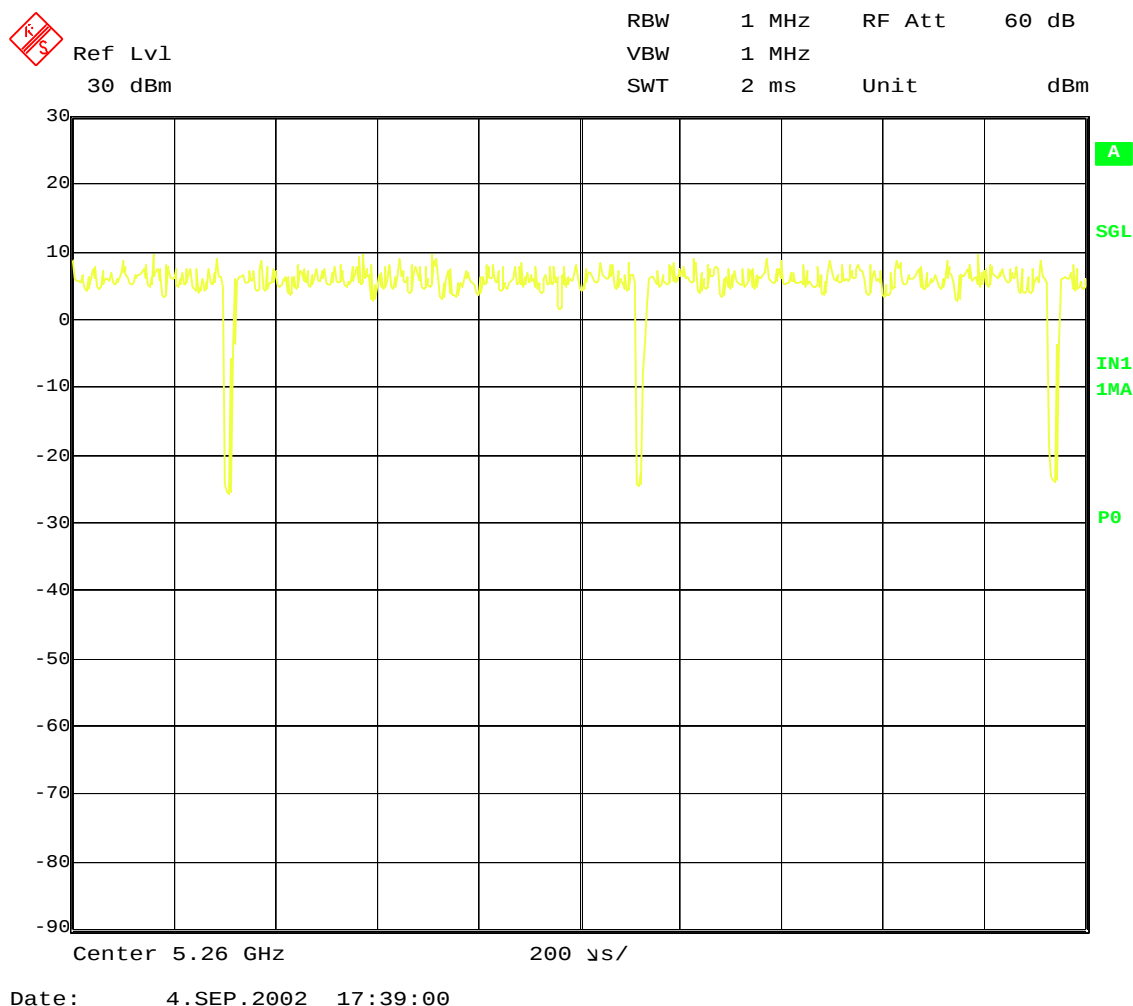

- Three kinds of frequencies were chosen for the measurement. i.e. 5180MHz (lowest), 5260MHz(middle), and 5320MHz (highest).

Table-D Transmission mode of EUT (The measurement plots are shown in shading.)

Operation Frequency [GHz]	Rated output power (conducted) [dBm]							
	IEEE802.11a							
	6M bps	9M bps	12M bps	18M bps	24M bps	36M bps	48M bps	54M bps
5.180 (Ch. 36)	+14	+14	+14	+14	+14	+14	+14	+13
5.200 (Ch. 40)	+14	+14	+14	+14	+14	+14	+14	+13
5.220 (Ch. 44)	+14	+14	+14	+14	+14	+14	+14	+13
5.240 (Ch. 48)	+14	+14	+14	+14	+14	+14	+14	+13
5.260 (Ch. 52)	+17	+17	+17	+17	+17	+15	+14	+13
5.280 (Ch. 56)	+17	+17	+17	+17	+17	+15	+14	+13
5.300 (Ch. 60)	+17	+17	+17	+17	+17	+15	+14	+13
5.320 (Ch. 64)	+14	+14	+14	+14	+14	+14	+14	+13

3. 24Mbps transmission mode was selected for full testing as the worst case sampling.
See "Chapter 2. Peak Conducted Transmit Output Power" as to the determination of measurement plots.
4. As for the RF receiving test, the middle channel with the worst case(i.e. 5260MHz, 24Mbps mode) was selected representatively.

E. Justification

The EUT was investigated for both the main(left) and the auxiliary(right) antennas. The worse case data taken in this report represents the measurement results for the left(main) antenna of 15 inch LCD model in ThinkPad R40 Series that has comparatively higher gain as listed below.

	13" / 14" LCD model	15" LCD model
Left Antenna gain	1.87 dBi (peak)	2.98 dBi (peak)
Right Antenna gain	2.91 dBi (peak)	1.96 dBi (peak)

And the columns marked with shading in the Table-D are the worst cases of each Tx mode for all measurement items (i.e. conducted power, 26dB BW..etc.). This test report represents the measurement results performed with those Tx modes.

F. Measurement Uncertainty

Uncertainties of the both, the Yamato EMI radiated test facilities (EMI chambers, #1 and #2) and the Yamato EMI conducted test facility are derived with the NIS 81 " Treatment of uncertainty in EMC measurements" 1994.

Estimated site uncertainty values are as follows.

EMI chamber #1 : 4.39dB

EMI chamber #2 : 4.40dB

EMI conducted measurement system : 2.4dB

Detail should be referred to "Treatment of Uncertainty, Calculations and Policy" report, document number TCR 10-0015.

G. Temperature and Humidity

The temperature is controlled within range of 17° to 28°.

The relative humidity is controlled within range of 40% to 70%.

H. Related Submittal(s)/Grant(s)/Notes

The host unit with full peripheral devices including the applying modular as an unintentional radiator is classified as a Digital Device under the FCC Part 15 Subpart B or the Industry Canada Class B Emission Compliance (ICES-003), and subject to DoC.

1. Bandwidth at 26 dB below / Bandedge

[5150-5250MHz: FCC 15.407(a)(1), RSS 6.2.2q1(i) / q1(iV)(b)]

[5250-5350MHz: FCC 15.407(a)(2), RSS 6.2.2q1(ii) / q1(iV)(b)]

1.1 Test Procedure

The bandwidth at 26 dB down from the peak of the RF emission was measured with a spectrum analyzer connected to the antenna terminal, while EUT was operating in continuous transmission mode at the appropriate center frequencies (5180 / 5260 / 5320MHz).

The spectrum analyzer was set to:

RBW=300kHz^{*1}, VBW=1MHz^{*2}, Span=50MHz, Sweep= 50ms, Mode= Peak detector

*1: approximately 1% of the emission bandwidth (§15.403(c))

*2: VBW > RBW (To be adjusted accordingly based on the spectrum stability.)

Table 1-1 : 26 dB Bandwidth Test Instruments

Description	Model	Serial Number
Spectrum Analyzer EMI Test Receiver	R&S ESI26	836119/003
Coax cables: - Spectrum Analyzer <=> EUT	Length: 110 cm Loss: 2.2 dB	

Notes: - R&S: Rohde & Schwarz




Figure 1: Measurement setup for 26dB bandwidth test

1.2 Measurement Results


Test Date: October 29, 2002

Table 1-2. EUT: M/T 2682-NLU, s/n FX-00336 , TX mode 24Mbps

Center Frequency (MHz)	Lower frequency (MHz)	Upper frequency (MHz)	Bandwidth at 26 dB below (MHz)	Plot data
5180 (ch. 36)	5166.12	5194.58	28.46	Plot 1-1
5260 (ch. 52)	5242.01	5277.28	35.27	Plot 1-2
5320 (ch. 64)	5306.32	5334.58	28.26	Plot 1-3

: the closest frequencies to the bandedge

1.3 Trace Data

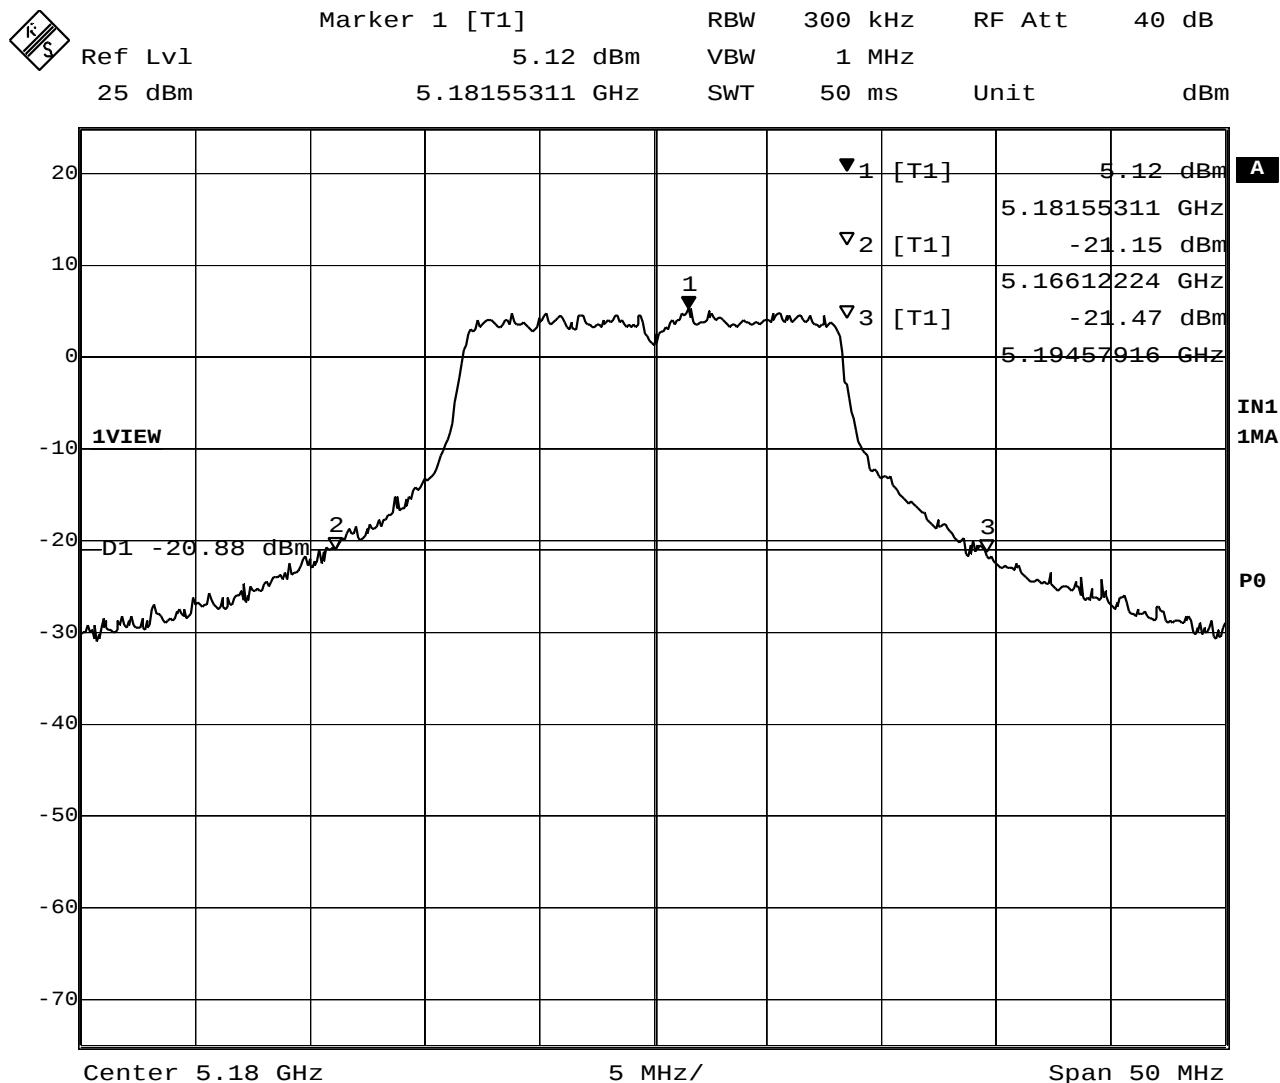


Date: 29.OCT.2002 15:32:57

Plot 1-1. 26dB BW at 5180MHz



Marker 1 [T1] RBW 300 kHz RF Att 40 dB
Ref Lvl 8.20 dBm VBW 1 MHz
25 dBm 5.26275551 GHz SWT 50 ms Unit dBm

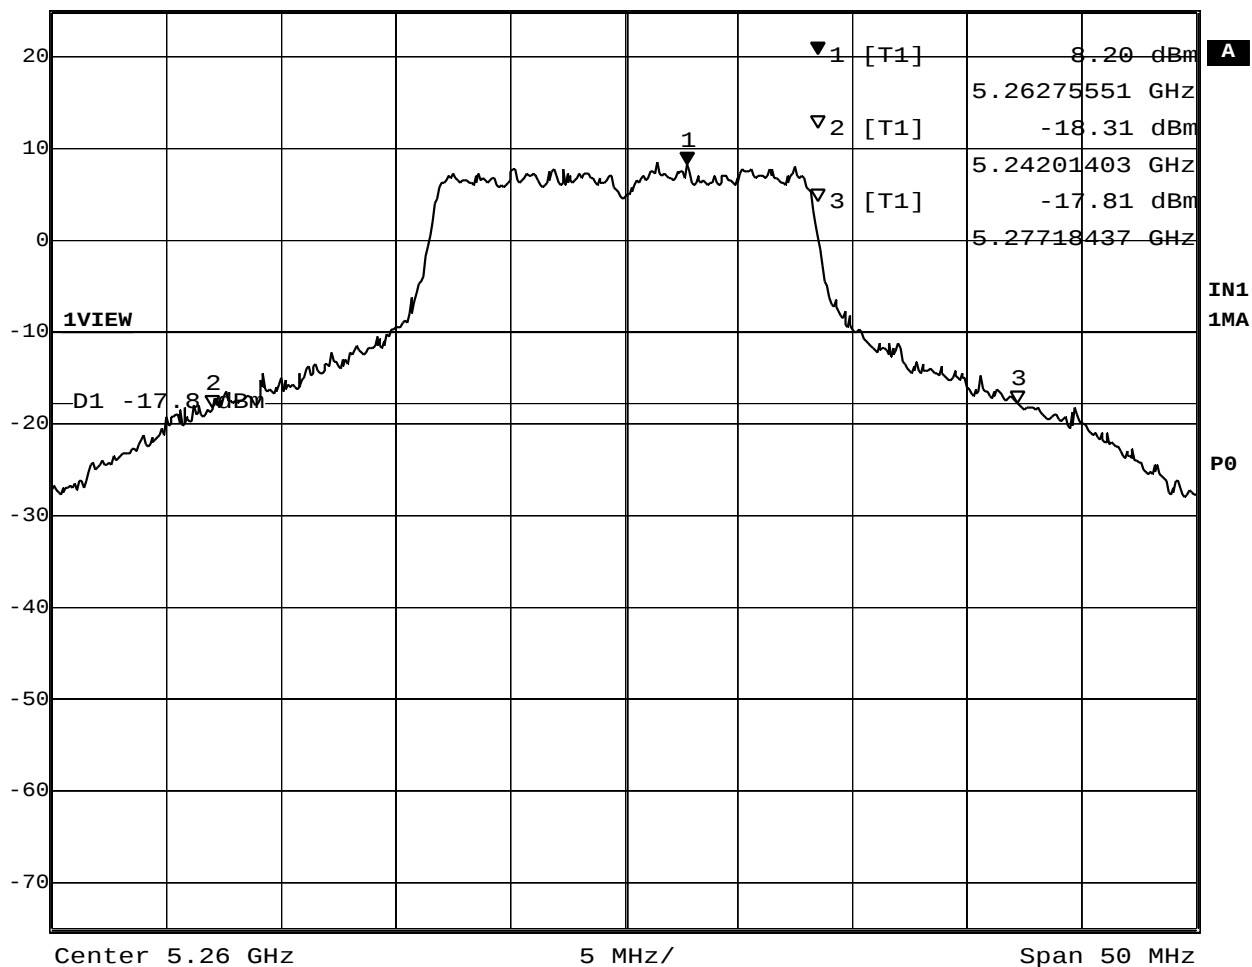


Date: 29.OCT.2002 15:36:25

Plot 1-2. 26dB BW at 5260MHz



Ref Lvl	Marker 1 [T1]	RBW	300 kHz	RF Att	40 dB
25 dBm	5.34 dBm	VBW	1 MHz		
	5.32155311 GHz	SWT	50 ms	Unit	dBm

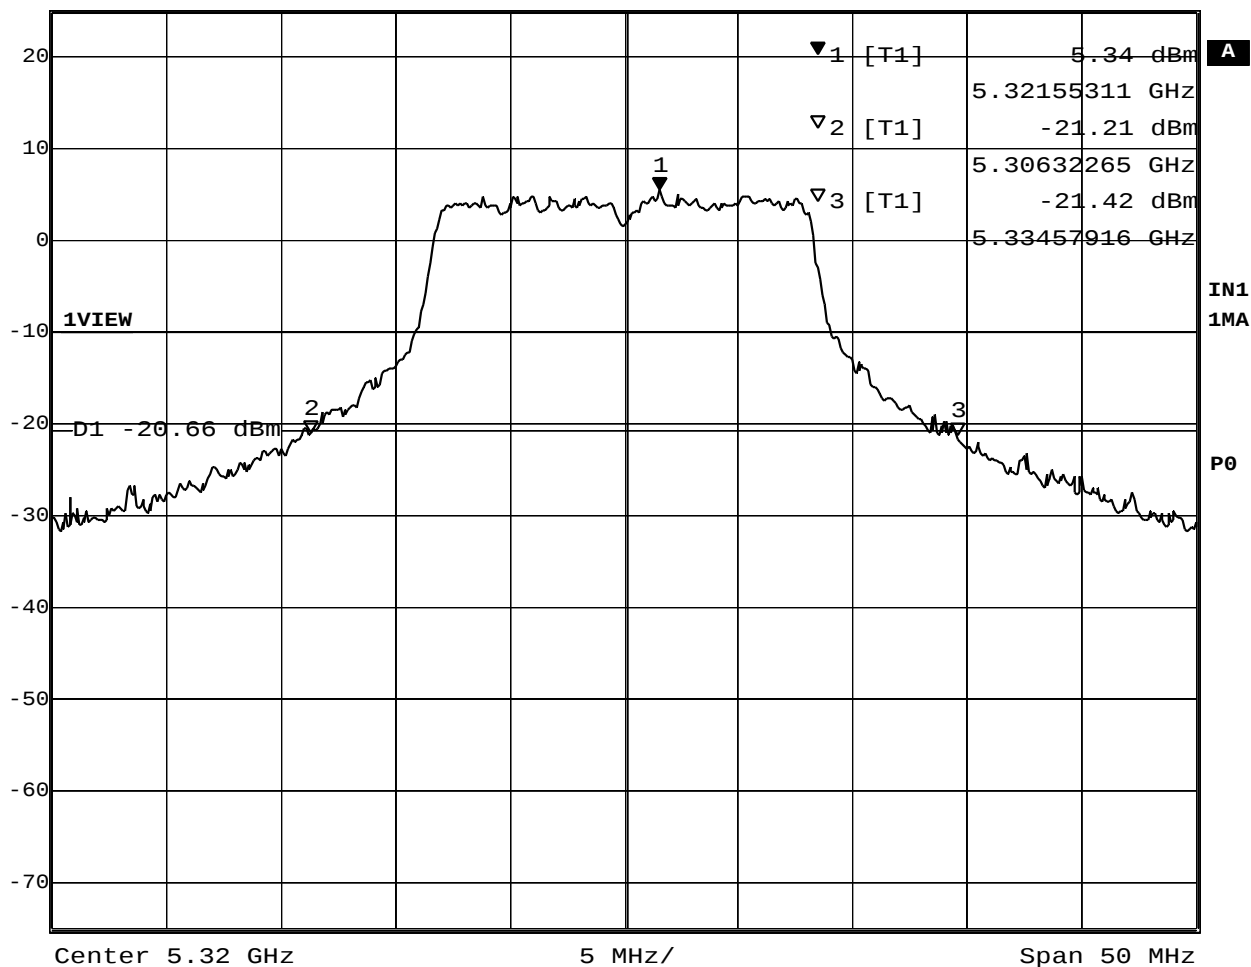

Date: 29.OCT.2002 15:39:07

Plot 1-3. 26dB BW at 5320MHz

2. Peak Conducted Transmit Output Power

[5150-5250MHz: FCC 15.407(a)(1), RSS 6.2.2q1(i) / q1(iV)(b)]

[5250-5350MHz: FCC 15.407(a)(2), RSS 6.2.2q1(ii) / q1(iV)(b)]

2.1 Test Procedure

The test was performed with two kinds of measurement methods as follows.

- 1) using Power meter
- 2) using Spectrum Analyzer according the FCC Public Notice, DA 02-2138, August/30/2002 (Method III)

2.1.1 Power Meter measurement method

To find the worse case in the implemented transmission modes in each measuring frequency (low, middle, high), the following test was performed with a power meter.

- A transmitter antenna terminal of EUT was connected to the input of a RF power sensor.
- Measurement was performed while EUT was operating in continuous transmission mode at the appropriate center frequencies. The spectrum of the continuous transmission test mode is shown in the Chapter D.

Table 2-1 : Test Instruments of power meter method

Description	Model	Serial Number
Power Meter	HP 437B	3043U03437
Power Sensor	HP 8481A	US41030582
Coax cables: - Power Sensor <=> EUT	Length: 20 cm Loss: 1.2dB	

Notes: - HP: Hewlett Packard




Figure 2-1: Measurement setup of power meter method

2.1.2 Spectrum Analyzer measurement (Method III)

The spectrum analyzer was connected to the antenna terminal, while EUT was operating in continuous transmission mode (shown in the Chapter D) at the appropriate center frequencies.

The spectrum analyzer was set to :

VBW= 30kHz ($\geq 1/T$, where T is transmission pulse duration. See Chapter D.), RBW=1MHz,
Span=30-40MHz encompassing the entire 26dB emission bandwidth of the transmission signal,
Mode= sample detector, Trigger= free run

The band power measurement function was used to measure the peak power of each transmission mode selected by the step 2.1.1. The analyzer computed the peak power by integrating the spectrum across the 26 dB emission bandwidth given by the previous chapter.

Table 2-2 : Test Instruments of spectrum analyzer method

Description	Model	Serial Number
Spectrum Analyzer EMI Test Receiver	R&S ESI26	836119/003
Coax cables: - Spectrum Analyzer <=> EUT	Length: 110 cm Loss: 2.2 dB	

Notes: - R&S: Rohde & Schwarz




Figure 2-2 : Measurement setup of spectrum analyzer method

2.2 Measurement Results

Test Date: October 15 and 29, 2002

Table 2-2-1. Power meter measurement results (EUT: M/T 2682-NLU, s/n FX-00336)

Operation Frequency [GHz]	Rated output power (conducted) [dBm]							
	6M bps	9M bps	12M bps	18M bps	24M bps	36M bps	48M bps	54M bps
5.180	13.2	13.2				13.1	13.0	11.8
specification	14							13
5.260	16.1	16.2				14.4	13.5	12.4
specification	17					15	14	13
5.320	13.3	13.4				13.3	13.2	12.4
specification	14							13


[Calculation table]

Measured Frequency (MHz)	Power Meter Reading (dBm)	Cable Loss (dB)	Results (dBm)	Limit		Peak antenna gain of EUT (dBi)	EIRP (dBm)	IC limit (dBm)
				FCC (dBm)	IC (dBm)			
5180	13.2	1.2	14.4	17	N/A	2.98	17.4	23
5260	16.2	1.2	17.4	24	24		20.4	30
5320	13.4	1.2	14.6	24	24		17.6	30

Table 2-2-2. Spectrum analyzer measurement results (EUT: M/T 2682-NLU, s/n FX-00336)

Measured Frequency (MHz)	Analyzer reading (dBm)	Trace number	Cable Loss (dB)	Results (dBm)	Limit		Peak antenna gain of EUT (dBi)	EIRP (dBm)	IC limit (dBm)
					FCC (dBm)	IC (dBm)			
5180	11.91	Plot 2-1	2.2	14.1	17	N/A	2.98	17.1	23
5260	14.97	Plot 2-2	2.2	17.2	24	24		20.2	30
5320	12.19	Plot 2-3	2.2	14.4	24	24		17.4	30

2.3 Trace Data

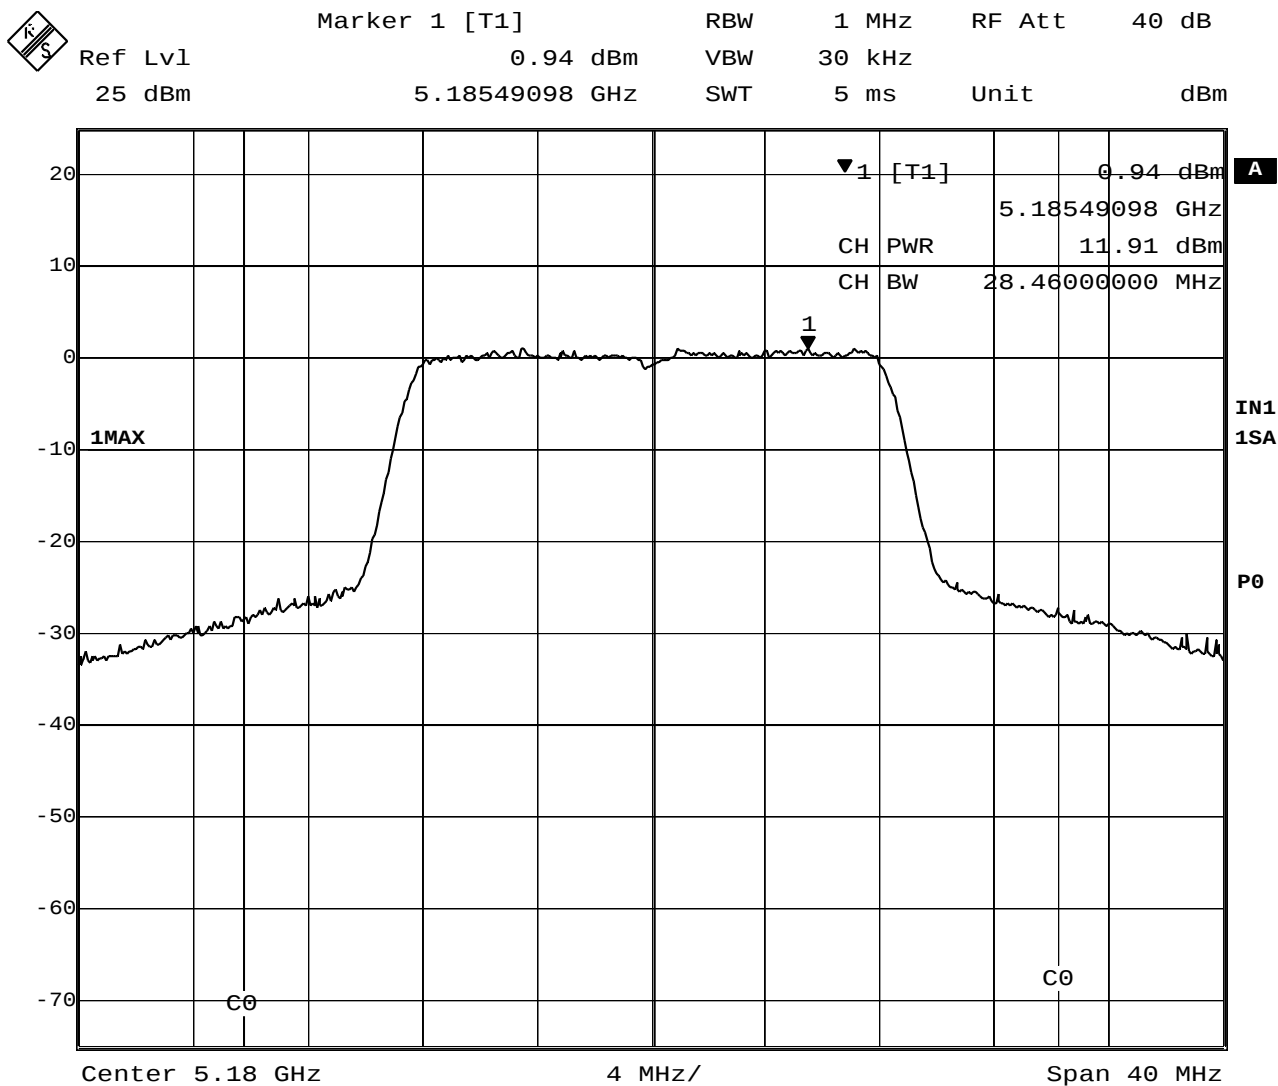


Date: 29.OCT.2002 15:45:54

Plot 2-1 Conducted Peak Power at 5180MHz



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	40 dB
25 dBm	4.10 dBm	VBW	30 kHz		
	5.26148297 GHz	SWT	5 ms	Unit	dBm

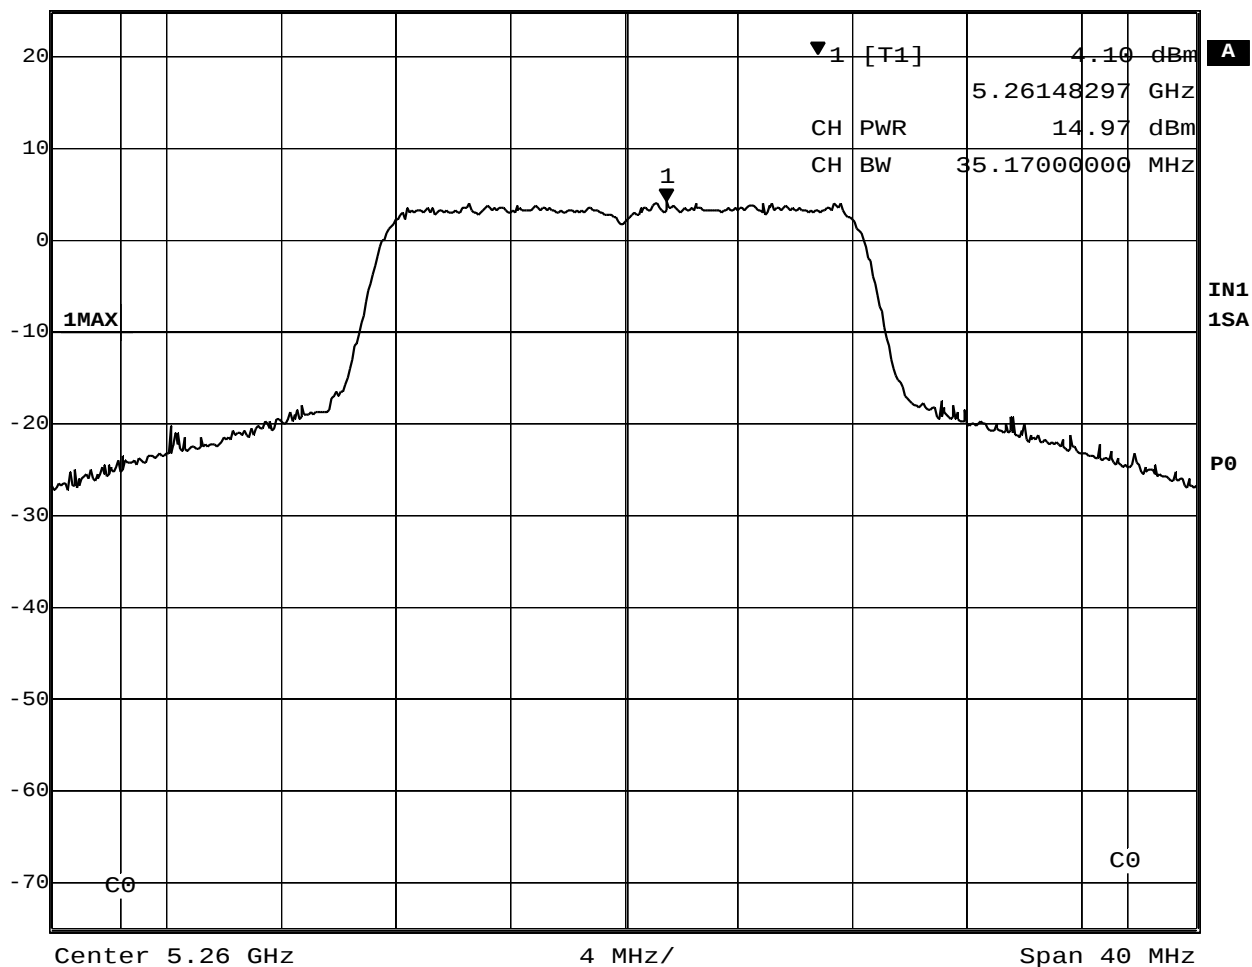


Date: 29.OCT.2002 15:51:21

Plot 2-2 Conducted Peak Power at 5260MHz



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	40 dB
25 dBm	1.29 dBm	VBW	30 kHz		
	5.32124248 GHz	SWT	5 ms	Unit	dBm

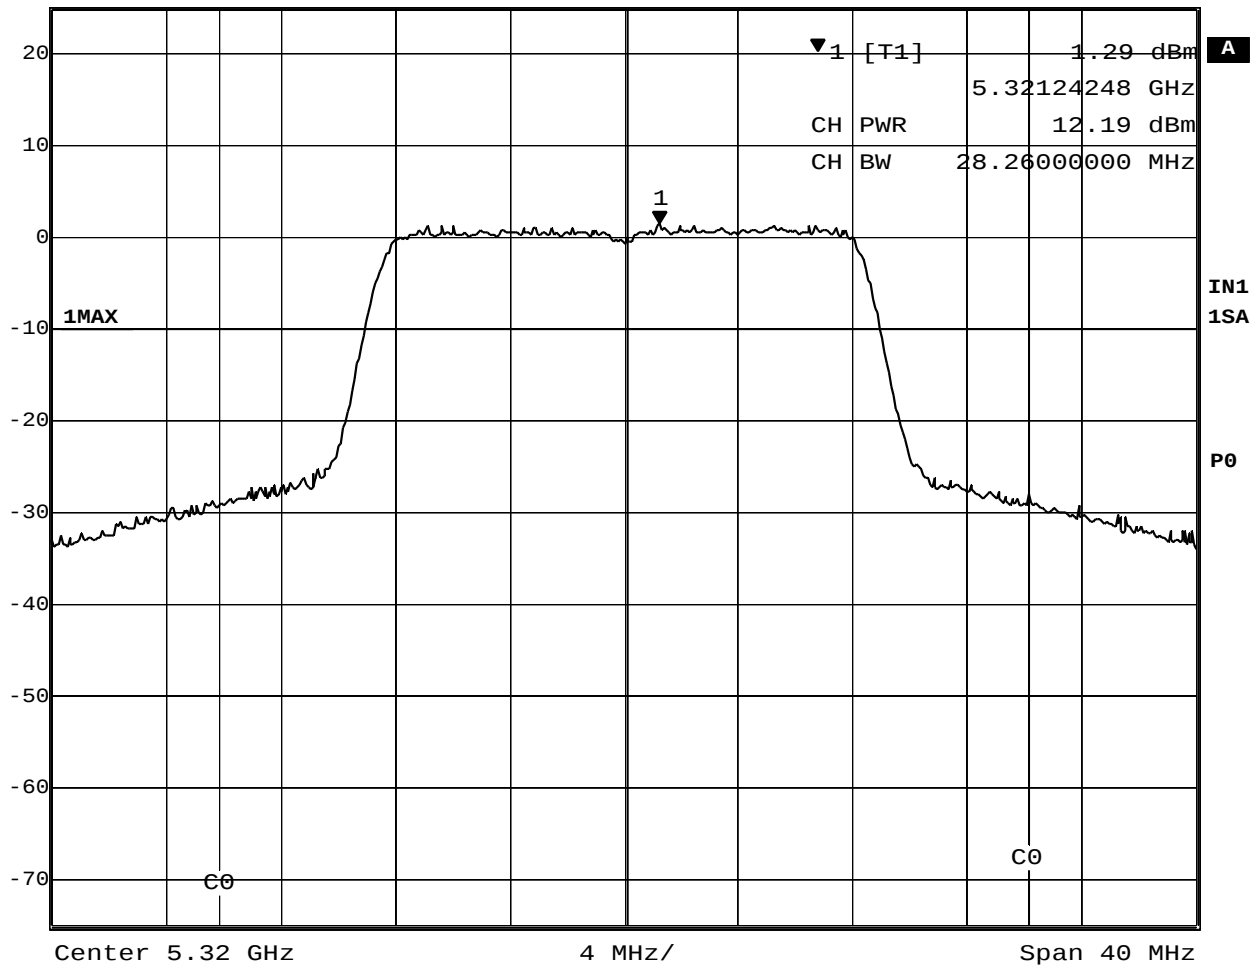

Date: 29.OCT.2002 15:53:06

Plot 2-3 Conducted Peak Power at 5320MHz

3. Peak Power Spectral Density

[5150-5250MHz: FCC 15.407(a)(1), RSS 6.2.2q1(i), (iv)(b)]
 [5250-5350MHz: FCC 15.407(a)(2), RSS 6.2.2q1(ii), (iv)(b)]

3.1 Test Procedure

The spectrum analyzer was connected to the antenna terminal, while EUT was operating in continuous transmission mode at the appropriate center frequencies.

The spectrum analyzer was set to :

RBW= 1MHz, VBW=3MHz, Span=20MHz, Mode= sample detector,
 The analyzer averaged 100 traces in averaging mode, then the marker was set to the highest position in the spectrum.

Also the Canadian PPSD was examined with the following spectrum analyzer setting.

RBW= 1MHz, VBW=1MHz, Span=20MHz, Mode= sample detector, averaging off

The test instruments and setup configuration are the same as the Table 2-2 and Figure 2-2.

3.2 Measurement Results

Test Date: October 29, 2002

Table 3-1. Measurement results of PPSD (EUT: M/T 2682-NLU, s/n FX-00336)


Measured Frequency (MHz)	Analyzer reading (dBm)	Trace number	Cable Loss (dB)	Results (dBm)	FCC Limit (dBm)	IC Limit q1(ii) (dBm)	Peak Antenna Gain (dBm)	IC EIRP (dBm)	IC Limit q1(i) (dBm)
5180	-1.28	Plot 3-1	2.2	0.9	4.0	N/A	2.98	3.9	10
5260	2.16	Plot 3-2	2.2	4.4	11.0	11.0			N/A
5320	-1.92	Plot 3-3	2.2	0.3	11.0	11.0			N/A

Table 3-2. Measurement results of Canadian PPSD (EUT: M/T 2682-NLU, s/n FX-00336)

Measured Frequency (MHz)	Analyzer reading (dBm)	Trace number	Cable Loss (dB)	Results (dBm)	IC Limit q1(iv)(b) 3 + 10logB* (dBm)
5180	8.53	Plot 3-4	2.2	10.7	17.54
5260	11.09	Plot 3-5	2.2	13.3	18.47
5320	8.32	Plot 3-6	2.2	10.5	17.51

* B = 26dB Bandwidth

3.3 Trace Data

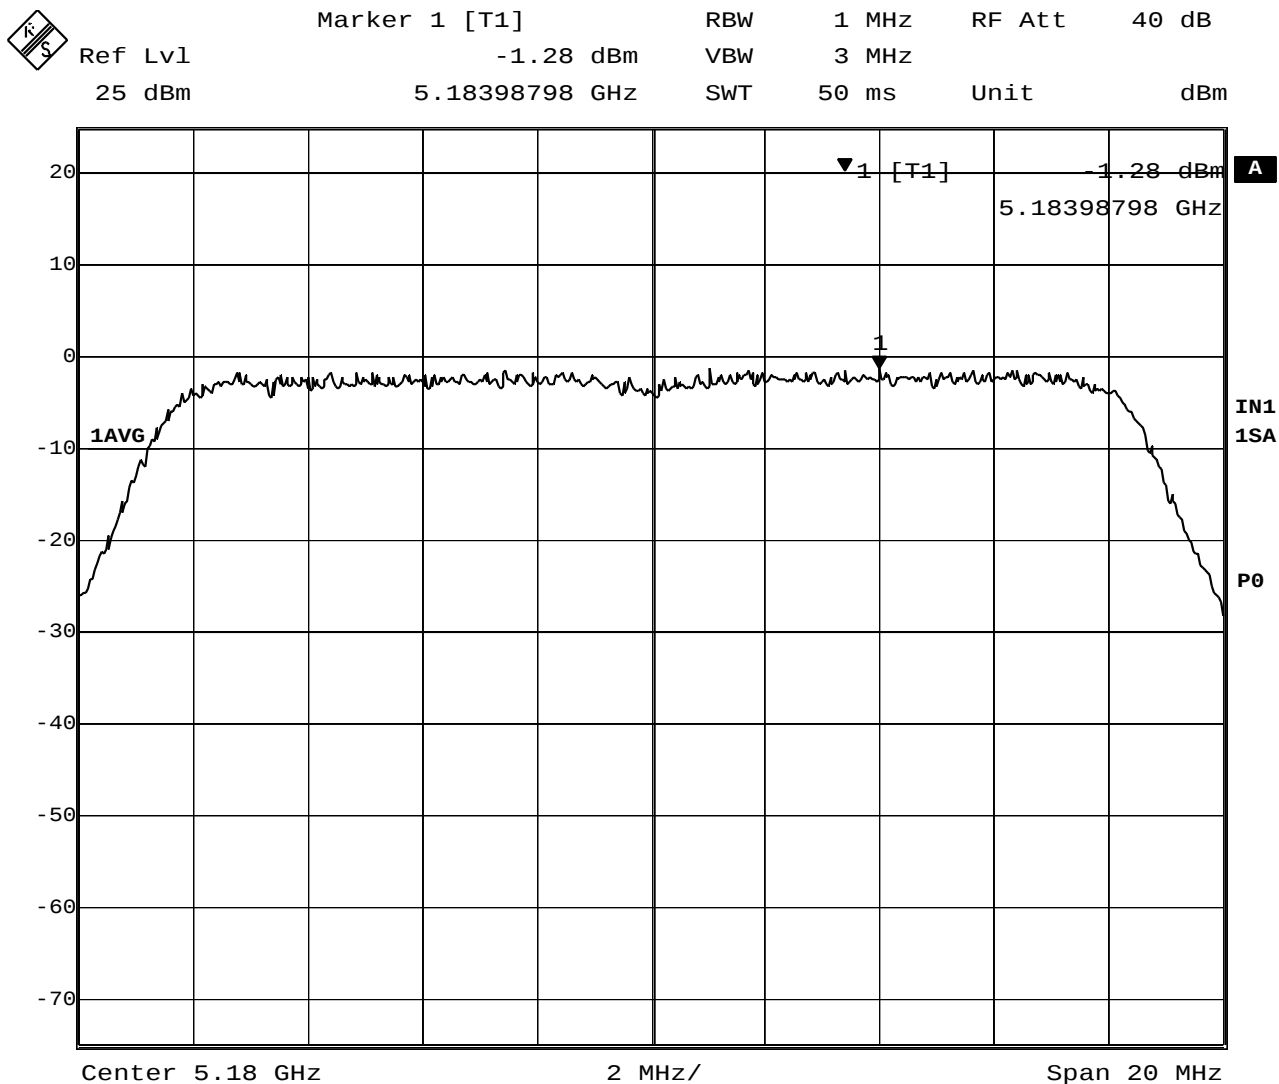


Date: 29.OCT.2002 15:57:34

Plot 3-1 Peak Power Spectral Density at 5180MHz



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	40 dB
25 dBm	2.16 dBm	VBW	3 MHz		
	5.26378758 GHz	SWT	50 ms	Unit	dBm

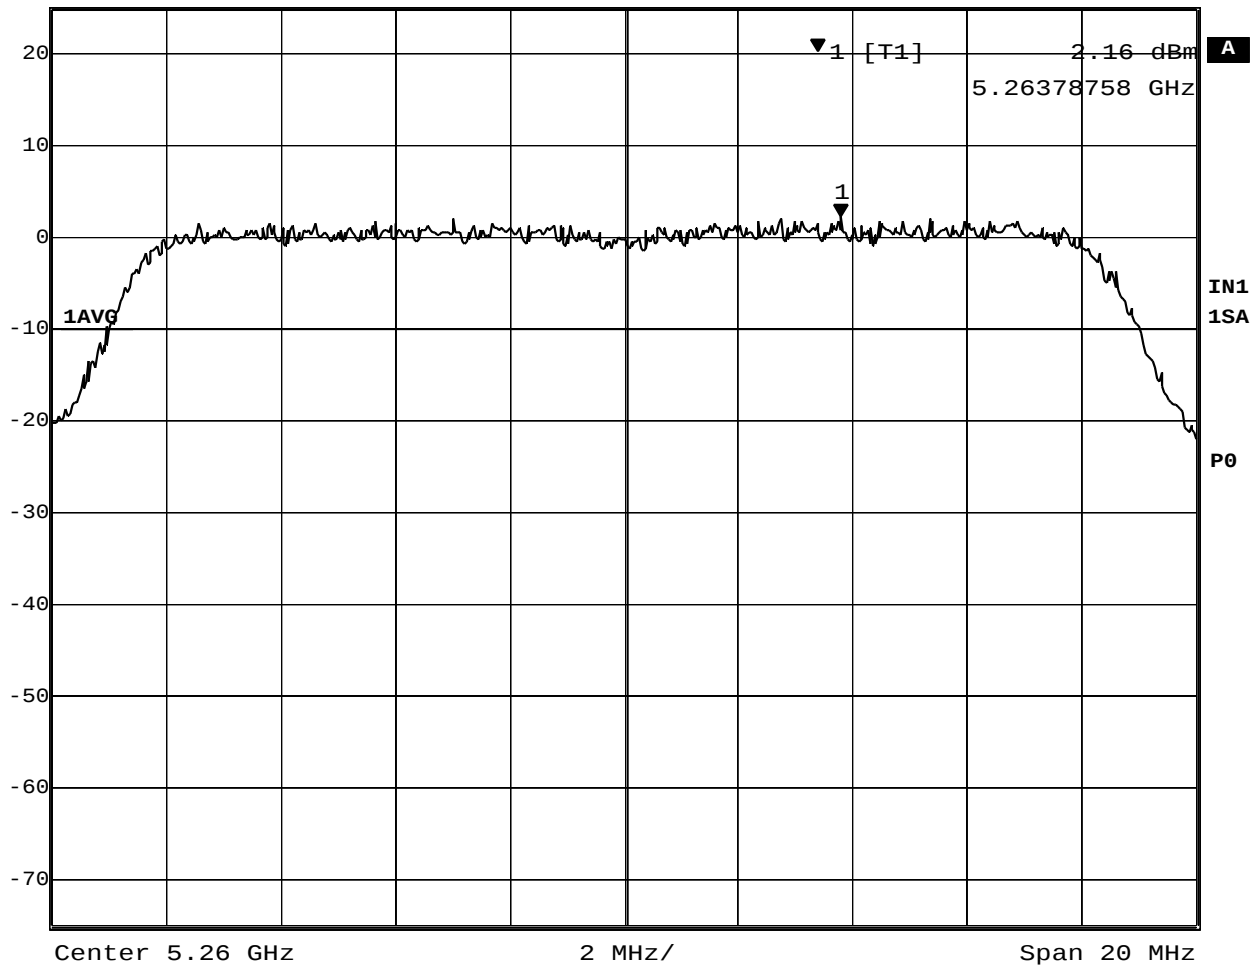


Date: 29.OCT.2002 16:02:05

Plot 3-2 Peak Power Spectral Density at 5260MHz



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	40 dB
25 dBm	-1.92 dBm	VBW	3 MHz		
	5.31845691 GHz	SWT	50 ms	Unit	dBm

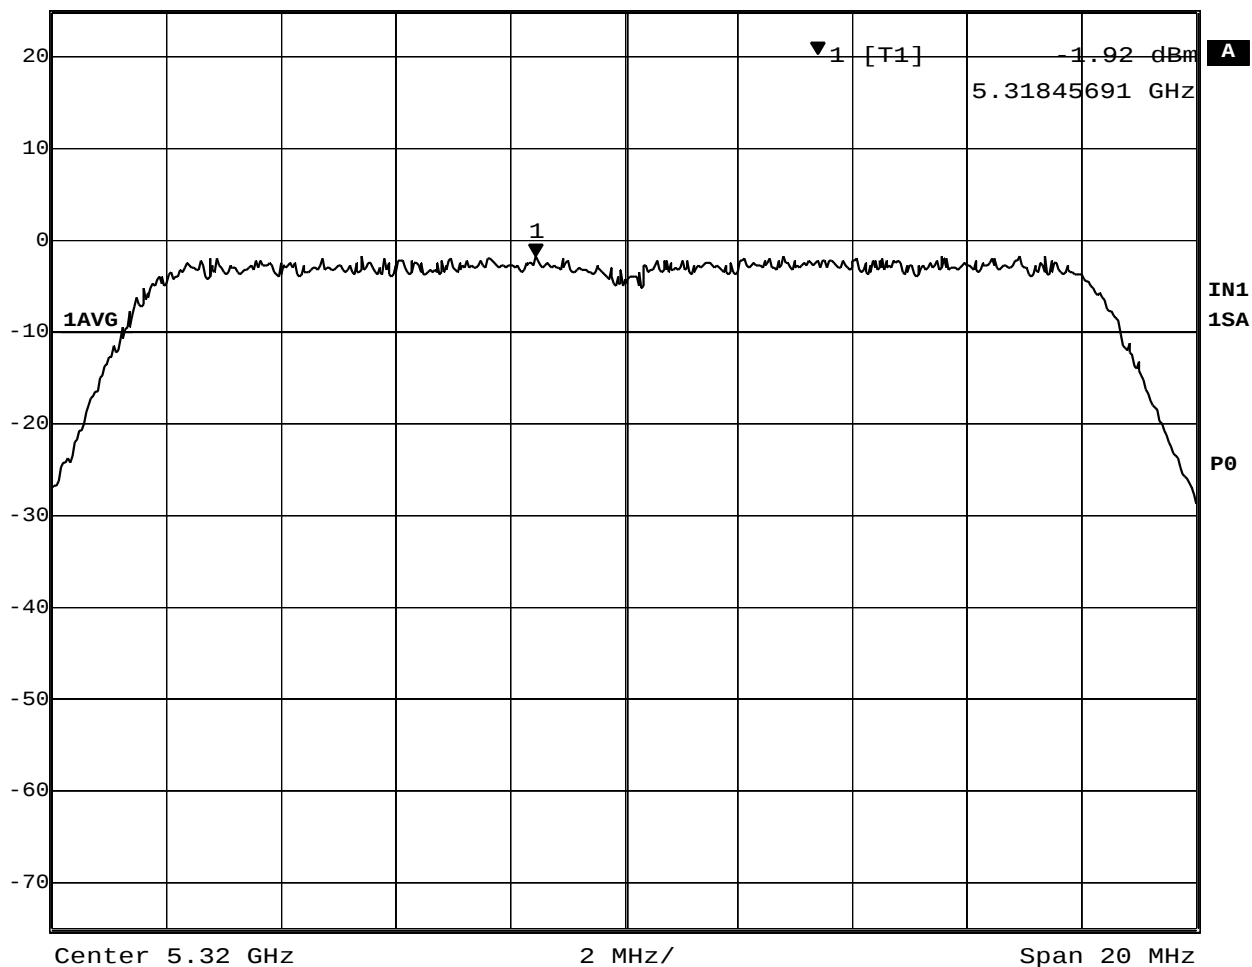


Date: 29.OCT.2002 16:03:36

Plot 3-3 Peak Power Spectral Density at 5320MHz



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	40 dB
25 dBm	8.53 dBm	VBW	1 MHz		
	5.18482966 GHz	SWT	50 ms	Unit	dBm

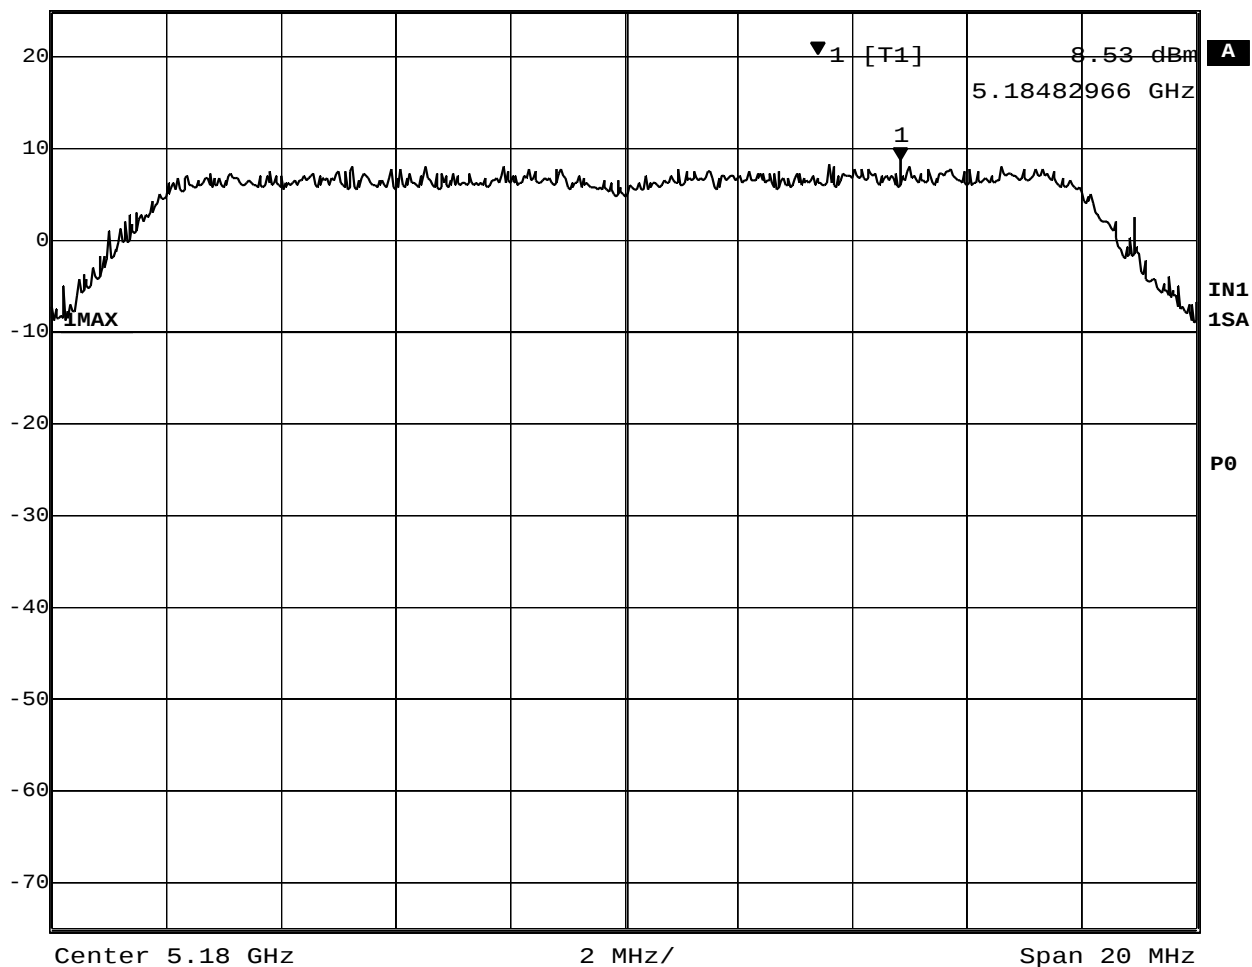


Date: 29.OCT.2002 15:59:57

Plot 3-4 Peak Power Spectral Density at 5180MHz (IC RSS-210)



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	40 dB
25 dBm	11.09 dBm	VBW	1 MHz		
	5.26358717 GHz	SWT	50 ms	Unit	dBm

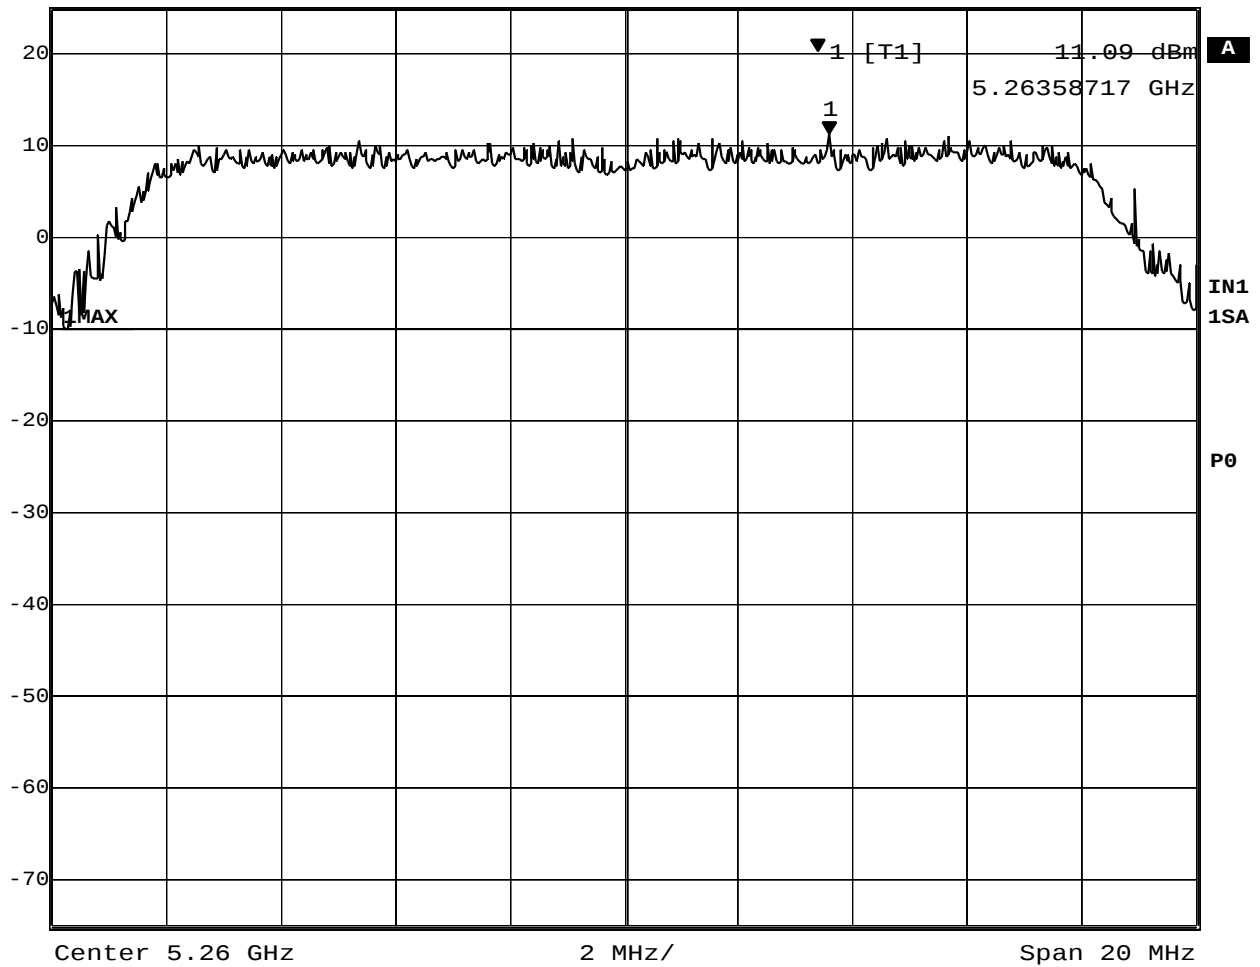


Date: 29.OCT.2002 16:01:05

Plot 3-5 Peak Power Spectral Density at 5260MHz (IC RSS-210)



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	40 dB
25 dBm	8.32 dBm	VBW	1 MHz		
	5.32555110 GHz	SWT	50 ms	Unit	dBm

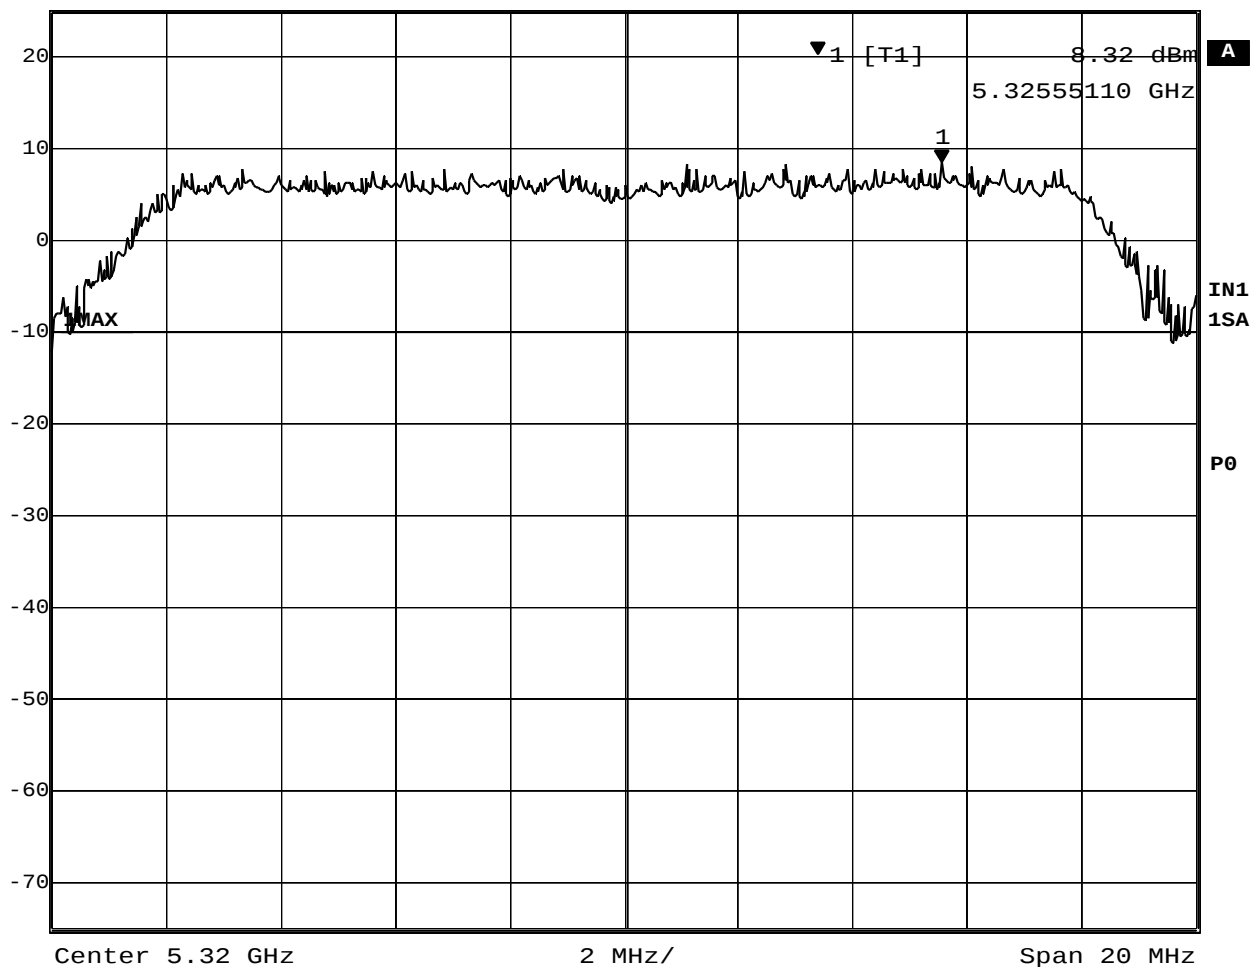

Date: 29.OCT.2002 16:04:29

Plot 3-6 Peak Power Spectral Density at 5320MHz (IC RSS-210)

4. Peak Excursion Ratio

[FCC 15.407(a)(6)]

4.1 Test Procedure

The spectrum analyzer was connected to the antenna terminal, while EUT was operating in continuous transmission mode at the appropriate center frequencies.

- 1st trace :
The spectrum analyzer was set to :
RBW= 1MHz, VBW=3MHz, Mode= peak detector and max hold
then to view.
- 2nd trace :
The measurement result of the peak conducted power in Chapter 2.1.2 tend to present the similar values to the results of power meter, therefore the same setting of spectrum analyzer as the one for the Chapter 2.1.2 was used for the 2nd trace.
i.e. VBW= 30kHz, RBW=1MHz, Span=30-40MHz, Trigger= free run,
Mode= sample detector

The largest difference of amplitude delta between the two trances is the peak excursion.

The test instruments and setup configuration are the same as the Table 2-2 and Figure 2-2.

4.2 Measurement Results

Test Date: November 13, 2002


Table 4-2. Measurement results of Peak Excursion Ratio (EUT: M/T 2682-NLU, s/n FX-00336)

Measured Frequency (MHz)	Analyzer reading (dB)	FCC Limit (dB)	Margin (dB)	Trace number
5180	9.17	13	3.83	Plot 4-1
5260	8.63		4.37	Plot 4-2
5320	8.71		4.29	Plot 4-3

4.3 Trace Data



Marker 1 [T2]	RBW	1 MHz	RF Att	40 dB
Ref Lvl	10.05 dBm	VBW	30 kHz	
25 dBm	5.18592184 GHz	SWT	50 ms	Unit dBm

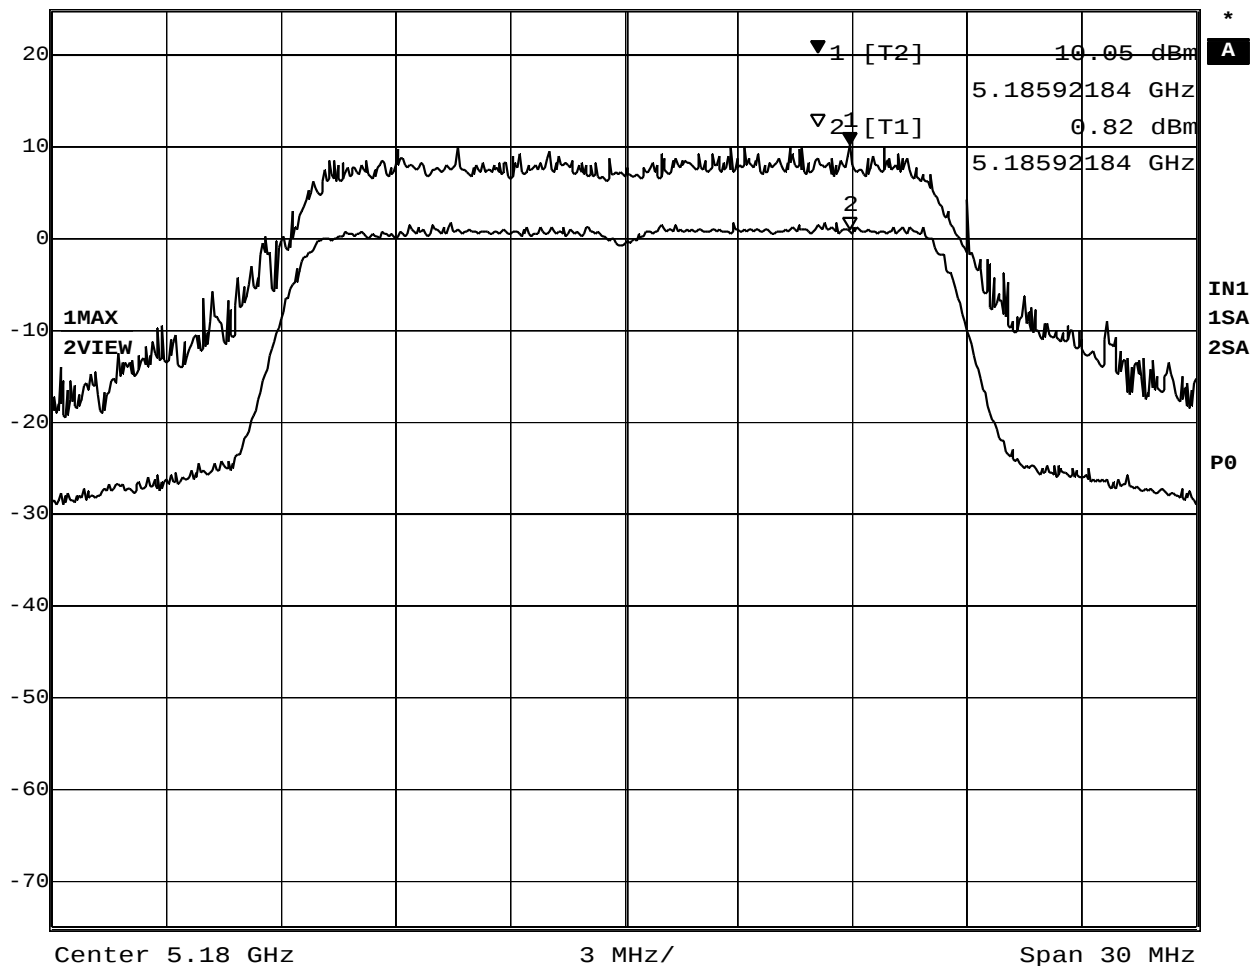


Date: 13.NOV.2002 08:54:36

Plot 4-1 Peak Excursion Ratio at 5180MHz



Ref Lvl	Marker 1 [T2]	RBW	1 MHz	RF Att	40 dB
25 dBm	12.07 dBm	VBW	30 kHz		
	5.25540080 GHz	SWT	50 ms	Unit	dBm

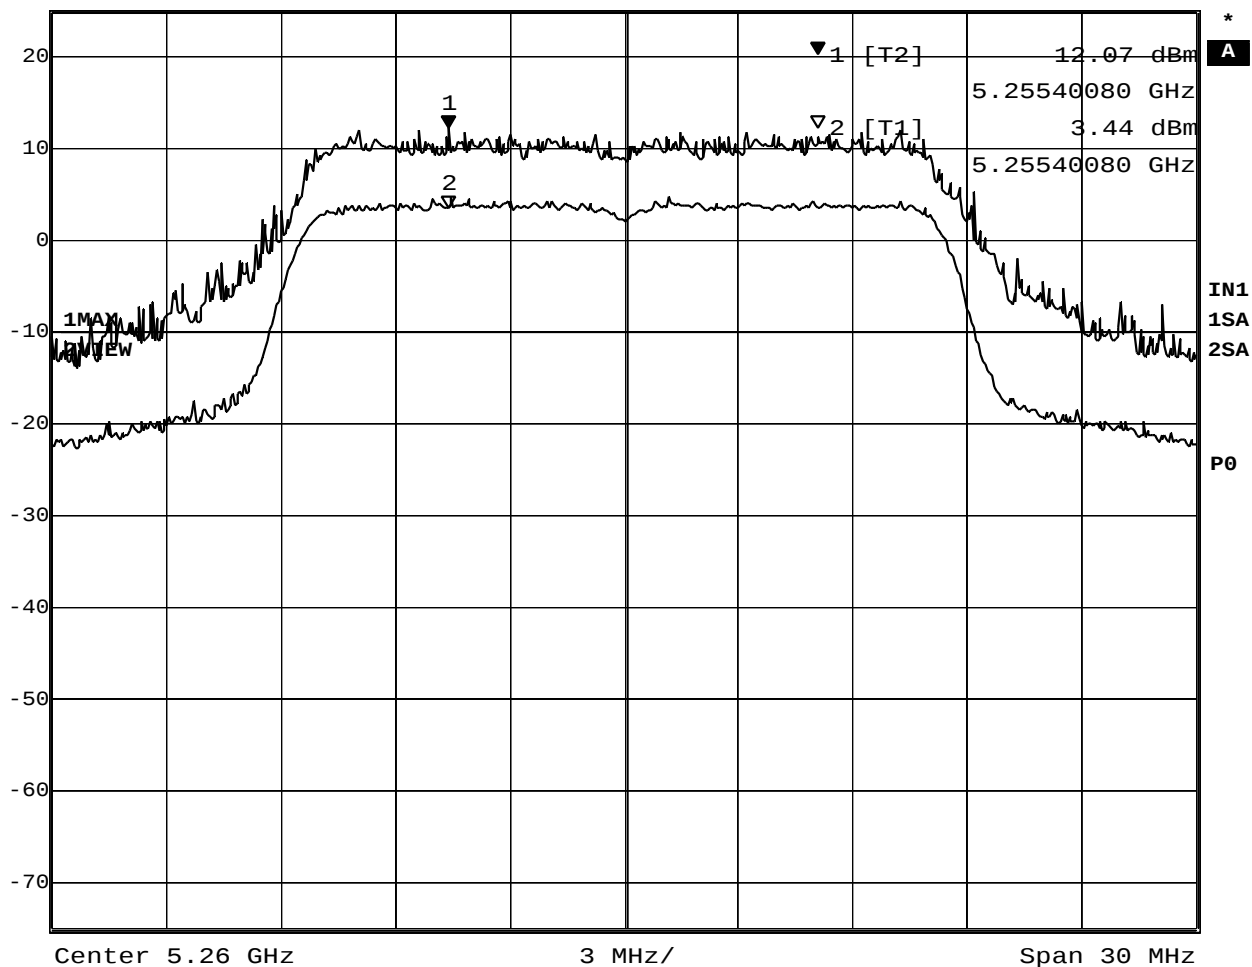


Date: 13.NOV.2002 09:01:07

Plot 4-2 Peak Excursion Ratio at 5260MHz



Ref Lvl	Marker 1 [T2]	RBW	1 MHz	RF Att	40 dB
25 dBm	9.53 dBm	VBW	30 kHz		
	5.32387776 GHz	SWT	50 ms	Unit	dBm

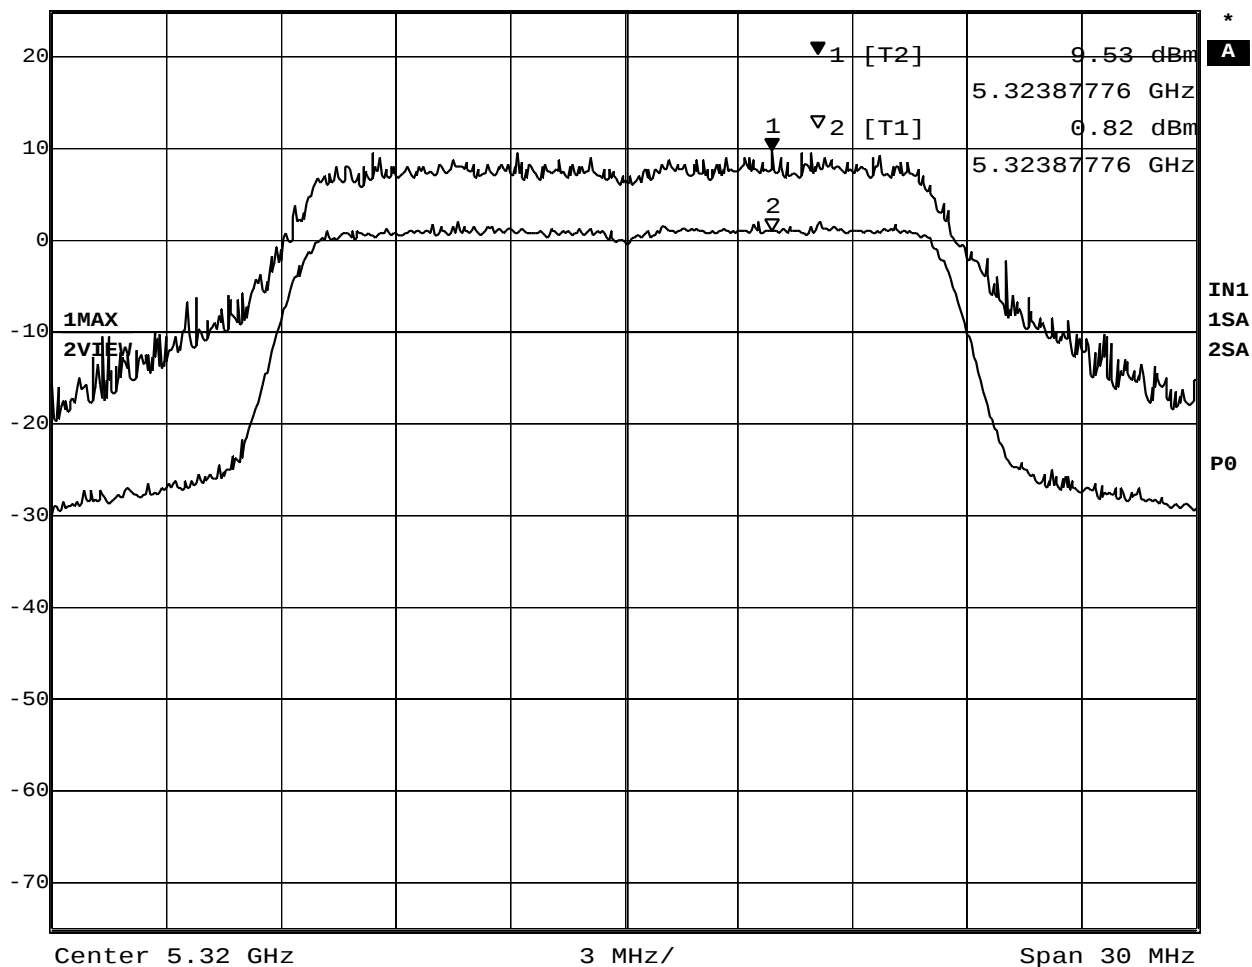

Date: 13.NOV.2002 08:57:50

Plot 4-3 Peak Excursion Ratio at 5320MHz

5. AC WIRELINE CONDUCTED EMISSIONS (450KHz – 30MHz)

[FCC 15.207/ 15.407(b)(5), RSS-210 6.2.2(q1)(v) / 6.6 / 7.4]

5.1 Test Procedure

The conducted emissions are measured in the IBM shielded room with a spectrum analyzer in peak hold. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9KHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.

5.2 Test Instruments and Measurement Setup

Table 5-1. Conducted Emission Test Instrumentation

Description	Model	Serial Number
Computer	IBM 6589-13J	97-15613
Spectrum Analyzer (100Hz-1.5GHz)	HP 85680B	2601A02634
Spectrum Analyzer Display	HP 85662A	2542A12308
Quasi-Peak Adapter	HP 85650A	2043A00062
Receiver (9kHz-30MHz)	R&S ESH3	891806/012
LISN	EMCO 3825/2	1426
Switch/control unit	HP 3488A	2719A17228
Plotter	HP 7550A	2631A33619
Coax cables: - Lisen-L <=> SW/Con.unit (SW100) - Lisen-N <=> SW/Con.unit (SW101) - SW/Con.unit <=> RCVR (Input) - SW/Con.unit<=> Spe Ana.(Signal In)	Length: 4 m 4 m 1 m 1 m	- EMIC-L - EMIC-N - EMIC-R - EMIC-S

Notes: - HP: Hewlett Packard, R&S: Rohde & Schwarz

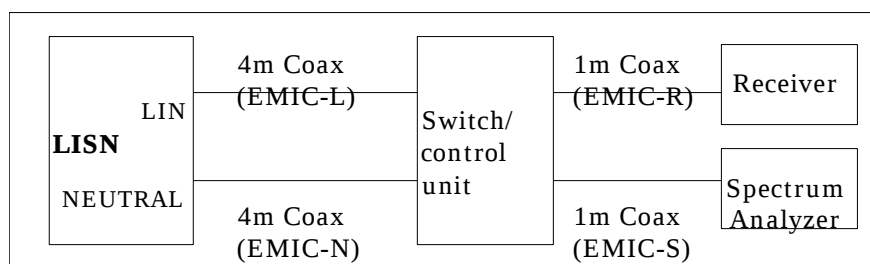


Figure 5. Cables for Conducted Emission Test

5.3 Measurement Results

The EUT was found to comply to the limits of FCC Part 15 Subpart E and RSS-210 with a margin of 17.3dB. The 6 highest emissions relative to the limits are reported.

Test Date: November 13, 2002

Table 5-2-1. EUT: M/T 2682-NLU, s/n FX-00336, Ch.36(5180MHz) **TX** mode 24Mbps

Frequency (MHz)	QP Voltage (dB μ V)	QP Limit (dB μ V)	QP Voltage (μ V)	QP Limit (μ V)	Phase
0.4813	28.6	48	26.9	250	NEUTRAL
0.5569	28.8	48	27.5	250	NEUTRAL
0.6911	28.3	48	26.0	250	NEUTRAL
0.8302	27.5	48	23.7	250	NEUTRAL
0.9704	26.7	48	21.6	250	NEUTRAL
4.0826	29.3	48	29.2	250	NEUTRAL

Table 5-2-2. EUT: M/T 2682-NLU, s/n FX-00336 , Ch.52(5260MHz) **TX** mode 24Mbps

Frequency (MHz)	QP Voltage (dB μ V)	QP Limit (dB μ V)	QP Voltage (μ V)	QP Limit (μ V)	Phase
0.5546	30.0	48	31.6	250	NEUTRAL
0.6230	25.4	48	18.6	250	NEUTRAL
0.6907	28.7	48	27.2	250	NEUTRAL
0.6937	28.2	48	25.7	250	NEUTRAL
0.8295	27.5	48	23.7	250	NEUTRAL
3.9444	30.7	48	34.3	250	LINE

Table 5-2-3. EUT: M/T 2682-NLU, s/n FX-00336, Ch.64(5320MHz) **TX** mode 24Mbps

Frequency (MHz)	QP Voltage (dB μ V)	QP Limit (dB μ V)	QP Voltage (μ V)	QP Limit (μ V)	Phase
0.4831	29.8	48	30.9	250	NEUTRAL
0.5562	29.4	48	29.5	250	NEUTRAL
0.6944	27.7	48	24.3	250	NEUTRAL
0.8314	27.2	48	22.9	250	NEUTRAL
0.9692	26.9	48	22.1	250	NEUTRAL
3.9443	30.5	48	33.5	250	LINE

Table 5-2-4. EUT: M/T 2682-NLU, s/n FX-00336, Ch. 52(5260MHz) **RX** mode

Frequency (MHz)	QP Voltage (dB μ V)	QP Limit (dB μ V)	QP Voltage (μ V)	QP Limit (μ V)	Phase
0.4828	29.7	48	30.5	250	NEUTRAL
0.5561	28.9	48	27.9	250	NEUTRAL
0.6944	27.5	48	23.7	250	NEUTRAL
0.8313	27.1	48	22.6	250	NEUTRAL
0.9696	26.5	48	21.1	250	NEUTRAL
4.0851	29.9	48	31.3	250	LINE

6. RESTRICTED BANDS RADIATIONS (30MHz – 1GHz)

[FCC 15.205&209 / 15.407(b)(1),(2),(5),(6)]
 [RSS-210 6.2.1 / 6.2.2(q1)(i),(ii),(v) / 6.3 / 7.3]

6.1 Test Procedure

Preliminary radiated emissions are measured in the semi-anechoic chamber at a 3 meter distance on every azimuth in both horizontal and vertical polarity. The antennas are also scanned in height. The emissions are recorded with a spectrum analyzer in peak hold mode. The identified emissions are further maximized by a cable manipulation. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120kHz. The highest emissions relative to the limit are listed.

6.2 Test Instruments and Measurement Setup

Table 6-1 Radiated Emission Test Instrumentation

Description	Model	Serial Number
Computer	IBM 5551-L	#4
Spectrum Analyzer (100Hz-1.5GHz) for 30-200MHz	HP 85680B	3019A05155
Spectrum Analyzer Display for 30-200MHz	HP 85662A	3026A19353
Quasi-Peak Adapter for 30-200MHz	HP 85650A	3033A01449
Spectrum Analyzer (100Hz-1.5GHz) for 200-1000MHz	HP 85680B	2841A04252
Spectrum Analyzer Display for 200-1000MHz	HP 85662A	2816A16831
Quasi-Peak Adapter for 200-1000MHz	HP 85650A	2811A01156
Amplifier (100KHz-1.3GHz)		
- for 30-200MHz	HP 8447D	2805A02919
- for 200-1000MHz	HP 8447D	2944A03506
Biconical Antenna (30-200MHz)	EMCO 3108	2309
Log-Periodic Antenna (200-1000MHz)	EMCO 3146	1585
Receiver (20MHz-1.3GHz)	R&S ESVP	893202/018
Switch/control unit	HP 3488A	2719A17226
N-Coax cables:	Length:	
- Bi-coni Ant <=> 10m Cable	9 m	- EM103L01
- 10m Cable <=> Shield Panel	10 m	- EM103L02
- Shield Panel <=> RF Amp	7 m	- EM103L03
- RF Amp <=> Power Splitter	0.5m	- EM103L04
- Log-peri Ant <=> 10m Cable	9 m	- EM103H01
- 10m Cable <=> Shield Panel	10 m	- EM103H02
- Shield Panel <=> RF Amp	7 m	- EM103H03
- RF Amp <=> Power Splitter	0.5m	- EM103H04
Coax cables:		
- Power Splitter <=> SW/Con.unit (SW110)	1 m	- EM103L05
- Power Splitter <=> SW/Con.unit (SW300)	1 m	- EM103L06
- Power Splitter <=> SW/Con.unit (SW100)	1 m	- EM103H05
- Power Splitter <=> SW/Con.unit (SW301)	1 m	- EM103H06

- SW/Con.unit <=> Receiver (Input)	2 m	- EM1RCV
- SW/Con.unit <=> Spe Ana.(Signal In) for 30- 200MHz	2 m	- EM1SPL
- SW/Con.unit <=> Spe Ana.(Signal In) for 200-1000MHz	2 m	- EM1SPH

Notes:

- HP: Hewlett Packard, R&S: Rohde & Schwarz

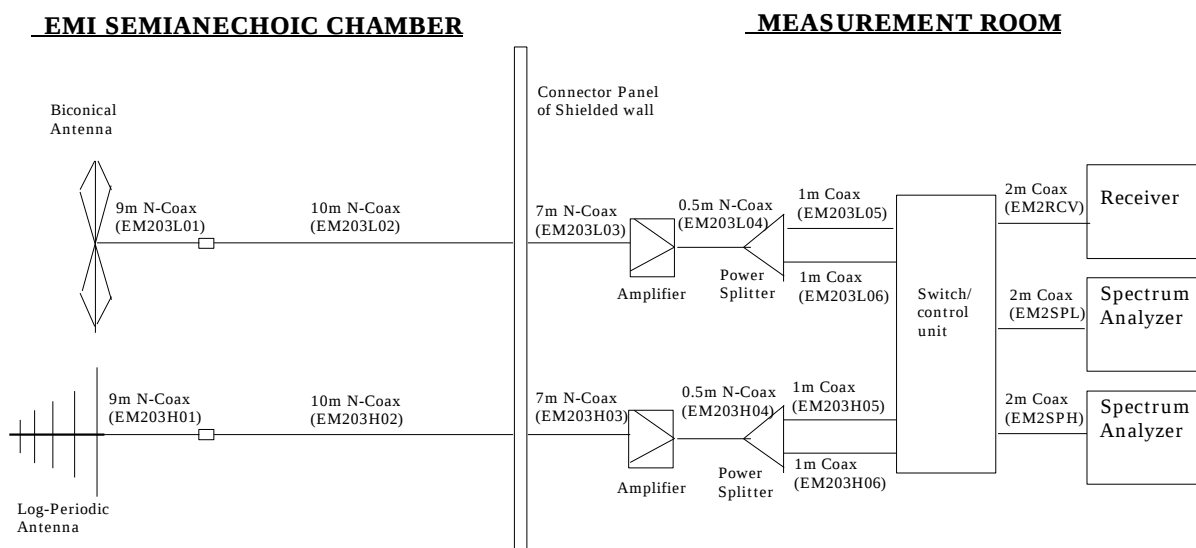


Figure 6 Cables for Radiated Emission Test

6.3 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver. All factors are included in the reported data.

$$FS = R + AF + CORR$$

where:

FS	=	Field Strength
R	=	Measured Receiver Input Amplitude
AF	=	Antenna Factor
CORR	=	Correction Factor = CL - AG
CL	=	Cable Loss
AG	=	Amplifier Gain

For example:

Given a Receiver input reading of 51.5dB μ V; Antenna Factor of 8.5dB/m; Cable Loss of 1.3dB; and an Amplifier Gain of 26dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 = 35.3\text{dB}\mu\text{V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:

$$\text{Level}(\text{dB}\mu\text{V/m}) = 20 \times \text{Log}(\text{Level}(\mu\text{V/m}))$$

$$40\text{dB}\mu\text{V/m} = 100\mu\text{V/m}$$

$$48\text{dB}\mu\text{V/m} = 250\mu\text{V/m}$$

6.4 Measurement Results

The EUT was found to comply to the limits of FCC Part 15 Subpart E and RSS-210 with a margin of 6.3 dB at 30MHz - 1000MHz band.

The 6 highest emissions relative to the limits are reported.

Test Date: October 18, 2002

Table 6-2-1. EUT: M/T 2682-NLU, s/n FX-00336, Ch.36(5180MHz) **TX** mode 24Mbps

Frequency (MHz)	Polarity (H/V)	Measured (dBμV)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dBμV/m)	Limit (dBμV/m)	Field Strength (μV/m)	Limit (μV/m)
157.505	H	38.1	12.4	-16.4	34.1	43.5	50.7	150
186.143	H	37.6	13.1	-16.0	34.7	43.5	54.3	150
200.460	H	34.4	11.3	-12.6	33.1	43.5	45.2	150
363.854	V	34.1	14.4	-13.7	34.8	46.0	55.0	200
528.104	V	30.9	17.7	-13.2	35.4	46.0	58.9	200
932.095	V	25.6	22.6	-9.0	39.2	46.0	91.2	200

Table 6-2-2. EUT: M/T 2682-NLU, s/n FX-00336, Ch.52(5260MHz) **TX** mode 24Mbps

Frequency (MHz)	Polarity (H/V)	Measured (dBμV)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dBμV/m)	Limit (dBμV/m)	Field Strength (μV/m)	Limit (μV/m)
157.505	H	37.7	12.4	-16.4	33.7	43.5	48.4	150
257.735	H	38.0	12	-14.6	35.4	46.0	58.9	200
332.716	V	35.6	14.1	-13.9	35.8	46.0	61.7	200
361.393	V	35.4	14.3	-13.5	36.2	46.0	64.6	200
528.104	V	32.0	17.7	-13.2	36.5	46.0	66.8	200
932.115	V	25.5	22.6	-9.0	39.1	46.0	90.2	200

Table 6-2-3. EUT: M/T 2682-NLU, s/n FX-00336, Ch.64(5320MHz) **TX** mode 24Mbps

Frequency (MHz)	Polarity (H/V)	Measured (dBμV)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dBμV/m)	Limit (dBμV/m)	Field Strength (μV/m)	Limit (μV/m)
157.505	H	38.0	12.4	-16.4	34.0	43.5	50.1	150
298.927	H	33.7	14	-14.2	33.5	46.0	47.3	200
528.104	V	30.3	17.7	-13.2	34.8	46.0	55.0	200
729.740	V	24.2	20.6	-11.1	33.7	46.0	48.4	200
902.073	V	23.4	22.5	-9.1	36.8	46.0	69.2	200
932.112	V	25.6	22.6	-9.0	39.2	46.0	91.2	200

Table 6-2-4. EUT: M/T 2682-NLU, s/n FX-00336, Ch.52(5260MHz) **RX** mode

Frequency (MHz)	Polarity (H/V)	Measured (dBμV)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dBμV/m)	Limit (dBμV/m)	Field Strength (μV/m)	Limit (μV/m)
157.505	H	37.9	12.4	-16.4	33.9	43.5	49.5	150
331.995	V	33.6	14.1	-13.9	33.8	46.0	49.0	200
365.345	V	34.1	14.4	-13.6	34.9	46.0	55.6	200
432.085	V	32.1	15.8	-13.6	34.3	46.0	51.9	200
528.104	V	32.2	17.7	-13.2	36.7	46.0	68.4	200
932.069	V	26.1	22.6	-9.0	39.7	46.0	96.6	200

7. RESTRICTED BANDS RADIATIONS (1GHz – 40GHz)

[FCC 15.205&209 / 15.407(b)(1),(2),(5),(6)]
 [RSS-210 6.2.1 / 6.2.2(q1)(i),(ii),(v) / 6.3 / 7.3]

7.1 Test Procedure

Radiated emissions were measured in the frequency range with 1 GHz to 40GHz in transmitting mode and 1 GHz to 25GHz in receiving mode. All tests were performed in the semi-anechoic chamber at a 3-meter distance (except for the frequency range with 18 GHz to 40 GHz where test distance was reduced to 1 meter) on both horizontal and vertical polarities. The antenna was also scanned in height. The emissions are recorded with a spectrum analyzer in peak hold mode. The identified emissions are further maximized as a function of cable manipulation, azimuth, and antenna height. The emissions closest to the limits are measured in the peak mode with the tuned spectrum analyzer using resolution bandwidth of 1MHz / video bandwidth of 1MHz, and the average setting mode with the tuned spectrum analyzer using resolution bandwidth of 1MHz / video bandwidth of 100Hz or 10Hz. The highest emissions relative to the limit are listed.

7.2 Test Instruments and Measurement Setup

Table 7 Radiated Emission Test Instrumentation (1GHz – 40GHz)

Description	Model	Serial Number
Spectrum Analyzer EMI Test Receiver	R&S ESI26	836119/003
Spectrum Analyzer	HP 8563E	3416A02248
Harmonic Mixer (26.5 – 40GHz)	Agilent 11970A	011269-001
Amplifier (1 - 26.5GHz)	HP 8449B	3008A00582
Amplifier (26.5 – 40GHz)	Agilent 83051A	3950M00193
Horn Antenna (1 - 18GHz)	EMCO 3115	9903-5774
Horn Antenna (3.95 – 5.85GHz)	EMCO 3160-5	1099
Horn Antenna (5.85 – 8.2GHz)	EMCO 3160-6	9712-1044
Horn Antenna (8.2 – 12.4GHz)	EMCO 3160-7	1158
Horn Antenna (12.4 – 18GHz)	EMCO 3160-8	1143
Horn Antenna (18 - 26.5GHz)	EMCO 3160-9	0004-1202
Horn Antenna (26.5 - 40GHz)	EMCO 3160-10	1175
SF106 cables (1 - 18GHz): - Horn Ant <=> RF Amp. - RF Amp.<=>Spectrum Analyzer	Length: 6 m 15 m	- EM206SCO - EM215SCO
SF102 cables (18 – 40GHz): - Horn Ant <=> RF Amp. - RF Amp.<=>Spectrum Analyzer	6m 1m	- SF102-20165 - SF102-21105

Notes: - HP: Hewlett Packard, R&S: Rohde & Schwarz

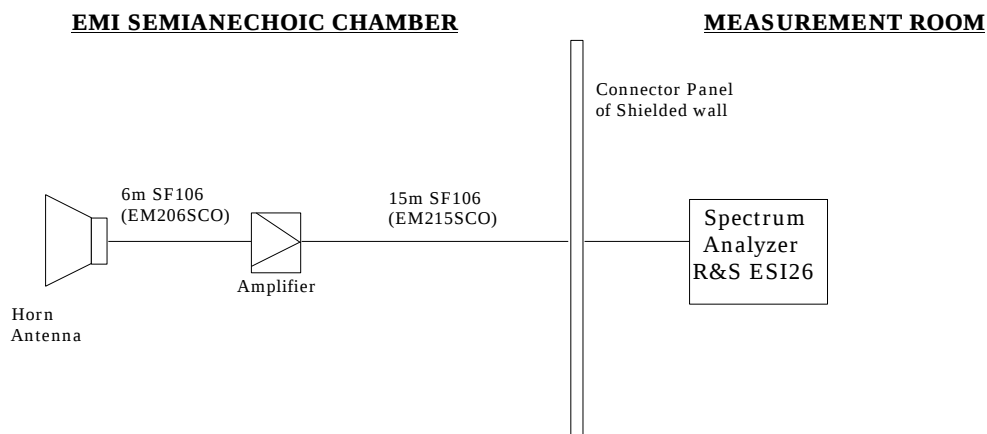


Figure 7-1. Cables for Radiated Emission Test (1 – 18 GHz)

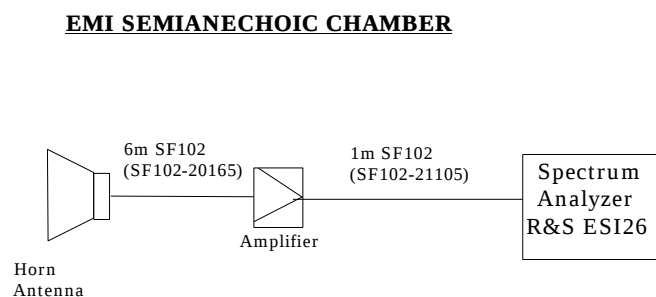


Figure 7-2. Cables for Radiated Emission Test (18 - 26.5GHz)

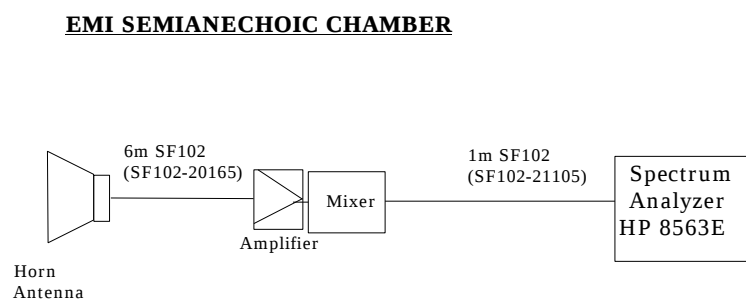


Figure 7-3. Cables for Radiated Emission Test (26.5 - 40GHz)

7.3 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where:

FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL-AG

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

For example:

Given a Spectrum Analyzer input reading of 51.5 dB μ V; Antenna Factor of 8.5 dB/m; Cable Loss of 1.3 dB; Falloff Factor of 0 dB; and an Amplifier Gain of 26 dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26 - 0.0 = 35.6 \text{ dB}\mu\text{V/m}$$

Conversions between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as :

$$\text{Level(dB}\mu\text{V/m)} = 20 \times \text{Log}(\text{Level}(\mu\text{V/m}))$$

$$40 \text{ dB}\mu\text{V/m} = 100 \mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250 \mu\text{V/m}$$

7.4 Measurement Results

The EUT was found to comply to the limits of FCC Part 15 Subpart E and RSS-210 with a margin of 0.9 dB. The measurement was done for the frequency range of 1 GHz to 40 GHz in TX mode and 1 GHz to 25GHz in RX mode.

Table 7-1. Limits for emissions

Limit for emissions in restricted bands	54 dB μ V/m (average)	74 dB μ V/m (peak)
Limit for emissions in non restricted bands	68.2 dB μ V/m (EIRP< -27 dBm/MHz)	

Test Date: October 15, 17, 18 and 21, 2002

Table 7-2-1. EUT: M/T 2682-NLU, s/n FX-00336, Ch.36(5180MHz) **TX** mode 24Mbps

Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) (peak)	Measured (dB μ V) (average)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dB μ V/m) (peak)	FCC Limit (dB μ V/m) (peak)	Field Strength (dB μ V/m) (average)	FCC Limit (dB μ V/m) (average)
inband										
5.185	H	101.8	89.5	33.7	-27.3	0.0	108.2	N/A	95.9	N/A
Adjacent RB										
5.150	H	62.9	43.7	33.6	-26.5	0.0	70.0	74.0	50.8	54.0
1.008	V	48.5	-	24.1	-32.9	0.0	39.7	74.0	-	54.0
1.066	V	49.6	-	24.6	-32.7	0.0	41.5	74.0	-	54.0
1.098	V	49.6	-	24.4	-32.6	0.0	41.4	74.0	-	54.0
1.441	V	50.2	-	25.1	-31.6	0.0	43.7	74.0	-	54.0
6.048	V	39.3	-	29.8	-26.5	0.0	42.6	68.2	-	NRB
6.080	H	38.7	-	29.8	-26.9	0.0	41.6	68.2	-	NRB
6.112	V	38.1	-	29.8	-26.2	0.0	41.7	68.2	-	NRB
6.216	V	54.0	-	29.9	-26.2	0.0	57.7	68.2	-	NRB
10.361	V	40.4	-	33.5	-23.0	0.0	50.9	68.2	-	NRB

Note: OB means “operation band” (5150-5250MHz). NRB means “non restricted band”: The limit of FCC Part 15.407(b)(1),(2) and RSS-210 6.2.2(q1)(I),(ii) apply.

Table 7-2-2. EUT: M/T 2682-NLU, s/n FX-00336, Ch.52(5260MHz) **TX** mode 24Mbps

Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) (peak)	Measured (dB μ V) (average)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dB μ V/m) (peak)	FCC Limit (dB μ V/m) (peak)	Field Strength (dB μ V/m) (average)	FCC Limit (dB μ V/m) (average)
Inband										
5.257	H	106.1	95.2	33.6	-27.2	0.0	112.5	N/A	101.6	N/A
Adjacent RB										
5.350	H	51.0	39.1	33.9	-27.2	0.0	57.7	74.0	45.8	54.0
1.008	V	47.0	-	24.1	-32.6	0.0	38.5	74.0	-	54.0
1.066	V	49.3	-	24.6	-32.3	0.0	41.6	74.0	-	54.0
1.441	V	48.2	-	25.1	-32.2	0.0	41.1	74.0	-	54.0
1.922	V	48.2	-	27.5	-30.6	0.0	45.1	68.2	-	NRB
6.048	H	38.9	-	29.8	-26.5	0.0	42.2	68.2	-	NRB
6.080	V	37.7	-	29.8	-26.9	0.0	40.6	68.2	-	NRB
6.112	H	37.8	-	29.8	-26.2	0.0	41.4	68.2	-	NRB
6.313	H	46.3	-	30.0	-26.4	0.0	49.9	68.2	-	NRB
10.521	V	52.6	-	33.5	-22.4	0.0	63.7	68.2	-	NRB

Note: OB means “operation band” (5250-5350MHz). NRB means “non restricted band”: The limit of FCC Part 15.407(b)(1),(2) and RSS-210 6.2.2(q1)(I),(ii) apply.

Table 7-2-3. EUT: M/T 2682-NLU, s/n FX-00336, Ch.64(5320MHz) **TX** mode 24Mbps

Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) (<i>peak</i>)	Measured (dB μ V) (<i>average</i>)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dB μ V/m) (<i>peak</i>)	FCC Limit (dB μ V/m) (<i>peak</i>)	Field Strength (dB μ V/m) (<i>average</i>)	FCC Limit (dB μ V/m) (<i>average</i>)
Inband										
5.324	H	103.8	91.3	33.7	-27.3	0.0	110.2	N/A	97.7	N/A
Adjacent RB										
5.350	H	66.0	46.4	33.9	-27.2	0.0	72.7	74.0	53.1	54.0
1.008	V	49.4	-	24.1	-32.9	0.0	40.6	74.0	-	54.0
1.066	V	49.6	-	24.6	-32.7	0.0	41.5	74.0	-	54.0
1.441	V	47.9	-	25.1	-31.6	0.0	41.4	74.0	-	54.0
1.922	V	47.3	-	27.5	-30.9	0.0	43.9	68.2	-	NRB
6.048	V	39.6	-	29.8	-26.5	0.0	42.9	68.2	-	NRB
6.080	H	37.8	-	29.8	-26.9	0.0	40.7	68.2	-	NRB
6.112	H	37.5	-	29.8	-26.2	0.0	41.1	68.2	-	NRB
6.385	V	43.8	-	29.9	-26.6	0.0	47.1	68.2	-	NRB
10.641	V	46.6	32.8	33.5	-22.3	0.0	57.8	74.0	44.0	54.0


*Note: OB means “operation band” (5250-5350MHz). NRB means “non restricted band”: The limit of FCC Part 15.407(b)(1),(2) and RSS-210 6.2.2(q1)(I),(ii) apply.

Table 7-2-4 EUT: M/T 2682-NLU, s/n FX-00336, Ch.52(5260MHz) **RX** mode

Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) (<i>peak</i>)	Measured (dB μ V) (<i>average</i>)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dB μ V/m) (<i>peak</i>)	FCC Limit (dB μ V/m) (<i>peak</i>)	Field Strength (dB μ V/m) (<i>average</i>)	FCC Limit (dB μ V/m) (<i>average</i>)
1.008	V	48.4	-	24.1	-32.9	0.0	39.6	74.0	-	54.0
1.066	V	49.0	-	24.6	-32.7	0.0	40.9	74.0	-	54.0
1.441	V	48.3	-	25.1	-31.6	0.0	41.8	74.0	-	54.0
1.922	V	47.4	-	27.5	-30.9	0.0	44.0	68.2	-	NRB

Note: NRB means “non restricted band”: The limit of FCC Part 15.407(b)(1),(2) and RSS-210 6.2.2(q1)(I),(ii) apply.

7.5 Measurement plots of adjacent restricted band

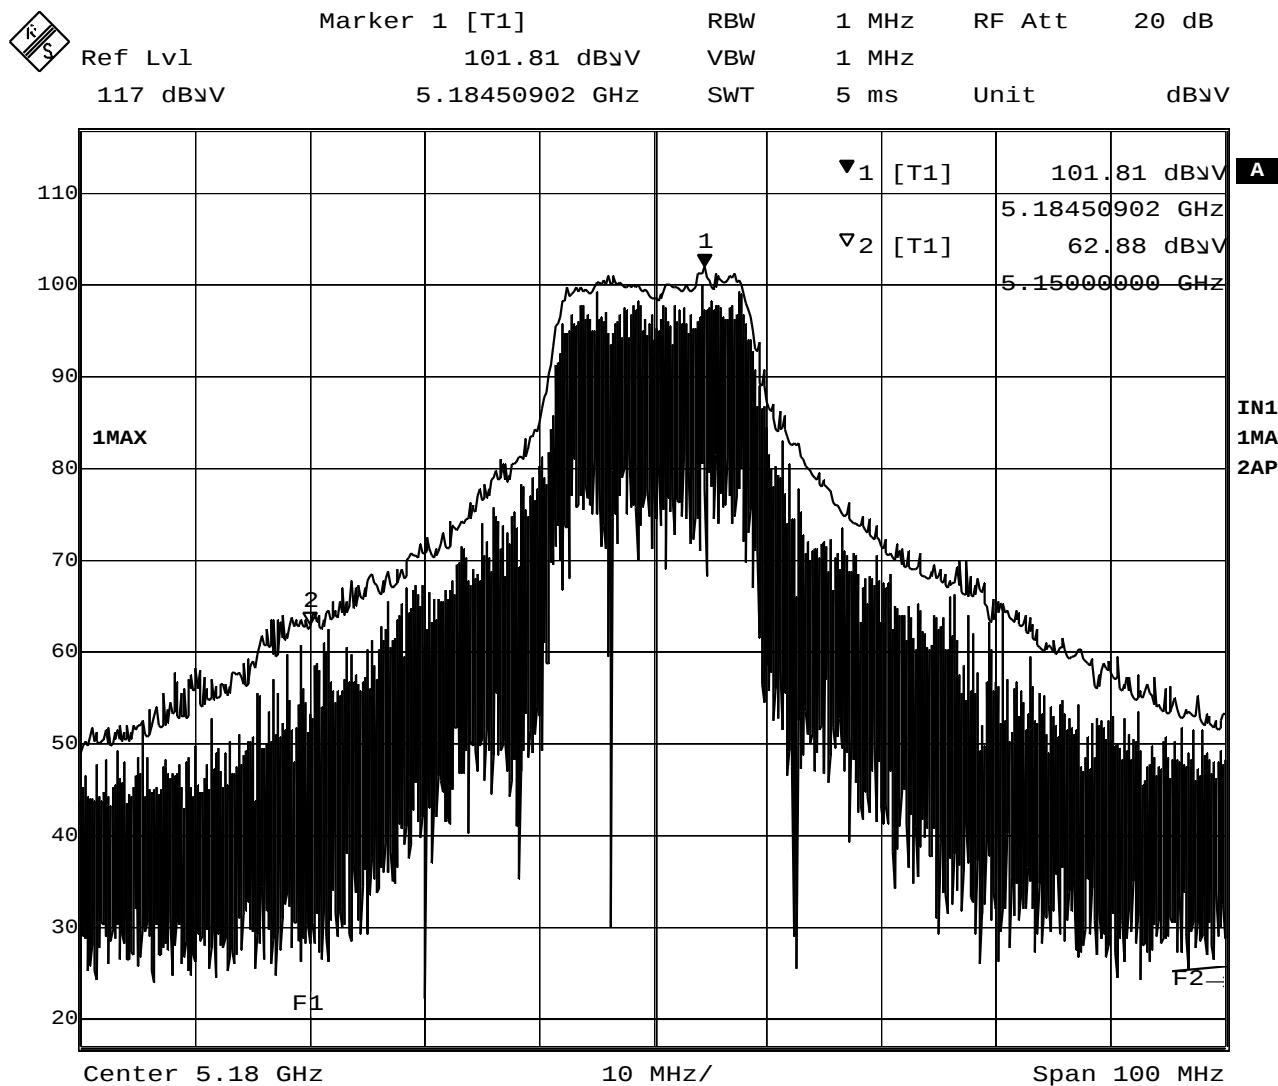


Date: 15.OCT.2002 19:49:27

Plot 7-1-1 5180MHz TX mode (Peak)



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	20 dB
117 dBμV	89.45 dBμV	VBW	10 Hz		
	5.18731463 GHz	SWT	25 s	Unit	dBμV

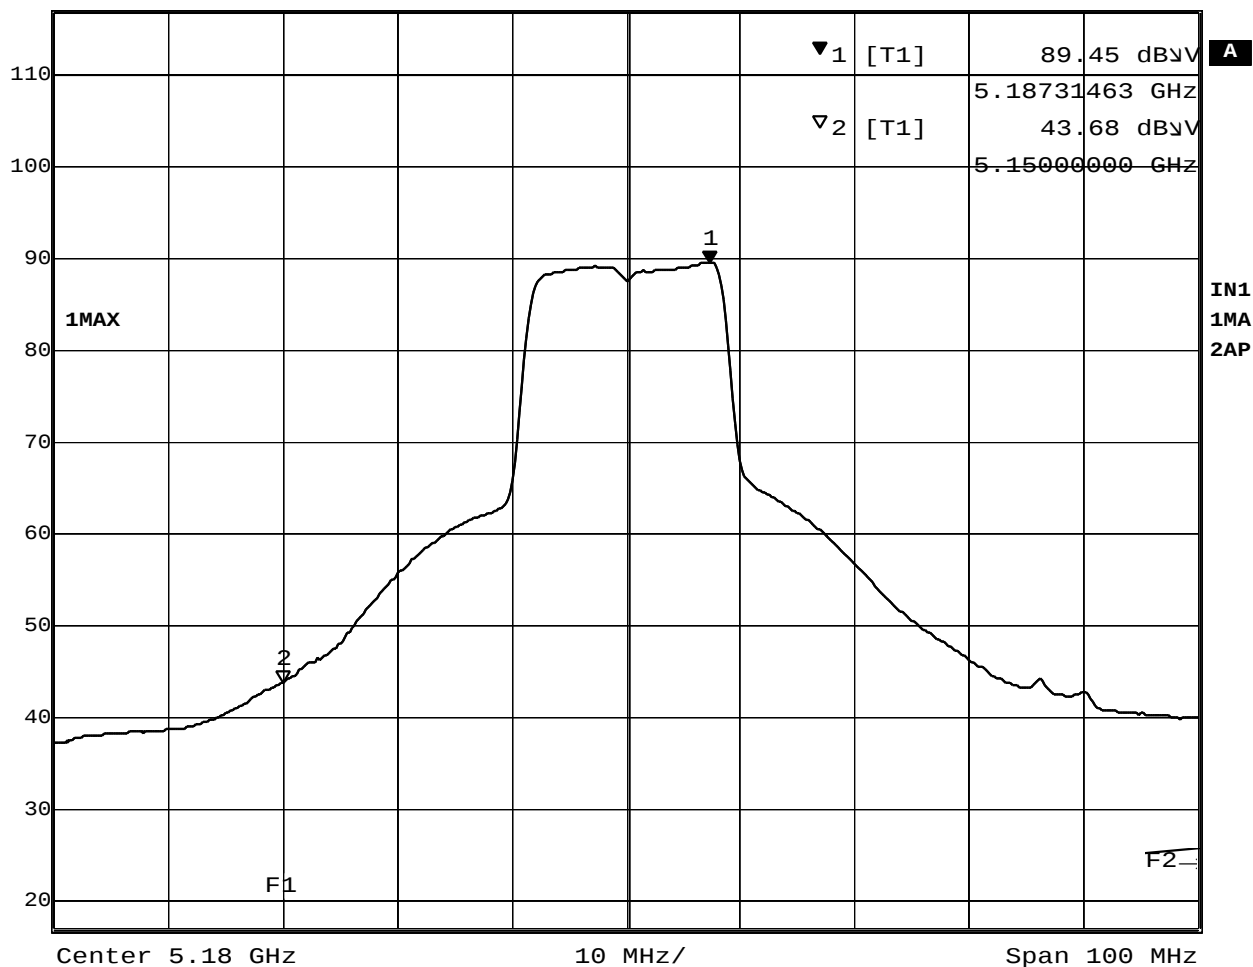


Date: 15.OCT.2002 19:50:14

Plot 7-1-2 5180MHz TX mode (Average)



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	20 dB
117 dBμV	106.05 dBμV	VBW	1 MHz		
	5.25659319 GHz	SWT	5 ms	Unit	dBμV

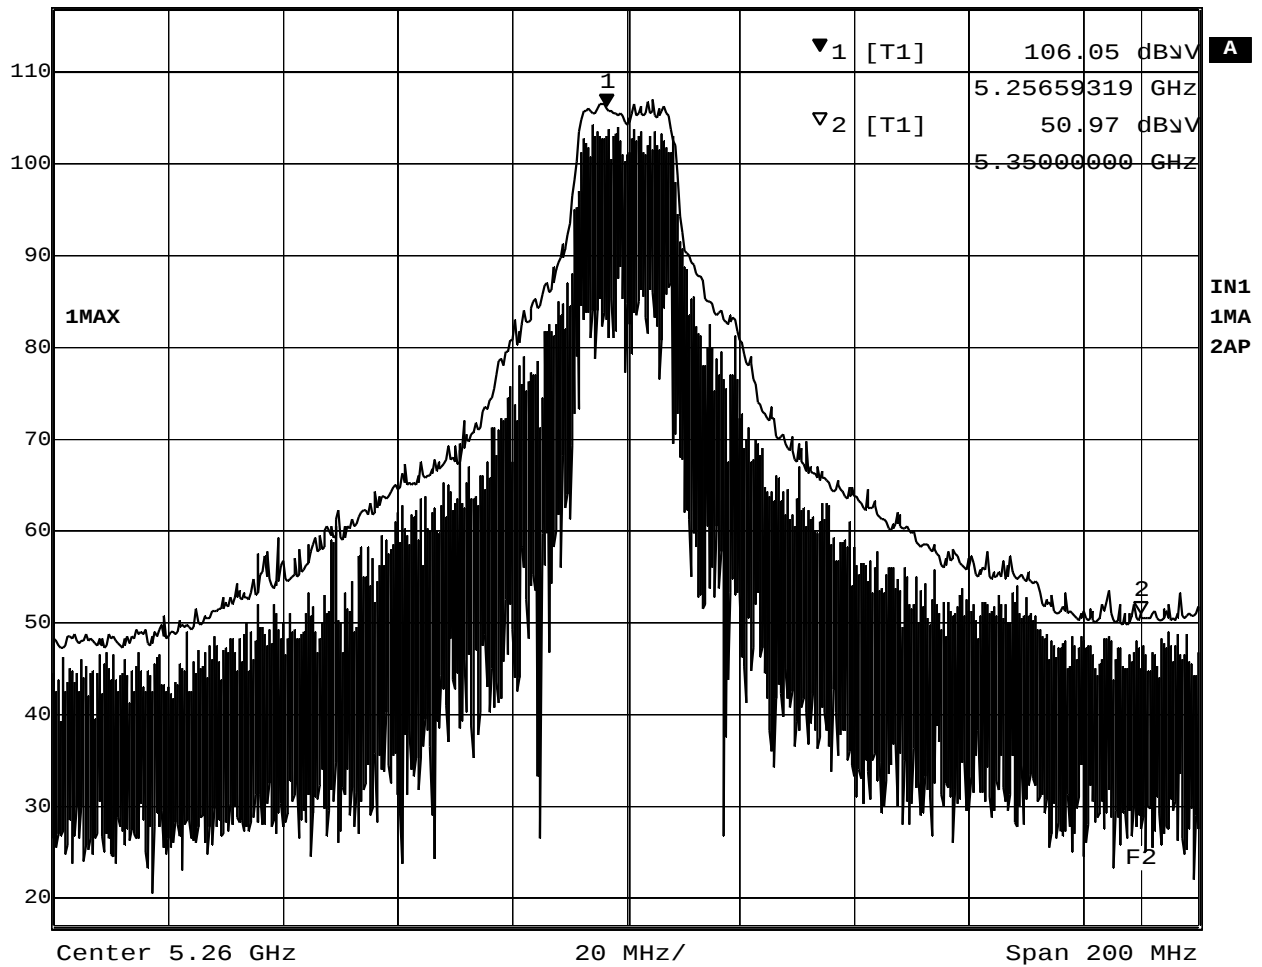


Date: 15.OCT.2002 19:36:57

Plot 7-2-1 5260MHz TX mode (Peak)



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	20 dB
117 dBμV	95.20 dBμV	VBW	10 Hz		
	5.25498998 GHz	SWT	50 s	Unit	dBμV

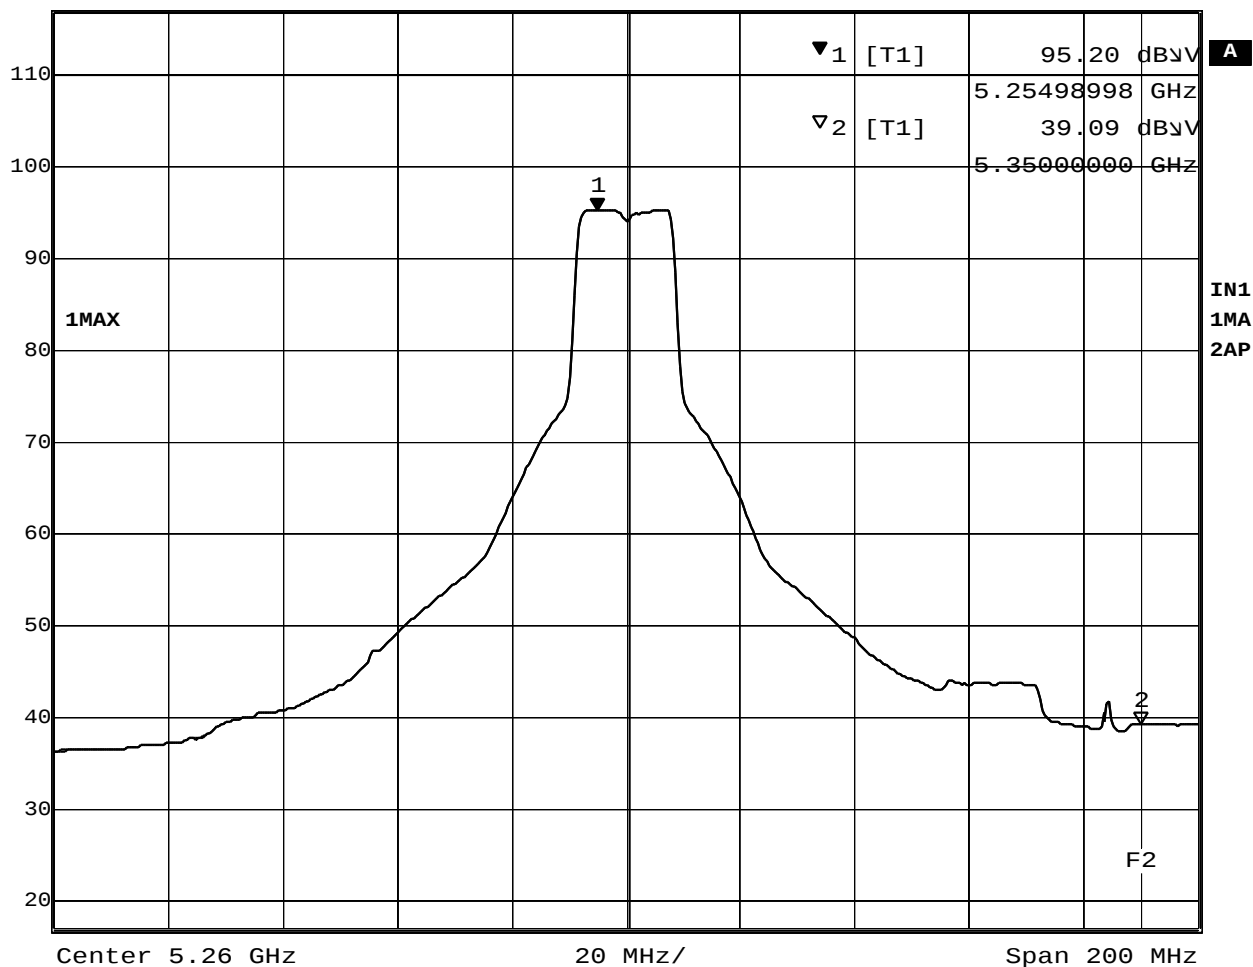


Date: 15.OCT.2002 19:36:16

Plot 7-2-2 5260MHz TX mode (Average)



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	20 dB
117 dBμV	103.81 dBμV	VBW	1 MHz		
	5.32390782 GHz	SWT	5 ms	Unit	dBμV

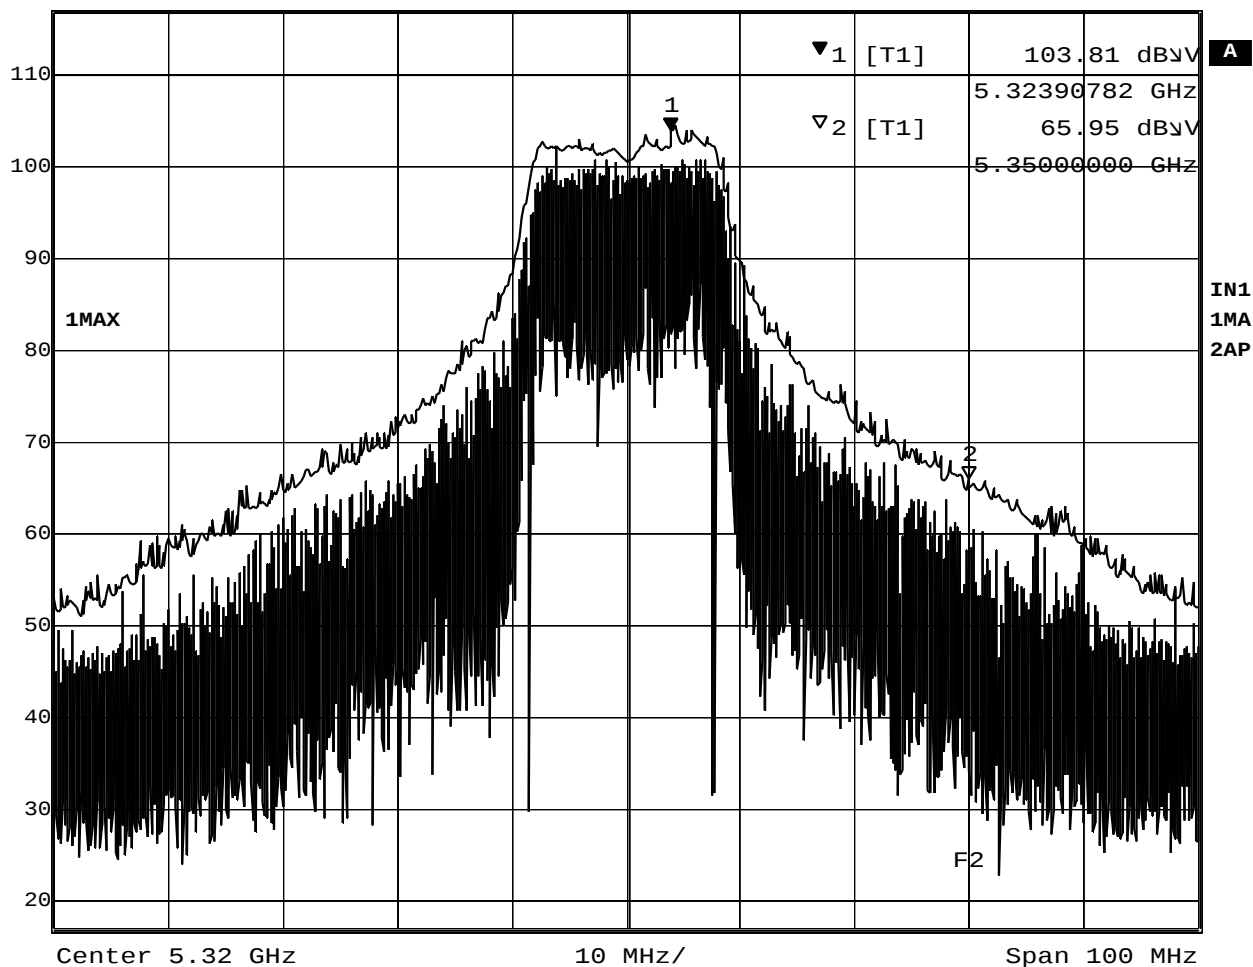


Date: 15.OCT.2002 19:25:21

Plot 7-3-1 5320MHz TX mode (Peak)



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	20 dB
117 dBμV	91.33 dBμV	VBW	10 Hz		
	5.32490982 GHz	SWT	25 s	Unit	dBμV

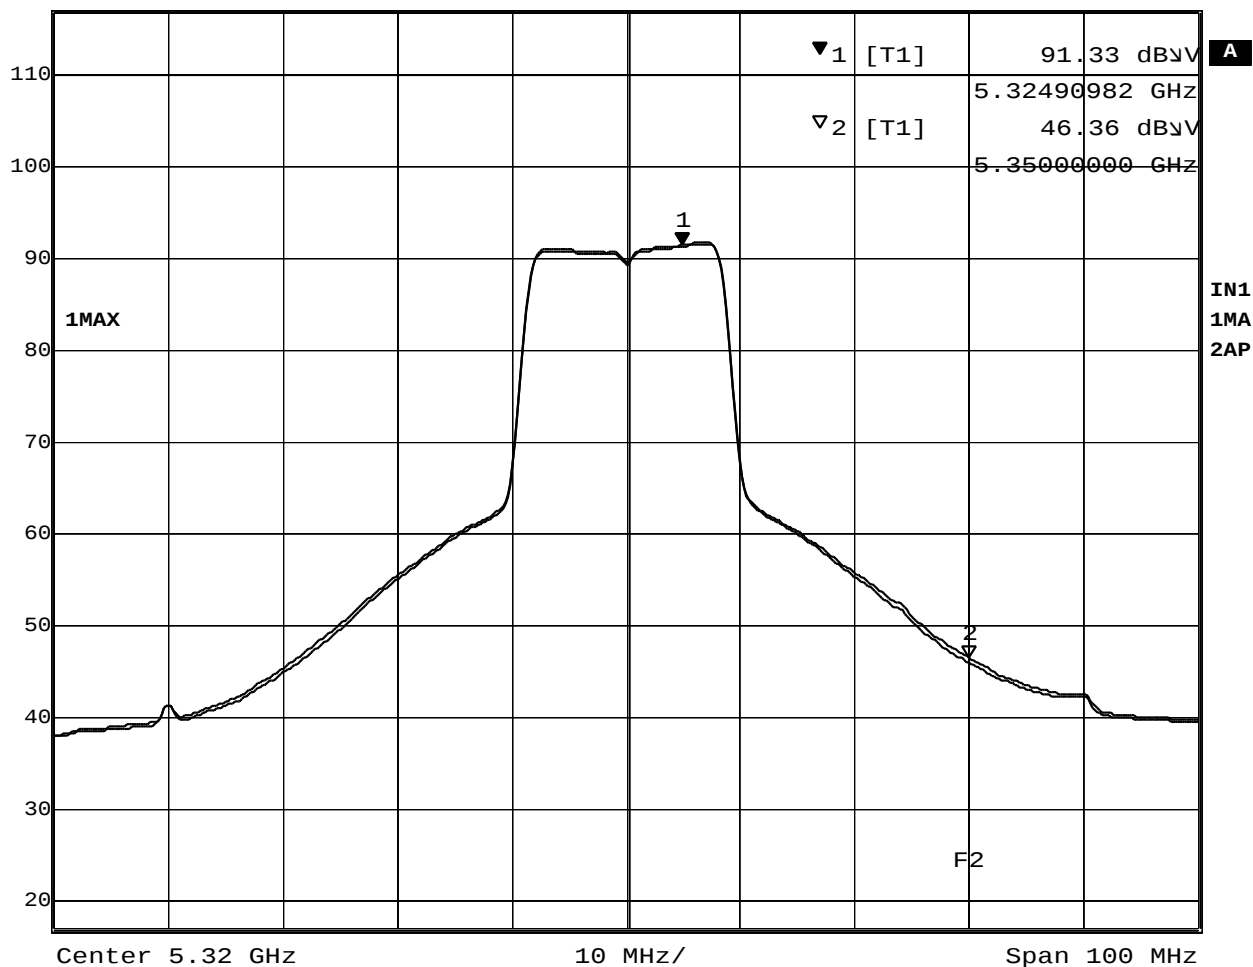

Date: 15.OCT.2002 19:23:59

Plot 7-3-2 5320MHz TX mode (Average)

8. AC WIRELINE CONDUCTED EMISSIONS (150KHz – 30MHz, CISPR 22) [FCC 15.207/ 15.407(b)(5), RSS-210 6.2.2(q1)(v) / 6.6 / 7.4]

8.1 Test Procedure

The conducted emissions are measured in the IBM shielded room with a spectrum analyzer in peak hold. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9KHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.

8.2 Test Instruments and Measurement Setup

Test Date: May 19, 2003

Table 8-1. Conducted Emission Test Instrumentation

Description	Model	Serial Number	Calibration Date	Calibration Interval
Computer	IBM 6589-13J	97-15613	N/A	N/A
Spectrum Analyzer (100Hz-1.5GHz)	HP 85680B	2601A02634	08/28/02	1 year
Spectrum Analyzer Display	HP 85662A	2542A12308	08/28/02	1 year
Quasi-Peak Adapter	HP 85650A	2043A00062	08/28/02	1 year
Receiver (9kHz-30MHz)	R&S ESH3	891806/012	10/07/02	1 year
LISN	EMCO 3825/2	1426	09/01/02	1 year
Switch/control unit	HP 3488A	2719A17228	N/A	N/A
Plotter	HP 7550A	2631A33619	N/A	N/A
Coax cables: - Lisen-L <=> SW/Con.unit (SW100) - Lisen-N <=> SW/Con.unit (SW101) - SW/Con.unit <=> RCVR (Input) - SW/Con.unit<=> Spe Ana.(Signal In)	Length: 4 m 4 m 1 m 1 m	- EMIC-L - EMIC-N - EMIC-R - EMIC-S	04/14/03 04/14/03 04/14/03 04/14/03	1 year 1 year 1 year 1 year

Notes: - HP: Hewlett Packard, R&S: Rohde & Schwarz

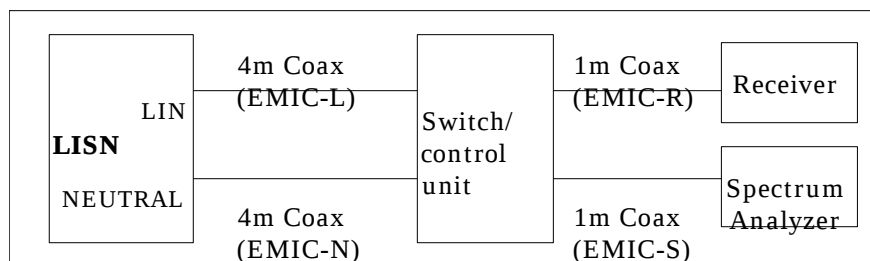


Figure 8. Cables for Conducted Emission Test

8.3 Powerline Voltage Calculation

The powerline voltage is calculated by adding insertion losses of LISN, Cable, Switch control unit and Pulse limiter to the measured reading. All factors are included in the reported data.

$$PV = R + CORR$$

where:

PV = Powerline Voltage (dBμV)

R = Measured Receiver Input Amplitude (dBμV)

CORR = Correction Factor (dB) = LL+CL+SWL+PLL

LL = Insertion loss of LISN (dB)

CL = Insertion loss of Cable (dB)

SWL = Insertion loss of Switch control unit (dB)

PLL = Insertion loss of Pulse Limiter (dB)

Given a Receiver input reading of 50.0 dBμV, LISN loss of 0.6 dB, Cable loss of 0.1dB, Switch control unit loss of 0.1dB and Pulse limiter loss of 0.2dB. The Powerline Voltage of the measured emission is:

$$CORR = 0.6 + 0.1 + 0.1 + 0.2 = 1.0 \text{ (dB)}$$

$$PV = 50.0 + 1.0 = 51.0 \text{ (dBμV)}$$

8.4 Measurement Results

The EUT was found to comply to the limits of FCC Part 15 Subpart E and RSS-210 with a margin of 4.0dB. The 6 highest emissions relative to the limits are reported.

Table 8-2-1. EUT: M/T 2682-NLU, s/n FX-00336, Ch.36 (5180MHz) **TX** mode 24Mbps

Frequency (MHz)	QP			AV			CISPR22 QP Limit (dBμV)	CISPR22 AV Limit (dBμV)	Phase
	Measured Reading (dBμV)	Corr. Factor (dB)	Powerline Voltage (dBμV)	Measured Reading (dBμV)	Corr. Factor (dB)	Powerline Voltage (dBμV)			
0.3692	32.7	0.5	33.2	27.6	0.5	28.1	58.5	48.5	Neutral
0.4311	32.7	0.5	33.2	23.8	0.5	24.3	57.2	47.2	Neutral
0.5081	41.3	0.5	41.8	26.8	0.5	27.3	56.0	46.0	Neutral
0.5520	39.8	0.5	40.3	32.6	0.5	33.1	56.0	46.0	Line
0.6159	35.6	0.5	36.1	29.2	0.5	29.7	56.0	46.0	Neutral
0.6960	34.3	0.5	34.8	22.0	0.5	22.5	56.0	46.0	Neutral

Table 8-2-2. EUT: M/T 2682-NLU, s/n FX-00336, Ch.52 (5260MHz) **TX** mode 24Mbps

Frequency (MHz)	QP			AV			CISPR22 QP Limit (dBμV)	CISPR22 AV Limit (dBμV)	Phase
	Measured Reading (dBμV)	Corr. Factor (dB)	Powerline Voltage (dBμV)	Measured Reading (dBμV)	Corr. Factor (dB)	Powerline Voltage (dBμV)			
0.1695	42.7	0.4	43.1	16.5	0.4	16.9	65.0	55.0	Line
0.4413	34.3	0.5	34.8	21.9	0.5	22.4	57.0	47.0	Neutral
0.5087	40.8	0.5	41.3	26.4	0.5	26.9	56.0	46.0	Neutral
0.5525	39.4	0.5	39.9	32.6	0.5	33.1	56.0	46.0	Line
0.6163	35.8	0.5	36.3	29.2	0.5	29.7	56.0	46.0	Neutral
0.6956	34.7	0.5	35.2	22.6	0.5	23.1	56.0	46.0	Neutral

Table 8-2-3. EUT: M/T 2682-NLU, s/n FX-00336, Ch.64 (5320MHz) **TX** mode 24Mbps

Frequency (MHz)	QP			AV			CISPR22 QP Limit (dBμV)	CISPR22 AV Limit (dBμV)	Phase
	Measured Reading (dBμV)	Corr. Factor (dB)	Powerline Voltage (dBμV)	Measured Reading (dBμV)	Corr. Factor (dB)	Powerline Voltage (dBμV)			
0.1708	42.4	0.4	42.8	16.2	0.4	16.6	64.9	54.9	Line
0.3693	40.6	0.5	41.1	32.8	0.5	33.3	58.5	48.5	Line
0.4461	40.1	0.5	40.6	23.4	0.5	23.9	56.9	46.9	Neutral
0.5089	49.0	0.5	49.5	35.0	0.5	35.5	56.0	46.0	Neutral
0.5530	49.9	0.5	50.4	41.5	0.5	42.0	56.0	46.0	Line
0.6144	44.1	0.5	44.6	35.8	0.5	36.3	56.0	46.0	Line

Table 8-2-4. EUT: M/T 2682-NLU, s/n FX-00336, Ch.52 (5260MHz) **RX** mode

Frequency (MHz)	QP			AV			CISPR22 QP Limit (dB μ V)	CISPR22 AV Limit (dB μ V)	Phase
	Measured Reading (dB μ V)	Corr. Factor (dB)	Powerline Voltage (dB μ V)	Measured Reading (dB μ V)	Corr. Factor (dB)	Powerline Voltage (dB μ V)			
0.1776	41.5	0.4	41.9	17.9	0.4	18.3	64.6	54.6	Neutral
0.3760	39.1	0.5	39.6	26.1	0.5	26.6	58.4	48.4	Line
0.4418	35.1	0.5	35.6	24.2	0.5	24.7	57.0	47.0	Line
0.4926	40.1	0.5	40.6	34.9	0.5	35.4	56.1	46.1	Neutral
0.5519	36.4	0.5	36.9	29.5	0.5	30.0	56.0	46.0	Line
0.6137	38.5	0.5	39.0	32.3	0.5	32.8	56.0	46.0	Neutral