



Test Reports

for

IBM 11a/b/g Wireless LAN Mini PCI Adapter

with

ThinkPad T40 Series

ThinkPad X30 Series

This exhibit covers the following emission measurement results.

FCC Part 15E : U-NII device

IEEE802.11a, 5180M-5320MHz band transmission modes

Document number : **FCC 19-0210-0** ; Test Report for IBM ThinkPad X30 Series
FCC 19-0245-0 ; Test Report for IBM ThinkPad T40 Series

[Transmission mode details]

Operation Frequency [GHz]	IEEE802.11a							
	6M bps	9M bps	12M bps	18M bps	24M bps	36M bps	48M bps	54M bps
5.180 (Ch. 36)	0	0	0	0	0	0	0	0
5.200 (Ch. 40)	0	0	0	0	0	0	0	0
5.220 (Ch. 44)	0	0	0	0	0	0	0	0
5.240 (Ch. 48)	0	0	0	0	0	0	0	0
5.260 (Ch. 52)	0	0	0	0	0	0	0	0
5.280 (Ch. 56)	0	0	0	0	0	0	0	0
5.300 (Ch. 60)	0	0	0	0	0	0	0	0
5.320 (Ch. 64)	0	0	0	0	0	0	0	0

Emission Test Report

Standard: FCC Part 15 Subpart E / IC RSS-210

Document Number : FCC 19-0210-0


Product: IBM 11a/b/g Wireless LAN Mini PCI Adapter
measured with IBM ThinkPad X30 Series

FCC ID: ANO20030400LEG
IC: 349E-PH12127E

May 12, 2003

Prepared:
EMC R&D Staff Engineer


Takeshi Asano

Signature: 
IBM Japan, Ltd.
EMC Engineering
LAB-S59

1623-14, Shimotsuruma,
Yamato-shi Kanagawa-ken 242, Japan
Phone: +81-46-215-4779
Fax: +81-46-273-7420
E-Mail: asano@jp.ibm.com

Reviewed and Checked:
EMC R&D Staff Engineer

Toshiya Murota

Signature: 
IBM Japan, Ltd.
EMC Engineering
LAB-S59

1623-14, Shimotsuruma,
Yamato-shi Kanagawa-ken 242, Japan
Phone: +81-46-215-6574
Fax: +81-46-273-7420
E-Mail: murota@jp.ibm.com

Approved:
Manager, EMC Engineering
/ NVLAP signatory

Akihisa Sakurai
Signature: 
IBM Japan, Ltd.
EMC Engineering
LAB-S59
1623-14, Shimotsuruma,
Yamato-shi Kanagawa-ken 242, Japan
Phone: +81-46-215-2613
Fax: +81-46-273-7420
E-Mail: akihisa@jp.ibm.com

Note :

The measurements in this test report were performed for the previous submission of the following device.

FCC ID: ANO20020304T2L(Granted date: Feb/26/2003)

IC: 349E-PH11107E (Approval date:Feb/26/2003, TAC number: 17674)

However, the core PCB and RF components of the applying transmitter module supplied by Philips Components are the same as the previous ones except a slight modification. Refer to the attestation of the Philips Components in the "Submittal Outline" exhibit.

Therefore there is no change placed on the RF characteristics, and the measurement results in this report are valid for the applying device.

The following is the comparison of the measurement results to prove the equivalence between the previous and the applying device.

26dB Bandedge (24Mb/s)

center Frequency (MHz)	submittal results (MHz)	sampling results tested with the new adapter (MHz)
5180 (ch. 36)	27.46	27.75
5260 (ch. 52)	34.47	34.67
5320 (ch. 64)	28.16	28.36

Peak conducted transmission output power (24Mb/s)

center Frequency (MHz)	submittal results (dBm)	sampling results tested with the new adapter (dBm)
5180 (ch. 36)	14.6	14.51
5260 (ch. 52)	17.5	17.43
5320 (ch. 64)	14.4	14.32

MEASUREMENT / TECHNICAL REPORT – Part 15 Subpart E
(Intentional Radiator)**IBM 11a/b/g Wireless LAN Mini PCI Adapter**
with**IBM ThinkPad X30 Series**
(Machine type : 2672, 2673, 2890, 2891)**FCC ID : ANO20030400LEG****May 12, 2003**

This report concerns: (check one)

Original Grant _____
Class I change _____
Class II change ☒ _____Equipment type: Wireless LAN device

This report shall not be reproduced except in full, without the written permission of this test lab.

The measurement results contained in this report relate only to the item which was tested.

Measurement procedure used is ANSI C63.4-2000 unless otherwise specified.

Other test procedure: _____

The FCC has issued provisional acceptance of this test laboratory for Declaration of Conformity testing per letter dated 1997.

APPLICANT ANTI-DRUG ABUSE CERTIFICATION:

By checking yes, the applicant certifies that, in the case of an individual applicant, he or she is not subject to a denial of federal benefits, that includes FCC benefits, pursuant to Section 5301 of the Anti-Drug Abuse of 1988, 21 U.S.C. 853(a), or, in the case of a non-individual applicant (e.g. corporation, partnership or other unincorporated association), no party to the application is subject to a denial of federal benefits, that includes FCC benefits, pursuant to that section. For the definition of a “party” for these purposes, see 47 CFR 1.2002(b).

☒ **Yes** or ☐ **No**

“Report shall not be reproduced except in full, without the written approval of the laboratory” “the report must not be used by the client to claim product endorsement by NVLAP or any agency of the US government”

Prepared by: Takeshi Asano

IBM Japan Corporation, Yamato EMC Engineering
LAB-S59, 1623-14, Shimotsuruma, Yamato-shi Kanagawa-ken 242-8502, Japan
Tel: +81-46-215-4779 Fax: +81-46-273-7420

- Index -

A. GENERAL INFORMATION	5
B. SUMMARY OF TEST RESULTS	6
C. TEST INSTRUMENTS	7
D. OPERATION MODE OF EUT	9
E. JUSTIFICATION	9
F. MEASUREMENT UNCERTAINTY	10
G. TEMPERATURE AND HUMIDITY	10
H. RELATED SUBMITTAL(S)/GRANT(S)/NOTES	10
1. BANDWIDTH AT 26 DB BELOW / BANDEDGE	11
1.1 Test Procedure	11
1.2 Measurement Results	11
1.3 Trace Data	12
2. PEAK CONDUCTED TRANSMIT OUTPUT POWER	15
2.1 Test Procedure	15
2.2 Measurement Results	17
2.3 Trace Data	18
3. PEAK POWER SPECTRAL DENSITY	21
3.1 Test Procedure	21
3.2 Measurement Results	21
3.3 Trace Data	22
4. PEAK EXCURSION RATIO	28
4.1 Test Procedure	28
4.2 Measurement Results	28
4.3 Trace Data	29
5. AC WIRELINE CONDUCTED EMISSIONS (150KHZ – 30MHZ)	32
5.1 Test Procedure	32
5.2 Test Instruments and Measurement Setup	32
5.3 Measurement Results	33
6. RESTRICTED BANDS RADIATIONS (30MHZ – 1GHZ)	34
6.1 Test Procedure	34
6.2 Test Instruments and Measurement Setup	34
6.3 Field Strength Calculation	36
6.4 Measurement Results	37
7. RESTRICTED BANDS RADIATIONS (1GHZ – 40GHZ)	38
7.1 Test Procedure	38
7.2 Test Instruments and Measurement Setup	38
7.3 Field Strength Calculation	40
7.4 Limits	40
7.5 Measurement Results	41
7.6 Measurement plots of adjacent restricted band	43

A. General Information

APPLICANT : IBM Japan, Ltd.
 TEST SITE : IBM Japan, Ltd., Yamato Semi-anechoic chamber #1
 TEST SITE ADDRESS : 1623 – 14 Shimotsuruma, Yamato-shi, Kanagawa 242-8502 Japan
 Tel: +81-46-215-4779, Fax: +81-46-273-7420
 REGULATION : FCC Part 15 Subpart E
 Industry Canada RSS-210 (Issue No.5)
 MODEL NUMBER : 2672-CHU (ThinkPad X30 Series)
 SERIAL NUMBER : ZZ-00094
 FCC ID : ANO20030400LEG
 IC Certification Number : 349E-PH12127E
 PHYSICAL CONDITION : Preproduction
 KIND OF EQUIPMENT : Personal computer with an IEEE802.11a, 11b & 11g Wireless LAN
 Mini-PCI Combo Card ([Composite application](#))
 TESTED DATE : November 18, 25, 26, 27, December 4, 5, 16, 2002
 and January 8, 2003

A.1 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4-2000. Radiated testing was performed at an antenna to EUT distance of 3 meters.

A.2 Test Facility / NVLAP Accreditation

The semi-anechoic chamber #1 and #2 used to correct the data are located in Yamato Laboratory, IBM Japan.

- This facility has been fully described in a report dated September 1998, submitted to the FCC office, and accepted in a letter, dated Nov. 2, 1998(31040/SIT).
- IBM Yamato EMC Engineering is recognized under the National Voluntary Laboratory Accreditation Program for satisfactory compliance with Criteria established in Title 15, Part 285 Code of Federal Regulations.(NVLAP Lab code: 200198-0)
- This facility is accepted by **Industry Canada** in a letter dated March 19, 2001 as number **IC 349E** for chamber #2, and January 25, 2002 as number **IC 4221** for chamber #1.

A.3 EUT details

Table-A EUT details

Model and S/N	FCC ID IC Certification Number	Description
IBM 11a/b/g Wireless LAN Mini PCI Adapter (s/n A310037307)	FCC ID: ANO20030400LEG IC: 349E-PH12127E	Applying equipment IEEE802.11a/b/g Wireless LAN Mini-PCI Combo Card without antenna
ThinkPad X30 Series M/T 2672-CHU (s/n ZZ-00094)	N/A	IBM Notebook PC with built_in antenna CPU: Intel® Pentium® M Processor, 1.3GHz
P/N 02K6808	N/A	Universal AC adapter 56W, Unshielded power cord

B. Summary of Test Results

Table-B presents the list of the measurement items for U-NII devices under FCC Part 15 Subpart E, and for LELAN devices under Industry Canada RSS-210.

The section numbers of upper portion are showing FCC codes, and the lower ones are for IC RSS-210.

Table-B List of the measurements

Section(s)	Test Items		Condition	Result
	Transmit mode (TX):			
15.407(a)(1), (2) 6.2.2 (q1)(i)(ii)	Bandwidth at 26 dB below	26dB BW was also taken for IC instead of 99% BW, according to RSS-210 6.2.2q(iv)(b).	Conducted	Pass
	Peak conducted transmit output power or EIRP for IC	5150-5250MHz: FCC: 50mW or (4+10logB)dBm IC : 200mW* or (10+10logB)dBm* *: EIRP		Pass
		5250-5350MHz: FCC: 250mW or (11+10logB)dBm IC : 250mW or (11+10logB)dBm IC : 1W* or (17+10logB)dBm* *: EIRP B: 26dB BW in MHz		Pass
	Peak Power Spectral Density	5150-5250MHz: FCC: 4 dBm in any 1MHz IC : 10 dBm in any 1MHz (EIRP) 5250-5350MHz: FCC: 11 dBm in any 1MHz IC : 11 dBm in any 1MHz		Pass
	N/A 6.2.2 (q1)(iv)(b)	Peak Spectral Density		IC: 3 + 10logB dBm/MHz
15.407(a)(6) N/A	Peak Excursion	The ratio of the peak excursion of the modulation envelope to the peak transmit shall not exceed 13 dB across any 1 MHz .		Pass
15.207 / 407(b)(5) 6.2.2 (q1)(v) / 6.6	AC Wireline Conducted Emissions 150kHz- 30MHz	Class B: Freq.(MHz) QP(dBμV) Ave.(dBμV) 0.15 - 0.5 66 - 56 56 - 46 0.5 - 5 56 46 5 - 30 60 50		Pass
15.205 & 209 / 407(b)(5) & (b)(6) 6.2.1 / 6.2.2(q1)(v) / 6.3	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Shall not exceed the limits specified in FCC 15.209 or RSS-210 Table3.	Radiated (30MHz - 1GHz)	Pass
			Radiated (1G - 40GHz)	Pass

	Receive mode (RX):			
15.207 / 407(b)(5) 6.2.2(q1)(v) / 7.4	AC Wireline Conducted Emissions 150kHz - 30MHz	Class B: Freq.(MHz) QP(dBμV) Ave.(dBμV) 0.15 - 0.5 66 - 56 56 - 46 0.5 - 5 56 46 5 - 30 60 50	Conducted	Pass

15.205 & 209 / 407(b)(5) & (b)(6) 6.2.1 / 6.2.2(q1)(v) / 7.3	General Field Strength Limits (Radiated Emission Limits)	Shall not exceed the limits specified in RSS-210.	Radiated (30MHz - 1GHz)	Pass
			Radiated (1G - 40GHz)	Pass

	Other general requirements		Result
15.407(a)(1)(2)	Antenna gain	Peak : 1.42 dBi	N/A
6.2.2(q1)(iv)(a)	Digital modulation	Applying equipment employs IEEE802.11a, 11g(OFDM) or 11b(CCK) digital modulation technology.	complies
15.407(c) 6.2.2(q1)(iv)(d)	Automatic link disconnection in no transaction state	Refer to “Circuitry Description” document.	complies
15.407(d) 6.2.2(q1)(i)	Integral antenna in the 5150M - 5250MHz band	The device employs an unique electronic handshake connector. Refer to “Confidential_BIOS_Lock” exhibit.	complies
15.407(e) 6.2.2(q1)(i) (q1)(iv)(g)	Indoor use in the 5150M - 5250MHz band, and interference from radars.	Refer to the manual (Regulatory Notice).	complies
15.407(f) 6.2.2(q1)(iv)(g)	RF Exposure Requirement	Refer to “RF Exposure Evaluation” or “Exposure of Humans to Radio Frequency Fields” documents.	complies
15.407(g) 6.2.2(q1)(iv)(e)	Frequency stability	Refer to “Circuitry Description” document.	complies

C. Test Instruments

Table-C List of Measuring Instruments

Description	Model	Serial Number	Calibration Date	Calibration Interval
Computer	IBM 5551-L	#4	N/A	N/A
Computer	IBM 6589-13J	97-15613	N/A	N/A
Spectrum Analyzer (100Hz-1.5GHz)	HP 85680B	2601A02634	08/28/02	1 year
Spectrum Analyzer (100Hz-1.5GHz)	HP 85680B	3019A05155	02/15/02	1 year
Spectrum Analyzer (100Hz-1.5GHz)	HP 85680B	2841A04252	06/17/02	1 year
Spectrum Analyzer Display	HP 85662A	2542A12308	08/28/02	1 year
Spectrum Analyzer Display	HP 85662A	3026A19353	02/15/02	1 year
Spectrum Analyzer Display	HP 85662A	2816A16831	06/17/02	1 year
Quasi-Peak Adapter	HP 85650A	2043A00062	08/28/02	1 year
Quasi-Peak Adapter	HP 85650A	2811A01156	06/17/02	1 year
Quasi-Peak Adapter	HP 85650A	3033A01449	02/15/02	1 year
Amplifier (100KHz - 1.3GHz)				
- for 30-200MHz	HP 8447D	2805A02919	04/15/02	1 year
- for 200-1000MHz	HP 8447D	2944A03506	04/15/02	1 year
Amplifier (1 - 26.5GHz)	HP 8449B	3008A00582	06/13/02	1 year
Amplifier (26.5 - 40GHz)	Agilent 83051A	3950M00193	12/06/01	1 year

Spectrum Analyzer EMI Test Receiver	R&S ESI26	836119/003	07/18/02	1 year
Spectrum Analyzer	HP 8563E	3416A02248	08/14/02	1 year
Harmonic Mixer	Agilent 11970A	011269-001	07/19/02	1 year
Receiver (9kHz-30MHz)	R&S ESH3	891806/012	10/07/02	1 year
Receiver (20MHz-1.3GHz)	R&S ESVP	893202/018	02/06/02	1 year
Biconical Antenna (30-200MHz)	EMCO 3108	2309	05/06/02	1 year
Log-Periodic Antenna (200-1000MHz)	EMCO 3146	1585	05/06/02	1 year
Horn Antenna (1- 18GHz)	EMCO 3115	9903-5774	07/18/02	1 year
Horn Antenna (3.95- 5.85GHz)	EMCO 3160-5	1099	04/17/02	1 year
Horn Antenna (5.85- 8.20GHz)	EMCO 3160-6	9712-1044	04/17/02	1 year
Horn Antenna (8.2- 12.4GHz)	EMCO 3160-7	1156	04/17/02	1 year
Horn Antenna (12.4- 18GHz)	EMCO 3160-8	1143	04/17/02	1 year
Horn Antenna (18- 26.5GHz)	EMCO 3160-9	0004-1202	04/17/02	1 year
Horn Antenna (26.5- 40GHz)	EMCO 3160-10	1175	04/17/02	1 year
LISN	EMCO 3825/2	1426	09/01/02	1 year
Power Meter	HP 437B	3043U03437	11/08/02	1 year
Power Sensor	HP 8481A	US41030582	11/08/02	1 year
Switch/control unit	HP 3488A	2719A17226 2719A17228	N/A N/A	N/A N/A
Plotter	HP 7550A	2631A33619	N/A	N/A
Coaxial cables (1 – 18GHz):	Length:			
- Horn Ant <=> RF Amp.	6 m	- EM206SCO	09/05/02	1 year
- RF Amp.<=>Spectrum Analyzer(<12GHz)	15m	- EM215SCO	09/05/02	1 year
- RF Amp.<=>Spectrum Analyzer(>12GHz)	3 m	- SF102-20166	09/05/02	1 year
Coaxial cables (18 – 40GHz):				
- Horn Ant <=> RF Amp.	3m	- SF102-20167	09/05/02	1 year
- RF Amp.<=>Spectrum Analyzer	1m	- SF102-21105	09/05/02	1 year
N-Coax cables:				
- Bi-coni Ant <=> 10m Cable	9 m	- EM103L01	04/15/02	1 year
- 10m Cable <=> Shield Panel	10 m	- EM103L02	04/15/02	1 year
- Shield Panel <=> RF Amp	7 m	- EM103L03	04/15/02	1 year
- RF Amp <=> Power Splitter	0.5m	- EM103L04	04/15/02	1 year
- Log-peri Ant <=> 10m Cable	9 m	- EM103H01	04/15/02	1 year
- 10m Cable <=> Shield Panel	10 m	- EM103H02	04/15/02	1 year
- Shield Panel <=> RF Amp	7 m	- EM103H03	04/15/02	1 year
- RF Amp <=> Power Splitter	0.5m	- EM103H04	04/15/02	1 year
Coax cables:				
- Lisen-L <=> SW/Con.unit (SW100)	4 m	- EMIC-L	04/15/02	1 year
- Lisen-N <=> SW/Con.unit (SW101)	4 m	- EMIC-N	04/15/02	1 year
- SW/Con.unit <=> RCVR (Input)	1 m	- EMIC-R	04/15/02	1 year
- SW/Con.unit<=> Spe Ana.(Signal In)	1 m	- EMIC-S	04/15/02	1 year
- Power Splitter <=> SW/Con.unit (SW110)	1 m	- EM103L05	04/15/02	1 year
- Power Splitter <=> SW/Con.unit (SW300)	1 m	- EM103L06	04/15/02	1 year
- Power Splitter <=> SW/Con.unit (SW100)	1 m	- EM103H05	04/15/02	1 year
- Power Splitter <=> SW/Con.unit (SW301)	1 m	- EM103H06	04/15/02	1 year
- SW/Con.unit <=> Receiver (Input)	2 m	- EM1RCV	04/15/02	1 year
- SW/Con.unit <=> Spe Ana.(Signal In) for 30- 200MHz	2 m	- EM1SPL	04/15/02	1 year
- SW/Con.unit <=> Spe Ana.(Signal In) for 200-1000MHz	2 m	- EM1SPH	04/15/02	1 year

Notes.

- The above equipment calibration is traceable to National standards.
- HP: Hewlett Packard, R&S: Rohde & Schwarz

D. Operation mode of EUT

1. All tests were performed using the “Atheros Radio Test” program. This tool supports to emit the continuous transmission mode for the testing purpose.
2. Three kinds of frequencies were chosen for the measurement. i.e. 5180MHz (lowest), 5260MHz(middle), and 5320MHz (highest).

Table-D Transmission mode of EUT (The measurement plots are shown in shading.)

Operation Frequency [GHz]	Rated output power (conducted) [dBm]							
	IEEE802.11a							
	6M bps	9M bps	12M bps	18M bps	24M bps	36M bps	48M bps	54M bps
5.180 (Ch. 36)	+14	+14	+14	+14	+14	+14	+14	+13
5.200 (Ch. 40)	+14	+14	+14	+14	+14	+14	+14	+13
5.220 (Ch. 44)	+14	+14	+14	+14	+14	+14	+14	+13
5.240 (Ch. 48)	+14	+14	+14	+14	+14	+14	+14	+13
5.260 (Ch. 52)	+17	+17	+17	+17	+17	+15	+14	+13
5.280 (Ch. 56)	+17	+17	+17	+17	+17	+15	+14	+13
5.300 (Ch. 60)	+17	+17	+17	+17	+17	+15	+14	+13
5.320 (Ch. 64)	+14	+14	+14	+14	+14	+14	+14	+13

3. 24Mbps transmission mode was selected for full testing as the worst case sampling.
See “Chapter 2. Peak Conducted Transmit Output Power” as to the determination of measurement plots.
4. As for the RF receiving test, the middle channel with the worst case(i.e. 5260MHz, 24Mbps mode) was selected representatively.

E. Justification

The EUT was investigated for both the main(left) and the auxiliary(right) antennas. The worse case data taken in this report represents the measurement results of the left(main) antenna that has comparatively higher gain.

Left Antenna gain	1.42 dBi (peak)
Right Antenna gain	0.19 dBi (peak)

And the columns marked with shading in the Table-D are the worst cases of each Tx mode for all measurement items (i.e. conducted power, 26dB BW, ..etc.). This test report represents the measurement results performed with those Tx modes.

F. Measurement Uncertainty

Uncertainties of the both, the Yamato EMI radiated test facilities (EMI chambers, #1 and #2) and the Yamato EMI conducted test facility are derived with the NIS 81 "Treatment of uncertainty in EMC measurements" 1994.

Estimated site uncertainty values are as follows.

EMI chamber #1 : 4.39dB

EMI chamber #2 : 4.40dB

EMI conducted measurement system : 2.4dB

Detail should be referred to "Treatment of Uncertainty, Calculations and Policy" report, document number TCR 10-0015.

G. Temperature and Humidity

The temperature is controlled within range of 17° to 28°.

The relative humidity is controlled within range of 40% to 70%.

H. Related Submittal(s)/Grant(s)/Notes

The host unit with full peripheral devices including the applying modular as an unintentional radiator is classified as a Digital Device under the FCC Part 15 Subpart B or the Industry Canada Class B Emission Compliance (ICES-003), and subject to DoC.

1. Bandwidth at 26 dB below / Bandedge

[5150-5250MHz: FCC 15.407(a)(1), RSS 6.2.2q1(i) / q1(iV)(b)]

[5250-5350MHz: FCC 15.407(a)(2), RSS 6.2.2q1(ii) / q1(iV)(b)]

1.1 Test Procedure

The bandwidth at 26 dB down from the peak of the RF emission was measured with a spectrum analyzer connected to the antenna terminal, while EUT was operating in continuous transmission mode at the appropriate center frequencies (5180 / 5260 / 5320MHz).

The spectrum analyzer was set to:

RBW=300kHz^{*1}, VBW=1MHz^{*2}, Span=50MHz, Sweep= 50ms, Mode= Peak detector

*1: approximately 1% of the emission bandwidth (§15.403(c))

*2: VBW > RBW (To be adjusted accordingly based on the spectrum stability.)

Table 1-1 : 26 dB Bandwidth Test Instruments

Description	Model	Serial Number
Spectrum Analyzer EMI Test Receiver	R&S ESI26	836119/003
Coax cables: - Spectrum Analyzer <=> EUT	Length: 110 cm Loss: 2.2 dB	

Notes: - R&S: Rohde & Schwarz




Figure 1: Measurement setup for 26dB bandwidth test

1.2 Measurement Results


Test Date: December 16, 2002

Table 1-2. EUT: M/T 2672-CHU, s/n ZZ-00094 , TX mode 24Mbps

Center Frequency (MHz)	Lower frequency (MHz)	Upper frequency (MHz)	Bandwidth at 26 dB below (MHz)	Plot data
5180 (ch. 36)	5165.92	5193.38	27.46	Plot 1-1
5260 (ch. 52)	5241.91	5276.38	34.47	Plot 1-2
5320 (ch. 64)	5306.02	5334.18	28.16	Plot 1-3

: the closest frequencies to the bandedge

1.3 Trace Data

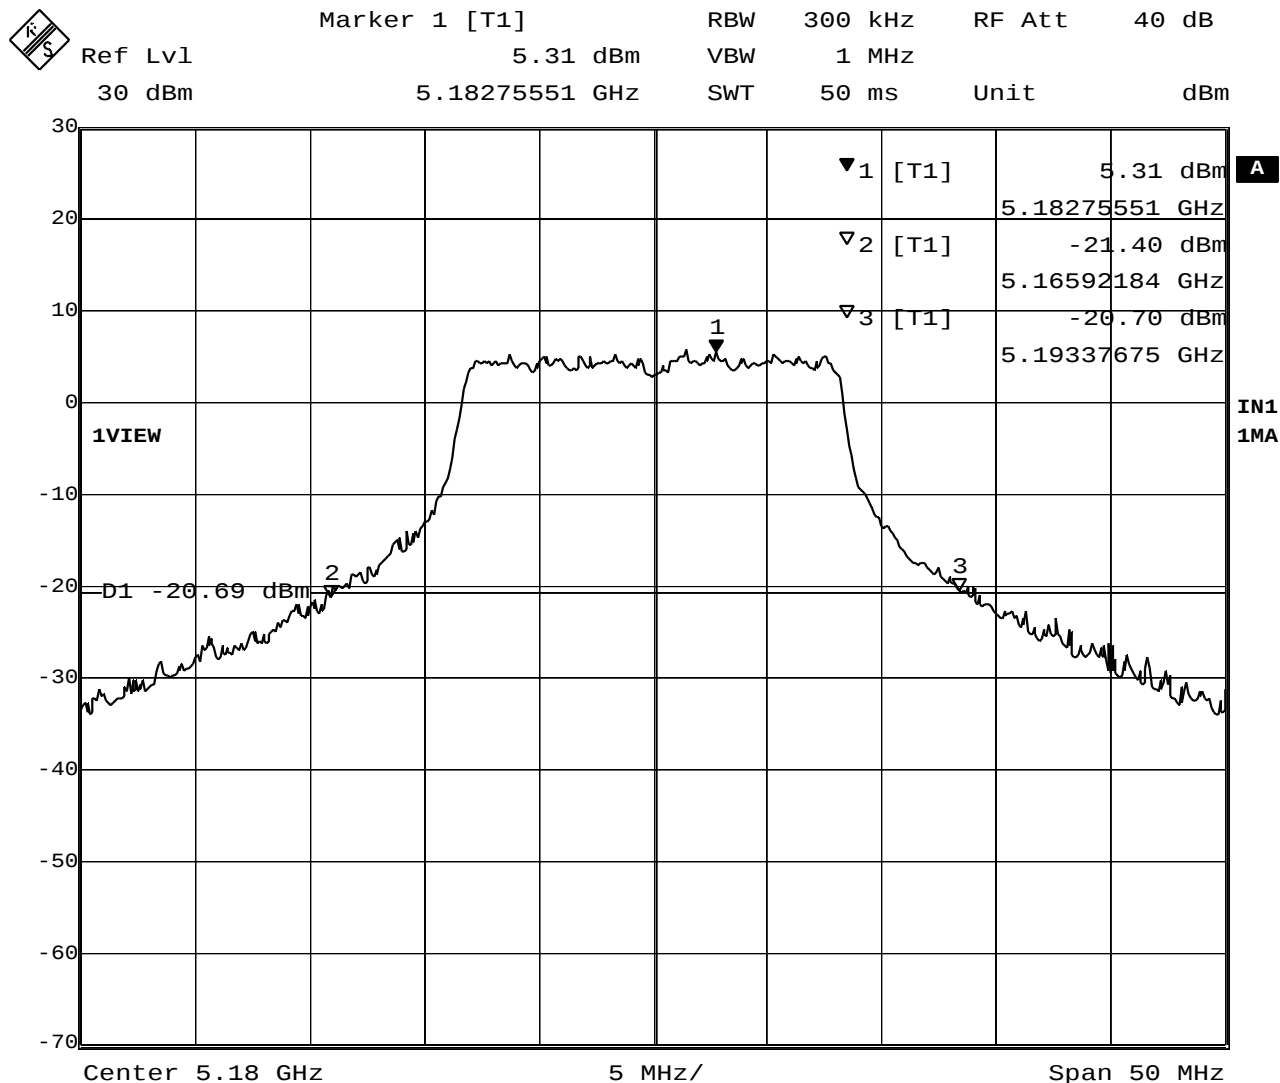


Date: 16.DEC.2002 18:42:55

Plot 1-1. 26dB BW at 5180MHz



Marker 1 [T1] RBW 300 kHz RF Att 40 dB
Ref Lvl 8.41 dBm VBW 1 MHz
30 dBm 5.26145291 GHz SWT 50 ms Unit dBm

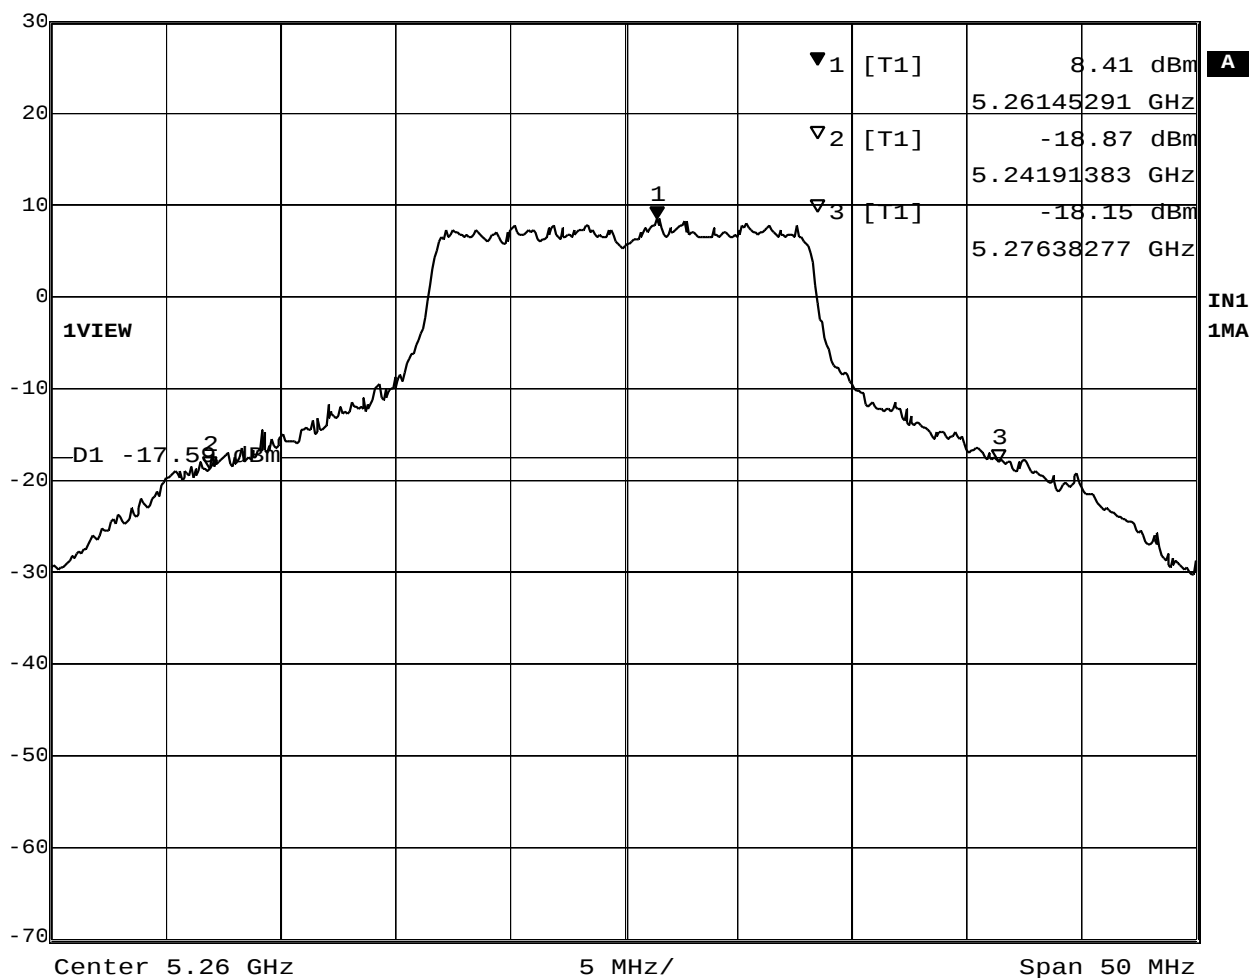


Date: 16.DEC.2002 18:46:48

Plot 1-2. 26dB BW at 5260MHz



Marker 1 [T1] RBW 300 kHz RF Att 40 dB
Ref Lvl 4.92 dBm VBW 1 MHz
30 dBm 5.32155311 GHz SWT 50 ms Unit dBm

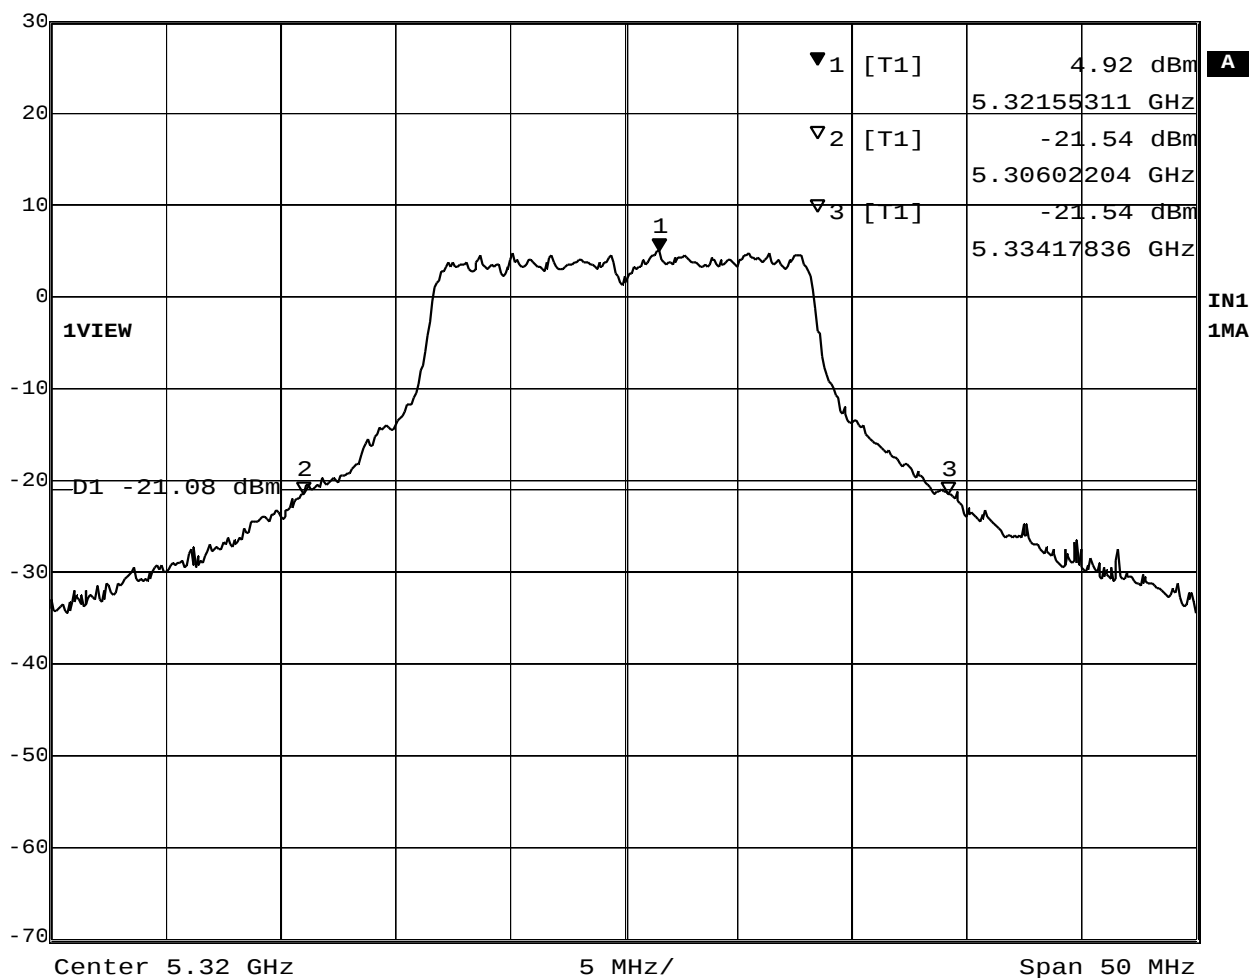

Date: 16.DEC.2002 19:55:27

Plot 1-3. 26dB BW at 5320MHz

2. Peak Conducted Transmit Output Power

[5150-5250MHz: FCC 15.407(a)(1), RSS 6.2.2q1(i) / q1(iV)(b)]

[5250-5350MHz: FCC 15.407(a)(2), RSS 6.2.2q1(ii) / q1(iV)(b)]

2.1 Test Procedure

The test was performed with two kinds of measurement methods as follows.

- 1) using Power meter
- 2) using Spectrum Analyzer according the Method #3 of the FCC Public Notice, DA 02-2138, August/30/2002

2.1.1 Power Meter measurement method

To find the worse case in the implemented transmission modes in each measuring frequency (low, middle, high), the following test was performed with a power meter.

- A transmitter antenna terminal of EUT was connected to the input of a RF power sensor.
- Measurement was performed while EUT was operating in continuous transmission mode at the appropriate center frequencies. The spectrum of the continuous transmission test mode is shown in the Plot 2-0.

Table 2-1 : Test Instruments of power meter method

Description	Model	Serial Number
Power Meter	HP 437B	3043U03437
Power Sensor	HP 8481A	US41030582
Coax cables: - Power Sensor <=> EUT	Length: 20 cm Loss: 1.2dB	

Notes: - HP: Hewlett Packard




Figure 2-1: Measurement setup of power meter method

2.1.2 Spectrum Analyzer measurement method

The spectrum analyzer was connected to the antenna terminal, while EUT was operating in continuous transmission mode (shown in the Plot 2-0) at the appropriate center frequencies.

The spectrum analyzer was set to :

VBW= 30kHz ($\geq 1/T$, where T is transmission pulse duration. See Plot 2-0.), RBW=1MHz,
Span=30-40MHz encompassing the entire 26dB emission bandwidth of the transmission signal,
Mode= sample detector, Trigger= free run

The band power measurement function was used to measure the peak power of each transmission mode selected by the step 2.1.1. The analyzer computed the peak power by integrating the spectrum across the 26 dB emission bandwidth given by the previous chapter.

Table 2-2 : Test Instruments of spectrum analyzer method

Description	Model	Serial Number
Spectrum Analyzer EMI Test Receiver	R&S ESI26	836119/003
Coax cables: - Spectrum Analyzer <=> EUT	Length: 110 cm Loss: 2.2 dB	

Notes: - R&S: Rohde & Schwarz





Figure 2-2 : Measurement setup of spectrum analyzer method

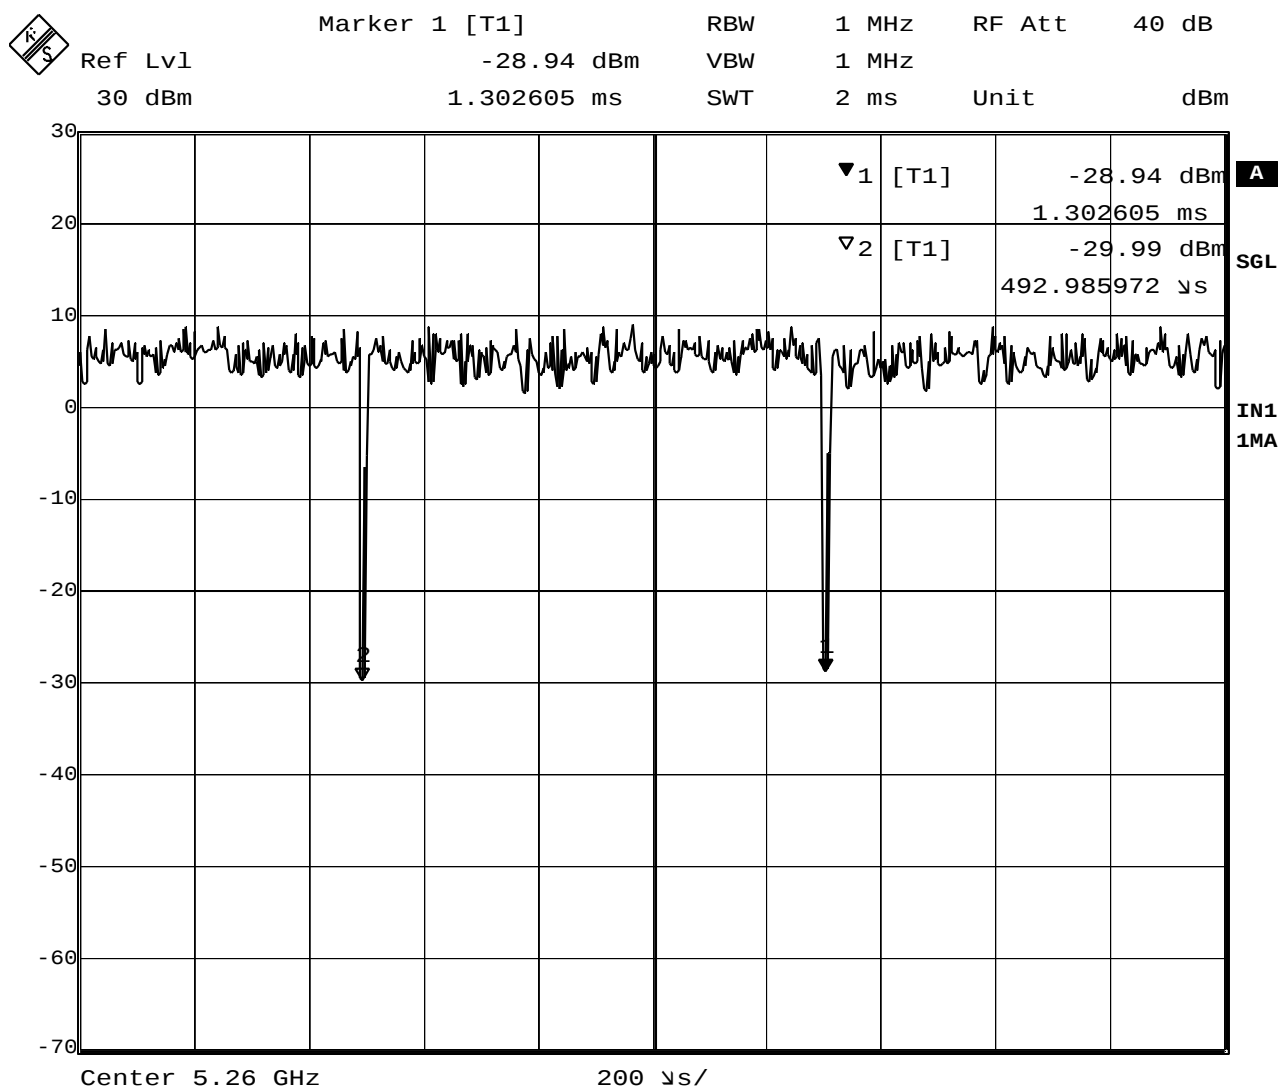

Date: 16.DEC.2002 18:33:32

Plot 2-0 Transmission Pulse Duration

2.2 Measurement Results

Test Date: November 18 and December 16, 2002

Table 2-2-1. Power meter measurement results (EUT: M/T 2672-CHU, s/n ZZ-00094)

Operation Frequency [GHz]	Rated output power (conducted) [dBm]							
	6M bps	9M bps	12M bps	18M bps	24M bps	36M bps	48M bps	54M bps
5.180	13.4	13.4				13.3	13.3	12.0
specification	14							13
5.260	16.3	16.3				14.3	13.4	12.6
specification	17					15	14	13
5.320	13.2	13.2				13.2	13.2	12.0
specification	14							13


[Calculation table]

Measured Frequency (MHz)	Power Meter Reading (dBm)	Cable Loss (dB)	Results (dBm)	Limit		Peak antenna gain of EUT (dBi)	EIRP (dBm)	IC limit (dBm)
				FCC (dBm)	IC (dBm)			
5180	13.4	1.2	14.6	17	N/A	1.42	16.0	23
5260	16.3	1.2	17.5	24	24		18.9	30
5320	13.2	1.2	14.4	24	24		15.8	30

Table 2-2-2. Spectrum analyzer measurement results (EUT: M/T 2672-CHU, s/n ZZ-00094)

Measured Frequency (MHz)	Analyzer reading (dBm)	Trace number	Cable Loss (dB)	Results (dBm)	Limit		Peak antenna gain of EUT (dBi)	EIRP (dBm)	IC limit (dBm)
					FCC (dBm)	IC (dBm)			
5180	12.13	Plot 2-1	2.2	14.3	17	N/A	1.42	15.7	23
5260	15.04	Plot 2-2	2.2	17.2	24	24		18.6	30
5320	12.16	Plot 2-3	2.2	14.4	24	24		15.8	30

2.3 Trace Data

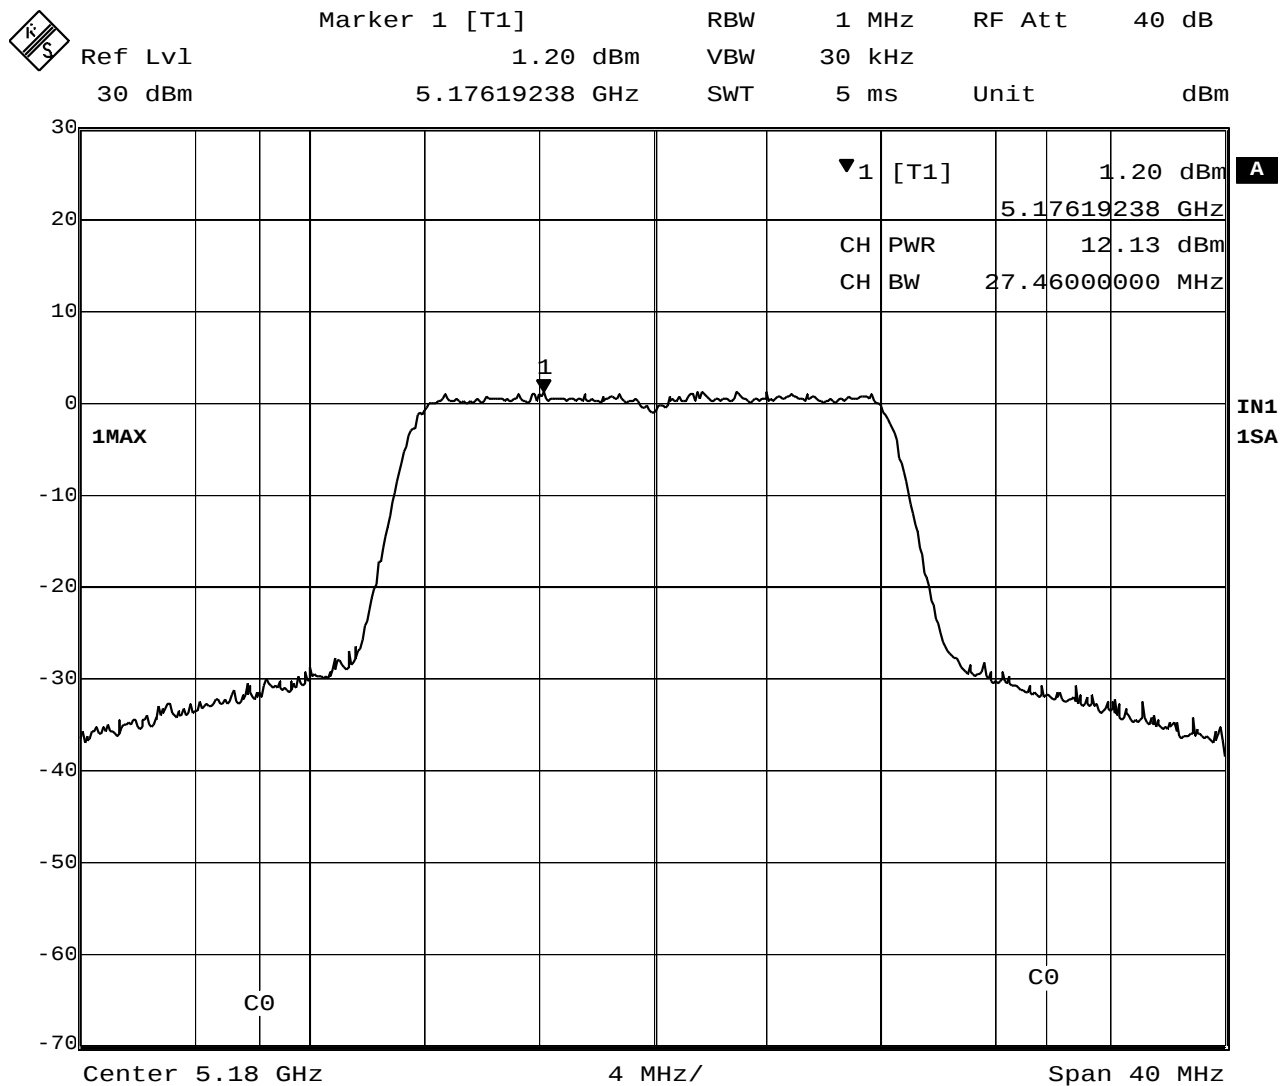


Date: 16.DEC.2002 18:53:02

Plot 2-1 Conducted Peak Power at 5180MHz



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	40 dB
30 dBm	4.47 dBm	VBW	30 kHz		
	5.26517034 GHz	SWT	5 ms	Unit	dBm

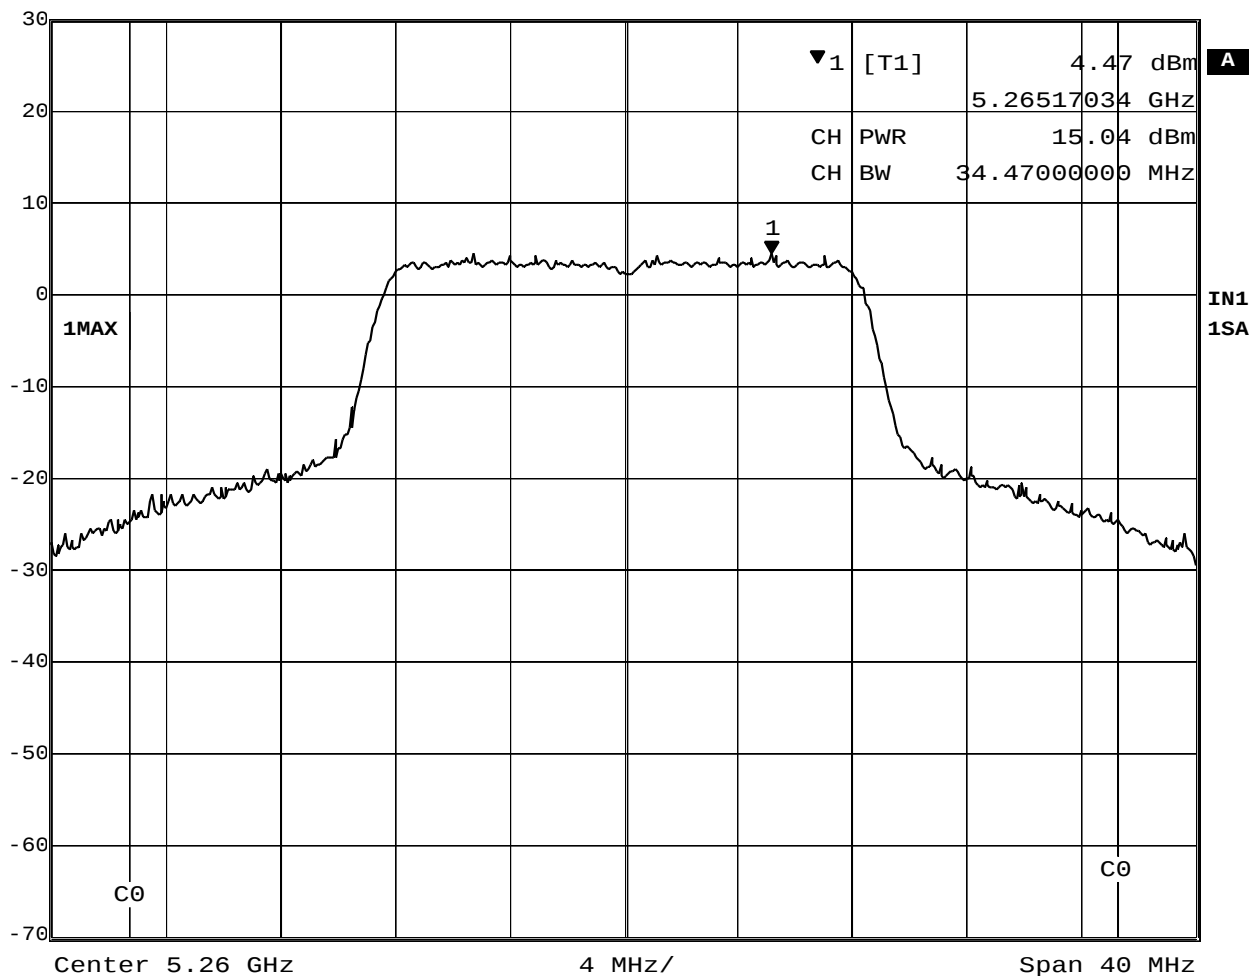


Date: 16.DEC.2002 18:56:31

Plot 2-2 Conducted Peak Power at 5260MHz



Marker 1 [T1] RBW 1 MHz RF Att 40 dB
Ref Lvl 1.36 dBm VBW 30 kHz
30 dBm 5.32516032 GHz SWT 5 ms Unit dBm

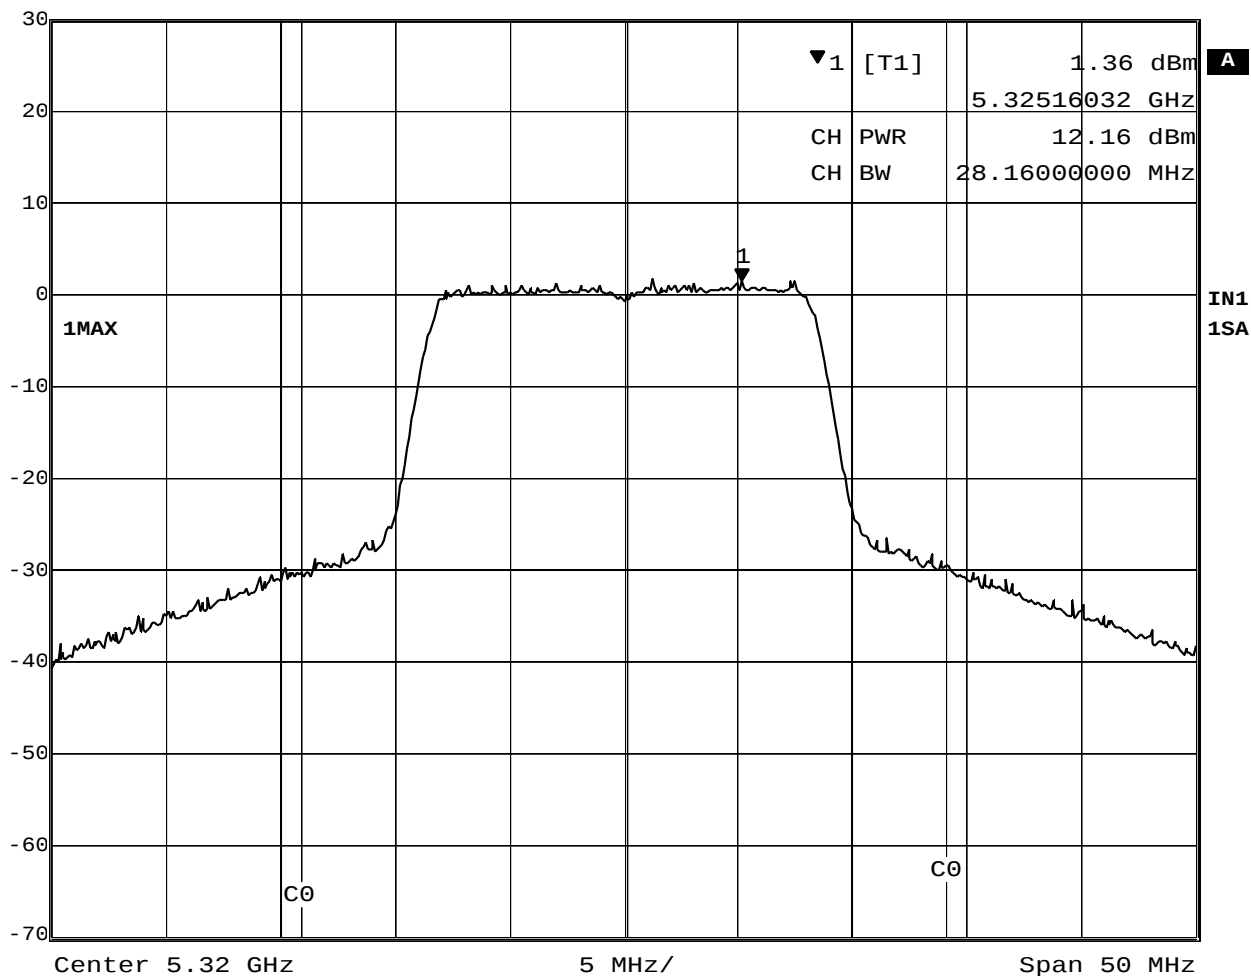

Date: 16.DEC.2002 19:58:29

Plot 2-3 Conducted Peak Power at 5320MHz

3. Peak Power Spectral Density

[5150-5250MHz: FCC 15.407(a)(1), RSS 6.2.2q1(i), (iv)(b)]
 [5250-5350MHz: FCC 15.407(a)(2), RSS 6.2.2q1(ii), (iv)(b)]

3.1 Test Procedure

The spectrum analyzer was connected to the antenna terminal, while EUT was operating in continuous transmission mode at the appropriate center frequencies.

The spectrum analyzer was set to :

RBW= 1MHz, VBW=3MHz, Span=20MHz, Mode= sample detector,
 The analyzer averaged 100 traces in averaging mode, then the marker was set to the highest position in the spectrum.

Also the Canadian PPSP was examined with the following spectrum analyzer setting.

RBW= 1MHz, VBW=1MHz, Span=20MHz, Mode= sample detector, averaging off

The test instruments and setup configuration are the same as the Table 2-2 and Figure 2-2.

3.2 Measurement Results

Test Date: December 16, 2002

Table 3-1. Measurement results of PPSP (EUT: M/T 2672-CHU, s/n ZZ-00094)


Measured Frequency (MHz)	Analyzer reading (dBm)	Trace number	Cable Loss (dB)	Results (dBm)	FCC Limit (dBm)	IC Limit q1(ii) (dBm)	Peak Antenna Gain (dBm)	IC EIRP (dBm)	IC Limit q1(i) (dBm)
5180	-0.93	Plot 3-1	2.2	1.3	4.0	N/A	1.42	2.7	10
5260	1.97	Plot 3-2	2.2	4.2	11.0	11.0			N/A
5320	-1.50	Plot 3-3	2.2	0.7	11.0	11.0			N/A

Table 3-2. Measurement results of Canadian PSD (EUT: M/T 2672-CHU, s/n ZZ-00094)

Measured Frequency (MHz)	Analyzer reading (dBm)	Trace number	Cable Loss (dB)	Results (dBm)	IC Limit q1(iv)(b) 3 + 10logB* (dBm)
5180	8.74	Plot 3-4	2.2	10.9	17.39
5260	11.12	Plot 3-5	2.2	13.3	18.37
5320	8.66	Plot 3-6	2.2	10.9	17.50

* B = 26dB Bandwidth

3.3 Trace Data

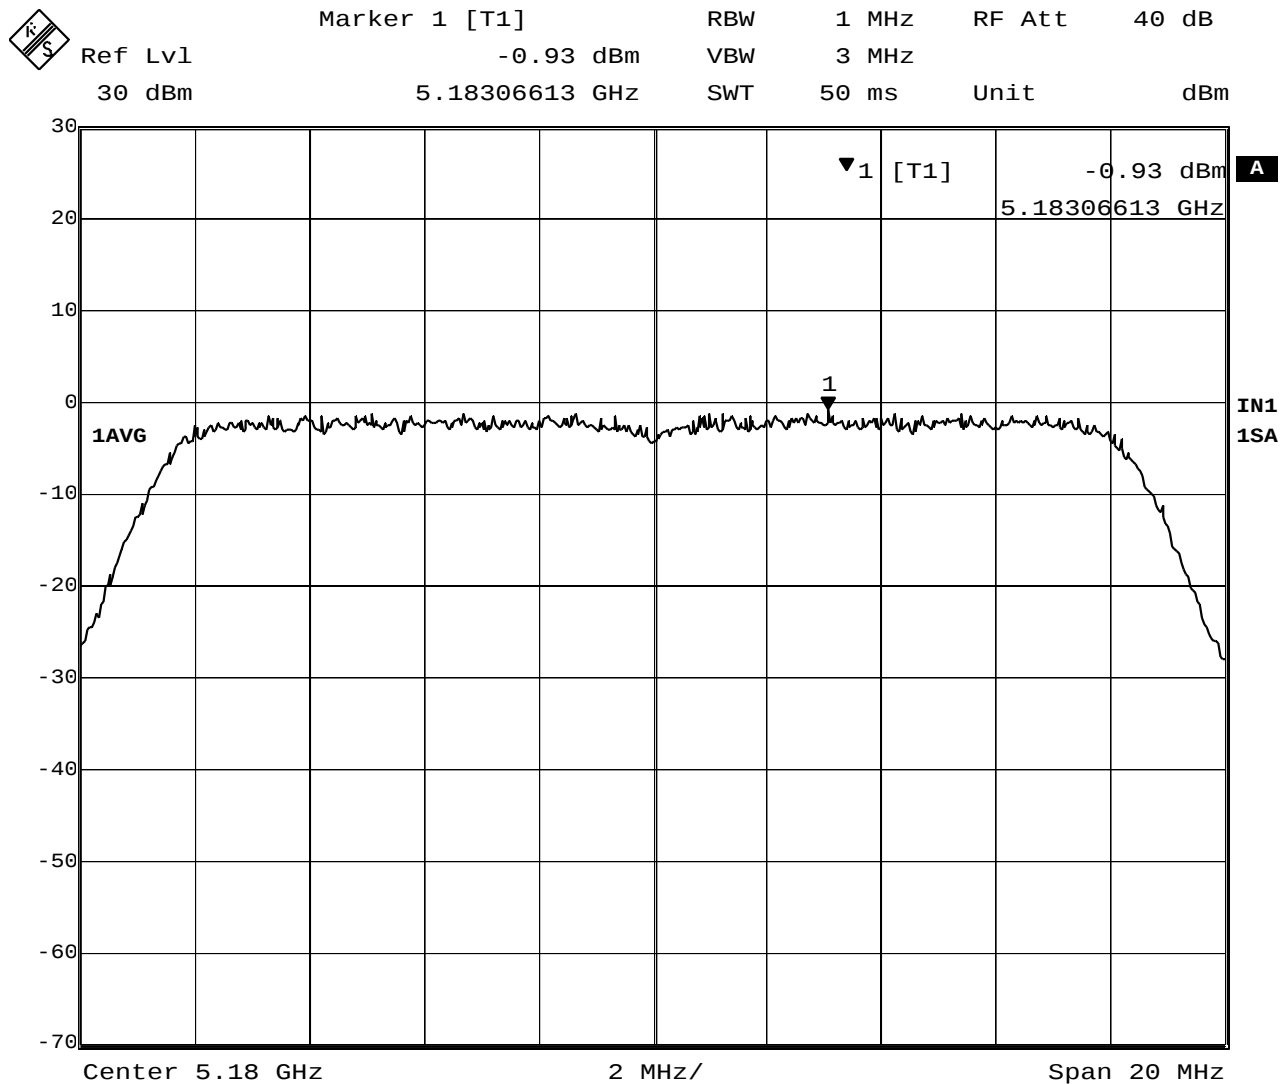


Date: 16.DEC.2002 19:03:45

Plot 3-1 Peak Power Spectral Density at 5180MHz



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	40 dB
30 dBm	1.97 dBm	VBW	3 MHz		
	5.25509018 GHz	SWT	50 ms	Unit	dBm

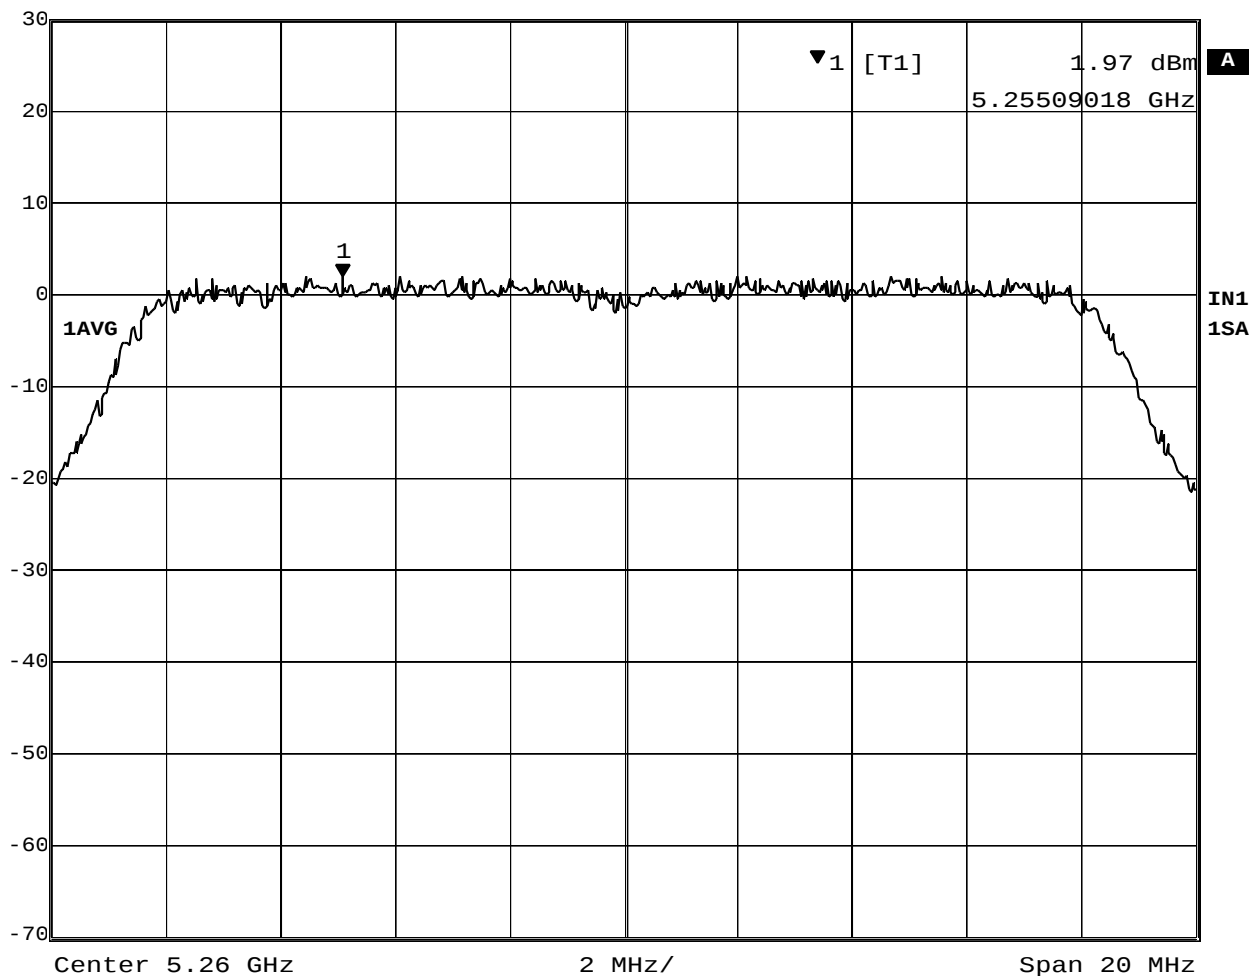


Date: 16.DEC.2002 19:05:26

Plot 3-2 Peak Power Spectral Density at 5260MHz



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	40 dB
30 dBm	-1.50 dBm	VBW	3 MHz		
	5.32655311 GHz	SWT	50 ms	Unit	dBm

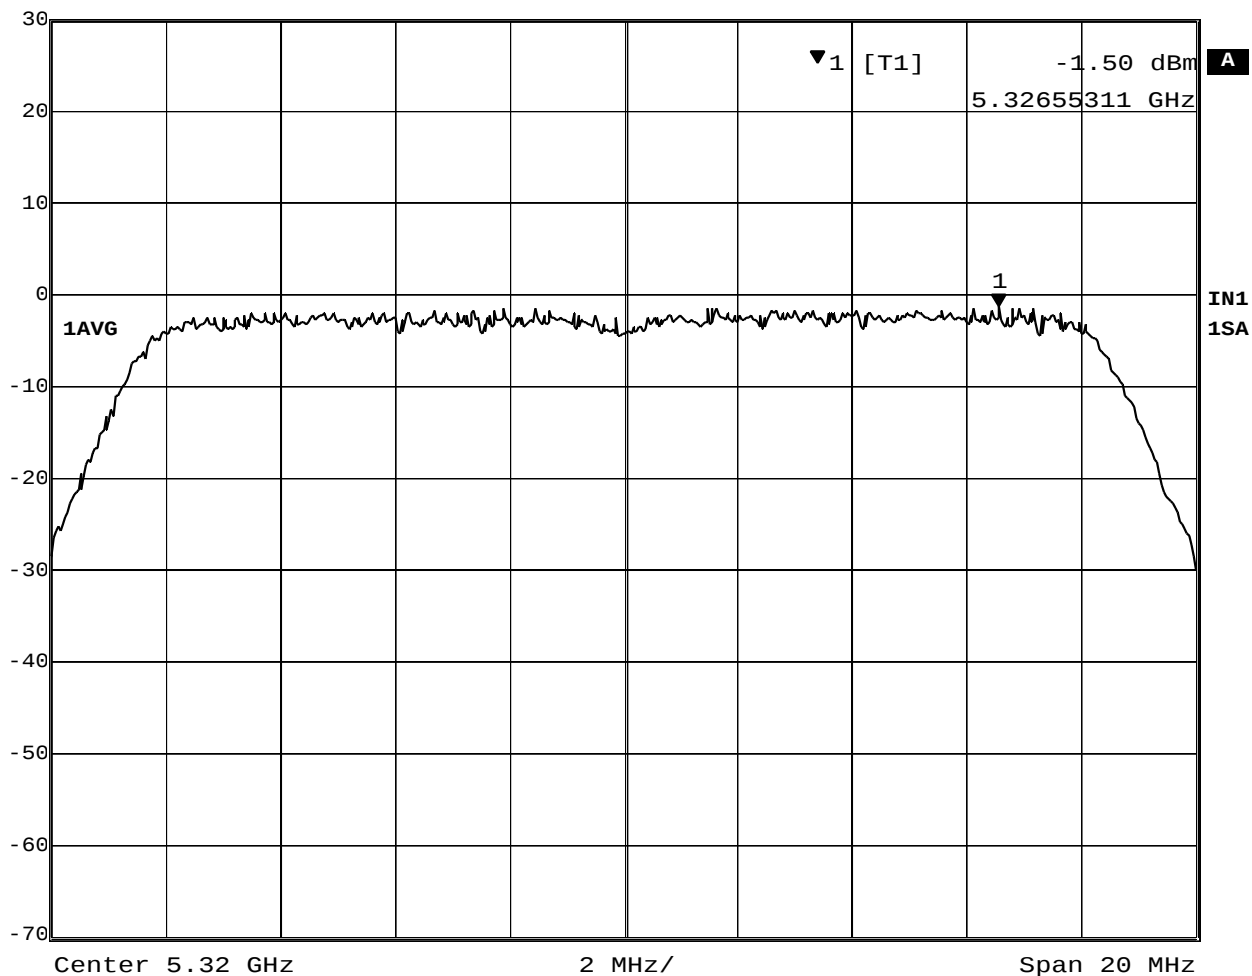


Date: 16.DEC.2002 19:06:37

Plot 3-3 Peak Power Spectral Density at 5320MHz



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	40 dB
30 dBm	8.74 dBm	VBW	1 MHz		
	5.17224449 GHz	SWT	50 ms	Unit	dBm

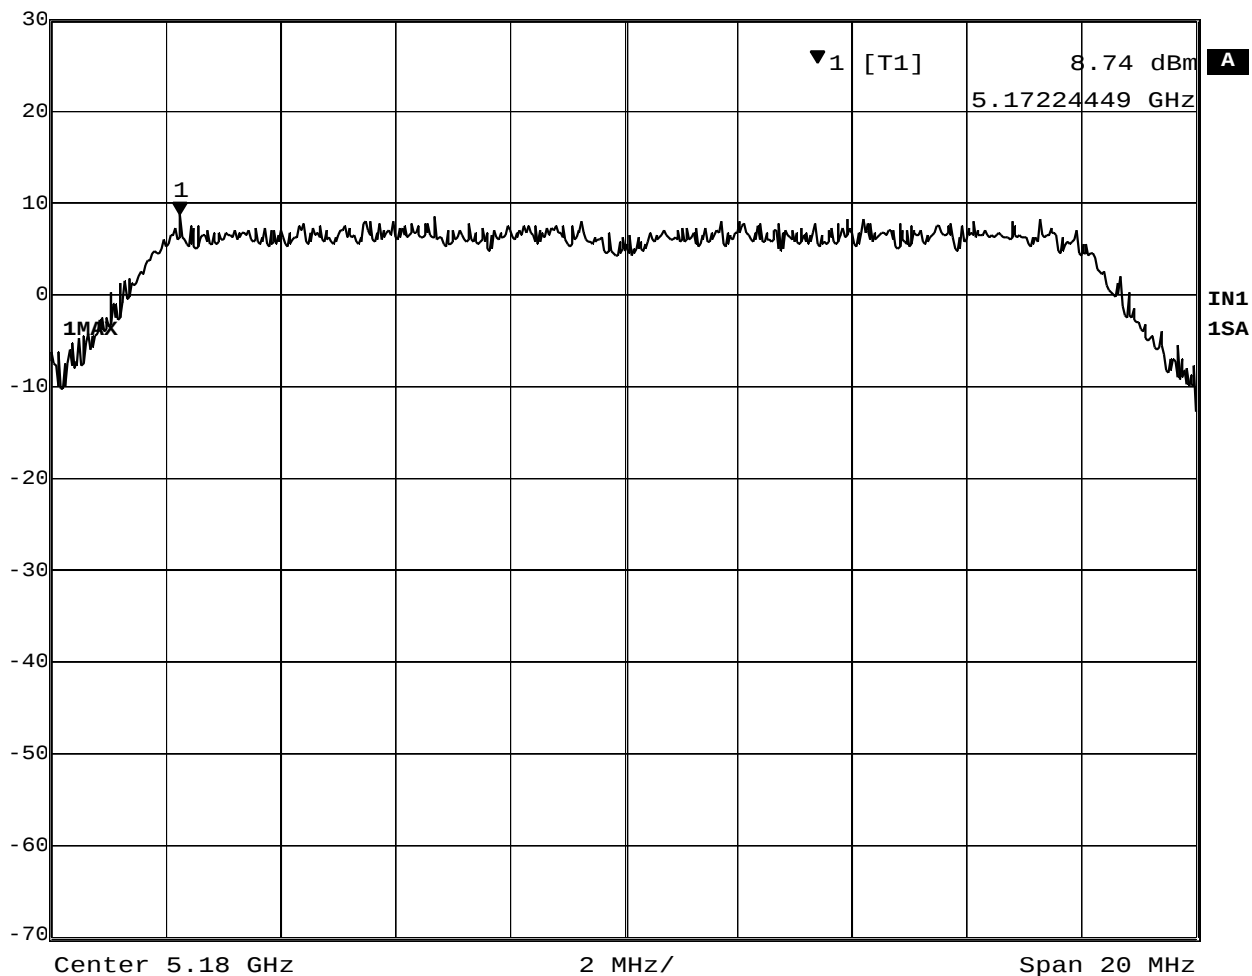


Date: 16.DEC.2002 19:09:16

Plot 3-4 Peak Power Spectral Density at 5180MHz (IC RSS-210)



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	40 dB
30 dBm	11.12 dBm	VBW	1 MHz		
	5.26535070 GHz	SWT	50 ms	Unit	dBm

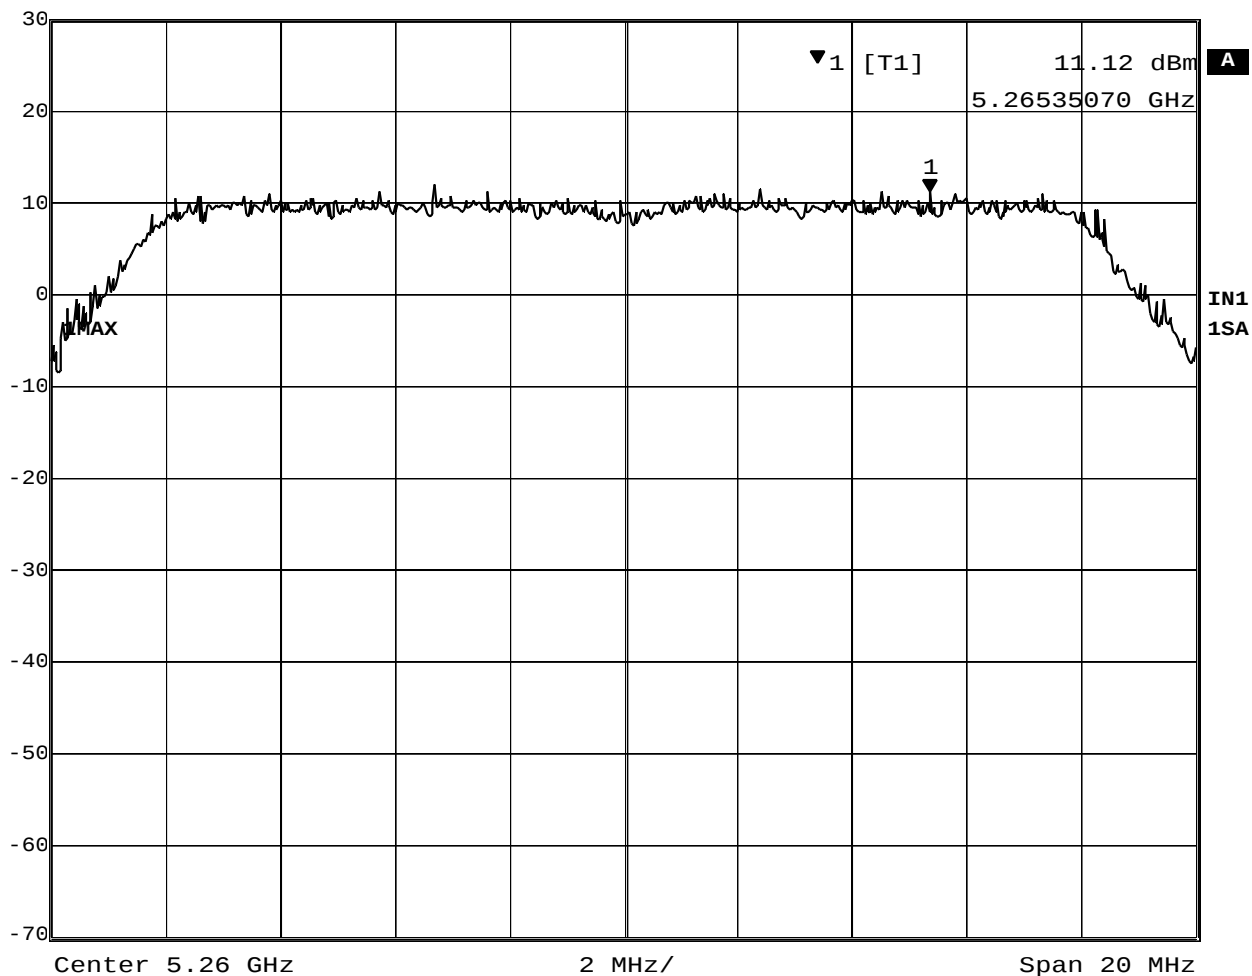


Date: 16.DEC.2002 19:10:34

Plot 3-5 Peak Power Spectral Density at 5260MHz (IC RSS-210)



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	40 dB
30 dBm	8.66 dBm	VBW	1 MHz		
	5.32438878 GHz	SWT	50 ms	Unit	dBm

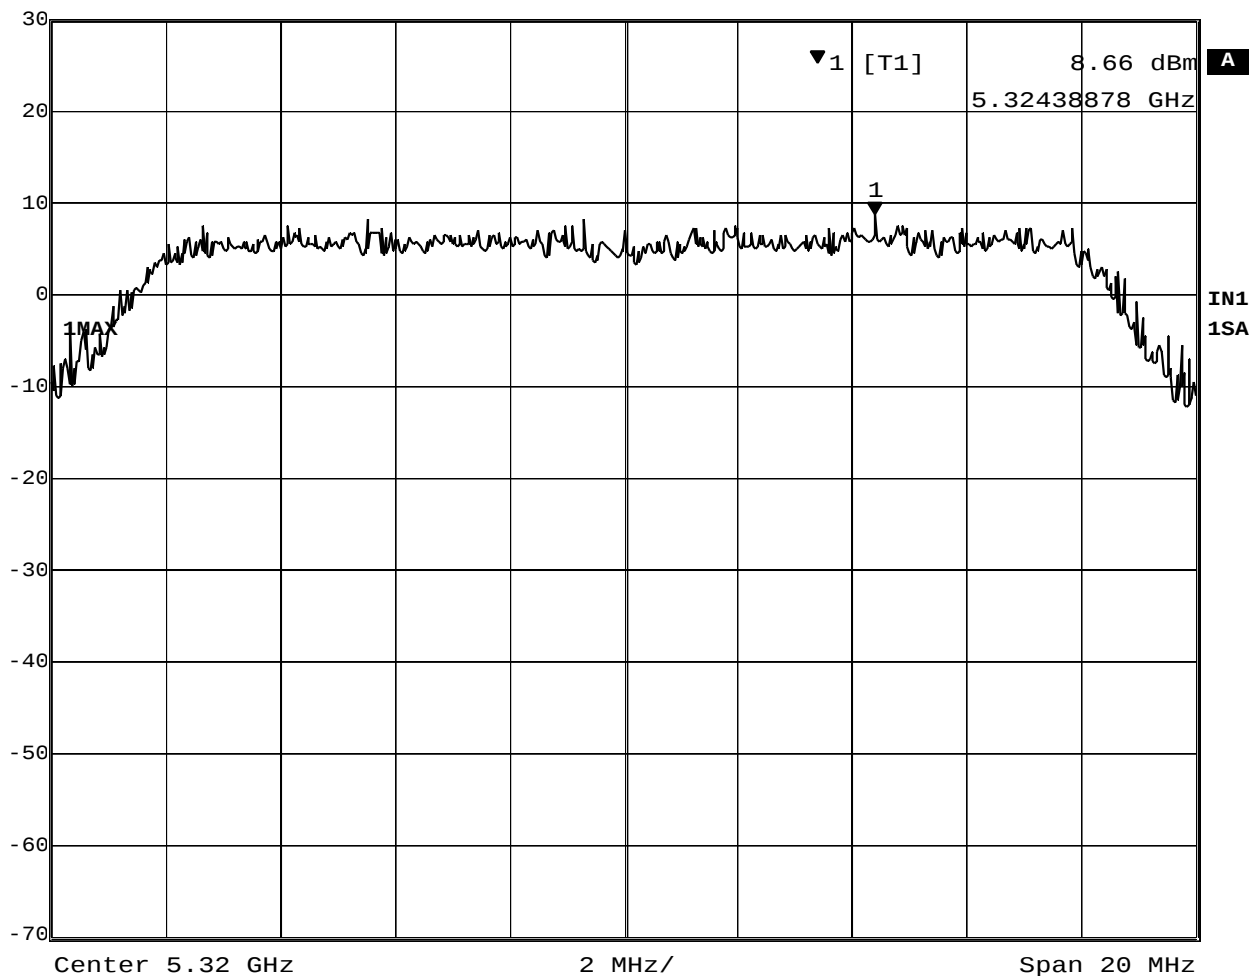

Date: 16.DEC.2002 19:12:10

Plot 3-6 Peak Power Spectral Density at 5320MHz (IC RSS-210)

4. Peak Excursion Ratio

[FCC 15.407(a)(6)]

4.1 Test Procedure

The spectrum analyzer was connected to the antenna terminal, while EUT was operating in continuous transmission mode at the appropriate center frequencies.

- 1st trace :
The spectrum analyzer was set to :
RBW= 1MHz, VBW=3MHz, Mode= peak detector and max hold then to view.
- 2nd trace :
The measurement result of the peak conducted power in Chapter 2.1.2 tend to present the similar values to the results of power meter, therefore the same setting of spectrum analyzer as the one for the Chapter 2.1.2 was used for the 2nd trace.
i.e. VBW= 30kHz, RBW=1MHz, Span=30-40MHz, Trigger= free run, Mode= sample detector

The largest difference of amplitude delta between the two trances is the peak excursion.

The test instruments and setup configuration are the same as the Table 2-2 and Figure 2-2.


4.2 Measurement Results

Test Date: December 16, 2002

Table 4-2. Measurement results of Peak Excursion Ratio (EUT: M/T 2672-CHU, s/n ZZ-00094)

Measured Frequency (MHz)	Analyzer Reading delta (dB)	FCC Limit (dB)	Margin (dB)	Trace number
5180	10.39	13	2.61	Plot 4-1
5260	9.65		3.35	Plot 4-2
5320	10.51		2.49	Plot 4-3

4.3 Trace Data

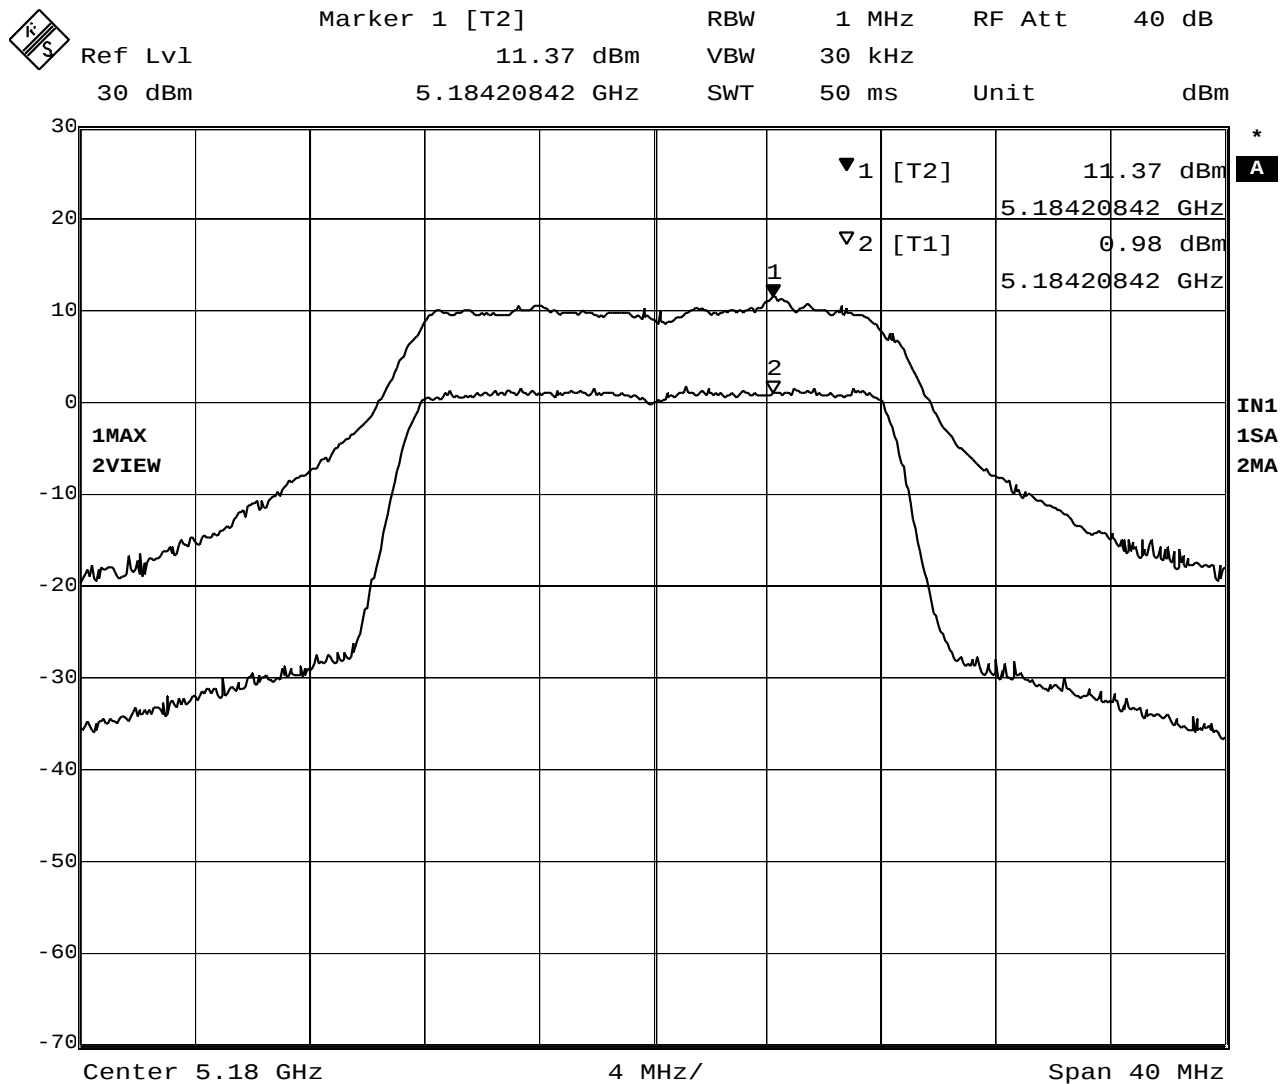


Date: 16.DEC.2002 19:26:18

Plot 4-1 Peak Excursion Ratio at 5180MHz



Marker 1 [T2] RBW 1 MHz RF Att 40 dB
Ref Lvl 13.27 dBm VBW 30 kHz
30 dBm 5.26452906 GHz SWT 50 ms Unit dBm

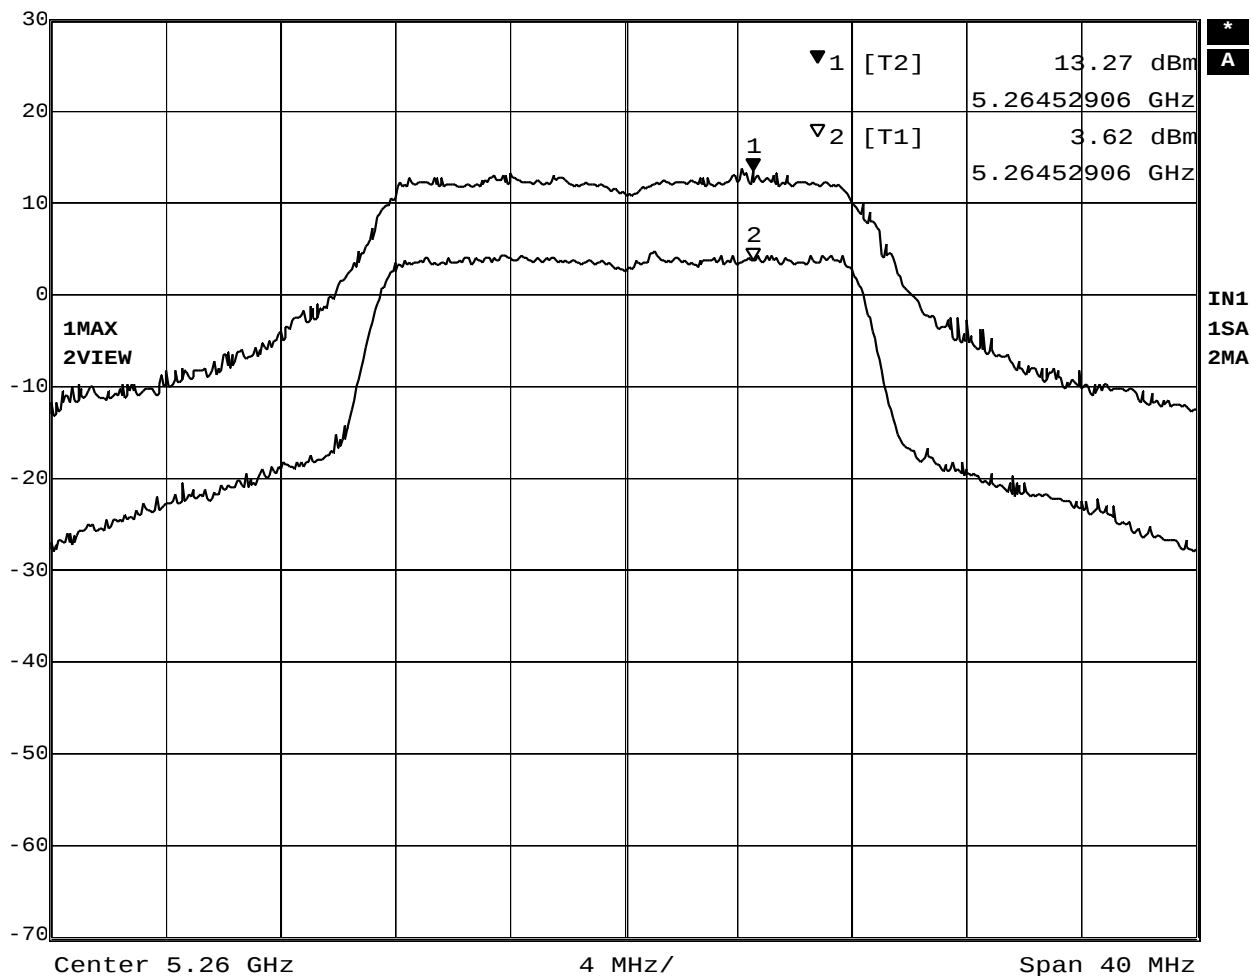


Date: 16.DEC.2002 19:29:41

Plot 4-2 Peak Excursion Ratio at 5260MHz



Marker 1 [T2] RBW 1 MHz RF Att 40 dB
Ref Lvl 10.97 dBm VBW 30 kHz
30 dBm 5.32436874 GHz SWT 50 ms Unit dBm

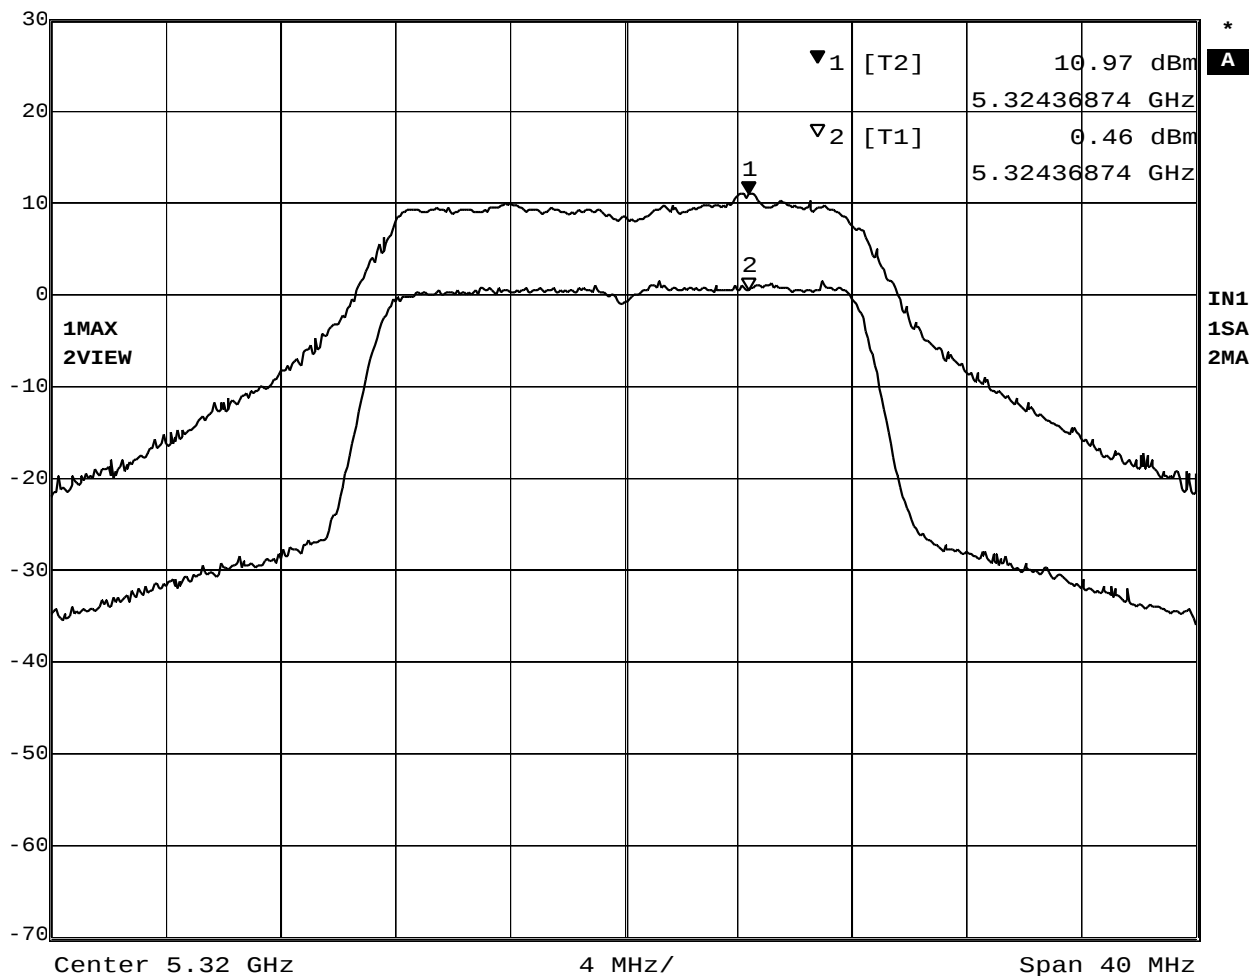

Date: 16.DEC.2002 19:32:50

Plot 4-3 Peak Excursion Ratio at 5320MHz

5. AC WIRELINE CONDUCTED EMISSIONS (150KHz – 30MHz)

[FCC 15.207/ 15.407(b)(5), RSS-210 6.2.2(q1)(v) / 6.6 / 7.4]

5.1 Test Procedure

The conducted emissions are measured in the IBM shielded room with a spectrum analyzer in peak hold. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9KHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.

5.2 Test Instruments and Measurement Setup

Table 5-1. Conducted Emission Test Instrumentation

Description	Model	Serial Number
Computer	IBM 6589-13J	97-15613
Spectrum Analyzer (100Hz-1.5GHz)	HP 85680B	2601A02634
Spectrum Analyzer Display	HP 85662A	2542A12308
Quasi-Peak Adapter	HP 85650A	2043A00062
Receiver (9kHz-30MHz)	R&S ESH3	891806/012
LISN	EMCO 3825/2	1426
Switch/control unit	HP 3488A	2719A17228
Plotter	HP 7550A	2631A33619
Coax cables: - Lisen-L <=> SW/Con.unit (SW100) - Lisen-N <=> SW/Con.unit (SW101) - SW/Con.unit <=> RCVR (Input) - SW/Con.unit<=> Spe Ana.(Signal In)	Length: 4 m 4 m 1 m 1 m	- EMIC-L - EMIC-N - EMIC-R - EMIC-S

Notes: - HP: Hewlett Packard, R&S: Rohde & Schwarz

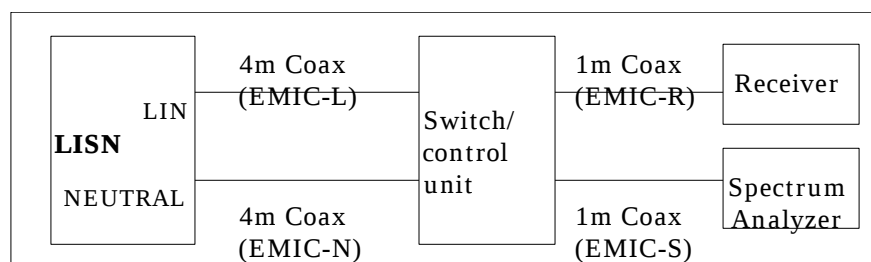


Figure 5. Cables for Conducted Emission Test

5.3 Measurement Results

The EUT was found to comply to the limits of FCC Part 15 Subpart E and RSS-210 with a margin of 18.3dB. The 6 highest emissions relative to the limits are reported.

Test Date: January 8, 2003

Table 5-2-1. EUT: M/T 2672-CHU, s/n ZZ-00094, Ch.36(5180MHz) **TX** mode 24Mbps

Frequency (MHz)	Phase	QP Voltage (dBμV)	CISPR22 QP Limit (dBμV)	AV Voltage (dBμV)	CISPR22 AV Limit (dBμV)
0.2025	LINE	38.8	63.5	33.6	53.5
0.2743	LINE	34.1	61.0	29.4	51.0
0.3430	LINE	29.1	59.1	25.2	49.1
0.4095	LINE	23.3	57.7	19.3	47.7
0.4792	LINE	26.0	56.4	22.4	46.4
0.6151	LINE	22.6	56.0	18.7	46.0

Table 5-2-2. EUT: M/T 2672-CHU, s/n ZZ-00094 , Ch.52(5260MHz) **TX** mode 24Mbps

Frequency (MHz)	Phase	QP Voltage (dBμV)	CISPR22 QP Limit (dBμV)	AV Voltage (dBμV)	CISPR22 AV Limit (dBμV)
0.2041	LINE	40.1	63.4	35.0	53.4
0.2728	LINE	34.0	61.0	29.1	51.0
0.3411	LINE	29.3	59.2	25.2	49.2
0.4080	NEUTRAL	20.6	57.7	17.6	47.7
0.4772	LINE	24.8	56.4	21.0	46.4
0.6174	LINE	23.0	56.0	19.1	46.0

Table 5-2-3. EUT: M/T 2672-CHU, s/n ZZ-00094, Ch.64(5320MHz) **TX** mode 24Mbps

Frequency (MHz)	Phase	QP Voltage (dBμV)	CISPR22 QP Limit (dBμV)	AV Voltage (dBμV)	CISPR22 AV Limit (dBμV)
0.2041	LINE	40.0	63.4	35.1	53.4
0.2763	LINE	33.5	60.9	28.7	50.9
0.3410	LINE	29.3	59.2	25.2	49.2
0.4102	LINE	23.8	57.6	19.9	47.6
0.4788	LINE	26.0	56.4	22.2	46.4
0.6176	LINE	23.0	56.0	19.1	46.0

Table 5-2-4. EUT: M/T 2672-CHU, s/n ZZ-00094, Ch. 52(5260MHz) **RX** mode

Frequency (MHz)	Phase	QP Voltage (dBμV)	CISPR22 QP Limit (dBμV)	AV Voltage (dBμV)	CISPR22 AV Limit (dBμV)
0.2024	LINE	39.0	63.5	34.1	53.5
0.2711	LINE	32.5	61.1	27.4	51.1
0.3397	LINE	28.0	59.2	24.1	49.2
0.4106	LINE	24.2	57.6	20.0	47.6
0.4771	LINE	24.9	56.4	21.3	46.4
0.6135	LINE	21.3	56.0	17.1	46.0

6. RESTRICTED BANDS RADIATIONS (30MHz – 1GHz)

[FCC 15.205&209 / 15.407(b)(1),(2),(5),(6)]
 [RSS-210 6.2.1 / 6.2.2(q1)(i),(ii),(v) / 6.3 / 7.3]

6.1 Test Procedure

Preliminary radiated emissions are measured in the semi-anechoic chamber at a 3 meter distance on every azimuth in both horizontal and vertical polarity. The antennas are also scanned in height. The emissions are recorded with a spectrum analyzer in peak hold mode. The identified emissions are further maximized by a cable manipulation. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120kHz. The highest emissions relative to the limit are listed.

6.2 Test Instruments and Measurement Setup

Table 6-1 Radiated Emission Test Instrumentation

Description	Model	Serial Number
Computer	IBM 5551-L	#4
Spectrum Analyzer (100Hz-1.5GHz) for 30-200MHz	HP 85680B	3019A05155
Spectrum Analyzer Display for 30-200MHz	HP 85662A	3026A19353
Quasi-Peak Adapter for 30-200MHz	HP 85650A	3033A01449
Spectrum Analyzer (100Hz-1.5GHz) for 200-1000MHz	HP 85680B	2841A04252
Spectrum Analyzer Display for 200-1000MHz	HP 85662A	2816A16831
Quasi-Peak Adapter for 200-1000MHz	HP 85650A	2811A01156
Amplifier (100KHz-1.3GHz)		
- for 30-200MHz	HP 8447D	2805A02919
- for 200-1000MHz	HP 8447D	2944A03506
Biconical Antenna (30-200MHz)	EMCO 3108	2309
Log-Periodic Antenna (200-1000MHz)	EMCO 3146	1585
Receiver (20MHz-1.3GHz)	R&S ESVP	893202/018
Switch/control unit	HP 3488A	2719A17226
N-Coax cables:	Length:	
- Bi-coni Ant <=> 10m Cable	9 m	- EM103L01
- 10m Cable <=> Shield Panel	10 m	- EM103L02
- Shield Panel <=> RF Amp	7 m	- EM103L03
- RF Amp <=> Power Splitter	0.5m	- EM103L04
- Log-peri Ant <=> 10m Cable	9 m	- EM103H01
- 10m Cable <=> Shield Panel	10 m	- EM103H02
- Shield Panel <=> RF Amp	7 m	- EM103H03
- RF Amp <=> Power Splitter	0.5m	- EM103H04
Coax cables:		
- Power Splitter <=> SW/Con.unit (SW110)	1 m	- EM103L05
- Power Splitter <=> SW/Con.unit (SW300)	1 m	- EM103L06
- Power Splitter <=> SW/Con.unit (SW100)	1 m	- EM103H05
- Power Splitter <=> SW/Con.unit (SW301)	1 m	- EM103H06
- SW/Con.unit <=> Receiver (Input)	2 m	- EM1RCV
- SW/Con.unit <=> Spe Ana.(Signal In) for 30- 200MHz	2 m	- EM1SPL

- SW/Con.unit <=> Spe Ana.(Signal In) for 200-1000MHz	2 m	- EM1SPH
---	-----	----------

Notes:

- HP: Hewlett Packard, R&S: Rohde & Schwarz

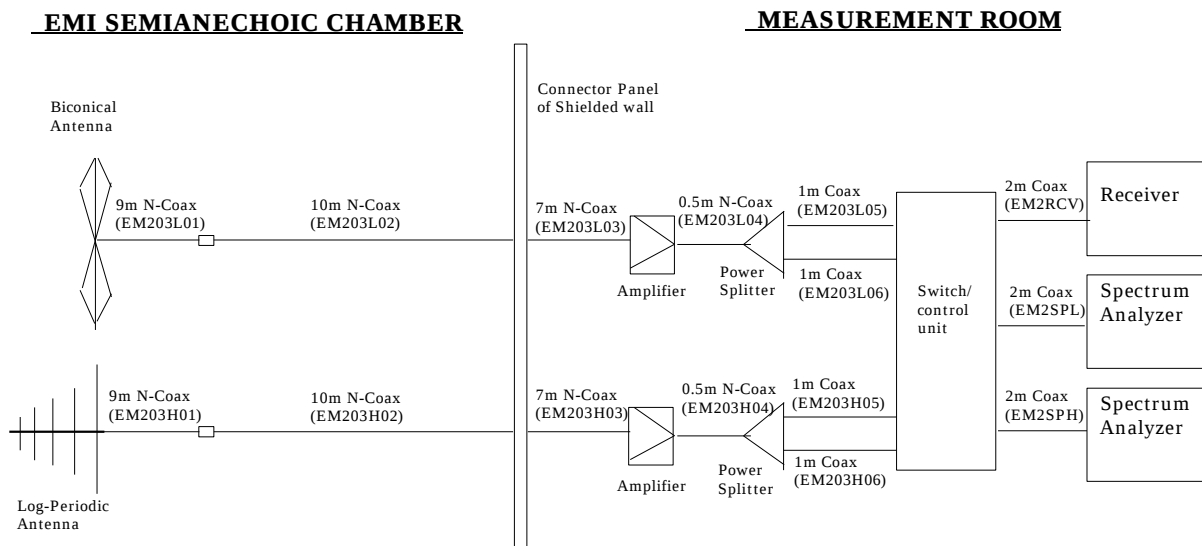


Figure 6 Cables for Radiated Emission Test

6.3 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver. All factors are included in the reported data.

$$FS = R + AF + CORR$$

where:

FS	=	Field Strength
R	=	Measured Receiver Input Amplitude
AF	=	Antenna Factor
CORR	=	Correction Factor = CL - AG
CL	=	Cable Loss
AG	=	Amplifier Gain

For example:

Given a Receiver input reading of 51.5dB μ V; Antenna Factor of 8.5dB/m; Cable Loss of 1.3dB; and an Amplifier Gain of 26dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 = 35.3\text{dB}\mu\text{V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:

$$\text{Level}(\text{dB}\mu\text{V/m}) = 20 \times \text{Log}(\text{Level}(\mu\text{V/m}))$$

$$40\text{dB}\mu\text{V/m} = 100\mu\text{V/m}$$

$$48\text{dB}\mu\text{V/m} = 250\mu\text{V/m}$$

6.4 Measurement Results

The EUT was found to comply to the limits of FCC Part 15 Subpart E and RSS-210 with a margin of 1.5 dB at 30MHz - 1000MHz band.

The 6 highest emissions relative to the limits are reported.

Test Date: November 25, 2002

Table 6-2-1. EUT: M/T 2672-CHU, s/n ZZ-00094, Ch.36(5180MHz) **TX** mode 24Mbps

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Field Strength (μ V/m)	Limit (μ V/m)
37.714	H	33.7	12.4	-18.7	27.4	40.0	23.4	100
59.160	V	37.3	9.5	-18.1	28.7	40.0	27.2	100
199.972	H	37.3	13.8	-15.7	35.4	43.5	58.9	150
454.779	V	41.0	16.5	-13.8	43.7	46.0	153.1	200
632.017	H	26.2	19.2	-11.9	33.5	46.0	47.3	200
863.996	V	24.6	22.2	-10.3	36.5	46.0	66.8	200

Table 6-2-2. EUT: M/T 2672-CHU, s/n ZZ-00094, Ch.52(5260MHz) **TX** mode 24Mbps

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Field Strength (μ V/m)	Limit (μ V/m)
38.917	V	33.9	12.2	-18.6	27.5	40.0	23.7	100
58.463	V	37.4	9.5	-18.2	28.7	40.0	27.2	100
199.972	H	38.2	13.8	-15.7	36.3	43.5	65.3	150
454.779	V	40.9	16.5	-13.8	43.6	46.0	151.4	200
733.234	V	24.3	20.6	-10.9	34.0	46.0	50.1	200
899.878	V	25.8	22.5	-9.3	39.0	46.0	89.1	200

Table 6-2-3. EUT: M/T 2672-CHU, s/n ZZ-00094, Ch.64(5320MHz) **TX** mode 24Mbps

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Field Strength (μ V/m)	Limit (μ V/m)
38.320	V	35.1	12.3	-18.7	28.7	40.0	27.2	100
58.270	V	37.4	9.5	-18.2	28.7	40.0	27.2	100
199.971	H	38.0	13.8	-15.7	36.1	43.5	63.8	150
454.779	V	41.0	16.5	-13.8	43.7	46.0	153.1	200
899.872	V	25.6	22.5	-9.3	38.8	46.0	87.1	200
930.357	H	20.3	22.6	-9.0	33.9	46.0	49.5	200

Table 6-2-4. EUT: M/T 2672-CHU, s/n ZZ-00094, Ch.52(5260MHz) **RX** mode

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Field Strength (μ V/m)	Limit (μ V/m)
38.619	V	33.8	12.2	-18.5	27.5	40.0	23.7	100
57.636	V	36.7	9.7	-18.2	28.2	40.0	25.7	100
62.952	V	37.6	9.1	-18.0	28.7	40.0	27.2	100
199.971	H	36.5	13.8	-15.7	34.6	43.5	53.7	150
454.779	V	41.8	16.5	-13.8	44.5	46.0	167.9	200
899.875	V	25.3	22.5	-9.3	38.5	46.0	84.1	200

7. RESTRICTED BANDS RADIATIONS (1GHz – 40GHz)

[FCC 15.205&209 / 15.407(b)(1),(2),(5),(6)]
 [RSS-210 6.2.1 / 6.2.2(q1)(i),(ii),(v) / 6.3 / 7.3]

7.1 Test Procedure

Radiated emissions were measured in the frequency range with 1 GHz to 40GHz in transmitting mode and 1 GHz to 25GHz in receiving mode. All tests were performed in the semi-anechoic chamber at a 3-meter distance (except for the frequency range with 18 GHz to 40 GHz where test distance was reduced to 1 meter) on both horizontal and vertical polarities. The antenna was also scanned in height. The emissions are recorded with a spectrum analyzer in peak hold mode. The identified emissions are further maximized as a function of cable manipulation, azimuth, and antenna height. The emissions closest to the limits are measured in the peak mode with the tuned spectrum analyzer using resolution bandwidth of 1MHz / video bandwidth of 1MHz, and the average setting mode with the tuned spectrum analyzer using resolution bandwidth of 1MHz / video bandwidth of 100Hz or 10Hz. The highest emissions relative to the limit are listed.

7.2 Test Instruments and Measurement Setup

Table 7 Radiated Emission Test Instrumentation (1GHz – 40GHz)

Description	Model	Serial Number
Spectrum Analyzer EMI Test Receiver	R&S ESI26	836119/003
Spectrum Analyzer	HP 8563E	3416A02248
Harmonic Mixer (26.5 – 40GHz)	Agilent 11970A	011269-001
Amplifier (1 - 26.5GHz)	HP 8449B	3008A00582
Amplifier (26.5 – 40GHz)	Agilent 83051A	3950M00193
Horn Antenna (1 - 18GHz)	EMCO 3115	9903-5774
Horn Antenna (3.95 – 5.85GHz)	EMCO 3160-5	1099
Horn Antenna (5.85 – 8.2GHz)	EMCO 3160-6	9712-1044
Horn Antenna (8.2 – 12.4GHz)	EMCO 3160-7	1158
Horn Antenna (12.4 – 18GHz)	EMCO 3160-8	1143
Horn Antenna (18 - 26.5GHz)	EMCO 3160-9	0004-1202
Horn Antenna (26.5 - 40GHz)	EMCO 3160-10	1175
Coaxial cables: - Horn Ant <=> RF Amp. (1-18GHz) - RF Amp.<=>Spectrum Analyzer (1-12.4GHz) - RF Amp.<=>Spectrum Analyzer (12.4-18GHz) - Horn Ant <=> RF Amp. (18-40GHz) - RF Amp.<=>Spectrum Analyzer (18-40GHz)	Length: 6 m 15 m 3m 3m 1m	- EM206SCO - EM215SCO - SF102-20166 - SF102-20167 - SF102-21105

Notes: - HP: Hewlett Packard, R&S: Rohde & Schwarz

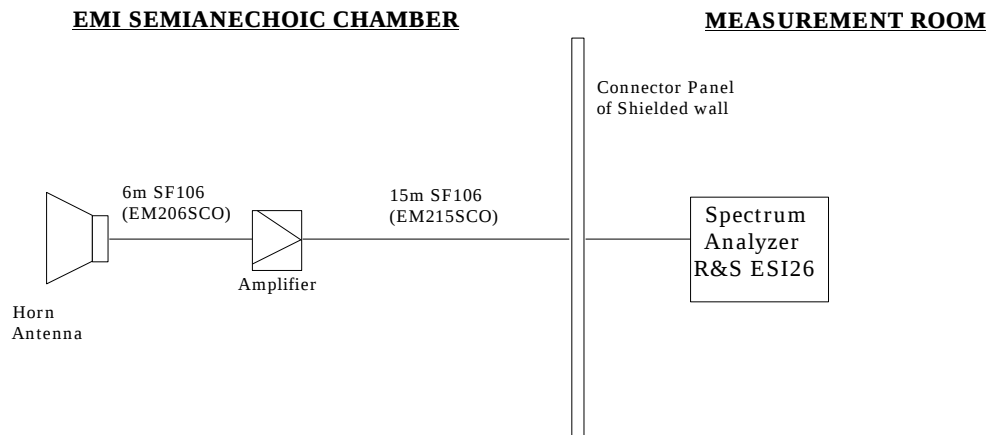


Figure 7-1. Cables for Radiated Emission Test (1 – 12.4 GHz)

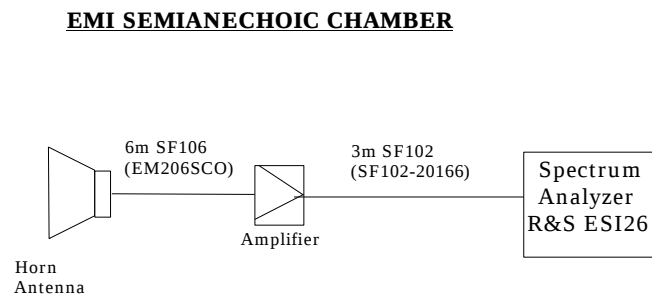


Figure 7-2. Cables for Radiated Emission Test (12.4 - 18GHz)

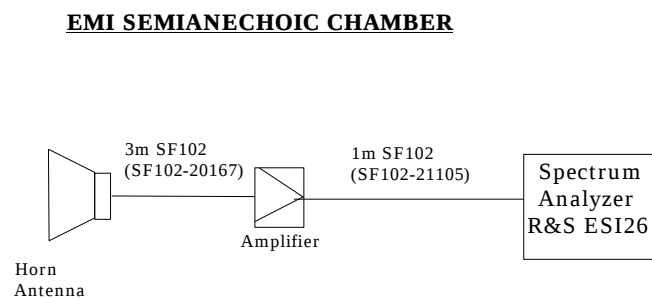


Figure 7-3. Cables for Radiated Emission Test (18 - 26.5GHz)

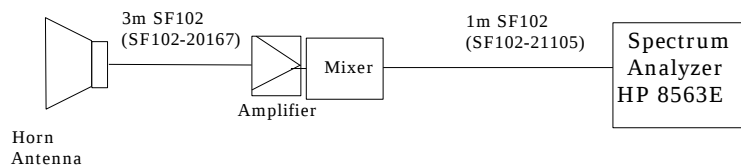
EMI SEMIANECHOIC CHAMBER

Figure 7-4. Cables for Radiated Emission Test (26.5 - 40GHz)

7.3 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where:

FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL-AG

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

For example:

Given a Spectrum Analyzer input reading of 51.5 dB μ V; Antenna Factor of 8.5 dB/m; Cable Loss of 1.3 dB; Falloff Factor of 0 dB; and an Amplifier Gain of 26 dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26 - 0.0 = 35.6 \text{ dB}\mu\text{V/m}$$

Conversions between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as :

$$\text{Level(dB}\mu\text{V/m)} = 20 \times \text{Log}(\text{Level}(\mu\text{V/m}))$$

$$40 \text{ dB}\mu\text{V/m} = 100 \mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250 \mu\text{V/m}$$

7.4 Limits

Table 7-1. Limits for emissions

Limit for emissions in restricted bands	54 dB μ V/m (average)	74 dB μ V/m (peak)
Limit for emissions in non_restricted bands	68.2 dB μ V/m (EIRP< -27 dBm/MHz)	

7.5 Measurement Results

The EUT was found to comply to the limits of FCC Part 15 Subpart E and RSS-210 with a margin of 3.5 dB. The measurement was done for the frequency range of 1 GHz to 40 GHz in TX mode and 1 GHz to 25GHz in RX mode.

Test Date: November 26, 27, December 4 and 5, 2002

Table 7-2-1. EUT: M/T 2672-CHU, s/n ZZ-00094, Ch.36(5180MHz) **TX** mode 24Mbps

Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) (peak)	Measured (dB μ V) (average)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dB μ V/m) (peak)	FCC Limit (dB μ V/m) (peak)	Field Strength (dB μ V/m) (average)	FCC Limit (dB μ V/m) (average)
Inband										
5.185	V	100.6	88.1	33.7	-27.3	0.0	107.0	OB	94.5	OB
Adjacent RB										
5.150	V	61.6	41.8	33.6	-26.5	0.0	68.7	74.0	48.9	54.0
1.066	V	52.7	-	24.6	-32.7	0.0	44.6	74.0	-	54.0
1.130	V	53.1	-	24.6	-32.4	0.0	45.3	74.0	-	54.0
1.152	V	51.6	-	24.6	-32.4	0.0	43.8	74.0	-	54.0
1.198	V	54.5	-	25.2	-32.3	0.0	47.4	74.0	-	54.0
6.048	V	42.6	-	29.8	-26.5	0.0	45.9	68.2	-	NRB
6.112	V	38.4	-	29.8	-26.2	0.0	42.0	68.2	-	NRB
6.176	V	37.6	-	29.9	-25.7	0.0	41.8	68.2	-	NRB
6.216	H	46.1	-	29.9	-26.2	0.0	49.8	68.2	-	NRB
10.359	V	36.7	-	33.5	-23.0	0.0	47.2	68.2	-	NRB

Note: OB means “operation band” (5150-5250MHz).
NRB means “non restricted band”: The limit of FCC Part 15.407(b)(1),(2) and RSS-210 6.2.2(q1)(I),(ii) apply.

Table 7-2-2. EUT: M/T 2672-CHU, s/n ZZ-00094, Ch.52(5260MHz) **TX** mode 24Mbps

Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) (peak)	Measured (dB μ V) (average)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dB μ V/m) (peak)	FCC Limit (dB μ V/m) (peak)	Field Strength (dB μ V/m) (average)	FCC Limit (dB μ V/m) (average)
Inband										
5.256	V	105.2	94.0	33.6	-27.2	0.0	111.6	OB	100.4	OB
Adjacent RB										
5.350	V	51.2	38.0	33.9	-27.2	0.0	57.9	74.0	44.7	54.0
1.066	V	52.5	-	24.6	-32.7	0.0	44.4	74.0	-	54.0
1.130	V	53.0	-	24.6	-32.4	0.0	45.2	74.0	-	54.0
1.152	V	50.2	-	24.6	-32.4	0.0	42.4	74.0	-	54.0
1.198	V	58.3	-	25.2	-32.3	0.0	51.2	74.0	-	54.0
6.048	V	41.8	-	29.8	-26.5	0.0	45.1	68.2	-	NRB
6.112	H	38.6	-	29.8	-26.2	0.0	42.2	68.2	-	NRB
6.313	V	46.3	-	30.0	-26.4	0.0	49.9	68.2	-	NRB
6.549	V	39.7	-	29.9	-26.6	0.0	43.0	68.2	-	NRB
10.521	H	45.4	-	33.5	-22.4	0.0	56.5	68.2	-	NRB

Note: OB means “operation band” (5250-5350MHz).
NRB means “non restricted band”: The limit of FCC Part 15.407(b)(1),(2) and RSS-210 6.2.2(q1)(I),(ii) apply.

Table 7-2-3. EUT: M/T 2672-CHU, s/n ZZ-00094, Ch.64(5320MHz) **TX** mode 24Mbps

Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) (<i>peak</i>)	Measured (dB μ V) (<i>average</i>)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dB μ V/m) (<i>peak</i>)	FCC Limit (dB μ V/m) (<i>peak</i>)	Field Strength (dB μ V/m) (<i>average</i>)	FCC Limit (dB μ V/m) (<i>average</i>)
Inband										
5.324	V	102.5	90.6	33.7	-27.3	0.0	108.9	OB	97.0	OB
Adjacent RB										
5.350	V	60.9	43.8	33.9	-27.2	0.0	67.6	74.0	50.5	54.0
1.066	V	54.1	-	24.6	-32.7	0.0	46.0	74.0	-	54.0
1.130	V	52.2	-	24.6	-32.4	0.0	44.4	74.0	-	54.0
1.152	V	49.9	-	24.6	-32.4	0.0	42.1	74.0	-	54.0
1.198	V	54.7	-	25.2	-32.3	0.0	47.6	74.0	-	54.0
6.048	V	41.0	-	29.8	-26.5	0.0	44.3	68.2	-	NRB
6.112	V	37.9	-	29.8	-26.2	0.0	41.5	68.2	-	NRB
6.176	V	37.2	-	29.9	-25.7	0.0	41.4	68.2	-	NRB
6.385	V	41.2	-	29.9	-26.6	0.0	44.5	68.2	-	NRB
10.643	H	39.0	-	33.5	-22.3	0.0	50.2	74.0	-	54.0

*Note: OB means “operation band” (5250-5350MHz).


NRB means “non restricted band”: The limit of FCC Part 15.407(b)(1),(2) and RSS-210 6.2.2(q1)(I),(ii) apply.

Table 7-2-4 EUT: M/T 2672-CHU, s/n ZZ-00094, Ch.52(5260MHz) **RX** mode

Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) (<i>peak</i>)	Measured (dB μ V) (<i>average</i>)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dB μ V/m) (<i>peak</i>)	FCC Limit (dB μ V/m) (<i>peak</i>)	Field Strength (dB μ V/m) (<i>average</i>)	FCC Limit (dB μ V/m) (<i>average</i>)
1.066	V	56.6	-	24.6	-32.7	0.0	48.5	74.0	-	54.0
1.130	V	52.3	-	24.6	-32.4	0.0	44.5	74.0	-	54.0
1.152	V	50.2	-	24.6	-32.4	0.0	42.4	74.0	-	54.0
1.198	V	56.3	-	25.2	-32.3	0.0	49.2	74.0	-	54.0

Note: NRB means “non restricted band”: The limit of FCC Part 15.407(b)(1),(2) and RSS-210 6.2.2(q1)(I),(ii) apply.

7.6 Measurement plots of adjacent restricted band

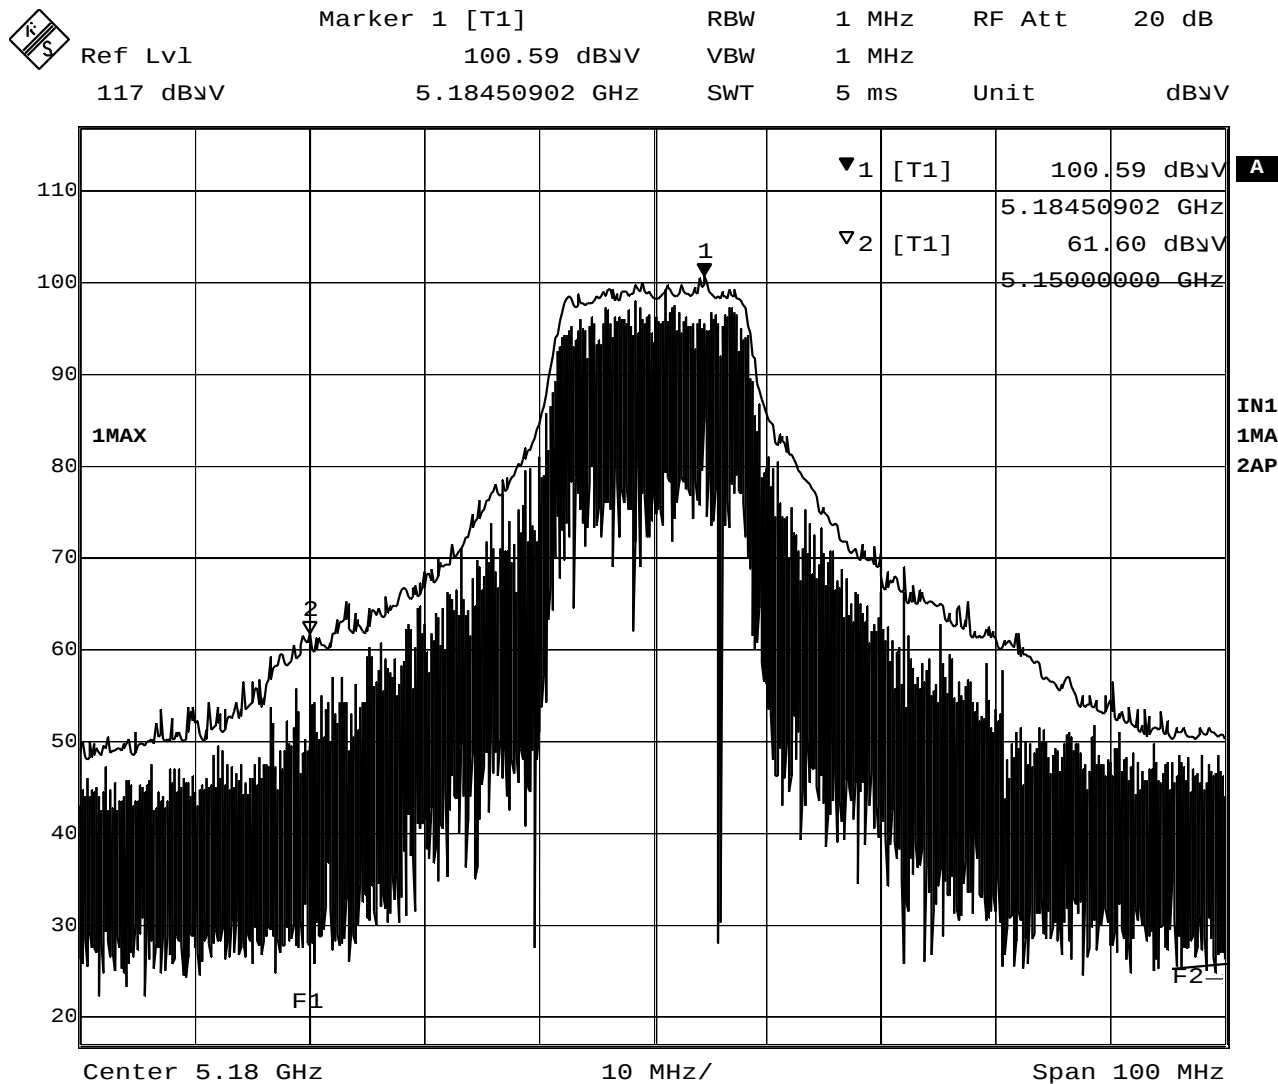


Date: 26.NOV.2002 18:00:18

Plot 7-1-1 5180MHz TX mode (Peak)



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	20 dB
117 dBμV	88.14 dBμV	VBW	10 Hz		
	5.18130261 GHz	SWT	25 s	Unit	dBμV

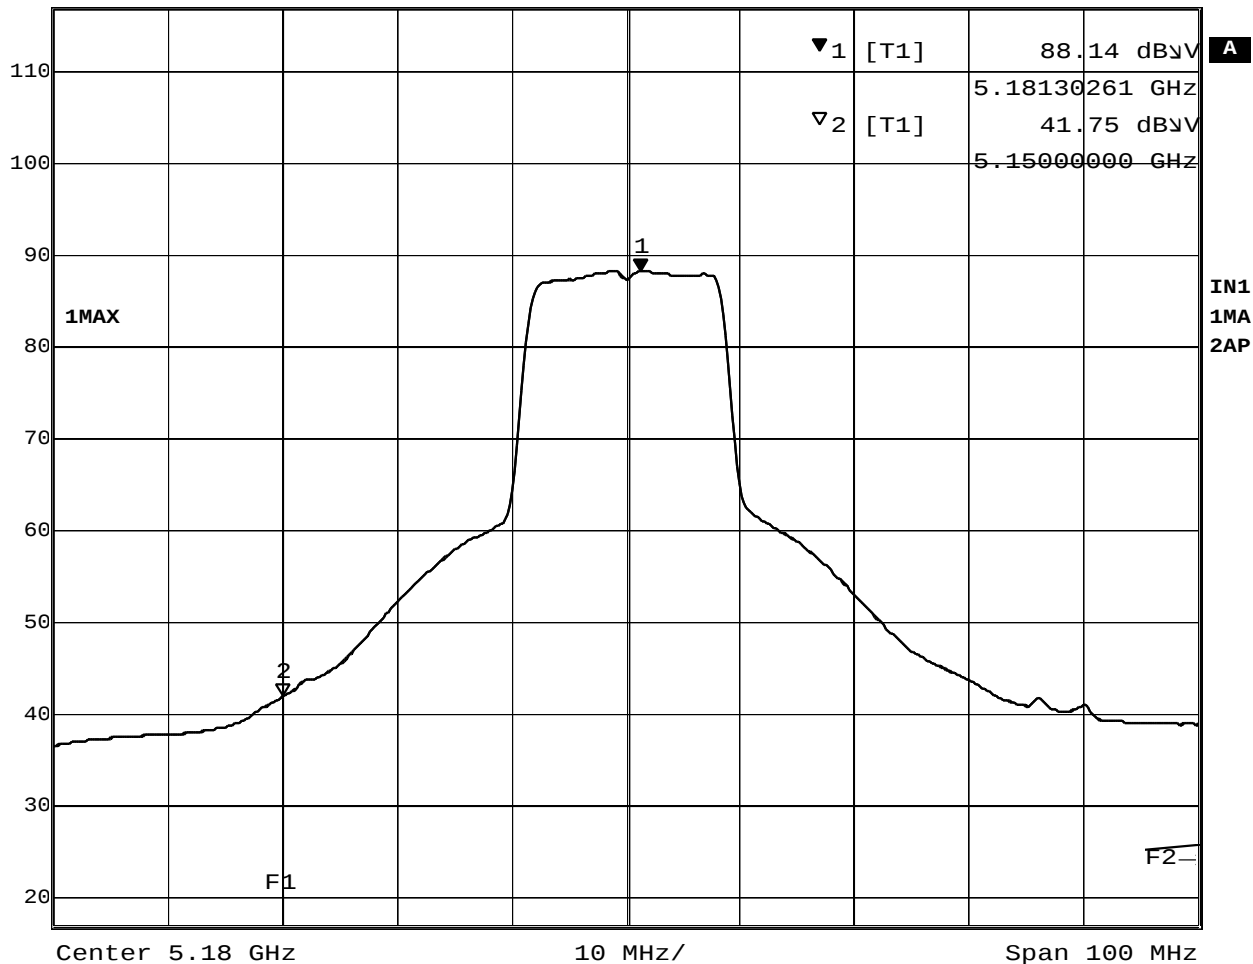

Date: 26.NOV.2002 18:01:47

Plot 7-1-2 5180MHz TX mode (Average)




The image shows a spectrum plot with a grid. The horizontal axis is labeled 'Center 5.26 GHz' and '20 MHz/' (representing 20 MHz per division). The vertical axis is labeled '1MAX' and 'Span 200 MHz'. A signal trace is shown with a prominent peak. A cursor labeled '1' points to the peak, with a data box showing:

- ▼1 [T1] 105.20 dBμV
- 5.25579158 GHz
- ▽2 [T1] 51.21 dBμV
- 5.35000000 GHz

 The signal is noisy, and there is a label 'F2' at the bottom right.

Plot 7-2-1 5260MHz TX mode (Peak)

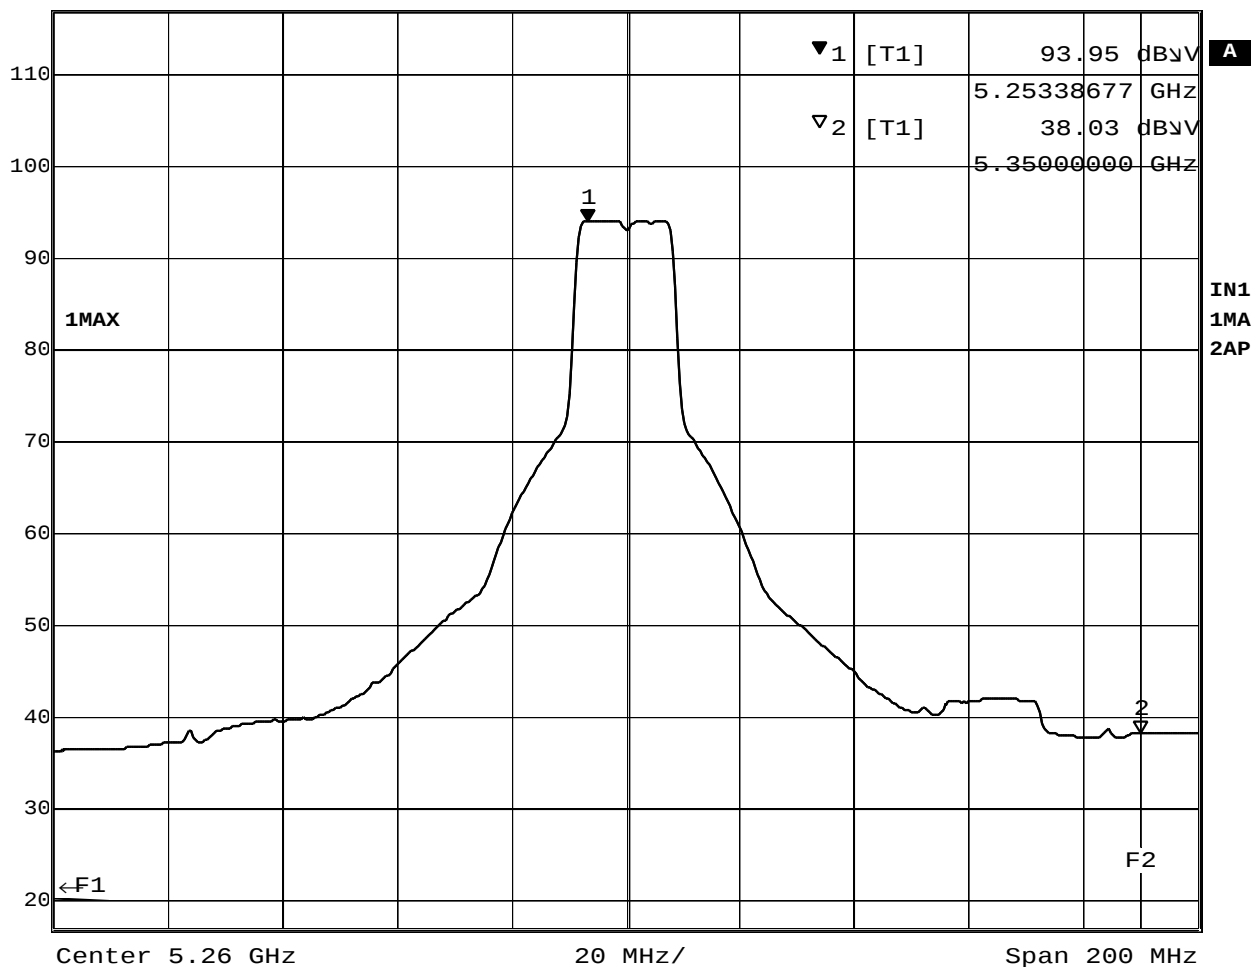
Ref Lvl
117 dBμVMarker 1 [T1]
93.95 dBμV
5.25338677 GHzRBW 1 MHz RF Att 20 dB
VBW 10 Hz
SWT 50 s Unit dBμV

Date: 26.NOV.2002 17:45:10

Plot 7-2-2 5260MHz TX mode (Average)




Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	20 dB
117 dBμV	102.51 dBμV	VBW	1 MHz		
	5.32430862 GHz	SWT	5 ms	Unit	dBμV

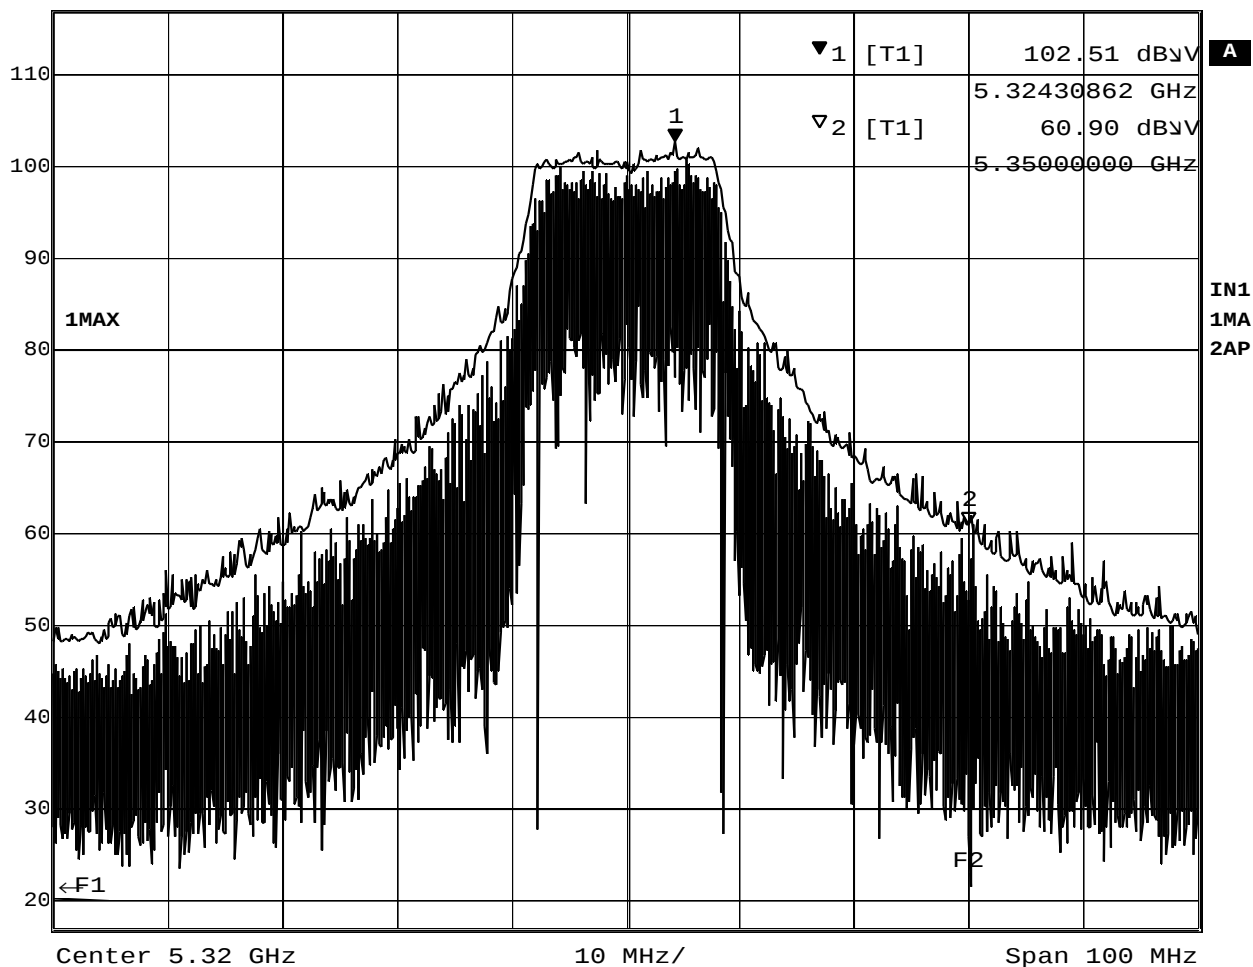

Date: 26.NOV.2002 17:52:05

Plot 7-3-1 5320MHz TX mode (Peak)

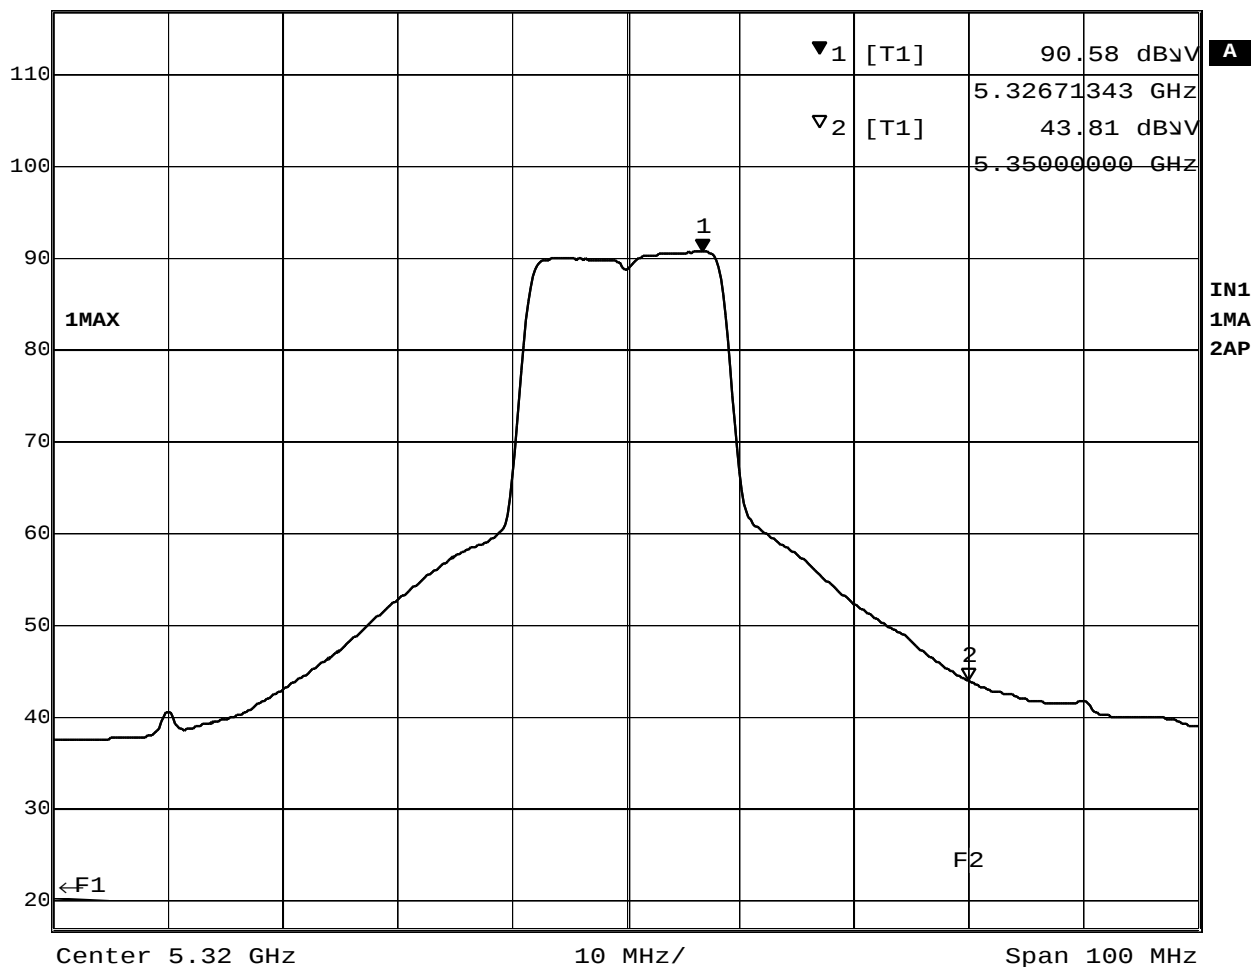Ref Lvl
117 dBμVMarker 1 [T1]
90.58 dBμV
5.32671343 GHzRBW 1 MHz RF Att 20 dB
VBW 10 Hz
SWT 25 s Unit dBμV

Date: 26.NOV.2002 17:51:34

Plot 7-3-2 5320MHz TX mode (Average)

Emission Test Report

Standard: FCC Part 15 Subpart E / IC RSS-210

Document Number : FCC 19-0245-0

Product: IBM 11a/b/g Wireless LAN Mini PCI Adapter
measured with IBM ThinkPad T40 Series

FCC ID: ANO20030400LEG
IC: 349E-PH12127E

May 22, 2003

Prepared:
EMC R&D Staff Engineer

Takeshi Asano

Signature: 
IBM Japan, Ltd.
EMC Engineering
LAB-S59

1623-14, Shimotsuruma,
Yamato-shi Kanagawa-ken 242, Japan
Phone: +81-46-215-4779
Fax: +81-46-273-7420
E-Mail: asano@jp.ibm.com

Reviewed and Checked:
EMC R&D Staff Engineer

Toshiya Murota

Signature: 
IBM Japan, Ltd.
EMC Engineering
LAB-S59

1623-14, Shimotsuruma,
Yamato-shi Kanagawa-ken 242, Japan
Phone: +81-46-215-6574
Fax: +81-46-273-7420
E-Mail: murota@jp.ibm.com

Approved:
Manager, EMC Engineering
/ NVLAP signatory

Akihisa Sakurai
Signature: 
IBM Japan, Ltd.
EMC Engineering
LAB-S59

1623-14, Shimotsuruma,
Yamato-shi Kanagawa-ken 242, Japan
Phone: +81-46-215-2613
Fax: +81-46-273-7420
E-Mail: akihisa@jp.ibm.com

Note :

The measurements in this test report were performed for the previous submission of the following device.

FCC ID: ANO20020302R1L(Granted date: Feb/26/2003)

IC: 349E-PH11107E (Approval date:Feb/26/2003, TAC number: 17674)

However, the core PCB and RF components of the applying transmitter module supplied by Philips Components are the same as the previous ones except a slight modification. Refer to the attestation of the Philips Components in the "Submittal Outline" exhibit.

Therefore there is no change placed on the RF characteristics, and the measurement results in this report are valid for the applying device.

The following is the comparison of the measurement results to prove the equivalence between the previous and the applying device.

26dB Bandedge (24Mb/s)

center Frequency (MHz)	submittal results (MHz)	sampling results tested with the new adapter (MHz)
5180 (ch. 36)	28.44	28.66
5260 (ch. 52)	34.46	34.87
5320 (ch. 64)	28.76	28.76

Peak conducted transmission output power (24Mb/s)

center Frequency (MHz)	submittal results (dBm)	sampling results tested with the new adapter (dBm)
5180 (ch. 36)	14.4	14.4
5260 (ch. 52)	17.4	17.4
5320 (ch. 64)	14.6	14.5

MEASUREMENT / TECHNICAL REPORT – Part 15 Subpart E (Intentional Radiator)

IBM 11a/b/g Wireless LAN Mini PCI Adapter with IBM ThinkPad T40 Series (Machine type : 2373, 2374, 2375, 2376, 2378, 2379)

FCC ID : ANO20030400LEG

May 22, 2003

This report concerns: (check one) Original Grant _____ Class I change _____ Class II change ☒ _____
Equipment type: <u>Wireless LAN device</u>
This report shall not be reproduced except in full, without the written permission of this test lab.
The measurement results contained in this report relate only to the item which was tested.
Measurement procedure used is ANSI C63.4-2000 unless otherwise specified.
Other test procedure: _____
The FCC has issued provisional acceptance of this test laboratory for Declaration of Conformity testing per letter dated 1997.
APPLICANT ANTI-DRUG ABUSE CERTIFICATION: By checking yes, the applicant certifies that, in the case of an individual applicant, he or she is not subject to a denial of federal benefits, that includes FCC benefits, pursuant to Section 5301 of the Anti-Drug Abuse of 1988, 21 U.S.C. 853(a), or, in the case of a non-individual applicant (e.g. corporation, partnership or other unincorporated association), no party to the application is subject to a denial of federal benefits, that includes FCC benefits, pursuant to that section. For the definition of a “party” for these purposes, see 47 CFR 1.2002(b). ☒ Yes or No
“Report shall not be reproduced except in full, without the written approval of the laboratory” “the report must not be used by the client to claim product endorsement by NVLAP or any agency of the US government”
Prepared by: Takeshi Asano IBM Japan Corporation, Yamato EMC Engineering LAB-S59, 1623-14, Shimotsuruma, Yamato-shi Kanagawa-ken 242-8502, Japan Tel: +81-46-215-4779 Fax: +81-46-273-7420

– Index –

A. GENERAL INFORMATION	5
B. SUMMARY OF TEST RESULTS	6
C. TEST INSTRUMENTS	7
D. OPERATION MODE OF EUT	9
E. JUSTIFICATION	9
F. MEASUREMENT UNCERTAINTY	10
G. TEMPERATURE AND HUMIDITY	10
H. RELATED SUBMITTAL(S)/GRANT(S)/NOTES	10
1. BANDWIDTH AT 26 DB BELOW / BANDEDGE	11
1.1 Test Procedure	11
1.2 Measurement Results	11
1.3 Trace Data	12
2. PEAK CONDUCTED TRANSMIT OUTPUT POWER	15
2.1 Test Procedure	15
2.2 Measurement Results	17
2.3 Trace Data	18
3. PEAK POWER SPECTRAL DENSITY	21
3.1 Test Procedure	21
3.2 Measurement Results	21
3.3 Trace Data	22
4. PEAK EXCURSION RATIO	28
4.1 Test Procedure	28
4.2 Measurement Results	28
4.3 Trace Data	29
5. AC WIRELINE CONDUCTED EMISSIONS (150KHZ – 30MHZ)	32
5.1 Test Procedure	32
5.2 Test Instruments and Measurement Setup	32
5.3 Measurement Results	33
6. RESTRICTED BANDS RADIATIONS (30MHZ – 1GHZ)	34
6.1 Test Procedure	34
6.2 Test Instruments and Measurement Setup	34
6.3 Field Strength Calculation	36
6.4 Measurement Results	37
7. RESTRICTED BANDS RADIATIONS (1GHZ – 40GHZ)	38
7.1 Test Procedure	38
7.2 Test Instruments and Measurement Setup	38
7.3 Field Strength Calculation	40
7.4 Limits	40
7.5 Measurement Results	41
7.6 Trace Data	エラー! フォントが定義されていません。

A. General Information

APPLICANT : IBM Japan, Ltd.
 TEST SITE : IBM Japan, Ltd., Yamato Semi-anechoic chamber #1
 TEST SITE ADDRESS : 1623 – 14 Shimotsuruma, Yamato-shi, Kanagawa 242-8502 Japan
 Tel: +81-46-215-4779, Fax: +81-46-273-7420
 REGULATION : FCC Part 15 Subpart E
 Industry Canada RSS-210 (Issue No.5)
 MODEL NUMBER : 2373-92U (ThinkPad T40 Series)
 FCC ID : ANO20030400LEG
 IC Certification Number : 349E-PH12127E
 SERIAL NUMBER : ZZ-00129
 PHYSICAL CONDITION : Preproduction
 KIND OF EQUIPMENT : Personal computer with a IEEE802.11a, 11b & 11g Wireless LAN
 Mini-PCI Combo Card ([Composite application](#))
 TESTED DATE : November 18, December 5, 6, 9, 11, 18, 2002 and January 7, 2003

A.1 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4-2000. Radiated testing was performed at an antenna to EUT distance of 3 meters.

A.2 Test Facility / NVLAP Accreditation

The semi-anechoic chamber #1 and #2 used to correct the data are located in Yamato Laboratory, IBM Japan.

- This facility has been fully described in a report dated September 1998, submitted to the FCC office, and accepted in a letter, dated Nov. 2, 1998(31040/SIT).
- IBM Yamato EMC Engineering is recognized under the National Voluntary Laboratory Accreditation Program for satisfactory compliance with Criteria established in Title 15, Part 285 Code of Federal Regulations.(NVLAP Lab code: 200198-0)
- This facility is accepted by **Industry Canada** in a letter dated March 19, 2001 as number **IC 349E** for chamber #2, and January 25, 2002 as number **IC 4221** for chamber #1.

A.3 EUT details

Table-A EUT details

Model and S/N	FCC ID IC Certification Number	Description
IBM 11a/b/g Wireless LAN Mini PCI Adapter (s/n A310037307)	FCC ID: ANO20030400LEG IC: 349E-PH12127E	Applying equipment IEEE802.11a/b/g Wireless LAN Mini-PCI Combo Card without antenna
ThinkPad T40 Series M/T 2373-92U (s/n ZZ-00129)	N/A	IBM Notebook PC with built_in antenna CPU: Intel® Pentium® M Processor, 1.6GHz
P/N 02K6746	N/A	Universal AC adapter 72W, Unshielded power cord

B. Summary of Test Results

Table-B presents the list of the measurement items for U-NII devices under FCC Part 15 Subpart E, and for LELAN devices under Industry Canada RSS-210.

The section numbers of upper portion are showing FCC codes, and the lower ones are for IC RSS-210.

Table-B List of the measurements

Section(s)	Test Items		Condition	Result
	Transmit mode (TX):			
15.407(a)(1), (2) 6.2.2 (q1)(i)(ii)	Bandwidth at 26 dB below	26dB BW was also taken for IC instead of 99% BW, according to RSS-210 6.2.2q(iv)(b).	Conducted	Pass
	Peak conducted transmit output power or EIRP for IC	5150-5250MHz: FCC: 50mW or (4+10logB)dBm IC : 200mW* or (10+10logB)dBm* *: EIRP		Pass
		5250-5350MHz: FCC: 250mW or (11+10logB)dBm IC : 250mW or (11+10logB)dBm IC : 1W* or (17+10logB)dBm* *: EIRP B: 26dB BW in MHz		Pass
	Peak Power Spectral Density	5150-5250MHz: FCC: 4 dBm in any 1MHz IC : 10 dBm in any 1MHz (EIRP) 5250-5350MHz: FCC: 11 dBm in any 1MHz IC : 11 dBm in any 1MHz		Pass
	N/A 6.2.2 (q1)(iv)(b)	Peak Spectral Density		IC: 3 + 10logB dBm/MHz
15.407(a)(6) N/A	Peak Excursion	The ratio of the peak excursion of the modulation envelope to the peak transmit shall not exceed 13 dB across any 1 MHz .		Pass
15.207 / 407(b)(5) 6.2.2 (q1)(v) / 6.6	AC Wireline Conducted Emissions 150kHz- 30MHz	Class B: Freq.(MHz) QP(dBμV) Ave.(dBμV) 0.15 - 0.5 66 - 56 56 - 46 0.5 - 5 56 46 5 - 30 60 50		Pass
15.205 & 209 / 407(b)(5) & (b)(6) 6.2.1 / 6.2.2(q1)(v) / 6.3	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Shall not exceed the limits specified in FCC 15.209 or RSS-210 Table3.	Radiated (30MHz - 1GHz)	Pass
			Radiated (1G - 40GHz)	Pass

	Receive mode (RX):			
15.207 / 407(b)(5) 6.2.2(q1)(v) / 7.4	AC Wireline Conducted Emissions 150kHz - 30MHz	Class B: Freq.(MHz) QP(dBμV) Ave.(dBμV) 0.15 - 0.5 66 - 56 56 - 46 0.5 - 5 56 46 5 - 30 60 50	Conducted	Pass

15.205 & 209 / 407(b)(5) & (b)(6) 6.2.1 / 6.2.2(q1)(v) / 7.3	General Field Strength Limits (Radiated Emission Limits)	Shall not exceed the limits specified in RSS-210.	Radiated (30MHz - 1GHz)	Pass
			Radiated (1G - 40GHz)	Pass

	Other general requirements		Result
15.407(a)(1)(2)	Antenna gain	Peak : 1.42 dBi	N/A
6.2.2(q1)(iv)(a)	Digital modulation	Applying equipment employs IEEE802.11a, 11g(OFDM) or 11b(CCK) digital modulation technology.	complies
15.407(c) 6.2.2(q1)(iv)(d)	Automatic link disconnection in no transaction state	Refer to "Circuitry Description" document.	complies
15.407(d) 6.2.2(q1)(i)	Integral antenna in the 5150M - 5250MHz band	The device employs an unique electronic handshake connector. Refer to "Confidential_BIOS_Lock" exhibit.	complies
15.407(e) 6.2.2(q1)(i) (q1)(iv)(g)	Indoor use in the 5150M - 5250MHz band, and interference from radars.	Refer to the manual (Regulatory Notice).	complies
15.407(f) 6.2.2(q1)(iv)(g)	RF Exposure Requirement	Refer to "RF Exposure Evaluation" or "Exposure of Humans to Radio Frequency Fields" documents.	complies
15.407(g) 6.2.2(q1)(iv)(e)	Frequency stability	Refer to "Circuitry Description" document.	complies

C. Test Instruments

Table-C List of Measuring Instruments

Description	Model	Serial Number	Calibration Date	Calibration Interval
Computer	IBM 5551-L	#4	N/A	N/A
Computer	IBM 6589-13J	97-15613	N/A	N/A
Spectrum Analyzer (100Hz-1.5GHz)	HP 85680B	2601A02634	08/28/02	1 year
Spectrum Analyzer (100Hz-1.5GHz)	HP 85680B	3019A05155	02/15/02	1 year
Spectrum Analyzer (100Hz-1.5GHz)	HP 85680B	2841A04252	06/17/02	1 year
Spectrum Analyzer Display	HP 85662A	2542A12308	08/28/02	1 year
Spectrum Analyzer Display	HP 85662A	3026A19353	02/15/02	1 year
Spectrum Analyzer Display	HP 85662A	2816A16831	06/17/02	1 year
Quasi-Peak Adapter	HP 85650A	2043A00062	08/28/02	1 year
Quasi-Peak Adapter	HP 85650A	2811A01156	06/17/02	1 year
Quasi-Peak Adapter	HP 85650A	3033A01449	02/15/02	1 year
Amplifier (100KHz - 1.3GHz)				
- for 30-200MHz	HP 8447D	2805A02919	04/15/02	1 year
- for 200-1000MHz	HP 8447D	2944A03506	04/15/02	1 year
Amplifier (1 - 26.5GHz)	HP 8449B	3008A00582	06/13/02	1 year
Amplifier (26.5 - 40GHz)	Agilent 83051A	3950M00193	12/06/01	1 year

Spectrum Analyzer EMI Test Receiver	R&S ESI26	836119/003	07/18/02	1 year
Spectrum Analyzer	HP 8563E	3416A02248	08/14/02	1 year
Harmonic Mixer	Agilent 11970A	011269-001	07/19/02	1 year
Receiver (9kHz-30MHz)	R&S ESH3	891806/012	10/07/02	1 year
Receiver (20MHz-1.3GHz)	R&S ESVP	893202/018	02/06/02	1 year
Biconical Antenna (30-200MHz)	EMCO 3108	2309	05/06/02	1 year
Log-Periodic Antenna (200-1000MHz)	EMCO 3146	1585	05/06/02	1 year
Horn Antenna (1- 18GHz)	EMCO 3115	9903-5774	07/18/02	1 year
Horn Antenna (3.95- 5.85GHz)	EMCO 3160-5	1099	04/17/02	1 year
Horn Antenna (5.85- 8.20GHz)	EMCO 3160-6	9712-1044	04/17/02	1 year
Horn Antenna (8.2- 12.4GHz)	EMCO 3160-7	1156	04/17/02	1 year
Horn Antenna (12.4- 18GHz)	EMCO 3160-8	1143	04/17/02	1 year
Horn Antenna (18- 26.5GHz)	EMCO 3160-9	0004-1202	04/17/02	1 year
Horn Antenna (26.5- 40GHz)	EMCO 3160-10	1175	04/17/02	1 year
LISN	EMCO 3825/2	1426	09/01/02	1 year
Power Meter	HP 437B	3043U03437	11/08/02	1 year
Power Sensor	HP 8481A	US41030582	11/08/02	1 year
Switch/control unit	HP 3488A	2719A17226 2719A17228	N/A N/A	N/A N/A
Plotter	HP 7550A	2631A33619	N/A	N/A
Coaxial cables (1 – 18GHz):	Length:			
- Horn Ant <=> RF Amp.	6 m	- EM206SCO	09/05/02	1 year
- RF Amp.<=>Spectrum Analyzer(<12GHz)	15m	- EM215SCO	09/05/02	1 year
- RF Amp.<=>Spectrum Analyzer(>12GHz)	3 m	- SF102-20166	09/05/02	1 year
Coaxial cables (18 – 40GHz):				
- Horn Ant <=> RF Amp.	3m	- SF102-20167	09/05/02	1 year
- RF Amp.<=>Spectrum Analyzer	1m	- SF102-21105	09/05/02	1 year
N-Coax cables:				
- Bi-coni Ant <=> 10m Cable	9 m	- EM103L01	04/15/02	1 year
- 10m Cable <=> Shield Panel	10 m	- EM103L02	04/15/02	1 year
- Shield Panel <=> RF Amp	7 m	- EM103L03	04/15/02	1 year
- RF Amp <=> Power Splitter	0.5m	- EM103L04	04/15/02	1 year
- Log-peri Ant <=> 10m Cable	9 m	- EM103H01	04/15/02	1 year
- 10m Cable <=> Shield Panel	10 m	- EM103H02	04/15/02	1 year
- Shield Panel <=> RF Amp	7 m	- EM103H03	04/15/02	1 year
- RF Amp <=> Power Splitter	0.5m	- EM103H04	04/15/02	1 year
Coax cables:				
- Lism-L <=> SW/Con.unit (SW100)	4 m	- EMIC-L	04/15/02	1 year
- Lism-N <=> SW/Con.unit (SW101)	4 m	- EMIC-N	04/15/02	1 year
- SW/Con.unit <=> RCVR (Input)	1 m	- EMIC-R	04/15/02	1 year
- SW/Con.unit<=> Spe Ana.(Signal In)	1 m	- EMIC-S	04/15/02	1 year
- Power Splitter <=> SW/Con.unit (SW110)	1 m	- EM103L05	04/15/02	1 year
- Power Splitter <=> SW/Con.unit (SW300)	1 m	- EM103L06	04/15/02	1 year
- Power Splitter <=> SW/Con.unit (SW100)	1 m	- EM103H05	04/15/02	1 year
- Power Splitter <=> SW/Con.unit (SW301)	1 m	- EM103H06	04/15/02	1 year
- SW/Con.unit <=> Receiver (Input)	2 m	- EM1RCV	04/15/02	1 year
- SW/Con.unit <=> Spe Ana.(Signal In) for 30- 200MHz	2 m	- EM1SPL	04/15/02	1 year
- SW/Con.unit <=> Spe Ana.(Signal In) for 200-1000MHz	2 m	- EM1SPH	04/15/02	1 year

Notes.

- The above equipment calibration is traceable to National standards.
- HP: Hewlett Packard, R&S: Rohde & Schwarz

D. Operation mode of EUT

1. All tests were performed using the “Atheros Radio Test” program. This tool supports to emit the continuous transmission mode for the testing purpose.
2. Three kinds of frequencies were chosen for the measurement. i.e. 5180MHz (lowest), 5260MHz(middle), and 5320MHz (highest).

Table-D Transmission mode of EUT (The measurement plots are shown in shading.)

Operation Frequency [GHz]	Rated output power (conducted) [dBm]							
	IEEE802.11a							
	6M bps	9M bps	12M bps	18M bps	24M bps	36M bps	48M bps	54M bps
5.180 (Ch. 36)	+14	+14	+14	+14	+14	+14	+14	+13
5.200 (Ch. 40)	+14	+14	+14	+14	+14	+14	+14	+13
5.220 (Ch. 44)	+14	+14	+14	+14	+14	+14	+14	+13
5.240 (Ch. 48)	+14	+14	+14	+14	+14	+14	+14	+13
5.260 (Ch. 52)	+17	+17	+17	+17	+17	+15	+14	+13
5.280 (Ch. 56)	+17	+17	+17	+17	+17	+15	+14	+13
5.300 (Ch. 60)	+17	+17	+17	+17	+17	+15	+14	+13
5.320 (Ch. 64)	+14	+14	+14	+14	+14	+14	+14	+13

3. 24Mbps transmission mode was selected for full testing as the worst case sampling.
See “Chapter 2. Peak Conducted Transmit Output Power” as to the determination of measurement plots.
4. As for the RF receiving test, the middle channel with the worst case(i.e. 5260MHz, 24Mbps mode) was selected representatively.

E. Justification

The EUT was investigated for both the main(left) and the auxiliary(right) antennas. The worse case data taken in this report represents the measurement results of the left(main) antenna that has comparatively higher gain as shown below.

Left Antenna gain	0.83 dBi (peak)
Right Antenna gain	0.36 dBi (peak)

And the columns marked with shading in the Table-D are the worst cases of each Tx mode for all measurement items (i.e. conducted power, 26dB BW..etc.). This test report represents the measurement results performed with those Tx modes.

F. Measurement Uncertainty

Uncertainties of the both, the Yamato EMI radiated test facilities (EMI chambers, #1 and #2) and the Yamato EMI conducted test facility are derived with the NIS 81 "Treatment of uncertainty in EMC measurements" 1994.

Estimated site uncertainty values are as follows.

EMI chamber #1 : 4.39dB

EMI chamber #2 : 4.40dB

EMI conducted measurement system : 2.4dB

Detail should be referred to "Treatment of Uncertainty, Calculations and Policy" report, document number TCR 10-0015.

G. Temperature and Humidity

The temperature is controlled within range of 17° to 28°.

The relative humidity is controlled within range of 40% to 70%.

H. Related Submittal(s)/Grant(s)/Notes

The host unit with full peripheral devices including the applying modular as an unintentional radiator is classified as a Digital Device under the FCC Part 15 Subpart B or the Industry Canada Class B Emission Compliance (ICES-003), and subject to DoC.

1. Bandwidth at 26 dB below / Bandedge

[5150-5250MHz: FCC 15.407(a)(1), RSS 6.2.2q1(i) / q1(iV)(b)]

[5250-5350MHz: FCC 15.407(a)(2), RSS 6.2.2q1(ii) / q1(iV)(b)]

1.1 Test Procedure

The bandwidth at 26 dB down from the peak of the RF emission was measured with a spectrum analyzer connected to the antenna terminal, while EUT was operating in continuous transmission mode at the appropriate center frequencies (5180 / 5260 / 5320MHz).

The spectrum analyzer was set to:

RBW=300kHz^{*1}, VBW=1MHz^{*2}, Span=50MHz, Sweep= 50ms, Mode= Peak detector

*1: approximately 1% of the emission bandwidth (§15.403(c))

*2: VBW > RBW (To be adjusted accordingly based on the spectrum stability.)

Table 1-1 : 26 dB Bandwidth Test Instruments

Description	Model	Serial Number
Spectrum Analyzer EMI Test Receiver	R&S ESI26	836119/003
Coax cables: - Spectrum Analyzer <=> EUT	Length: 110 cm Loss: 2.2 dB	

Notes: - R&S: Rohde & Schwarz




Figure 1: Measurement setup for 26dB bandwidth test

1.2 Measurement Results


Test Date: December 18, 2002

Table 1-2. EUT: M/T 2373-92U, s/n ZZ-00129 , TX mode 24Mbps

Center Frequency (MHz)	Lower frequency (MHz)	Upper frequency (MHz)	Bandwidth at 26 dB below (MHz)	Plot data
5180 (ch. 36)	5166.04	5194.48	28.44	Plot 1-1
5260 (ch. 52)	5242.52	5276.98	34.46	Plot 1-2
5320 (ch. 64)	5305.72	5334.48	28.76	Plot 1-3

: the closest frequencies to the bandedge

1.3 Trace Data

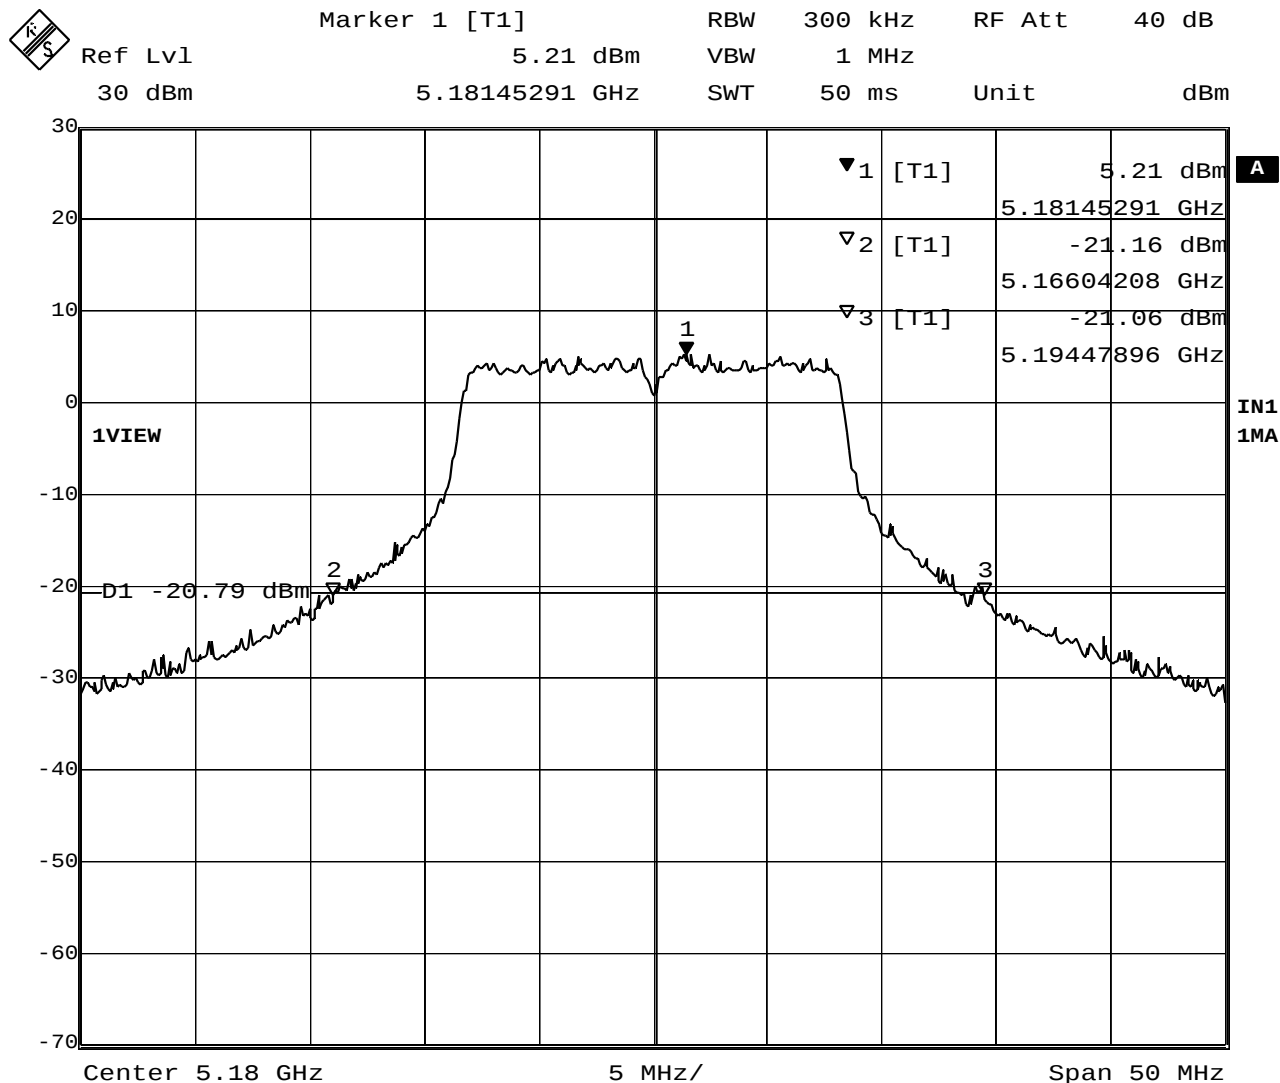


Date: 18.DEC.2002 19:05:04

Plot 1-1. 26dB BW at 5180MHz



Marker 1 [T1] RBW 300 kHz RF Att 40 dB
Ref Lvl 8.59 dBm VBW 1 MHz
30 dBm 5.26155311 GHz SWT 50 ms Unit dBm

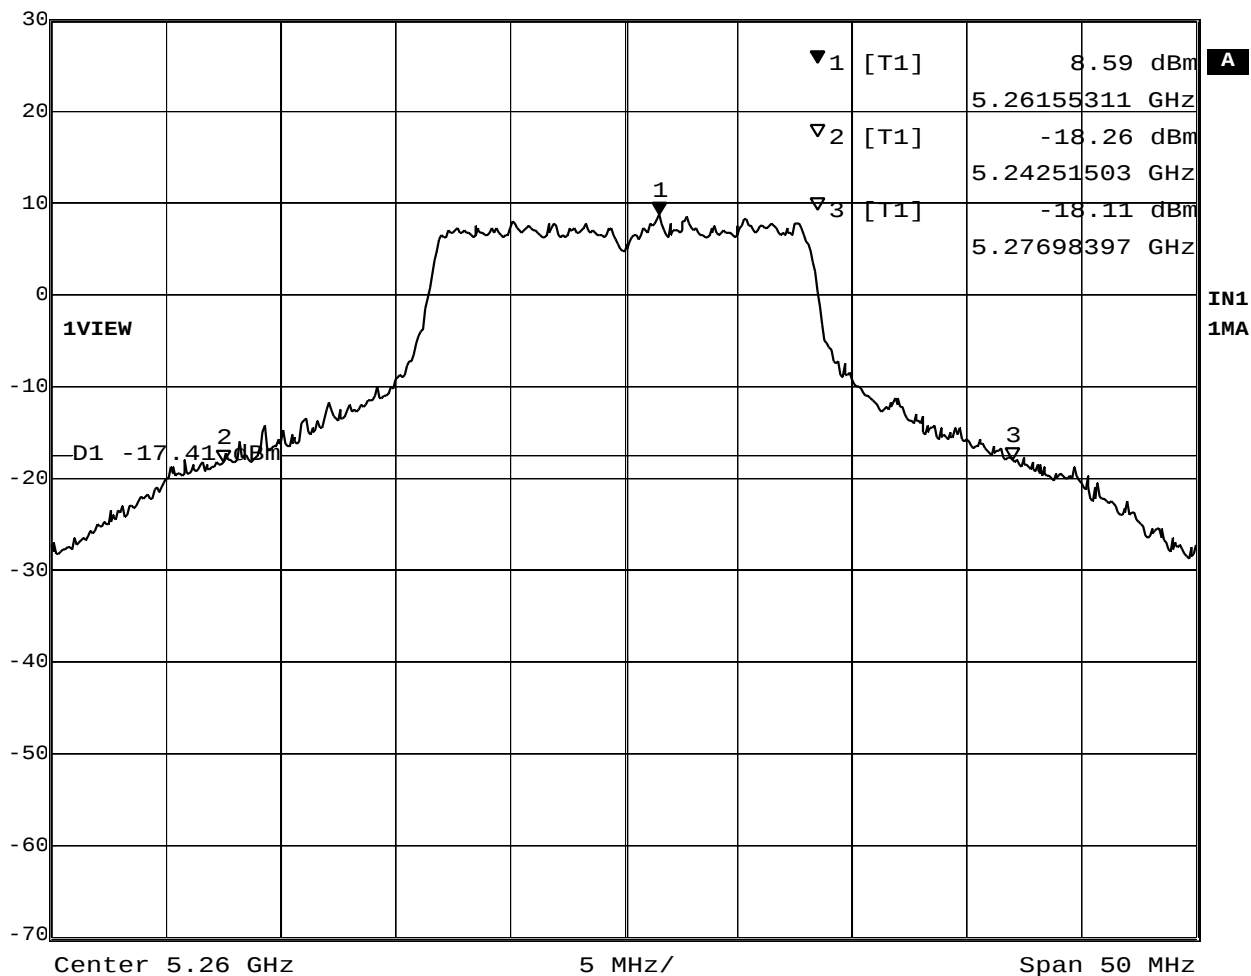


Date: 18.DEC.2002 19:08:11

Plot 1-2. 26dB BW at 5260MHz



Marker 1 [T1] RBW 300 kHz RF Att 40 dB
Ref Lvl 5.11 dBm VBW 1 MHz
30 dBm 5.32245491 GHz SWT 50 ms Unit dBm

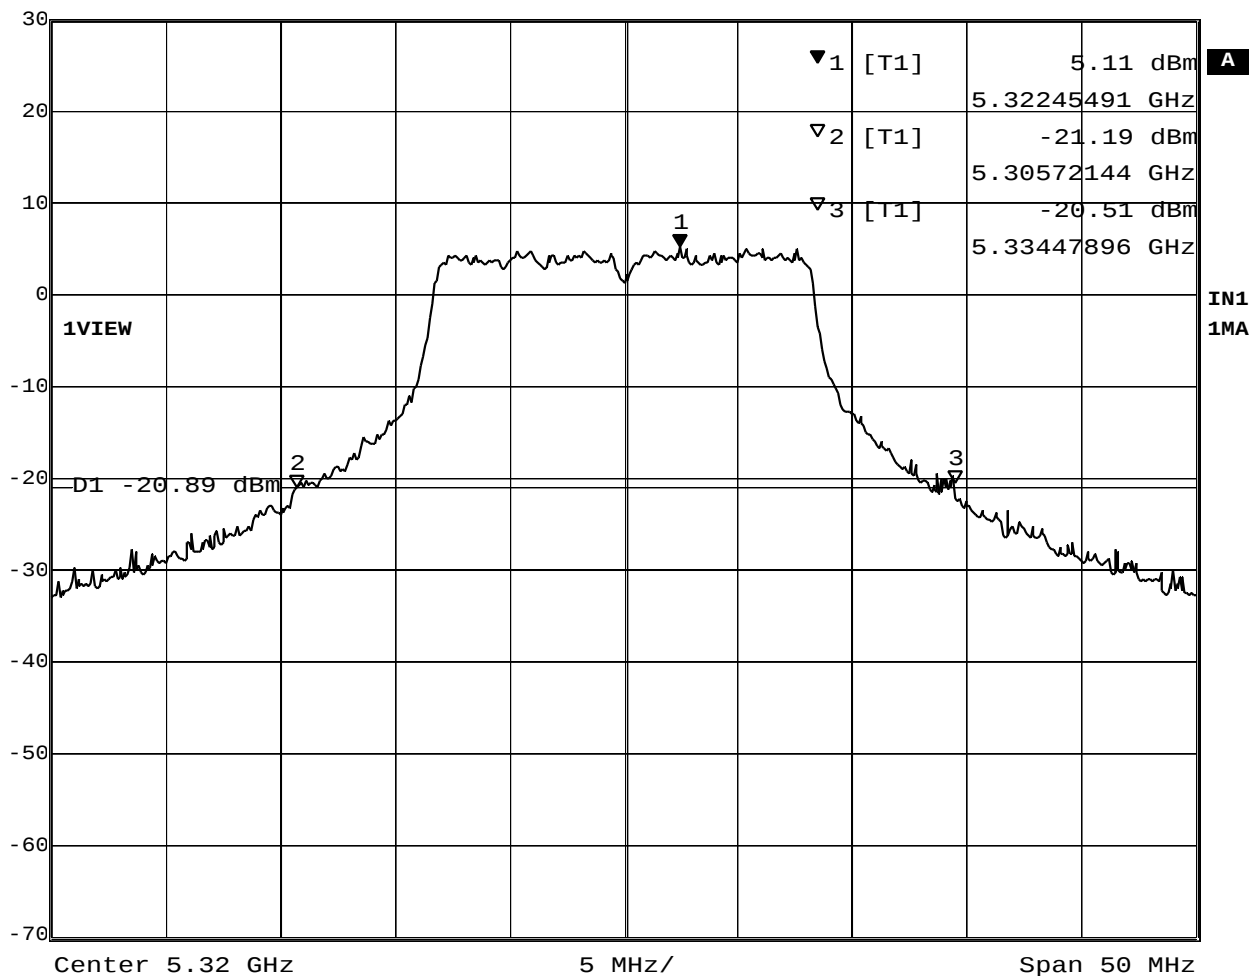

Date: 18.DEC.2002 19:10:39

Plot 1-3. 26dB BW at 5320MHz

2. Peak Conducted Transmit Output Power

[5150-5250MHz: FCC 15.407(a)(1), RSS 6.2.2q1(i) / q1(iV)(b)]

[5250-5350MHz: FCC 15.407(a)(2), RSS 6.2.2q1(ii) / q1(iV)(b)]

2.1 Test Procedure

The test was performed with two kinds of measurement methods as follows.

- 1) using Power meter
- 2) using Spectrum Analyzer according the Method #3 of the FCC Public Notice, DA 02-2138, August/30/2002

2.1.1 Power Meter measurement method

To find the worse case in the implemented transmission modes in each measuring frequency (low, middle, high), the following test was performed with a power meter.

- A transmitter antenna terminal of EUT was connected to the input of a RF power sensor.
- Measurement was performed while EUT was operating in continuous transmission mode at the appropriate center frequencies. The spectrum of the continuous transmission test mode is shown in the Plot 2-0.

Table 2-1 : Test Instruments of power meter method

Description	Model	Serial Number
Power Meter	HP 437B	3043U03437
Power Sensor	HP 8481A	US41030582
Coax cables: - Power Sensor <=> EUT	Length: 20 cm Loss: 1.2dB	

Notes: - HP: Hewlett Packard




Figure 2-1: Measurement setup of power meter method

2.1.2 Spectrum Analyzer measurement method

The spectrum analyzer was connected to the antenna terminal, while EUT was operating in continuous transmission mode (shown in the Plot 2-0) at the appropriate center frequencies.

The spectrum analyzer was set to :

VBW= 30kHz ($\geq 1/T$, where T is transmission pulse duration. See Plot 2-0.), RBW=1MHz,
Span=30-40MHz encompassing the entire 26dB emission bandwidth of the transmission signal,
Mode= sample detector, Trigger= free run

The band power measurement function was used to measure the peak power of each transmission mode selected by the step 2.1.1. The analyzer computed the peak power by integrating the spectrum across the 26 dB emission bandwidth given by the previous chapter.

Table 2-2 : Test Instruments of spectrum analyzer method

Description	Model	Serial Number
Spectrum Analyzer EMI Test Receiver	R&S ESI26	836119/003
Coax cables: - Spectrum Analyzer <=> EUT	Length: 110 cm Loss: 2.2 dB	

Notes: - R&S: Rohde & Schwarz





Figure 2-2 : Measurement setup of spectrum analyzer method

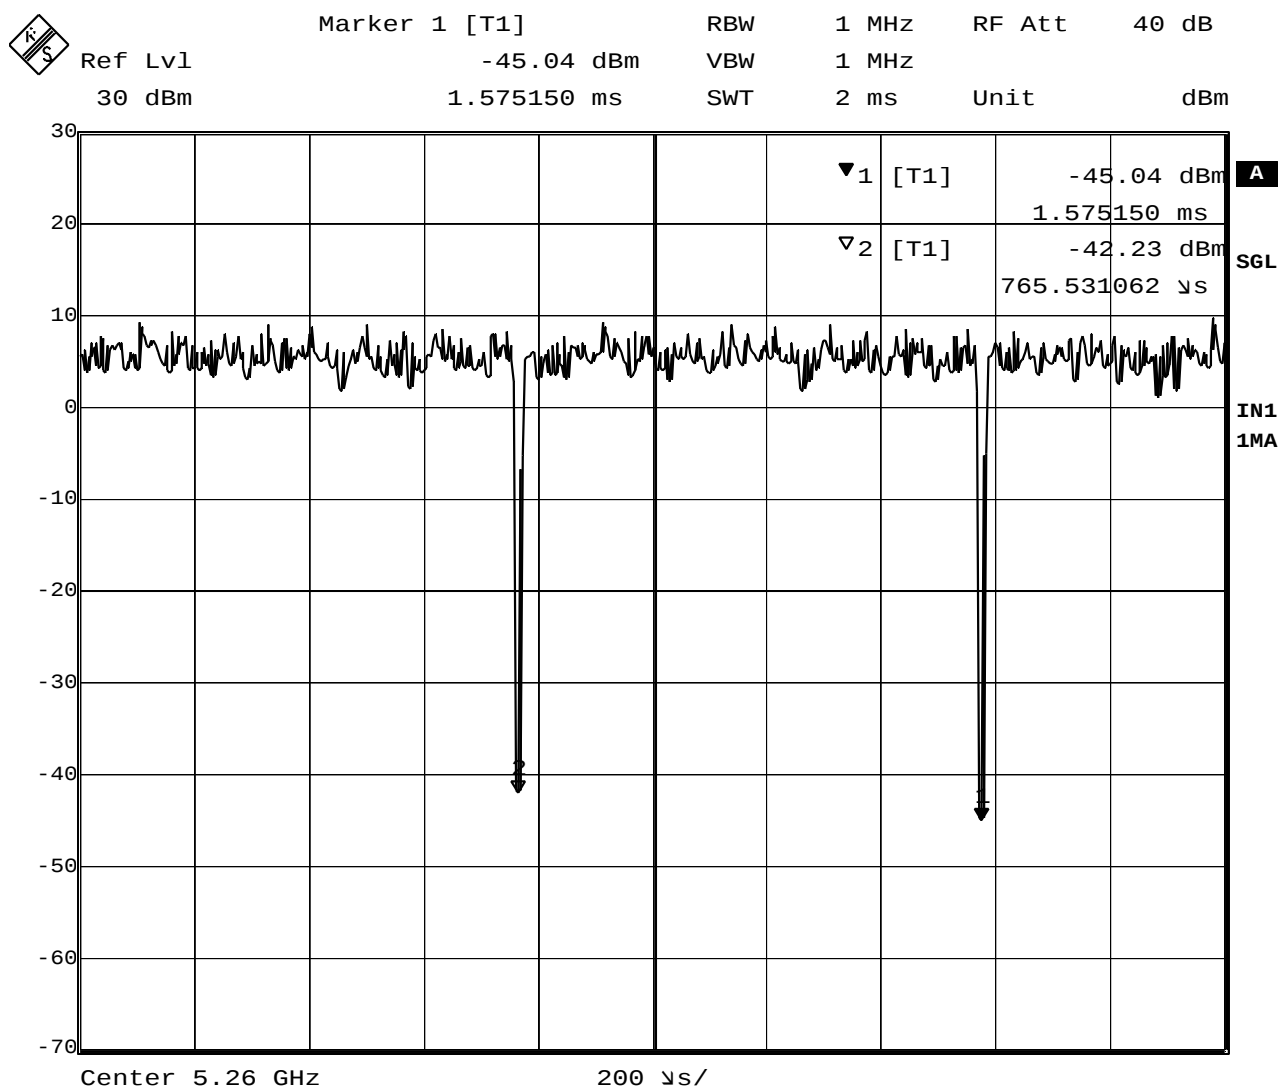

Date: 18.DEC.2002 18:58:54

Plot 2-0 Transmission Pulse Duration

2.2 Measurement Results

Test Date: November 18 and December 18, 2002

Table 2-2-1. Power meter measurement results (EUT: M/T 2373-92U, s/n ZZ-00129)

Operation Frequency [GHz]	Rated output power (conducted) [dBm]							
	6M bps	9M bps	12M bps	18M bps	24M bps	36M bps	48M bps	54M bps
5.180	13.2	13.2				13.1	13.0	11.8
specification	14							13
5.260	16.1	16.2				14.4	13.5	12.4
specification	17					15	14	13
5.320	13.3	13.4				13.3	13.2	12.4
specification	14							13


[Calculation table]

Measured Frequency (MHz)	Power Meter Reading (dBm)	Cable Loss (dB)	Results (dBm)	Limit		Peak antenna gain of EUT (dBi)	EIRP (dBm)	IC limit (dBm)
				FCC (dBm)	IC (dBm)			
5180	13.2	1.2	14.4	17	N/A	0.83	15.2	23
5260	16.2	1.2	17.4	24	24		18.2	30
5320	13.4	1.2	14.6	24	24		15.4	30

Table 2-2-2. Spectrum analyzer measurement results (EUT: M/T 2373-92U, s/n ZZ-00129)

Measured Frequency (MHz)	Analyzer reading (dBm)	Trace number	Cable Loss (dB)	Results (dBm)	Limit		Peak antenna gain of EUT (dBi)	EIRP (dBm)	IC limit (dBm)
					FCC (dBm)	IC (dBm)			
5180	12.20	Plot 2-1	2.2	14.4	17	N/A	0.83	15.2	23
5260	15.11	Plot 2-2	2.2	17.3	24	24		18.1	30
5320	12.26	Plot 2-3	2.2	14.5	24	24		15.3	30

2.3 Trace Data

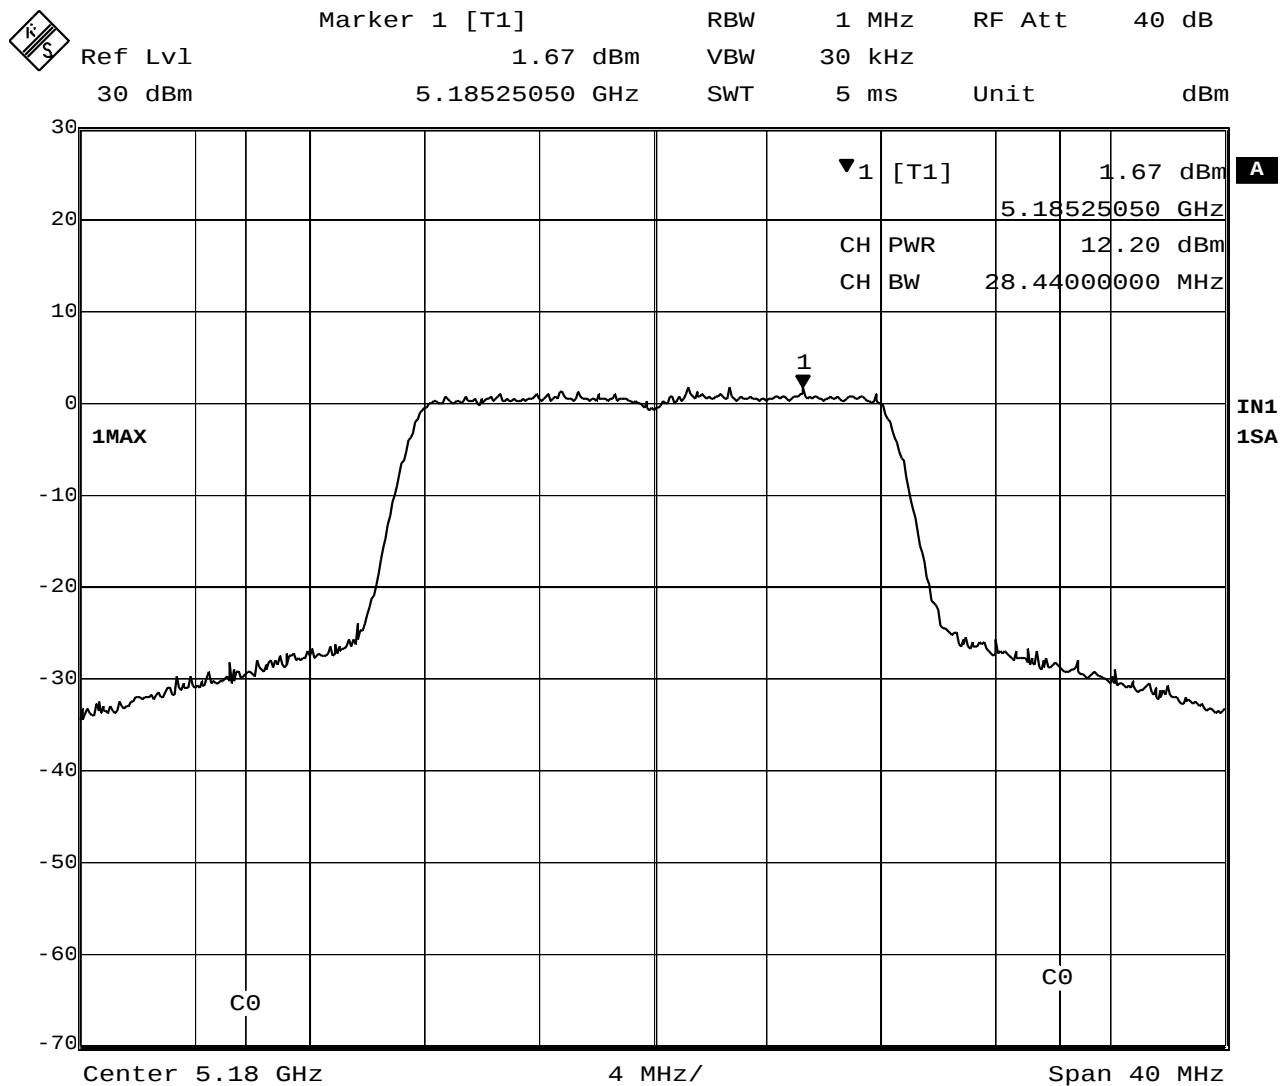


Date: 18.DEC.2002 19:13:33

Plot 2-1 Conducted Peak Power at 5180MHz



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	40 dB
30 dBm	4.31 dBm	VBW	30 kHz		
	5.26212425 GHz	SWT	5 ms	Unit	dBm

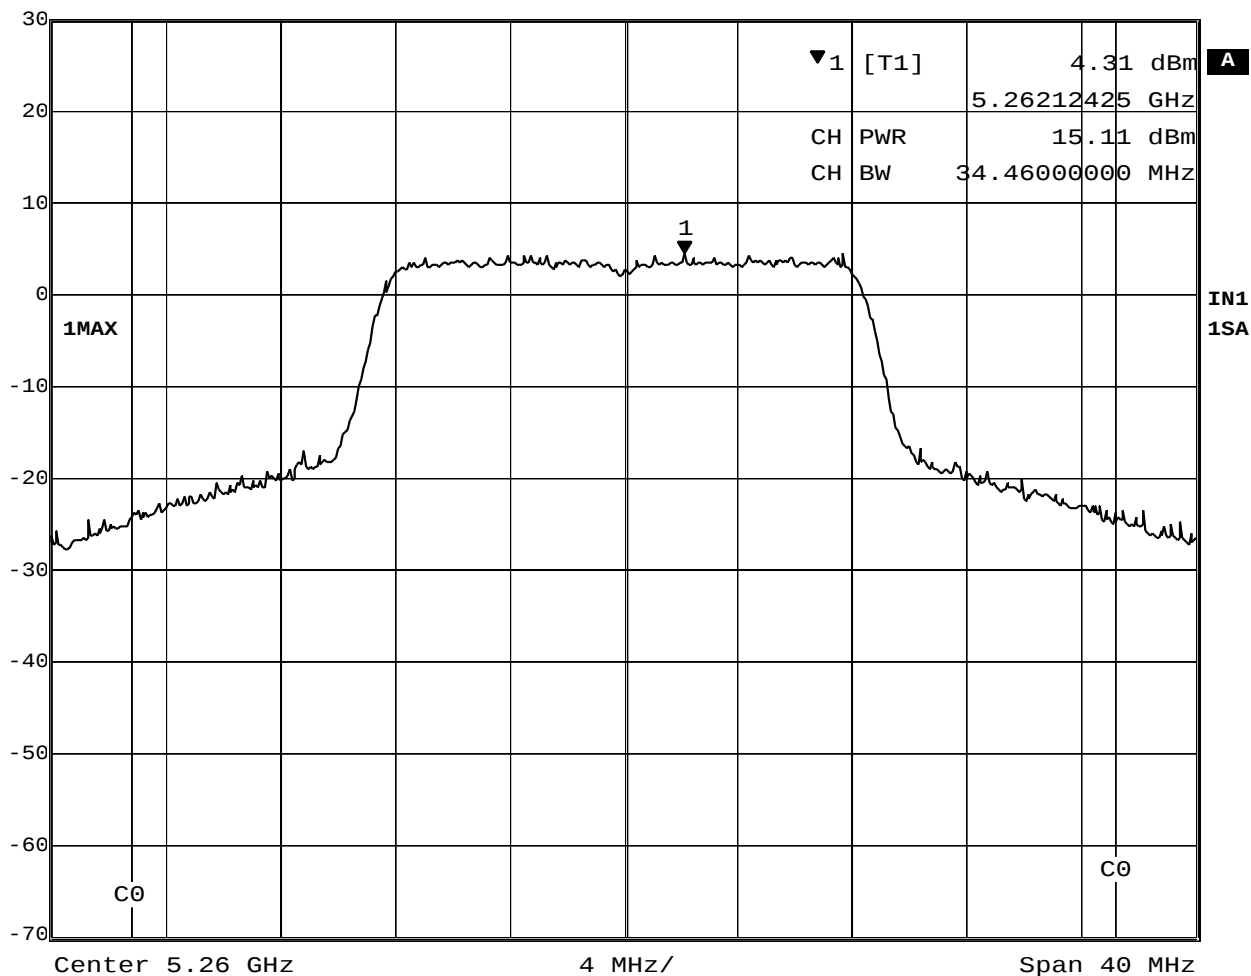


Date: 18.DEC.2002 19:15:44

Plot 2-2 Conducted Peak Power at 5260MHz



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	40 dB
30 dBm	1.56 dBm	VBW	30 kHz		
	5.32476954 GHz	SWT	5 ms	Unit	dBm

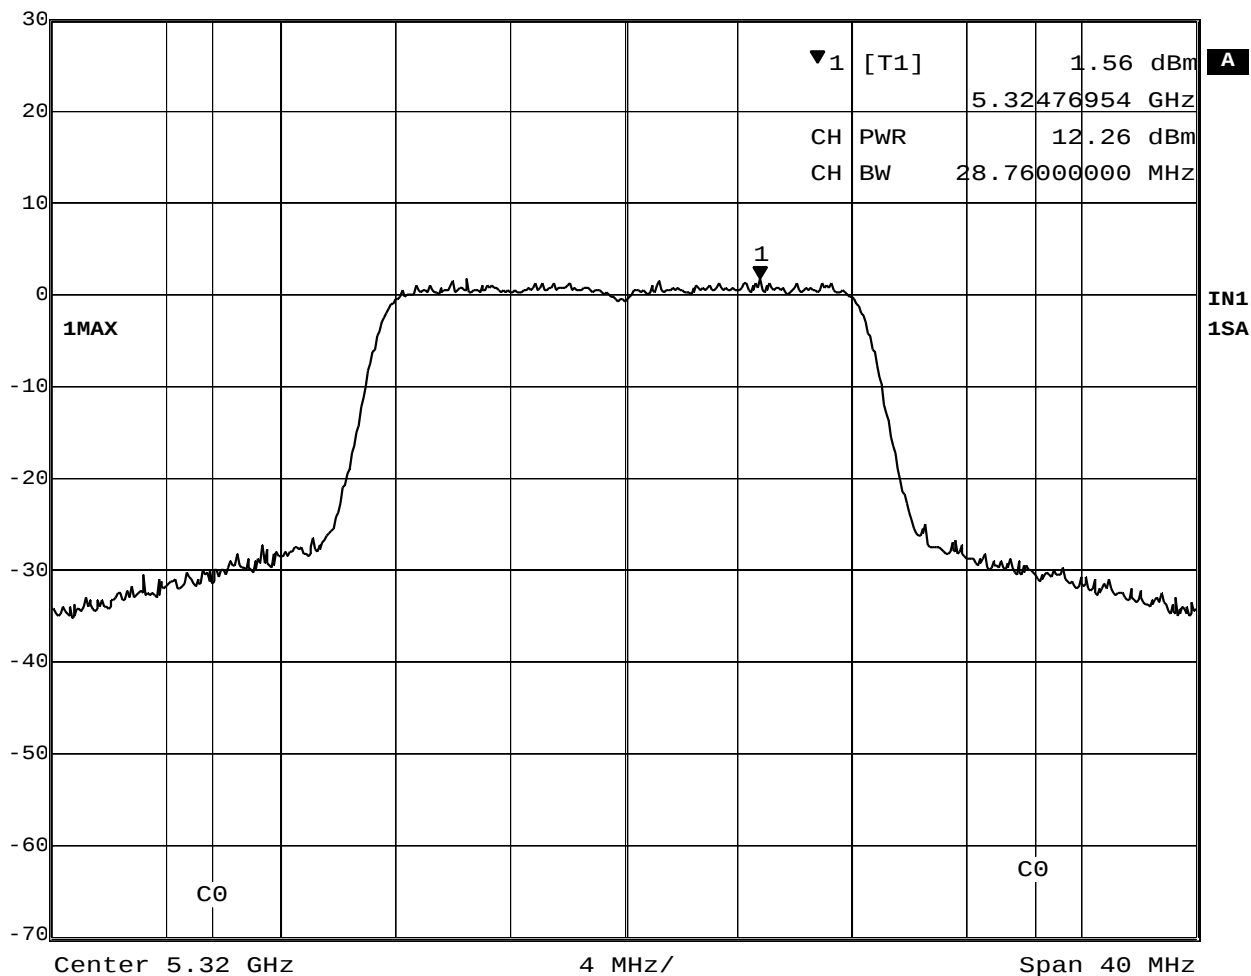

Date: 18.DEC.2002 19:17:23

Plot 2-3 Conducted Peak Power at 5320MHz

3. Peak Power Spectral Density

[5150-5250MHz: FCC 15.407(a)(1), RSS 6.2.2q1(i), (iv)(b)]
 [5250-5350MHz: FCC 15.407(a)(2), RSS 6.2.2q1(ii), (iv)(b)]

3.1 Test Procedure

The spectrum analyzer was connected to the antenna terminal, while EUT was operating in continuous transmission mode at the appropriate center frequencies.

The spectrum analyzer was set to :

RBW= 1MHz, VBW=3MHz, Span=20MHz, Mode= sample detector,
 The analyzer averaged 100 traces in averaging mode, then the marker was set to the highest position in the spectrum.

Also the Canadian PPSP was examined with the following spectrum analyzer setting.

RBW= 1MHz, VBW=1MHz, Span=20MHz, Mode= sample detector, averaging off

The test instruments and setup configuration are the same as the Table 2-2 and Figure 2-2.

3.2 Measurement Results

Test Date: December 18, 2002

Table 3-1. Measurement results of PPSP (EUT: M/T 2373-92U, s/n ZZ-00129)


Measured Frequency (MHz)	Analyzer reading (dBm)	Trace number	Cable Loss (dB)	Results (dBm)	FCC Limit (dBm)	IC Limit q1(ii) (dBm)	Peak Antenna Gain (dBm)	IC EIRP (dBm)	IC Limit q1(i) (dBm)
5180	-0.92	Plot 3-1	2.2	1.3	4.0	N/A	0.83	2.1	10
5260	1.90	Plot 3-2	2.2	4.1	11.0	11.0			N/A
5320	-1.04	Plot 3-3	2.2	1.2	11.0	11.0			N/A

Table 3-2. Measurement results of Canadian PSD (EUT: M/T 2373-92U, s/n ZZ-00129)

Measured Frequency (MHz)	Analyzer reading (dBm)	Trace number	Cable Loss (dB)	Results (dBm)	IC Limit q1(iv)(b) 3 + 10logB* (dBm)
5180	8.63	Plot 3-4	2.2	10.8	17.54
5260	11.47	Plot 3-5	2.2	13.7	18.37
5320	8.78	Plot 3-6	2.2	11.0	17.59

* B = 26dB Bandwidth

3.3 Trace Data

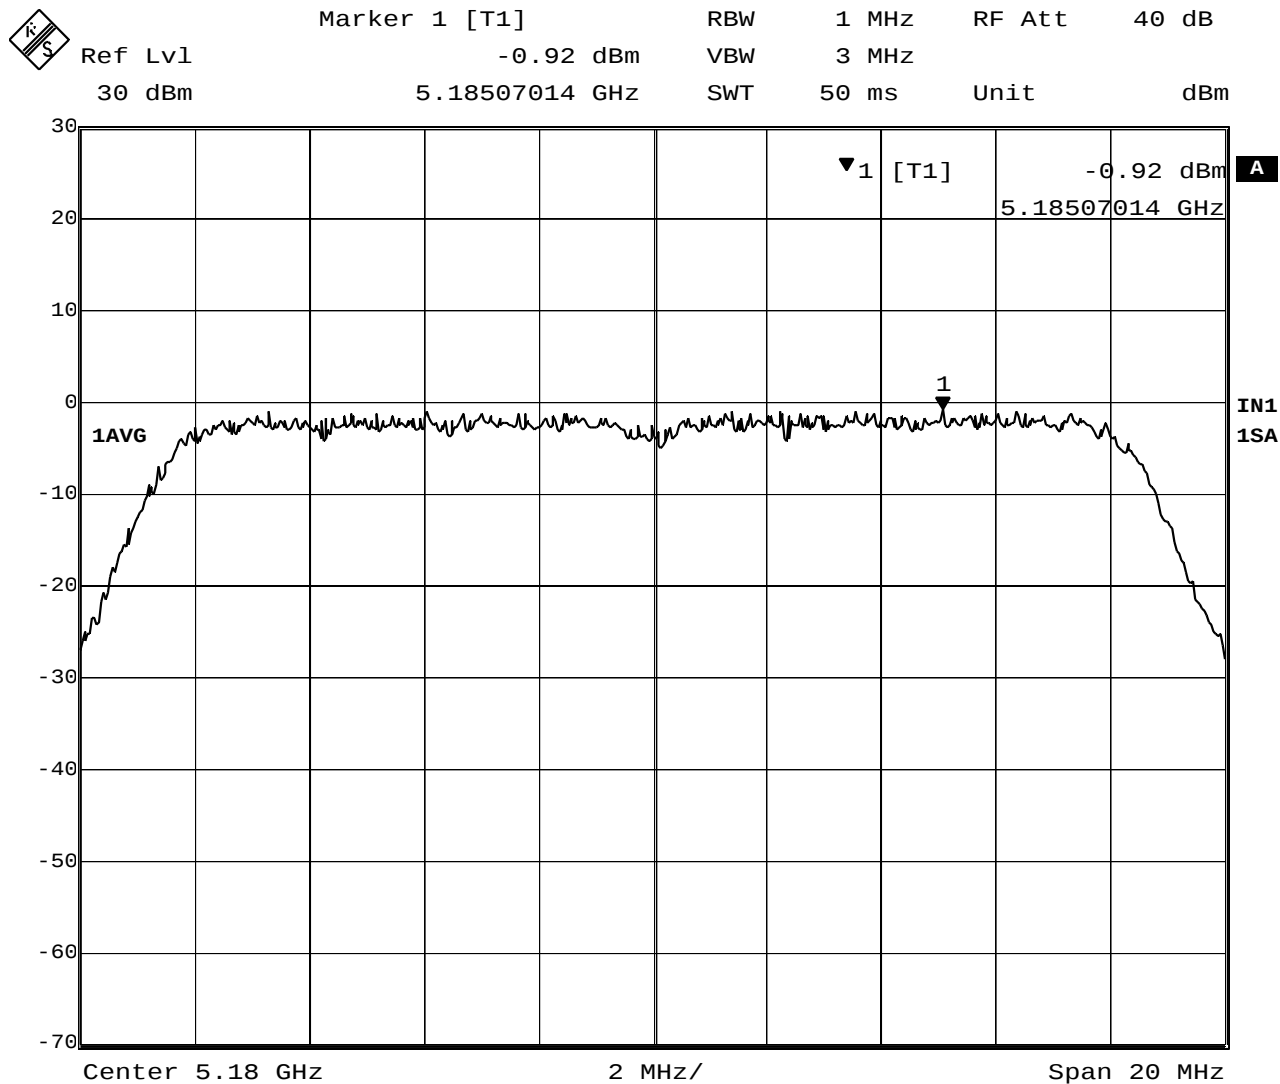


Date: 18.DEC.2002 19:26:37

Plot 3-1 Peak Power Spectral Density at 5180MHz



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	40 dB
30 dBm	1.90 dBm	VBW	3 MHz		
	5.25817635 GHz	SWT	50 ms	Unit	dBm

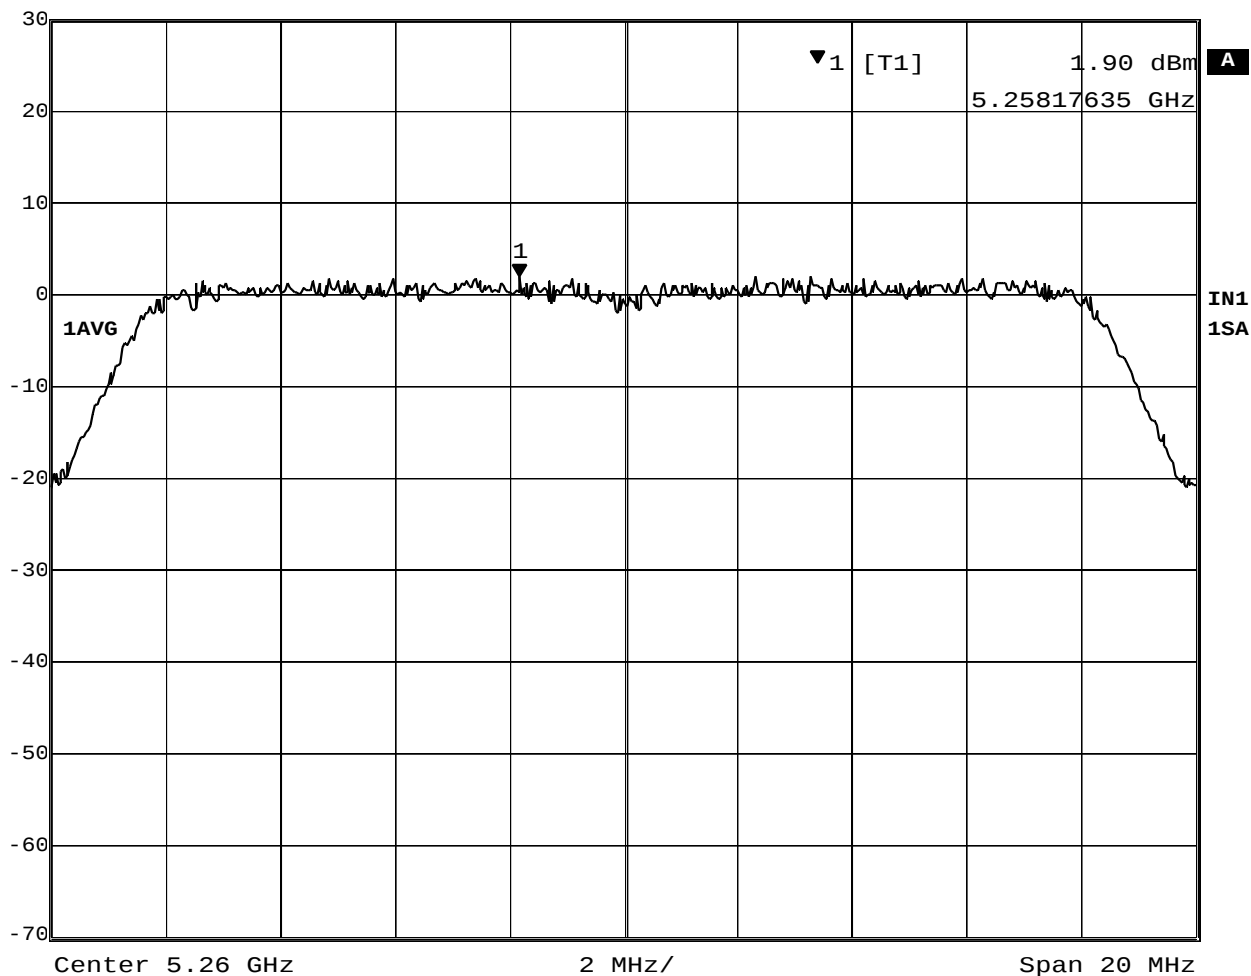


Date: 18.DEC.2002 19:27:49

Plot 3-2 Peak Power Spectral Density at 5260MHz



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	40 dB
30 dBm	-1.04 dBm	VBW	3 MHz		
	5.32154309 GHz	SWT	50 ms	Unit	dBm

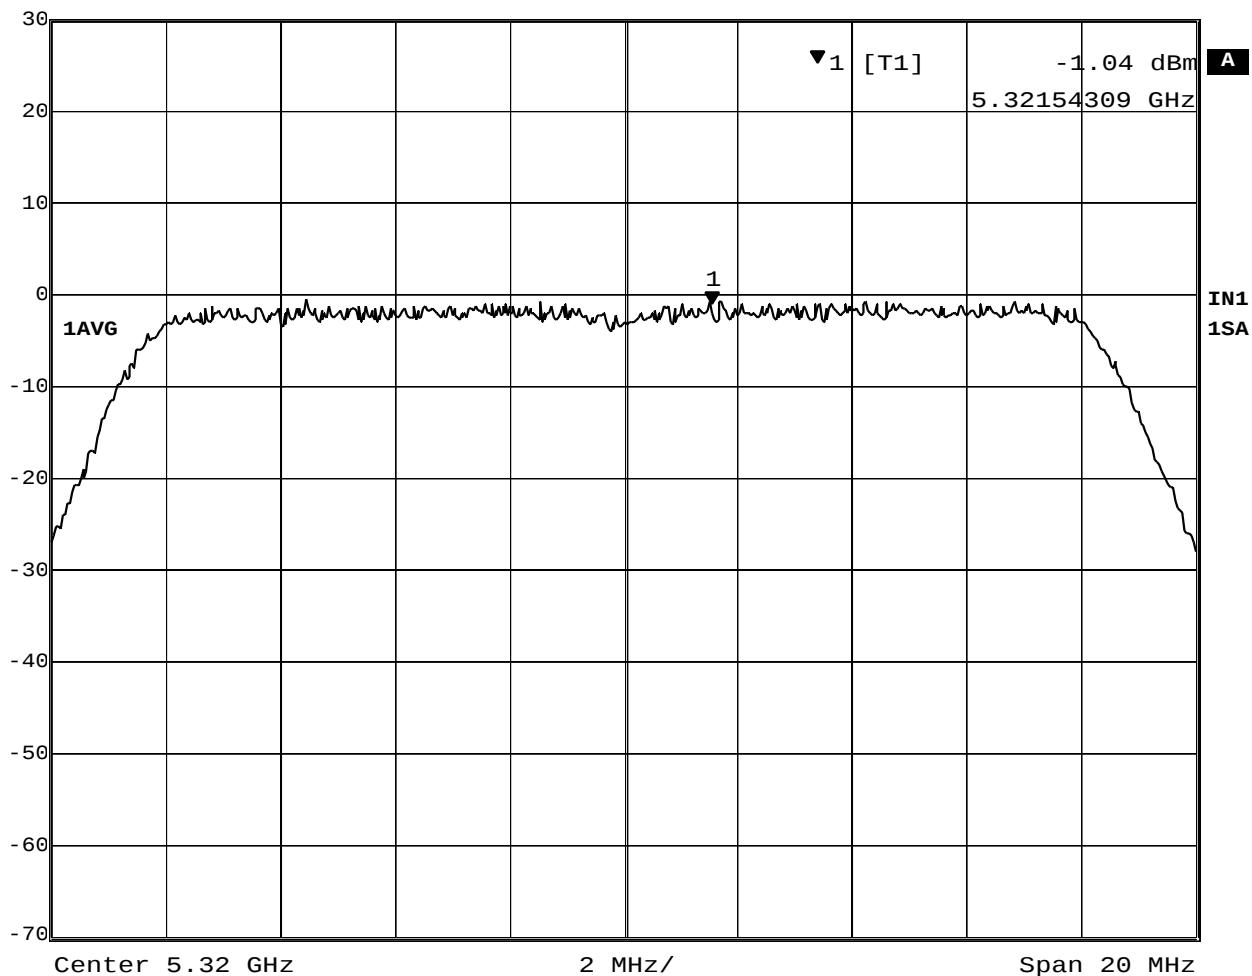


Date: 18.DEC.2002 19:29:08

Plot 3-3 Peak Power Spectral Density at 5320MHz



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	40 dB
30 dBm	8.63 dBm	VBW	1 MHz		
	5.18118236 GHz	SWT	50 ms	Unit	dBm

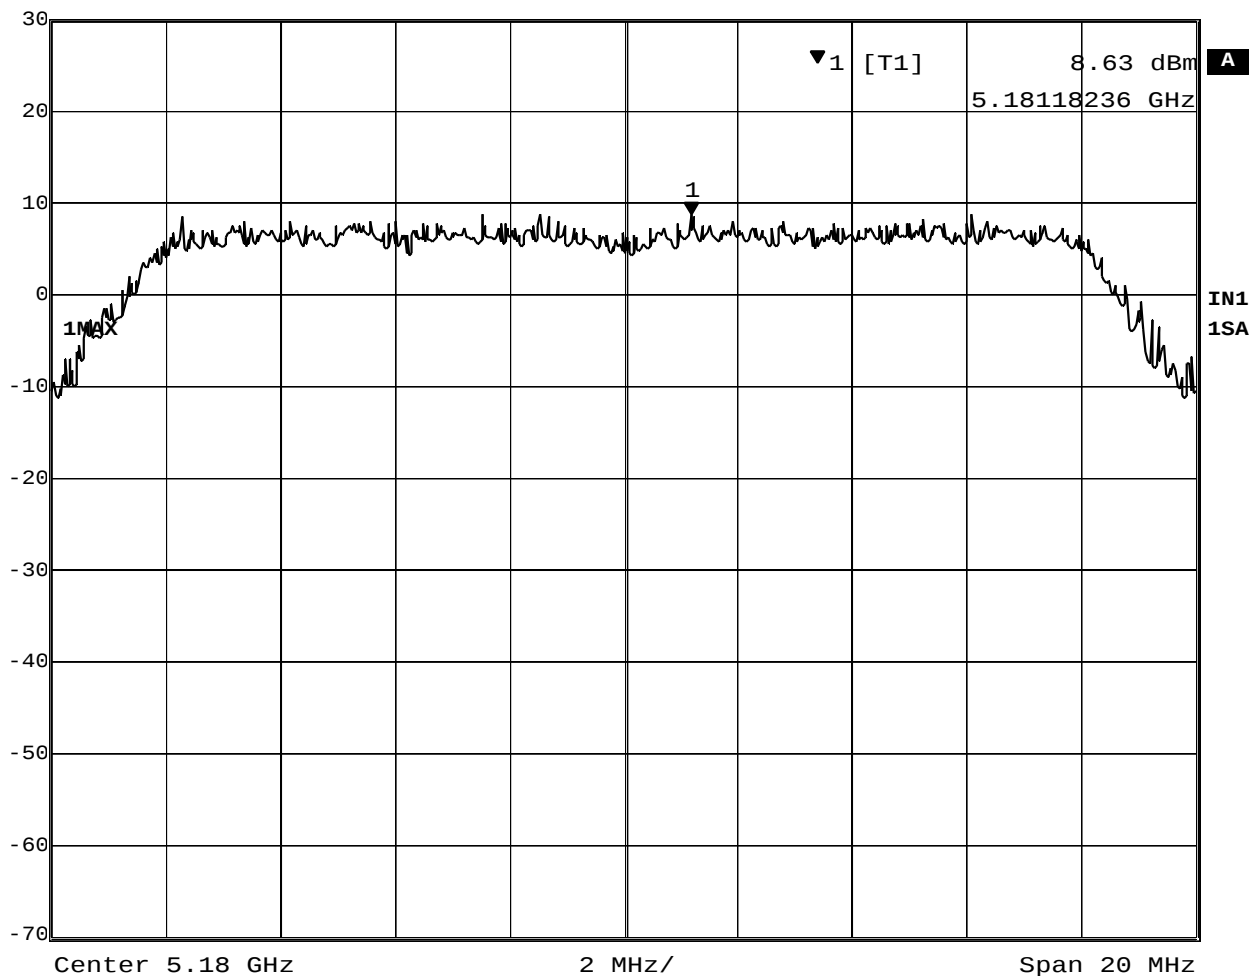


Date: 18.DEC.2002 19:31:12

Plot 3-4 Peak Power Spectral Density at 5180MHz (IC RSS-210)



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	40 dB
30 dBm	11.47 dBm	VBW	1 MHz		
	5.25693387 GHz	SWT	50 ms	Unit	dBm

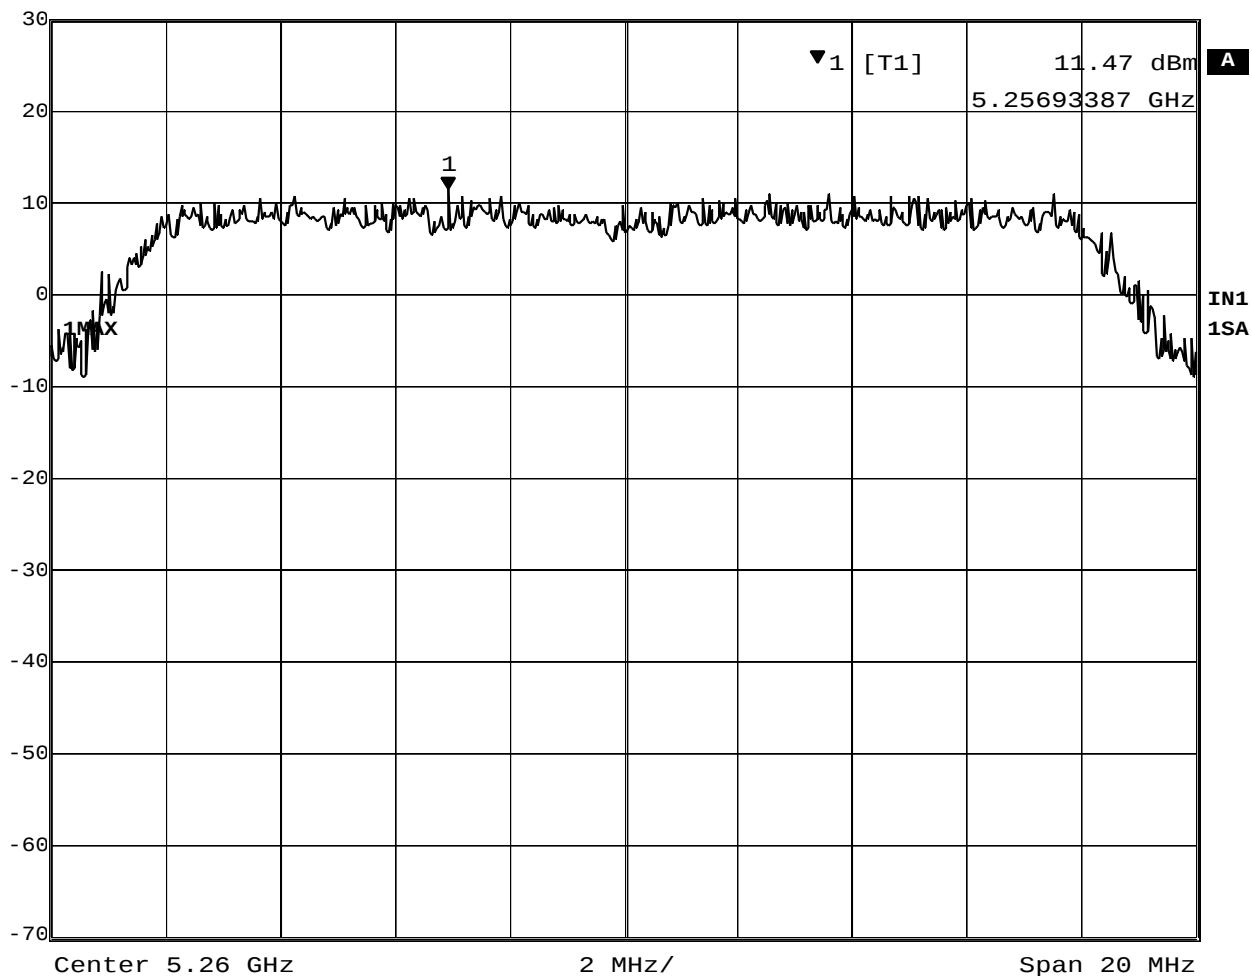


Date: 18.DEC.2002 19:32:28

Plot 3-5 Peak Power Spectral Density at 5260MHz (IC RSS-210)



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	40 dB
30 dBm	8.78 dBm	VBW	1 MHz		
	5.31316633 GHz	SWT	50 ms	Unit	dBm

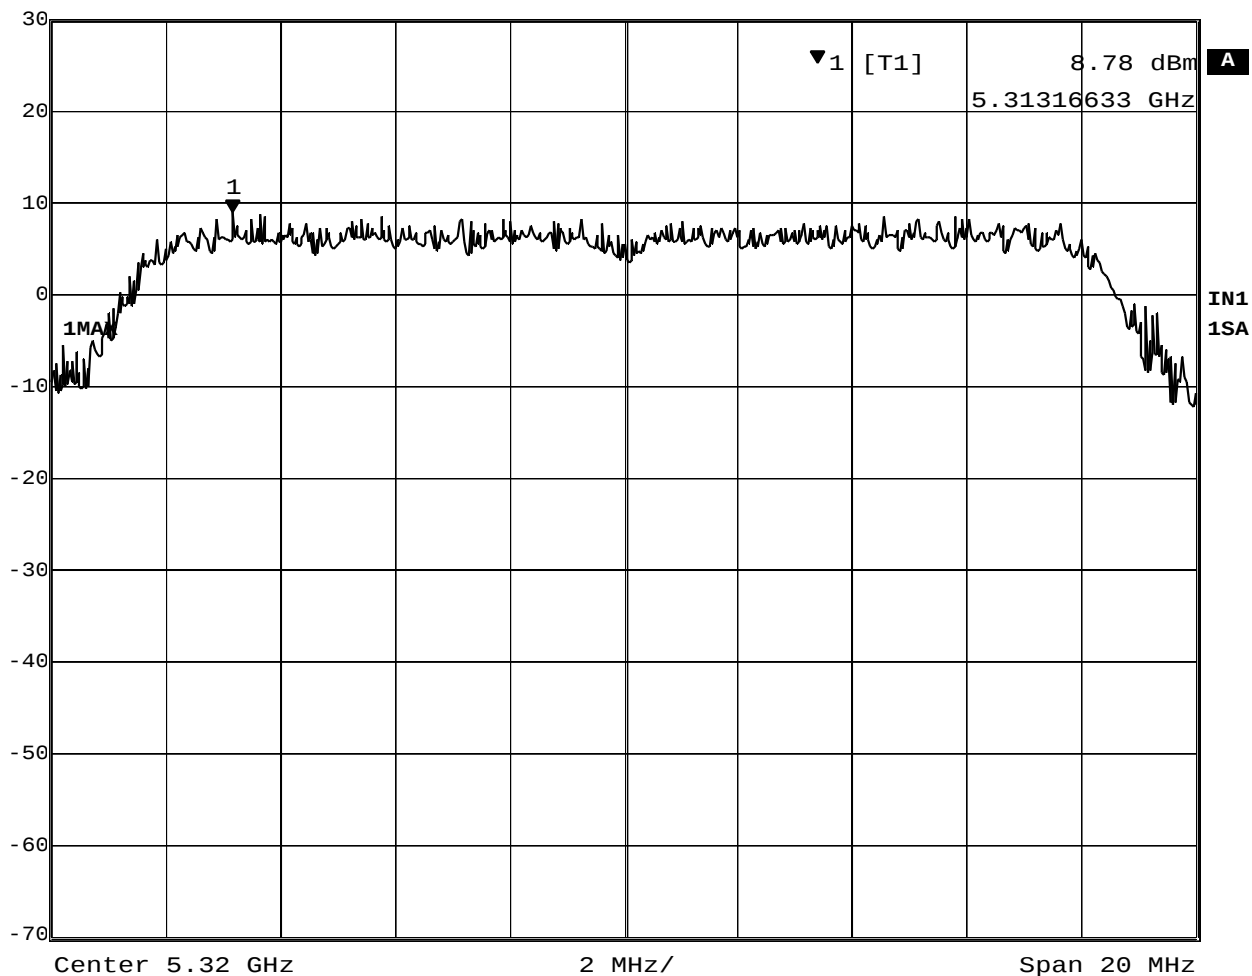

Date: 18.DEC.2002 19:34:31

Plot 3-6 Peak Power Spectral Density at 5320MHz (IC RSS-210)

4. Peak Excursion Ratio

[FCC 15.407(a)(6)]

4.1 Test Procedure

The spectrum analyzer was connected to the antenna terminal, while EUT was operating in continuous transmission mode at the appropriate center frequencies.

- 1st trace :
The spectrum analyzer was set to :
RBW= 1MHz, VBW=3MHz, Mode= peak detector and max hold then to view.
- 2nd trace :
The measurement result of the peak conducted power in Chapter 2.1.2 tend to present the similar values to the results of power meter, therefore the same setting of spectrum analyzer as the one for the Chapter 2.1.2 was used for the 2nd trace.
i.e. VBW= 30kHz, RBW=1MHz, Span=30-40MHz, Trigger= free run, Mode= sample detector

The largest difference of amplitude delta between the two trances is the peak excursion.

The test instruments and setup configuration are the same as the Table 2-2 and Figure 2-2.


4.2 Measurement Results

Test Date: December 18, 2002

Table 4-2. Measurement results of Peak Excursion Ratio (EUT: M/T 2373-92U, s/n ZZ-00129)

Measured Frequency (MHz)	Analyzer Reading delta (dB)	FCC Limit (dB)	Margin (dB)	Trace number
5180	10.94	13	2.06	Plot 4-1
5260	10.37		2.63	Plot 4-2
5320	10.40		2.60	Plot 4-3

4.3 Trace Data

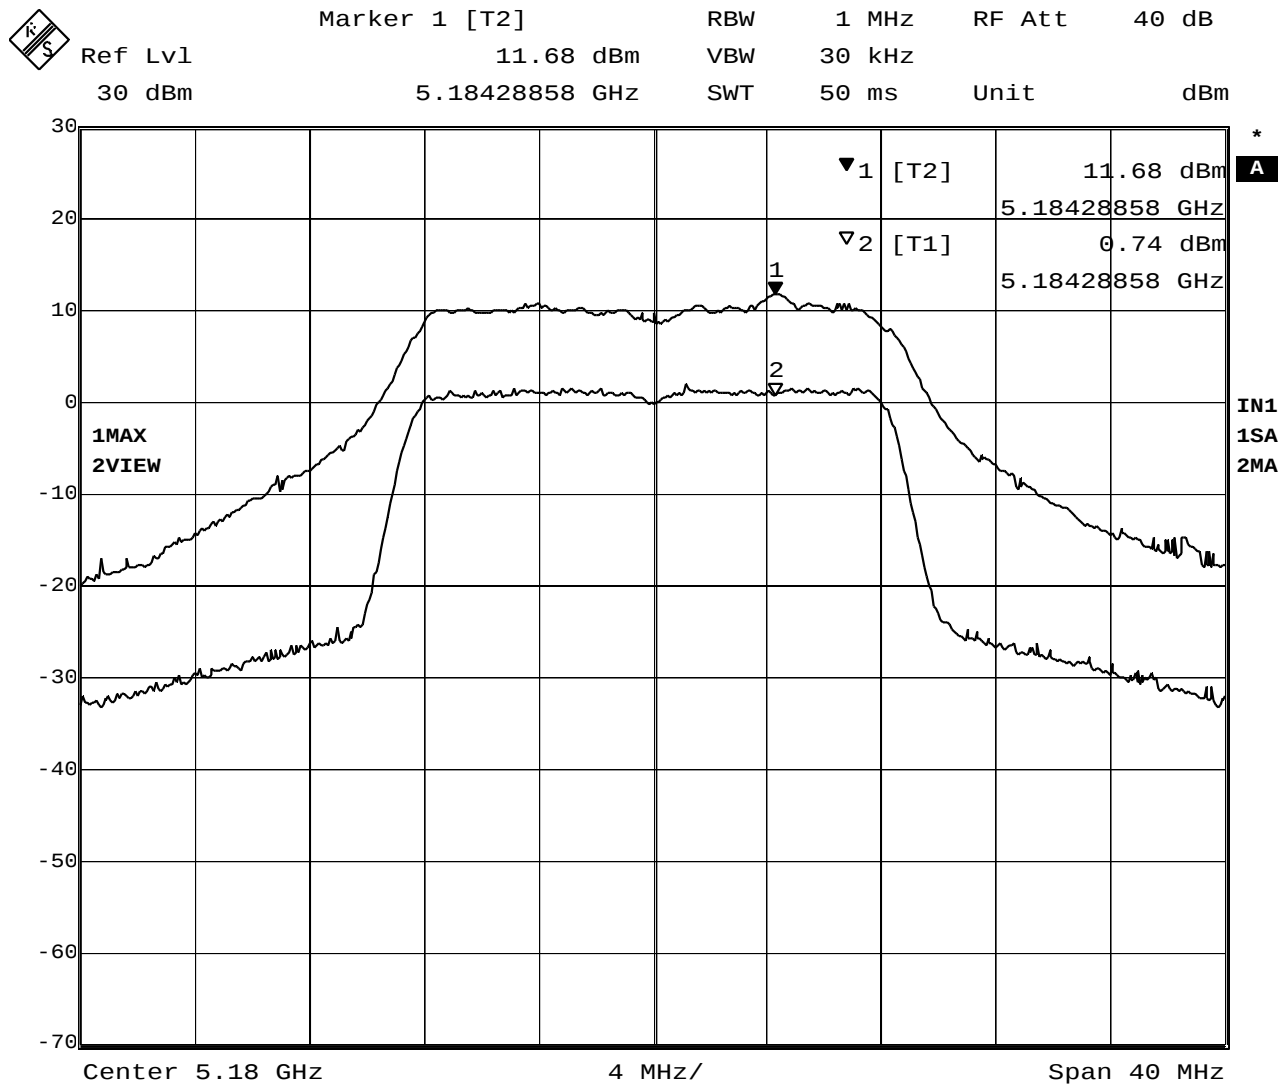


Date: 18.DEC.2002 19:40:03

Plot 4-1 Peak Excursion Ratio at 5180MHz



Marker 1 [T2] RBW 1 MHz RF Att 40 dB
Ref Lvl 13.95 dBm VBW 30 kHz
30 dBm 5.26541082 GHz SWT 50 ms Unit dBm

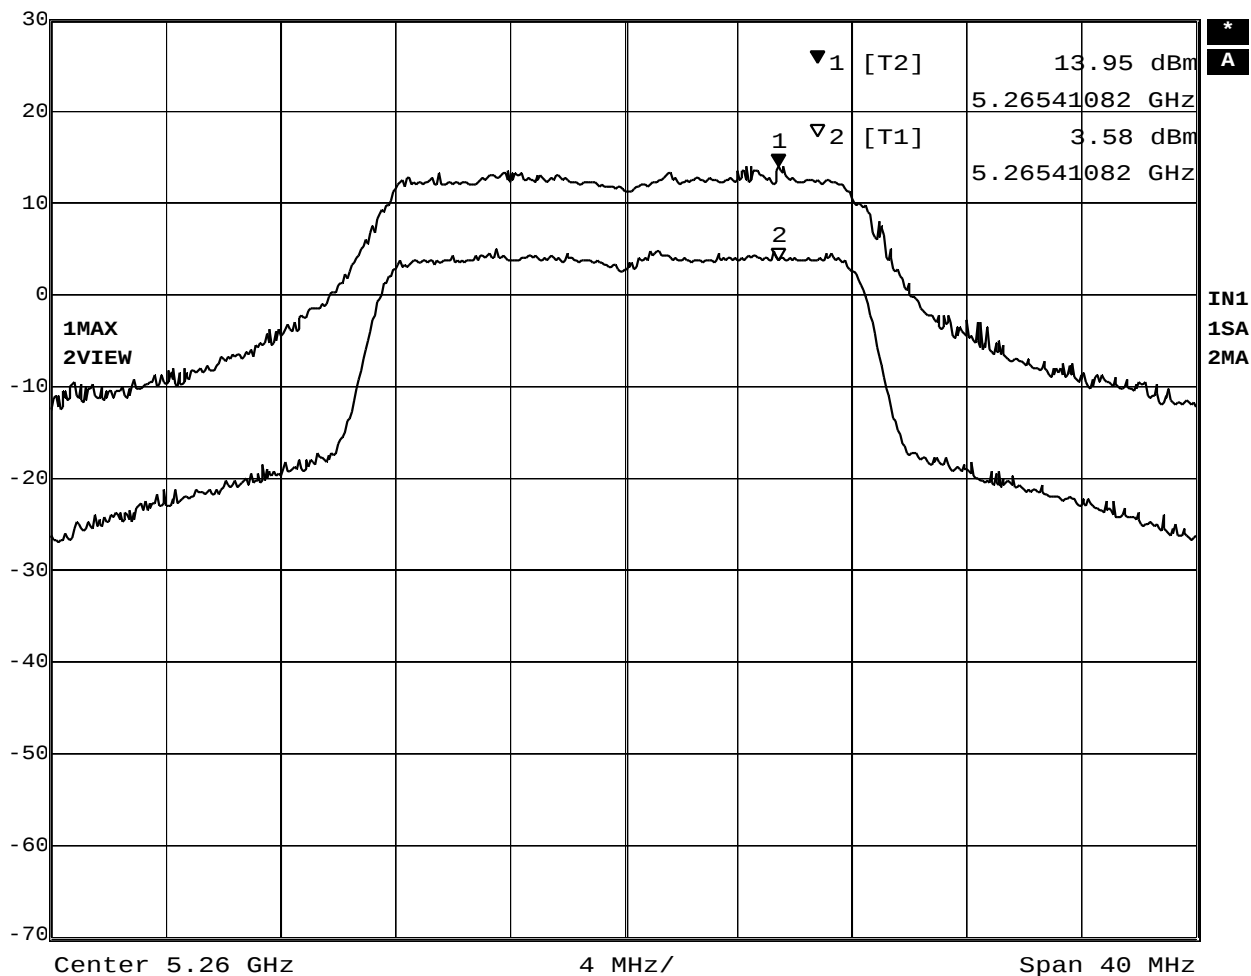


Date: 18.DEC.2002 19:43:38

Plot 4-2 Peak Excursion Ratio at 5260MHz



Marker 1 [T2] RBW 1 MHz RF Att 40 dB
Ref Lvl 11.70 dBm VBW 30 kHz
30 dBm 5.32436874 GHz SWT 50 ms Unit dBm

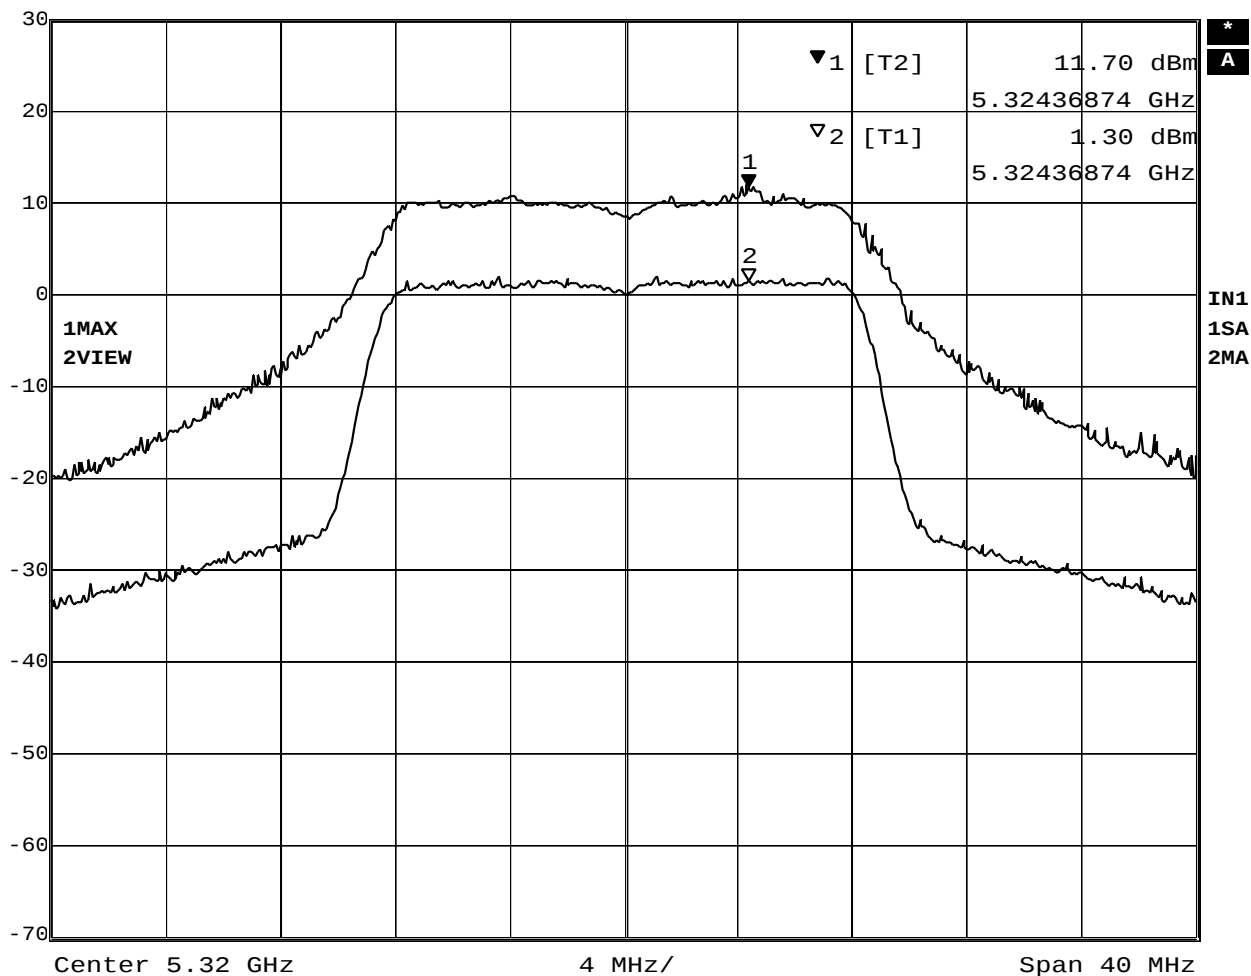

Date: 18.DEC.2002 19:47:02

Plot 4-3 Peak Excursion Ratio at 5320MHz

5. AC WIRELINE CONDUCTED EMISSIONS (150KHz – 30MHz)

[FCC 15.207/ 15.407(b)(5), RSS-210 6.2.2(q1)(v) / 6.6 / 7.4]

5.1 Test Procedure

The conducted emissions are measured in the IBM shielded room with a spectrum analyzer in peak hold. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9KHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.

5.2 Test Instruments and Measurement Setup

Table 5-1. Conducted Emission Test Instrumentation

Description	Model	Serial Number
Computer	IBM 6589-13J	97-15613
Spectrum Analyzer (100Hz-1.5GHz)	HP 85680B	2601A02634
Spectrum Analyzer Display	HP 85662A	2542A12308
Quasi-Peak Adapter	HP 85650A	2043A00062
Receiver (9kHz-30MHz)	R&S ESH3	891806/012
LISN	EMCO 3825/2	1426
Switch/control unit	HP 3488A	2719A17228
Plotter	HP 7550A	2631A33619
Coax cables: - Lisen-L <=> SW/Con.unit (SW100) - Lisen-N <=> SW/Con.unit (SW101) - SW/Con.unit <=> RCVR (Input) - SW/Con.unit<=> Spe Ana.(Signal In)	Length: 4 m 4 m 1 m 1 m	- EMIC-L - EMIC-N - EMIC-R - EMIC-S

Notes: - HP: Hewlett Packard, R&S: Rohde & Schwarz

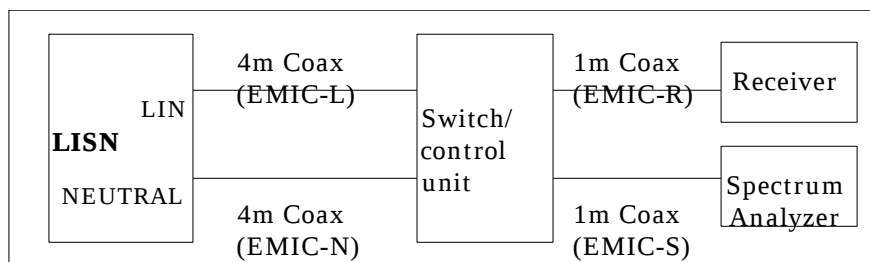


Figure 5. Cables for Conducted Emission Test

5.3 Measurement Results

The EUT was found to comply to the limits of FCC Part 15 Subpart E and RSS-210 with a margin of 11.2dB. The 6 highest emissions relative to the limits are reported.

Test Date: January 7, 2003

Table 5-2-1. EUT: M/T 2373-92U, s/n ZZ-00129, Ch.36(5180MHz) **TX** mode 24Mbps

Frequency (MHz)	Phase	QP Voltage (dBμV)	CISPR22 QP Limit (dBμV)	AV Voltage (dBμV)	CISPR22 AV Limit (dBμV)
0.1955	LINE	51.4	63.8	42.1	53.8
0.3001	LINE	40.3	60.2	32.9	50.2
0.4011	LINE	35.5	57.8	29.1	47.8
0.4861	LINE	32.4	56.2	25.9	46.2
0.6152	LINE	33.1	56.0	28.6	46.0
0.7118	LINE	31.4	56.0	27.3	46.0

Table 5-2-2. EUT: M/T 2373-92U, s/n ZZ-00129 , Ch.52(5260MHz) **TX** mode 24Mbps

Frequency (MHz)	Phase	QP Voltage (dBμV)	CISPR22 QP Limit (dBμV)	AV Voltage (dBμV)	CISPR22 AV Limit (dBμV)
0.1959	NEUTRAL	51.7	63.8	42.6	53.8
0.2990	LINE	40.4	60.3	33.2	50.3
0.3983	LINE	35.3	57.9	29.4	47.9
0.5124	LINE	33.0	56.0	28.0	46.0
0.6147	LINE	32.9	56.0	29.0	46.0
0.7946	LINE	30.2	56.0	26.9	46.0

Table 5-2-3. EUT: M/T 2373-92U, s/n ZZ-00129, Ch.64(5320MHz) **TX** mode 24Mbps

Frequency (MHz)	Phase	QP Voltage (dBμV)	CISPR22 QP Limit (dBμV)	AV Voltage (dBμV)	CISPR22 AV Limit (dBμV)
0.1960	NEUTRAL	51.3	63.8	42.3	53.8
0.2987	LINE	39.8	60.3	32.5	50.3
0.4006	LINE	34.8	57.8	29.1	47.8
0.5120	LINE	32.7	56.0	27.5	46.0
0.6148	LINE	33.1	56.0	29.0	46.0
0.7115	LINE	31.5	56.0	27.6	46.0

Table 5-2-4. EUT: M/T 2373-92U, s/n ZZ-00129, Ch. 52(5260MHz) **RX** mode

Frequency (MHz)	Phase	QP Voltage (dBμV)	CISPR22 QP Limit (dBμV)	AV Voltage (dBμV)	CISPR22 AV Limit (dBμV)
0.1959	LINE	51.2	63.8	42.1	53.8
0.2992	LINE	39.8	60.3	32.2	50.3
0.4016	LINE	35.3	57.8	28.2	47.8
0.6140	LINE	32.7	56.0	28.9	46.0
0.7105	LINE	30.3	56.0	26.8	46.0
0.7954	NEUTRAL	29.7	56.0	25.6	46.0

6. RESTRICTED BANDS RADIATIONS (30MHz – 1GHz)

[FCC 15.205&209 / 15.407(b)(1),(2),(5),(6)]
 [RSS-210 6.2.1 / 6.2.2(q1)(i),(ii),(v) / 6.3 / 7.3]

6.1 Test Procedure

Preliminary radiated emissions are measured in the semi-anechoic chamber at a 3 meter distance on every azimuth in both horizontal and vertical polarity. The antennas are also scanned in height. The emissions are recorded with a spectrum analyzer in peak hold mode. The identified emissions are further maximized by a cable manipulation. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120kHz. The highest emissions relative to the limit are listed.

6.2 Test Instruments and Measurement Setup

Table 6-1 Radiated Emission Test Instrumentation

Description	Model	Serial Number
Computer	IBM 5551-L	#4
Spectrum Analyzer (100Hz-1.5GHz) for 30-200MHz	HP 85680B	3019A05155
Spectrum Analyzer Display for 30-200MHz	HP 85662A	3026A19353
Quasi-Peak Adapter for 30-200MHz	HP 85650A	3033A01449
Spectrum Analyzer (100Hz-1.5GHz) for 200-1000MHz	HP 85680B	2841A04252
Spectrum Analyzer Display for 200-1000MHz	HP 85662A	2816A16831
Quasi-Peak Adapter for 200-1000MHz	HP 85650A	2811A01156
Amplifier (100KHz-1.3GHz)		
- for 30-200MHz	HP 8447D	2805A02919
- for 200-1000MHz	HP 8447D	2944A03506
Biconical Antenna (30-200MHz)	EMCO 3108	2309
Log-Periodic Antenna (200-1000MHz)	EMCO 3146	1585
Receiver (20MHz-1.3GHz)	R&S ESVP	893202/018
Switch/control unit	HP 3488A	2719A17226
N-Coax cables:	Length:	
- Bi-coni Ant <=> 10m Cable	9 m	- EM103L01
- 10m Cable <=> Shield Panel	10 m	- EM103L02
- Shield Panel <=> RF Amp	7 m	- EM103L03
- RF Amp <=> Power Splitter	0.5m	- EM103L04
- Log-peri Ant <=> 10m Cable	9 m	- EM103H01
- 10m Cable <=> Shield Panel	10 m	- EM103H02
- Shield Panel <=> RF Amp	7 m	- EM103H03
- RF Amp <=> Power Splitter	0.5m	- EM103H04
Coax cables:		
- Power Splitter <=> SW/Con.unit (SW110)	1 m	- EM103L05
- Power Splitter <=> SW/Con.unit (SW300)	1 m	- EM103L06
- Power Splitter <=> SW/Con.unit (SW100)	1 m	- EM103H05
- Power Splitter <=> SW/Con.unit (SW301)	1 m	- EM103H06
- SW/Con.unit <=> Receiver (Input)	2 m	- EM1RCV
- SW/Con.unit <=> Spe Ana.(Signal In) for 30- 200MHz	2 m	- EM1SPL

- SW/Con.unit <=> Spe Ana.(Signal In) for 200-1000MHz

2 m

- EM1SPH

Notes:

- HP: Hewlett Packard, R&S: Rohde & Schwarz

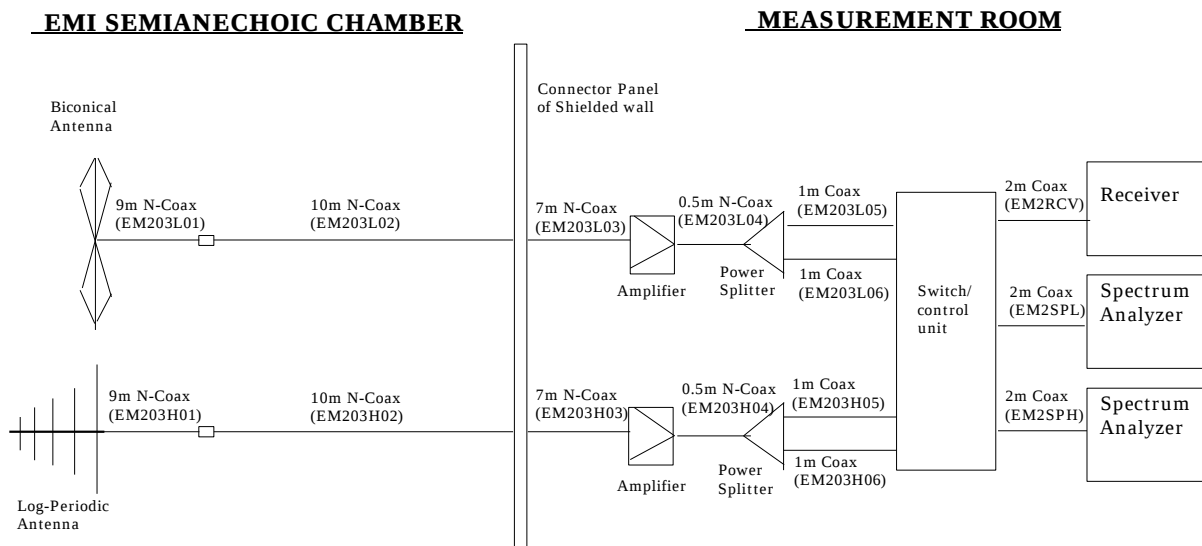


Figure 6 Cables for Radiated Emission Test

6.3 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver. All factors are included in the reported data.

$$FS = R + AF + CORR$$

where:

FS	=	Field Strength
R	=	Measured Receiver Input Amplitude
AF	=	Antenna Factor
CORR	=	Correction Factor = CL - AG
CL	=	Cable Loss
AG	=	Amplifier Gain

For example:

Given a Receiver input reading of 51.5dB μ V; Antenna Factor of 8.5dB/m; Cable Loss of 1.3dB; and an Amplifier Gain of 26dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 = 35.3\text{dB}\mu\text{V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:

$$\text{Level}(\text{dB}\mu\text{V/m}) = 20 \times \text{Log}(\text{Level}(\mu\text{V/m}))$$

$$40\text{dB}\mu\text{V/m} = 100\mu\text{V/m}$$

$$48\text{dB}\mu\text{V/m} = 250\mu\text{V/m}$$

6.4 Measurement Results

The EUT was found to comply to the limits of FCC Part 15 Subpart E and RSS-210 with a margin of 5.0 dB at 30MHz - 1000MHz band.

The 6 highest emissions relative to the limits are reported.

Test Date: December 5, 2002

Table 6-2-1. EUT: M/T 2373-92U, s/n ZZ-00129, Ch.36(5180MHz) **TX** mode 24Mbps

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Field Strength (μ V/m)	Limit (μ V/m)
161.915	H	41.3	12.4	-16.5	37.2	43.5	72.4	150
200.452	H	36.9	11.3	-12.6	35.6	43.5	60.3	150
257.998	V	36.0	12.0	-14.6	33.4	46.0	46.8	200
284.042	H	36.8	13.3	-14.2	35.9	46.0	62.4	200
399.413	V	31.7	15.2	-14.3	32.6	46.0	42.7	200
600.429	V	24.8	18.7	-12.7	30.8	46.0	34.7	200

Table 6-2-2. EUT: M/T 2373-92U, s/n ZZ-00129, Ch.52(5260MHz) **TX** mode 24Mbps

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Field Strength (μ V/m)	Limit (μ V/m)
161.613	H	41.4	12.4	-16.4	37.4	43.5	74.1	150
200.453	H	37.1	11.3	-12.6	35.8	43.5	61.7	150
258.123	H	37.0	12.0	-14.6	34.4	46.0	52.5	200
283.077	H	35.6	13.2	-14.2	34.6	46.0	53.7	200
399.624	V	31.7	15.2	-14.3	32.6	46.0	42.7	200
596.620	V	28.2	18.6	-12.7	34.1	46.0	50.7	200

Table 6-2-3. EUT: M/T 2373-92U, s/n ZZ-00129, Ch.64(5320MHz) **TX** mode 24Mbps

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Field Strength (μ V/m)	Limit (μ V/m)
161.584	H	41.2	12.4	-16.4	37.2	43.5	72.4	150
200.452	H	36.8	11.3	-12.6	35.5	43.5	59.6	150
257.997	H	36.5	12.0	-14.6	33.9	46.0	49.5	200
281.235	H	35.3	13.1	-14.2	34.2	46.0	51.3	200
464.513	V	29.1	16.7	-13.8	32.0	46.0	39.8	200
596.870	V	28.7	18.6	-12.8	34.5	46.0	53.1	200

Table 6-2-4. EUT: M/T 2373-92U, s/n ZZ-00129, Ch.52(5260MHz) **RX** mode

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Field Strength (μ V/m)	Limit (μ V/m)
143.180	H	37.1	12.2	-16.6	32.7	43.5	43.2	150
160.952	H	40.8	12.4	-16.5	36.7	43.5	68.4	150
200.452	H	39.8	11.3	-12.6	38.5	43.5	84.1	150
258.122	H	37.1	12.0	-14.6	34.5	46.0	53.1	200
282.473	H	34.3	13.2	-14.2	33.3	46.0	46.2	200
464.526	V	30.6	16.7	-13.8	33.5	46.0	47.3	200

7. RESTRICTED BANDS RADIATIONS (1GHz – 40GHz)

[FCC 15.205&209 / 15.407(b)(1),(2),(5),(6)]
 [RSS-210 6.2.1 / 6.2.2(q1)(i),(ii),(v) / 6.3 / 7.3]

7.1 Test Procedure

Radiated emissions were measured in the frequency range with 1 GHz to 40GHz in transmitting mode and 1 GHz to 25GHz in receiving mode. All tests were performed in the semi-anechoic chamber at a 3-meter distance (except for the frequency range with 18 GHz to 40 GHz where test distance was reduced to 1 meter) on both horizontal and vertical polarities. The antenna was also scanned in height. The emissions are recorded with a spectrum analyzer in peak hold mode. The identified emissions are further maximized as a function of cable manipulation, azimuth, and antenna height. The emissions closest to the limits are measured in the peak mode with the tuned spectrum analyzer using resolution bandwidth of 1MHz / video bandwidth of 1MHz, and the average setting mode with the tuned spectrum analyzer using resolution bandwidth of 1MHz / video bandwidth of 100Hz or 10Hz. The highest emissions relative to the limit are listed.

7.2 Test Instruments and Measurement Setup

Table 7 Radiated Emission Test Instrumentation (1GHz – 40GHz)

Description	Model	Serial Number
Spectrum Analyzer EMI Test Receiver	R&S ESI26	836119/003
Spectrum Analyzer	HP 8563E	3416A02248
Harmonic Mixer (26.5 – 40GHz)	Agilent 11970A	011269-001
Amplifier (1 - 26.5GHz)	HP 8449B	3008A00582
Amplifier (26.5 – 40GHz)	Agilent 83051A	3950M00193
Horn Antenna (1 - 18GHz)	EMCO 3115	9903-5774
Horn Antenna (3.95 – 5.85GHz)	EMCO 3160-5	1099
Horn Antenna (5.85 – 8.2GHz)	EMCO 3160-6	9712-1044
Horn Antenna (8.2 – 12.4GHz)	EMCO 3160-7	1158
Horn Antenna (12.4 – 18GHz)	EMCO 3160-8	1143
Horn Antenna (18 - 26.5GHz)	EMCO 3160-9	0004-1202
Horn Antenna (26.5 - 40GHz)	EMCO 3160-10	1175
Coaxial cables: - Horn Ant <=> RF Amp. (1-18GHz) - RF Amp.<=>Spectrum Analyzer (1-12.4GHz) - RF Amp.<=>Spectrum Analyzer (12.4-18GHz) - Horn Ant <=> RF Amp. (18-40GHz) - RF Amp.<=>Spectrum Analyzer (18-40GHz)	Length: 6 m 15 m 3m 3m 1m	- EM206SCO - EM215SCO - SF102-20166 - SF102-20167 - SF102-21105

Notes: - HP: Hewlett Packard, R&S: Rohde & Schwarz

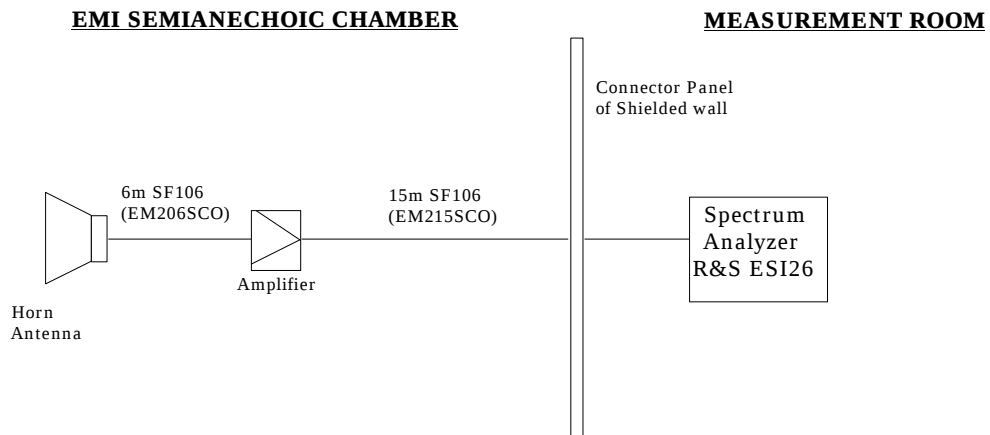


Figure 7-1. Cables for Radiated Emission Test (1 – 12.4 GHz)

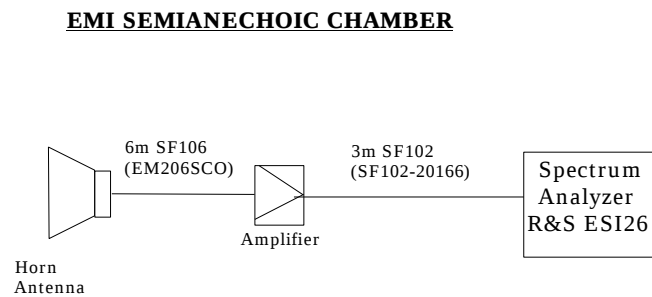


Figure 7-2. Cables for Radiated Emission Test (12.4 - 18GHz)

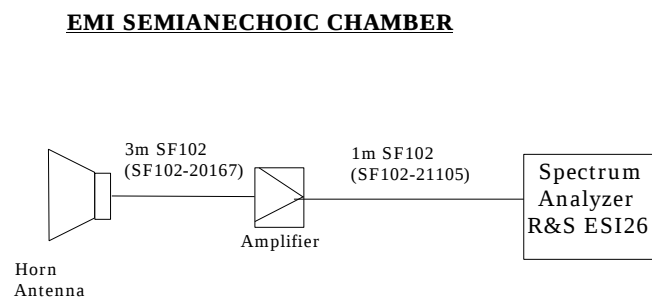


Figure 7-3. Cables for Radiated Emission Test (18 - 26.5GHz)

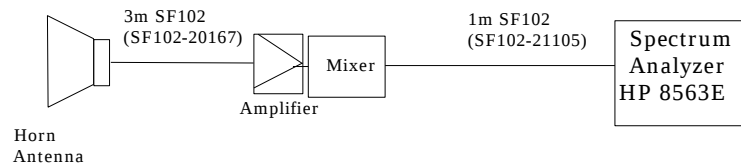
EMI SEMIANECHOIC CHAMBER

Figure 7-4. Cables for Radiated Emission Test (26.5 - 40GHz)

7.3 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where:

FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL-AG

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

For example:

Given a Spectrum Analyzer input reading of 51.5 dB μ V; Antenna Factor of 8.5 dB/m; Cable Loss of 1.3 dB; Falloff Factor of 0 dB; and an Amplifier Gain of 26 dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26 - 0.0 = 35.6 \text{ dB}\mu\text{V/m}$$

Conversions between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as :

$$\text{Level(dB}\mu\text{V/m)} = 20 \times \text{Log}(\text{Level}(\mu\text{V/m}))$$

$$40 \text{ dB}\mu\text{V/m} = 100 \mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250 \mu\text{V/m}$$

7.4 Limits

Table 7-1. Limits for emissions

Limit for emissions in restricted bands	54 dB μ V/m (average)	74 dB μ V/m (peak)
Limit for emissions in non_restricted bands	68.2 dB μ V/m (EIRP< -27 dBm/MHz)	

7.5 Measurement Results

The EUT was found to comply to the limits of FCC Part 15 Subpart E and RSS-210 with a margin of 2.8 dB. The measurement was done for the frequency range of 1 GHz to 40 GHz in TX mode and 1 GHz to 25GHz in RX mode.

Test Date: December 5, 6, 9 and 11, 2002

Table 7-2-1. EUT: M/T 2373-92U, s/n ZZ-00129, Ch.36(5180MHz) **TX** mode 24Mbps

Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) (peak)	Measured (dB μ V) (average)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dB μ V/m) (peak)	FCC Limit (dB μ V/m) (peak)	Field Strength (dB μ V/m) (average)	FCC Limit (dB μ V/m) (average)
Inband										
5.177	H	99.5	88.0	33.7	-27.3	0.0	105.9	N/A	94.4	N/A
Adjacent RB										
5.150	H	62.1	42.3	33.6	-26.5	0.0	69.2	74.0	49.4	54.0
1.130	V	50.0	-	24.6	-32.4	0.0	42.2	74.0	-	54.0
1.198	V	50.7	-	25.2	-32.3	0.0	43.6	74.0	-	54.0
1.265	V	48.5	-	25.2	-32.1	0.0	41.6	68.2	-	NRB
1.331	V	47.9	-	25.2	-31.9	0.0	41.2	74.0	-	54.0
6.016	H	42.2	-	29.8	-26.5	0.0	45.5	68.2	-	NRB
6.048	H	42.3	-	29.8	-26.8	0.0	45.3	68.2	-	NRB
6.216	H	52.5	-	29.9	-26.2	0.0	56.2	68.2	-	NRB
10.361	H	42.5	-	33.5	-23.0	0.0	53.0	68.2	-	NRB
15.543	V	44.1	30.6	37.2	-23.6	0.0	57.7	74.0	44.2	54.0

Note: OB means “operation band” (5150-5250MHz).
NRB means “non restricted band”: The limit of FCC Part 15.407(b)(1),(2) and RSS-210 6.2.2(q1)(I),(ii) apply.

Table 7-2-2. EUT: M/T 2373-92U, s/n ZZ-00129, Ch.52(5260MHz) **TX** mode 24Mbps

Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) (peak)	Measured (dB μ V) (average)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dB μ V/m) (peak)	FCC Limit (dB μ V/m) (peak)	Field Strength (dB μ V/m) (average)	FCC Limit (dB μ V/m) (average)
Inband										
5.266	H	104.1	91.8	33.6	-27.2	0.0	110.5	N/A	98.2	N/A
Adjacent RB										
5.350	H	49.5	37.8	33.9	-27.2	0.0	56.2	74.0	44.5	54.0
1.130	V	49.5	-	24.6	-32.4	0.0	41.7	74.0	-	54.0
1.198	V	51.2	-	25.2	-32.3	0.0	44.1	74.0	-	54.0
1.265	V	49.0	-	25.2	-32.1	0.0	42.1	68.2	-	NRB
1.331	V	48.4	-	25.2	-31.9	0.0	41.7	74.0	-	54.0
6.016	H	39.2	-	29.8	-26.5	0.0	42.5	68.2	-	NRB
6.048	H	40.2	-	29.8	-26.8	0.0	43.2	68.2	-	NRB
6.313	H	46.6	-	30.0	-26.4	0.0	50.2	68.2	-	NRB
10.519	H	50.9	-	33.5	-22.4	0.0	62.0	68.2	-	NRB
15.782	V	46.6	34.1	37.2	-23.7	0.0	60.1	74.0	47.6	54.0

Note: OB means “operation band” (5250-5350MHz).
NRB means “non restricted band”: The limit of FCC Part 15.407(b)(1),(2) and RSS-210 6.2.2(q1)(I),(ii) apply.

Table 7-2-3. EUT: M/T 2373-92U, s/n ZZ-00129, Ch.64(5320MHz) **TX** mode 24Mbps

Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) (<i>peak</i>)	Measured (dB μ V) (<i>average</i>)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dB μ V/m) (<i>peak</i>)	FCC Limit (dB μ V/m) (<i>peak</i>)	Field Strength (dB μ V/m) (<i>average</i>)	FCC Limit (dB μ V/m) (<i>average</i>)
Inband										
5.326	H	101.0	89.9	33.7	-27.3	0.0	107.4	N/A	96.3	N/A
Adjacent RB										
5.350	H	60.0	44.5	33.9	-27.2	0.0	66.7	74.0	51.2	54.0
1.130	V	50.6	-	24.6	-32.4	0.0	42.8	74.0	-	54.0
1.198	V	52.9	-	25.2	-32.3	0.0	45.8	74.0	-	54.0
1.265	V	49.7	-	25.2	-32.1	0.0	42.8	68.2	-	NRB
1.331	V	46.9	-	25.2	-31.9	0.0	40.2	74.0	-	54.0
6.016	H	38.8	-	29.8	-26.5	0.0	42.1	68.2	-	NRB
6.048	H	39.9	-	29.8	-26.8	0.0	42.9	68.2	-	NRB
6.385	V	43.0	-	29.9	-26.6	0.0	46.3	68.2	-	NRB
10.637	H	47.9	32.8	33.5	-22.3	0.0	59.1	74.0	44.0	54.0
15.960	V	39.8	-	37.2	-23.6	0.0	53.4	74.0	-	54.0

*Note: OB means “operation band” (5250-5350MHz).


NRB means “non restricted band”: The limit of FCC Part 15.407(b)(1),(2) and RSS-210 6.2.2(q1)(I),(ii) apply.

Table 7-2-4 EUT: M/T 2373-92U, s/n ZZ-00129, Ch.52(5260MHz) **RX** mode

Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) (<i>peak</i>)	Measured (dB μ V) (<i>average</i>)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dB μ V/m) (<i>peak</i>)	FCC Limit (dB μ V/m) (<i>peak</i>)	Field Strength (dB μ V/m) (<i>average</i>)	FCC Limit (dB μ V/m) (<i>average</i>)
1.130	V	49.6	-	24.6	-32.4	0.0	41.8	74.0	-	54.0
1.198	V	51.0	-	25.2	-32.3	0.0	43.9	74.0	-	54.0
1.265	V	49.8	-	25.2	-32.1	0.0	42.9	68.2	-	NRB
1.331	V	48.4	-	25.2	-31.9	0.0	41.7	74.0	-	54.0

Note: NRB means “non restricted band”: The limit of FCC Part 15.407(b)(1),(2) and RSS-210 6.2.2(q1)(I),(ii) apply.

7.6 Measurement plots of adjacent restricted band

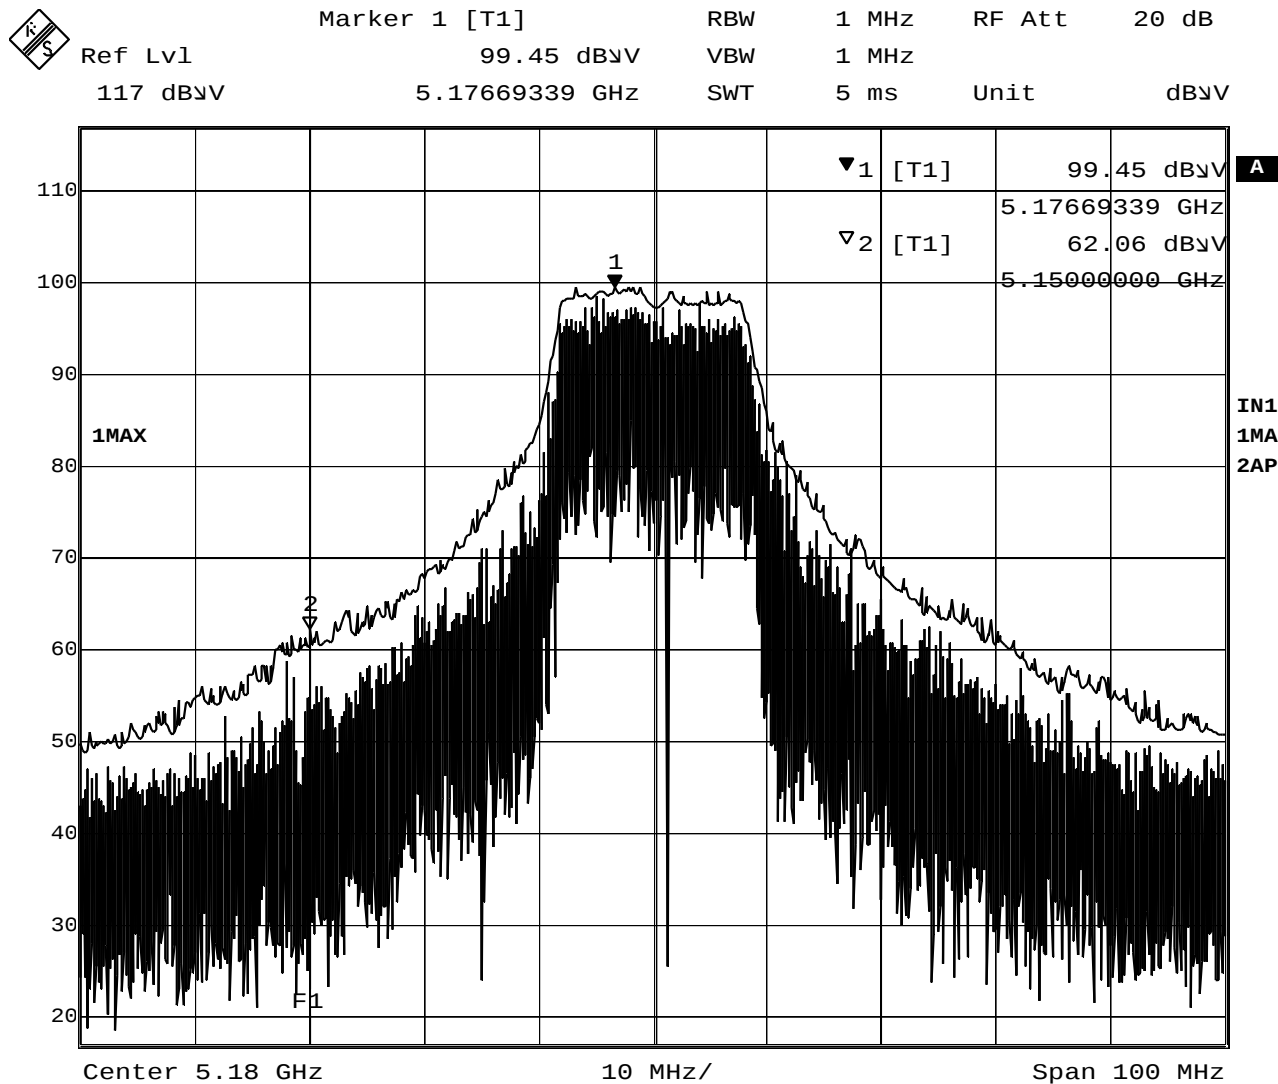


Date: 6.DEC.2002 17:57:49

Plot 7-1-1 5180MHz TX mode (Peak)



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	20 dB
117 dBμV	88.03 dBμV	VBW	10 Hz		
	5.17669339 GHz	SWT	25 s	Unit	dBμV

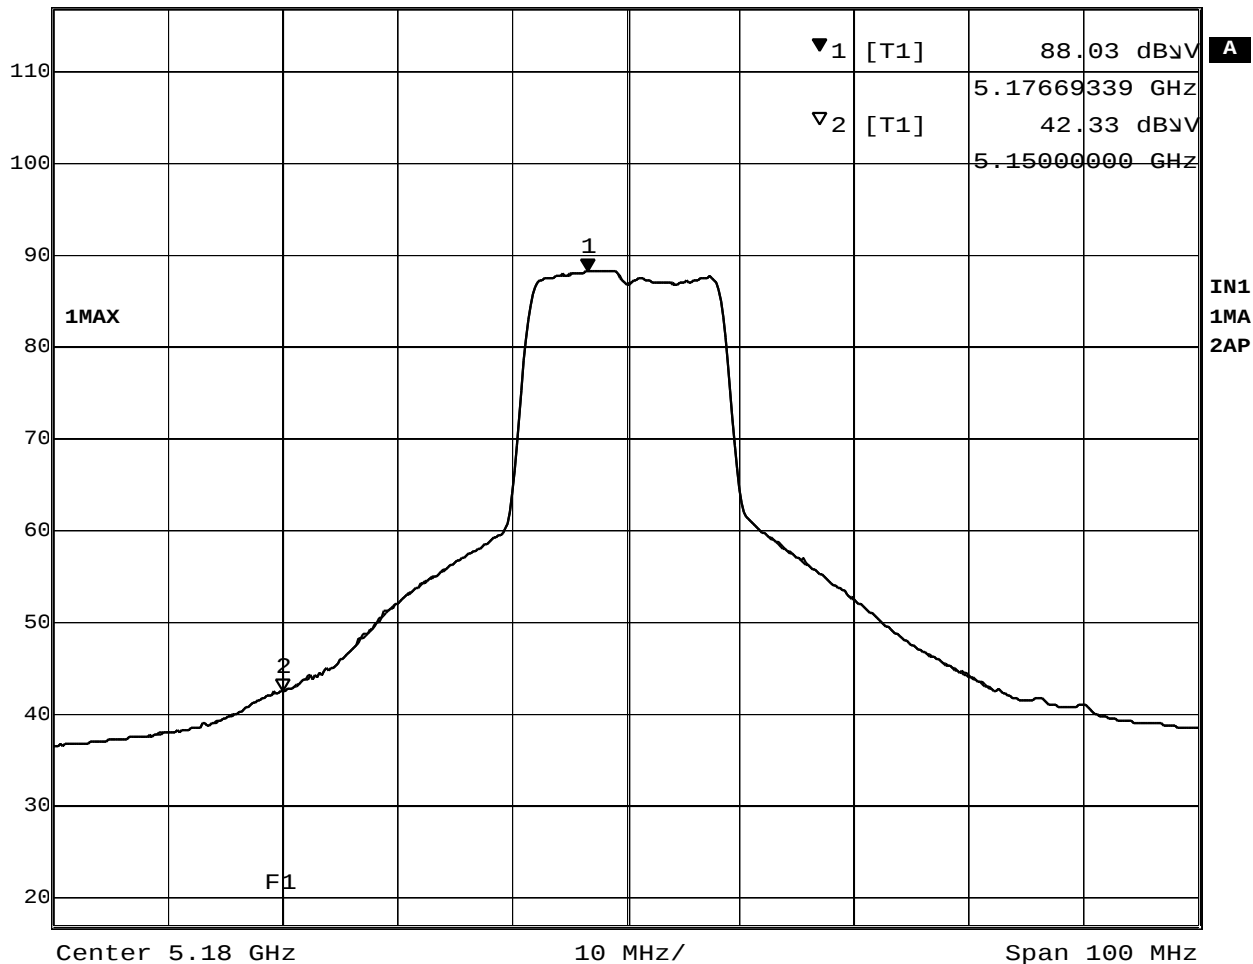


Date: 6.DEC.2002 17:58:59

Plot 7-1-2 5180MHz TX mode (Average)




Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	20 dB
117 dBμV	104.10 dBμV	VBW	1 MHz		
	5.26581162 GHz	SWT	5 ms	Unit	dBμV

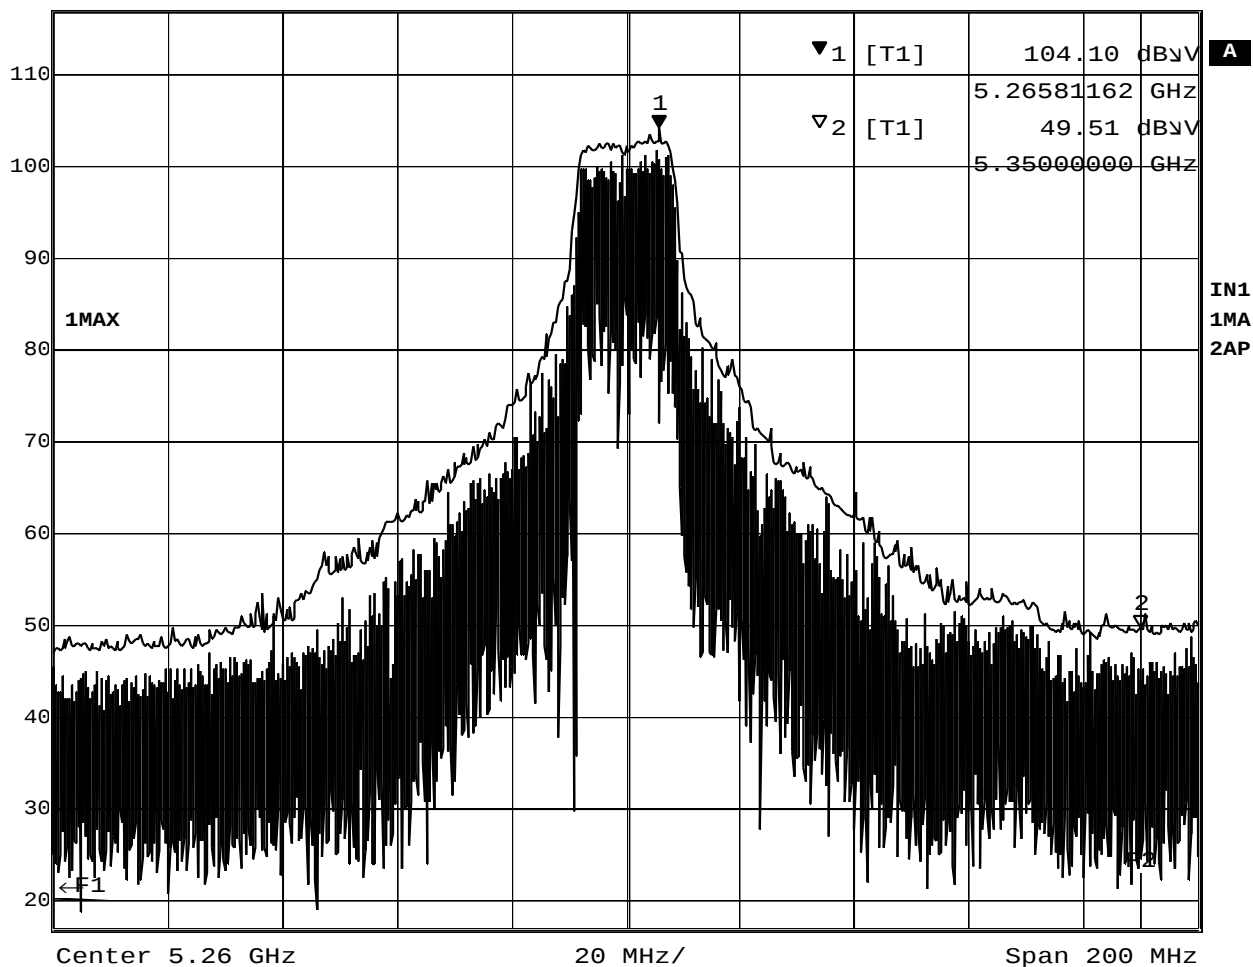


Date: 6.DEC.2002 18:02:17

Plot 7-2-1 5260MHz TX mode (Peak)

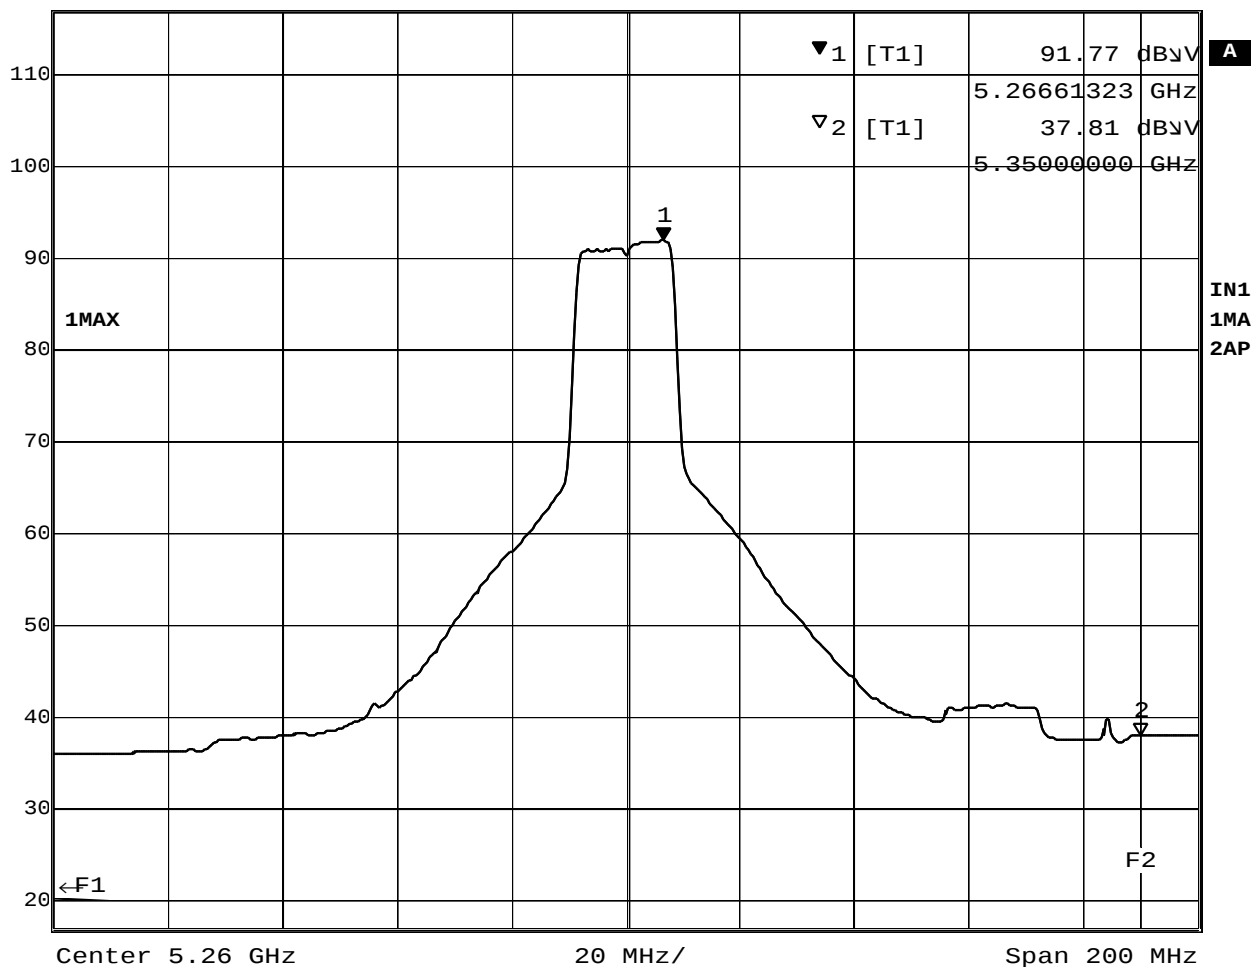Ref Lvl
117 dBμVMarker 1 [T1]
91.77 dBμV
5.26661323 GHzRBW 1 MHz RF Att 20 dB
VBW 10 Hz
SWT 50 s Unit dBμV


Date: 6.DEC.2002 18:01:22

Plot 7-2-2 5260MHz TX mode (Average)

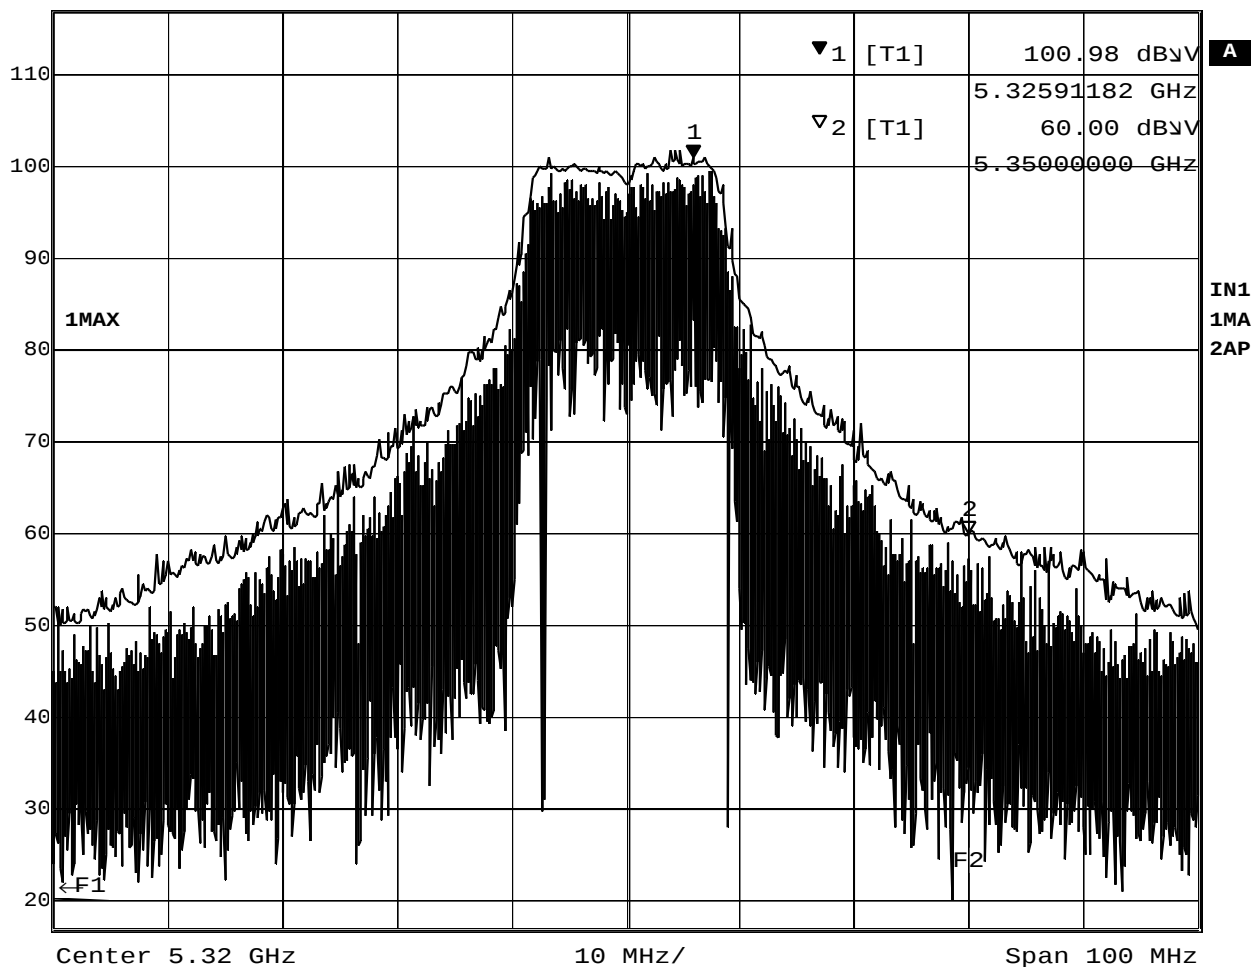Ref Lvl
117 dBμVMarker 1 [T1]
100.98 dBμV
5.32591182 GHzRBW 1 MHz RF Att 20 dB
VBW 1 MHz
SWT 5 ms Unit dBμV

Date: 6.DEC.2002 18:10:51

Plot 7-3-1 5320MHz TX mode (Peak)

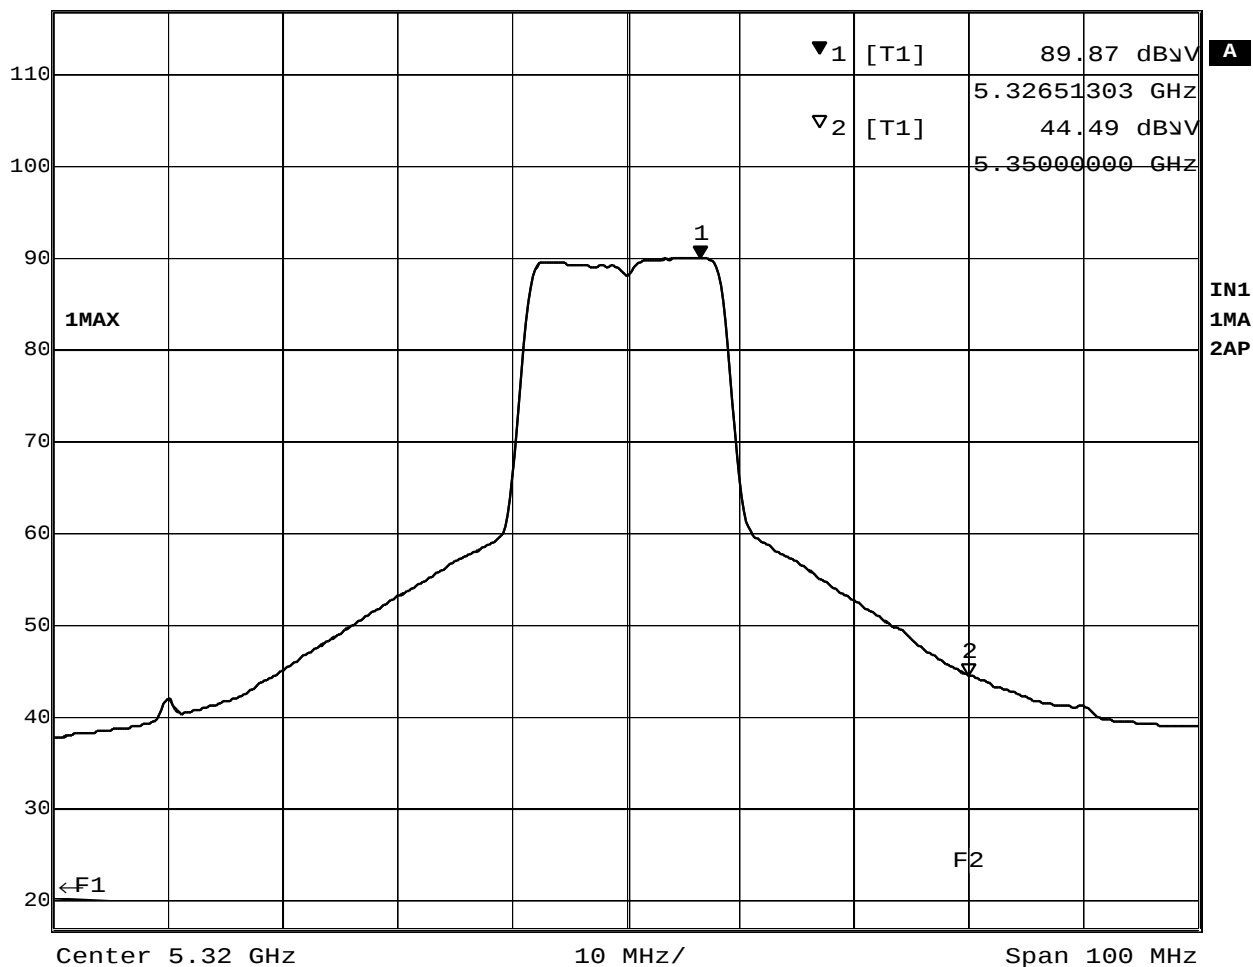Ref Lvl
117 dBμVMarker 1 [T1]
89.87 dBμV
5.32651303 GHzRBW 1 MHz RF Att 20 dB
VBW 10 Hz
SWT 25 s Unit dBμV

Date: 6.DEC.2002 18:12:14

Plot 7-3-2 5320MHz TX mode (Average)