

Emission Test Report
Standard: FCC Part 15 Subpart E / IC RSS-210
Class II Permissive change

Document Number : FCC 19-0235-0

Product: IBM 11a/b/g Wireless LAN Mini PCI Adapter

measured with IBM ThinkPad R50 Series


FCC ID: ANO20030400LEG
IC: 349E-PH12127E

August 15, 2003

Prepared:

EMC R&D Staff Engineer

Takeshi Asano

Signature: 
IBM Japan, Ltd.
EMC Engineering
LAB-S59

1623-14, Shimotsuruma,
Yamato-shi Kanagawa-ken 242, Japan
Phone: +81-46-215-4779
Fax: +81-46-273-7420
E-Mail: asano@jp.ibm.com

Reviewed and Checked:

EMC R&D Staff Engineer

Shigeru Motoki

Signature: 
IBM Japan, Ltd.
EMC Engineering
LAB-S59

1623-14, Shimotsuruma,
Yamato-shi Kanagawa-ken 242, Japan
Phone: +81-46-215-2239
Fax: +81-46-273-7420
E-Mail: motokis@jp.ibm.com

Approved:

Manager, EMC Engineering
/ NVLAP signatory

Akihisa Sakurai
Signature: 
IBM Japan, Ltd.
EMC Engineering
LAB-S59
1623-14, Shimotsuruma,
Yamato-shi Kanagawa-ken 242, Japan
Phone: +81-46-215-2613
Fax: +81-46-273-7420
E-Mail: akihisa@jp.ibm.com

**MEASUREMENT / TECHNICAL REPORT – Part 15 Subpart E
(Intentional Radiator)****IBM 11a/b/g Wireless LAN Mini PCI Adapter
with
IBM ThinkPad R50 Series****FCC ID : ANO20030400LEG****August 15, 2003**

This report concerns: (check one)

Original Grant ☐Class I change ☐Class II change ☒Equipment type: Wireless LAN device

This report shall not be reproduced except in full, without the written permission of this test lab.

The measurement results contained in this report relate only to the item which was tested.

Measurement procedure used is ANSI C63.4-2000 unless otherwise specified.

Other test procedure: _____

The FCC has issued provisional acceptance of this test laboratory for Declaration of Conformity testing per letter dated 1997.

APPLICANT ANTI-DRUG ABUSE CERTIFICATION:

By checking yes, the applicant certifies that, in the case of an individual applicant, he or she is not subject to a denial of federal benefits, that includes FCC benefits, pursuant to Section 5301 of the Anti-Drug Abuse of 1988, 21 U.S.C. 853(a), or, in the case of a non-individual applicant (e.g. corporation, partnership or other unincorporated association), no party to the application is subject to a denial of federal benefits, that includes FCC benefits, pursuant to that section. For the definition of a "party" for these purposes, see 47 CFR 1.2002(b).

☒ Yes or ☐ No

"Report shall not be reproduced except in full, without the written approval of the laboratory" "the report must not be used by the client to claim product endorsement by NVLAP or any agency of the US government"

Prepared by: Takeshi Asano

IBM Japan Corporation, Yamato EMC Engineering

LAB-S59, 1623-14, Shimotsuruma, Yamato-shi Kanagawa-ken 242-8502, Japan

Tel: +81-46-215-4779 Fax: +81-46-273-7420

- Index -

A. GENERAL INFORMATION	5
A.1 Test Methodology	5
A.2 Test Facility / NVLAP Accreditation	5
A.3 EUT details	5
B. SUMMARY OF TEST RESULTS	6
C. TEST INSTRUMENTS	7
D. OPERATION MODE OF EUT	9
E. JUSTIFICATION	9
F. MEASUREMENT UNCERTAINTY	10
G. TEMPERATURE AND HUMIDITY	10
H. RELATED SUBMITTAL(S)/GRANT(S)/NOTES	10
1. BANDWIDTH AT 26 DB BELOW / BANDEDGE	11
1.1 Test Procedure	11
1.2 Measurement Results	11
1.3 Trace Data	12
2. PEAK CONDUCTED TRANSMIT OUTPUT POWER	15
2.1 Test Procedure	15
2.2 Measurement Results	17
2.3 Trace Data	18
3. PEAK POWER SPECTRAL DENSITY	21
3.1 Test Procedure	21
3.2 Measurement Results	21
3.3 Trace Data	22
4. PEAK EXCURSION RATIO	28
4.1 Test Procedure	28
4.2 Measurement Results	28
4.3 Trace Data	29
5. AC WIRELINE CONDUCTED EMISSIONS (150KHZ – 30MHZ)	32
5.1 Test Procedure	32
5.2 Test Instruments and Measurement Setup	32
5.3 Powerline Voltage Calculation	33
5.4 Measurement Results	34
6. RESTRICTED BANDS RADIATIONS (30MHZ – 1GHZ)	36
6.1 Test Procedure	36
6.2 Test Instruments and Measurement Setup	36
6.3 Field Strength Calculation	38
6.4 Measurement Results	39
7. RESTRICTED BANDS RADIATIONS (1GHZ – 40GHZ)	40
7.1 Test Procedure	40
7.2 Test Instruments and Measurement Setup	40
7.3 Field Strength Calculation	42
7.4 Limits	42

7.5	Measurement Results.....	43
7.6	Trace Data.....	46

A. General Information

APPLICANT : IBM Japan, Ltd.
 TEST SITE : IBM Japan, Ltd., Yamato Semi-anechoic chamber #1
 TEST SITE ADDRESS : 1623 – 14 Shimotsuruma, Yamato-shi, Kanagawa 242-8502 Japan
 Tel: +81-46-215-4779, Fax: +81-46-273-7420
 REGULATION : FCC Part 15 Subpart E
 Industry Canada RSS-210 (Issue No.5)
 MODEL NAME : IBM 11a/b/g Wireless LAN Mini PCI Adapter
 FCC ID : ANO20030400LEG
 IC Certification Number : 349E-PH12127E
 SERIAL NUMBER : A310037304
 PHYSICAL CONDITION : Preproduction
 KIND OF EQUIPMENT : Personal computer with a IEEE802.11a, 11b & 11g Wireless LAN
 Mini-PCI Combo Card ([Composite application](#))
 TESTED DATE : July 15, 18, 25, 28, 31 and August 7, 2003

A.1 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4-2000. Radiated testing was performed at an antenna to EUT distance of 3 meters.

A.2 Test Facility / NVLAP Accreditation

The semi-anechoic chamber #1 used to correct the data are located in Yamato Laboratory, IBM Japan.

- This facility has been fully described in a report dated September 1998, submitted to the FCC office, and accepted in a letter, dated Nov. 2, 1998(31040/SIT).
- IBM Yamato EMC Engineering is recognized under the National Voluntary Laboratory Accreditation Program for satisfactory compliance with Criteria established in Title 15, Part 285 Code of Federal Regulations.(NVLAP Lab code: 200198-0)
- This facility is accepted by **Industry Canada** in a letter dated March 19, 2001 as number **IC 349E** for chamber #2, and January 25, 2002 as number **IC 4221** for chamber #1.

A.3 EUT details

Table-A EUT details

Model and S/N	FCC ID IC Certification Number	Description
IBM 11a/b/g Wireless LAN Mini PCI Adapter (s/n A310037304)	FCC ID: ANO20030400LEG IC: 349E-PH12127E	Applying equipment IEEE802.11a/b/g Wireless LAN Mini-PCI Combo Card without antenna
ThinkPad R50 Series M/T 1829-62x (s/n ZZ-08233)	N/A	IBM Notebook PC with built_in antenna CPU: Intel® Pentium® M Processor, 1.6GHz
P/N 02K6746	N/A	Universal AC adapter 72W, Unshielded power cord

B. Summary of Test Results

Table-B presents the list of the measurement items for U-NII devices under FCC Part 15 Subpart E, and for LELAN devices under Industry Canada RSS-210.

The section numbers of upper portion are showing FCC codes, and the lower ones are for IC RSS-210.

Table-B List of the measurements

Section(s)	Test Items		Condition	Result
	Transmit mode (TX):			
15.407(a)(1), (2) 6.2.2 (q1)(i)(ii)	Bandwidth at 26 dB below	26dB BW was also taken for IC instead of 99% BW, according to RSS-210 6.2.2q(iv)(b).	Conducted	Pass
	Peak conducted transmit output power or EIRP for IC	5150-5250MHz: FCC: 50mW or (4+10logB)dBm IC : 200mW* or (10+10logB)dBm* *: EIRP		Pass
		5250-5350MHz: FCC: 250mW or (11+10logB)dBm IC : 250mW or (11+10logB)dBm IC : 1W* or (17+10logB)dBm* *: EIRP B: 26dB BW in MHz		Pass
	Peak Power Spectral Density	5150-5250MHz: FCC: 4 dBm in any 1MHz IC : 10 dBm in any 1MHz (EIRP) 5250-5350MHz: FCC: 11 dBm in any 1MHz IC : 11 dBm in any 1MHz		Pass
	N/A 6.2.2 (q1)(iv)(b)	Peak Spectral Density		IC: 3 + 10logB dBm/MHz
15.407(a)(6) N/A	Peak Excursion	The ratio of the peak excursion of the modulation envelope to the peak transmit shall not exceed 13 dB across any 1 MHz .		Pass
15.207 / 407(b)(5) 6.2.2 (q1)(v) / 6.6	AC Wireline Conducted Emissions 150kHz- 30MHz	Class B: Freq.(MHz) QP(dBμV) Ave.(dBμV) 0.15 - 0.5 66 - 56 56 - 46 0.5 - 5 56 46 5 - 30 60 50		Pass
15.205 & 209 / 407(b)(5) & (b)(6) 6.2.1 / 6.2.2(q1)(v) / 6.3	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Shall not exceed the limits specified in FCC 15.209 or RSS-210 Table3.	Radiated (30MHz -1GHz)	Pass
			Radiated (1G -40GHz)	Pass

	Receive mode (RX):			
15.207 / 407(b)(5) 6.2.2(q1)(v) / 7.4	AC Wireline Conducted Emissions 150kHz - 30MHz	Class B: Freq.(MHz) QP(dBμV) Ave.(dBμV) 0.15 - 0.5 66 - 56 56 - 46 0.5 - 5 56 46 5 - 30 60 50	Conducted	Pass

15.205 & 209 / 407(b)(5) & (b)(6) 6.2.1 / 6.2.2(q1)(v) / 7.3	General Field Strength Limits (Radiated Emission Limits)	Shall not exceed the limits specified in RSS-210.	Radiated (30MHz -1GHz)	Pass
			Radiated (1G - 40GHz)	Pass

	Other general requirements		Result
15.407(a)(1)(2)	Antenna gain	Peak : 2.84 dBi in 5180-5320MHz band	N/A
6.2.2(q1)(iv)(a)	Digital modulation	Applying equipment employs IEEE802.11a, 11g(OFDM) or 11b(CCK) digital modulation technology.	complies
15.407(c) 6.2.2(q1)(iv)(d)	Automatic link disconnection in no transaction state	Refer to “Circuitry Description” document.	complies
15.407(d) 6.2.2(q1)(i)	Integral antenna in the 5150M -5250MHz band	The device employs an unique electronic handshake connector. Refer to “Confidential_BIOS_Lock” exhibit.	complies
15.407(e) 6.2.2(q1)(i) (q1)(iv)(g)	Indoor use in the 5150M -5250MHz band, and interference from radars.	Refer to the manual (Regulatory Notice).	complies
15.407(f) 6.2.2(q1)(iv)(g)	RF Exposure Requirement	Refer to “RF Exposure Evaluation” or “Exposure of Humans to Radio Frequency Fields” documents.	complies
15.407(g) 6.2.2(q1)(iv)(e)	Frequency stability	Refer to “Circuitry Description” document.	complies

C. Test Instruments

Table-C List of Measuring Instruments

Description	Model	Serial Number	Calibration Date	Calibration Interval
Computer	IBM 6868-30J	97-901X3	N/A	N/A
Computer	IBM 6589-13J	97-15613	N/A	N/A
Spectrum Analyzer (100Hz-1.5GHz)	HP 85680B	2601A02634	08/28/02	1 year
Spectrum Analyzer (100Hz-1.5GHz)	HP 85680B	2841A04242	10/30/02	1 year
Spectrum Analyzer (100Hz-1.5GHz)	HP 85680B	2732A03651	02/28/03	1 year
Spectrum Analyzer Display	HP 85662A	2542A12308	08/28/02	1 year
Spectrum Analyzer Display	HP 85662A	2816A16827	10/30/02	1 year
Spectrum Analyzer Display	HP 85662A	2648A15255	02/28/03	1 year
Quasi-Peak Adapter	HP 85650A	2043A00062	08/28/02	1 year
Quasi-Peak Adapter	HP 85650A	2521A00968	02/28/03	1 year
Quasi-Peak Adapter	HP 85650A	2811A01126	10/30/02	1 year
Amplifier (100KHz - 1.3GHz)				
- for 30-200MHz	HP 8447D	2805A02919	04/14/03	1 year
- for 200-1000MHz	HP 8447D	2727A05190	04/14/03	1 year
Amplifier (1 - 26.5GHz)	HP 8449B	3008A00582	06/11/03	1 year
Amplifier (26.5 - 40GHz)	Agilent 83051A	3950M00193	01/06/03	1 year

Spectrum Analyzer EMI Test Receiver	R&S ESI26	836119/003	05/01/03	1 year
Spectrum Analyzer	HP 8563E	3416A02248	08/14/02	1 year
Harmonic Mixer	Agilent 11970A	011269-001	07/19/03	1 year
Receiver (9kHz-30MHz)	R&S ESH3	891806/012	10/07/02	1 year
Receiver (20MHz-1.3GHz)	R&S ESVP	892111/030	03/17/03	1 year
Biconical Antenna (30-200MHz)	EMCO 3108	2536	04/23/03	1 year
Log-Periodic Antenna (200-1000MHz)	EMCO 3146	2849	04/23/03	1 year
Horn Antenna (1- 18GHz)	EMCO 3115	9903-5774	07/17/03	1 year
Horn Antenna (3.95- 5.85GHz)	EMCO 3160-5	1099	07/17/03	1 year
Horn Antenna (5.85- 8.20GHz)	EMCO 3160-6	9712-1044	07/17/03	1 year
Horn Antenna (8.2- 12.4GHz)	EMCO 3160-7	1156	07/17/03	1 year
Horn Antenna (12.4- 18GHz)	EMCO 3160-8	1143	07/17/03	1 year
Horn Antenna (18- 26.5GHz)	EMCO 3160-9	0004-1202	07/17/03	1 year
Horn Antenna (26.5- 40GHz)	EMCO 3160-10	1175	07/17/03	1 year
LISN	EMCO 3825/2	1426	09/01/02	1 year
Power Meter	HP 437B	3043U03437	11/08/02	1 year
Power Sensor	HP 8481A	US41030582	11/08/02	1 year
Switch/control unit	HP 3488A	2719A17226	N/A	N/A
		2719A17228	N/A	N/A
Plotter	HP 7550A	2631A33619	N/A	N/A
Coaxial cables (1 – 18GHz):	Length:			
- Horn Ant <=> RF Amp.	6 m	- EM206SCO	09/05/02	1 year
- RF Amp.<=>Spectrum Analyzer(<12GHz)	16m	- GEM0101	03/27/03	1 year
- RF Amp.<=>Spectrum Analyzer(>12GHz)	3 m	- SF102-20166	09/05/02	1 year
Coaxial cables (18 – 40GHz):				
- Horn Ant <=> RF Amp.	3m	- SF102-20167	09/05/02	1 year
- RF Amp.<=>Spectrum Analyzer	1m	- SF102-21105	09/05/02	1 year
N-Coax cables:				
- Bi-coni Ant <=> 10m Cable	9 m	- EM103L01	04/14/03	1 year
- 10m Cable <=> Shield Panel	10 m	- EM103L02	04/14/03	1 year
- Shield Panel <=> RF Amp	7 m	- EM103L03	04/14/03	1 year
- RF Amp <=> Power Splitter	0.5m	- EM103L04	04/14/03	1 year
- Log-peri Ant <=> 10m Cable	9 m	- EM103H01	04/14/03	1 year
- 10m Cable <=> Shield Panel	10 m	- EM103H02	04/14/03	1 year
- Shield Panel <=> RF Amp	7 m	- EM103H03	04/14/03	1 year
- RF Amp <=> Power Splitter	0.5m	- EM103H04	04/14/03	1 year
Coax cables:				
- Lisn-L <=> SW/Con.unit (SW100)	4 m	- EMIC-L	04/14/03	1 year
- Lisn-N <=> SW/Con.unit (SW101)	4 m	- EMIC-N	04/14/03	1 year
- SW/Con.unit <=> RCVR (Input)	1 m	- EMIC-R	04/14/03	1 year
- SW/Con.unit<=> Spe Ana.(Signal In)	1 m	- EMIC-S	04/14/03	1 year
- Power Splitter <=> SW/Con.unit (SW110)	1 m	- EM103L05	04/14/03	1 year
- Power Splitter <=> SW/Con.unit (SW300)	1 m	- EM103L06	04/14/03	1 year
- Power Splitter <=> SW/Con.unit (SW100)	1 m	- EM103H05	04/14/03	1 year
- Power Splitter <=> SW/Con.unit (SW301)	1 m	- EM103H06	04/14/03	1 year
- SW/Con.unit <=> Receiver (Input)	2 m	- EM1RCV	04/14/03	1 year
- SW/Con.unit <=> Spe Ana.(Signal In) for 30- 200MHz	2 m	- EM1SPL	04/14/03	1 year
- SW/Con.unit <=> Spe Ana.(Signal In) for 200-1000MHz	2 m	- EM1SPH	04/14/03	1 year

Notes.

- The above equipment calibration is traceable to National standards.
- HP: Hewlett Packard, R&S: Rohde & Schwarz

D. Operation mode of EUT

1. All tests were performed using the “Atheros Radio Test” program. This tool supports to emit the continuous transmission mode for the testing purpose.
2. Three kinds of frequencies were chosen for the measurement. i.e. 5180MHz (lowest), 5260MHz(middle), and 5320MHz (highest).

Table-D Transmission mode of EUT (The measurement plots are shown in shading.)

Operation Frequency [GHz]	Rated output power (conducted) [dBm]							
	6M bps	9M bps	12M bps	18M bps	24M bps	36M bps	48M bps	54M bps
5.180 (Ch. 36)	+14	+14	+14	+14	+14	+14	+14	+13
5.200 (Ch. 40)	+14	+14	+14	+14	+14	+14	+14	+13
5.220 (Ch. 44)	+14	+14	+14	+14	+14	+14	+14	+13
5.240 (Ch. 48)	+14	+14	+14	+14	+14	+14	+14	+13
5.260 (Ch. 52)	+17	+17	+17	+17	+17	+15	+14	+13
5.280 (Ch. 56)	+17	+17	+17	+17	+17	+15	+14	+13
5.300 (Ch. 60)	+17	+17	+17	+17	+17	+15	+14	+13
5.320 (Ch. 64)	+14	+14	+14	+14	+14	+14	+14	+13

3. 24Mbps transmission mode was selected for full testing as the worst case sampling.
See “Chapter 2. Peak Conducted Transmit Output Power” as to the determination of measurement plots.
4. As for the RF receiving test, the middle channel with the worst case(i.e. 5260MHz, 24Mbps mode) was selected representatively.

E. Justification

The EUT was investigated for both the main (left) and the auxiliary (right) antennas for each Tx mode. The worse case data taken in this report represents the measurement result of the right antenna of 15 inch LCD model that has comparatively higher gain in 5.2GHz band as shown below.

Table-D Peak Antenna Gains of EUT

		14 inch LCD	15 inch LCD
5.2GHz band	Left Antenna gain	2.66 dBi (peak)	1.63 dBi (peak)
	Right Antenna gain	1.37 dBi (peak)	2.84 dBi (peak)

And the columns marked with shading in the Table-C are the worst cases of each Tx mode for all measurement items. This test report represents the measurement results performed with those Tx modes.

F. Measurement Uncertainty

Uncertainties of the both, the Yamato EMI radiated test facilities (EMI chambers, #1 and #2) and the Yamato EMI conducted test facility are derived with the NIS 81 "Treatment of uncertainty in EMC measurements" 1994.

Estimated site uncertainty values are as follows.

EMI chamber #1 : 4.39dB

EMI chamber #2 : 4.40dB

EMI conducted measurement system : 2.4dB

Detail should be referred to "Treatment of Uncertainty, Calculations and Policy" report, document number TCR 10-0015.

G. Temperature and Humidity

The temperature is controlled within range of 17° to 28°.

The relative humidity is controlled within range of 40% to 70%.

H. Related Submittal(s)/Grant(s)/Notes

The host unit with full peripheral devices including the applying modular as an unintentional radiator is classified as a Digital Device under the FCC Part 15 Subpart B or the Industry Canada Class B Emission Compliance (ICES-003), and subject to SDoC.

1. Bandwidth at 26 dB below / Bandedge

[5150-5250MHz: FCC 15.407(a)(1), RSS 6.2.2q1(i) / q1(iV)(b)]

[5250-5350MHz: FCC 15.407(a)(2), RSS 6.2.2q1(ii) / q1(iV)(b)]

1.1 Test Procedure

The bandwidth at 26 dB down from the peak of the RF emission was measured with a spectrum analyzer connected to the antenna terminal, while EUT was operating in continuous transmission mode at the appropriate center frequencies (5180 / 5260 / 5320MHz).

The spectrum analyzer was set to:

RBW=300kHz^{*1}, VBW=1MHz^{*2}, Span=50MHz, Sweep= 50ms, Mode= Peak detector

*1: approximately 1% of the emission bandwidth (§15.403(c))

*2: VBW > RBW (To be adjusted accordingly based on the spectrum stability.)

Table 1-1 : 26 dB Bandwidth Test Instruments

Description	Model	Serial Number
Spectrum Analyzer EMI Test Receiver	R&S ESI26	836119/003
Coax cables: - Spectrum Analyzer <=> EUT	Length: 110 cm Loss: 2.2 dB	

Notes: - R&S: Rohde & Schwarz




Figure 1: Measurement setup for 26dB bandwidth test

1.2 Measurement Results


Test Date: July 31, 2003

Table 1-2. 26dB bandwidth, TX mode 24Mbps

Center Frequency (MHz)	Lower frequency (MHz)	Upper frequency (MHz)	Bandwidth at 26 dB below (MHz)	Plot data
5180 (ch. 36)	5166.52	5194.18	27.66	Plot 1-1
5260 (ch. 52)	5243.62	5277.69	34.07	Plot 1-2
5320 (ch. 64)	5305.82	5333.18	27.36	Plot 1-3

: the closest frequencies to the bandedge

1.3 Trace Data

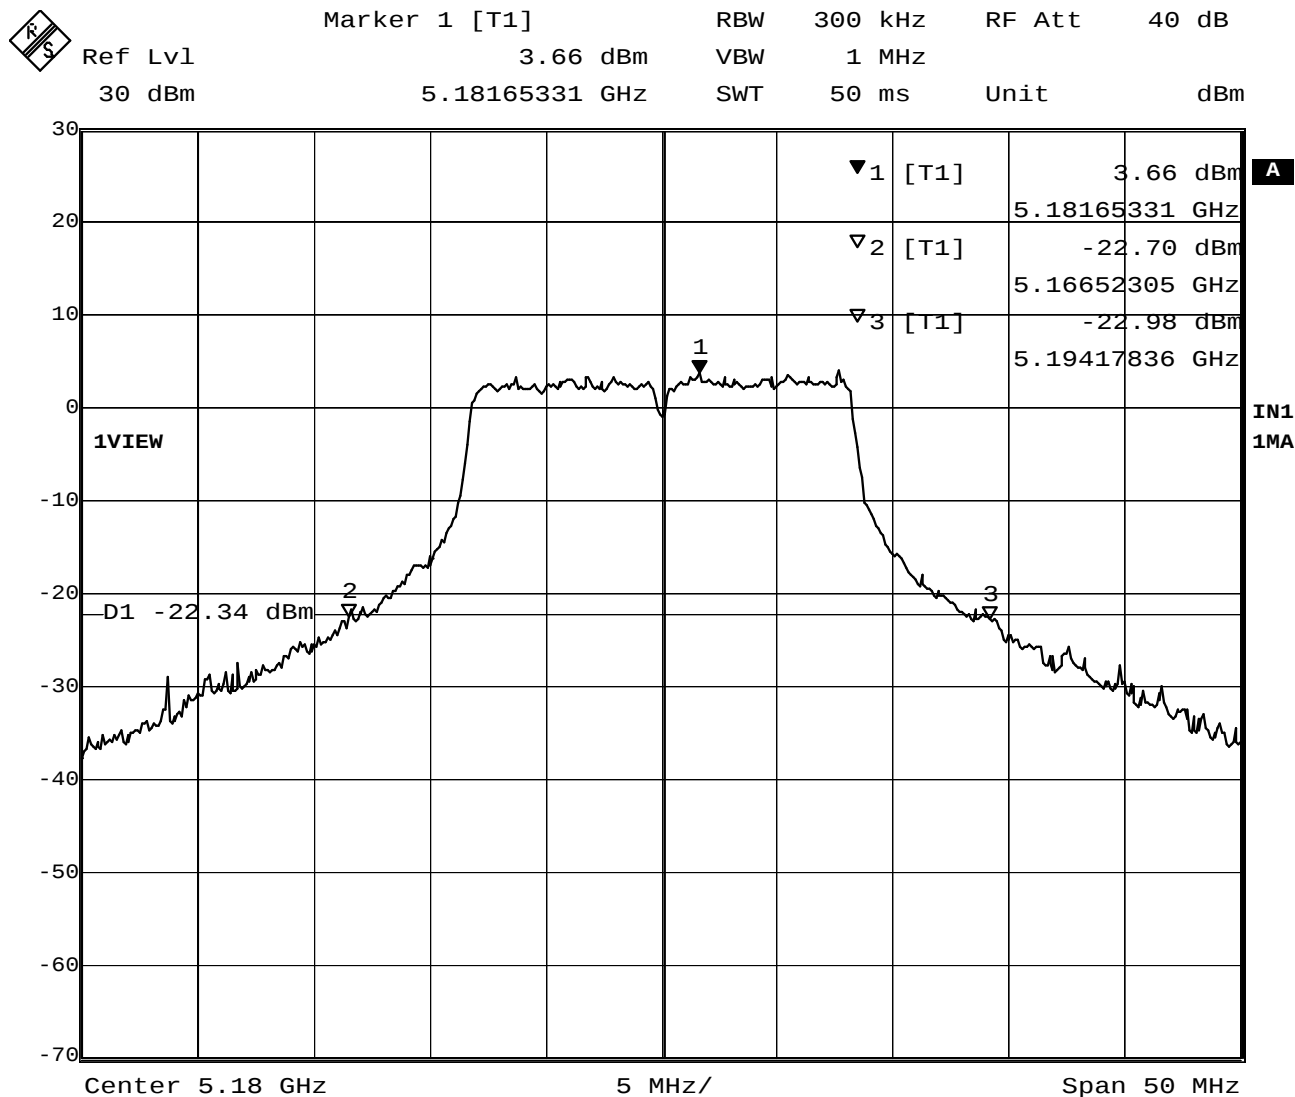


Date: 31.JUL.2003 15:08:50

Plot 1-1. 26dB BW at 5180MHz



Marker 1 [T1] RBW 300 kHz RF Att 40 dB
Ref Lvl 6.15 dBm VBW 1 MHz
30 dBm 5.26375752 GHz SWT 50 ms Unit dBm

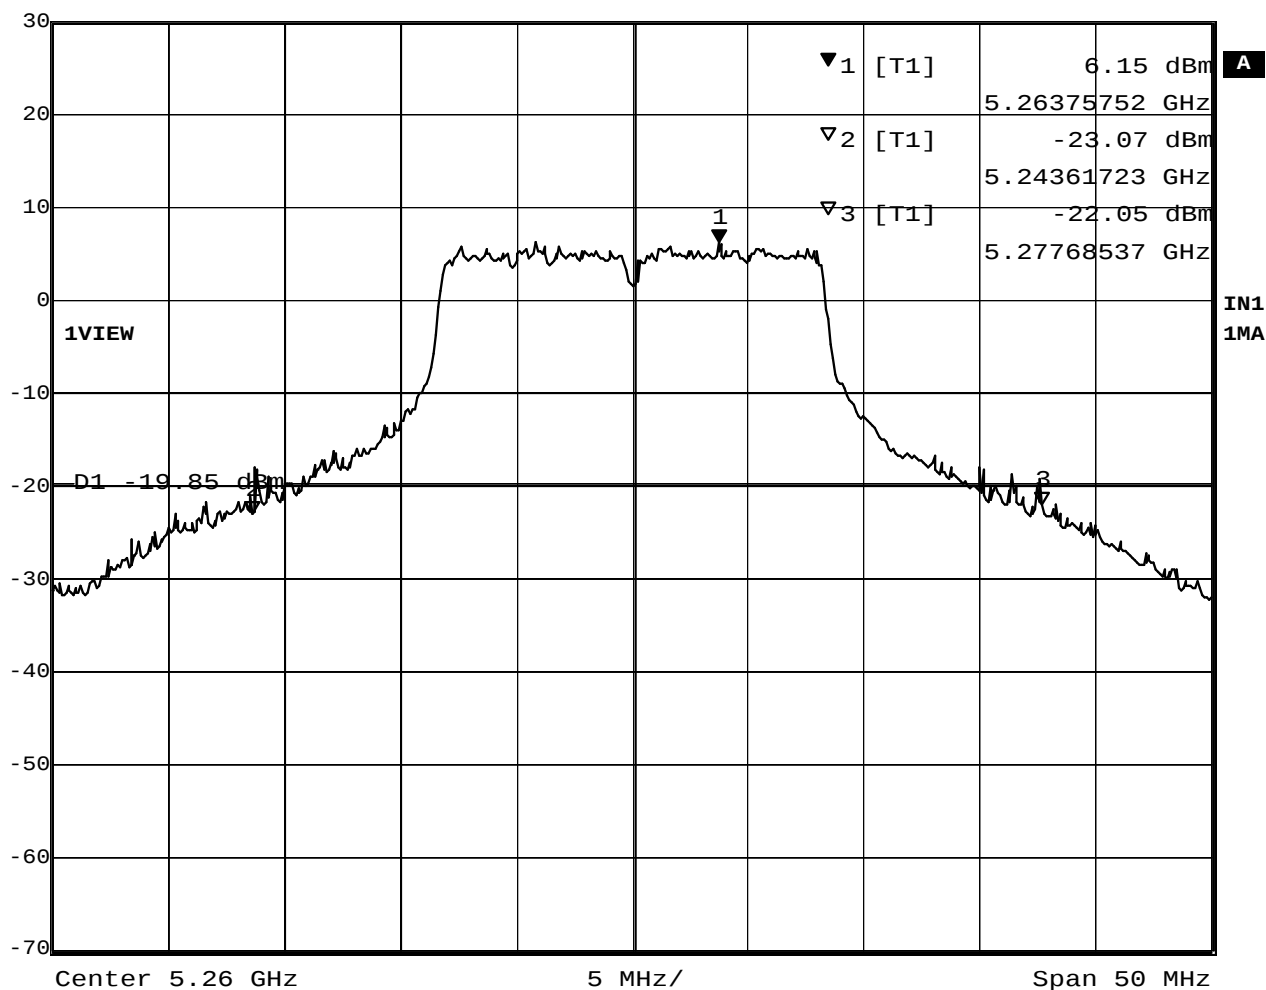


Date: 31.JUL.2003 15:02:35

Plot 1-2. 26dB BW at 5260MHz



Marker 1 [T1] RBW 300 kHz RF Att 40 dB
Ref Lvl 3.63 dBm VBW 1 MHz
30 dBm 5.32285571 GHz SWT 50 ms Unit dBm

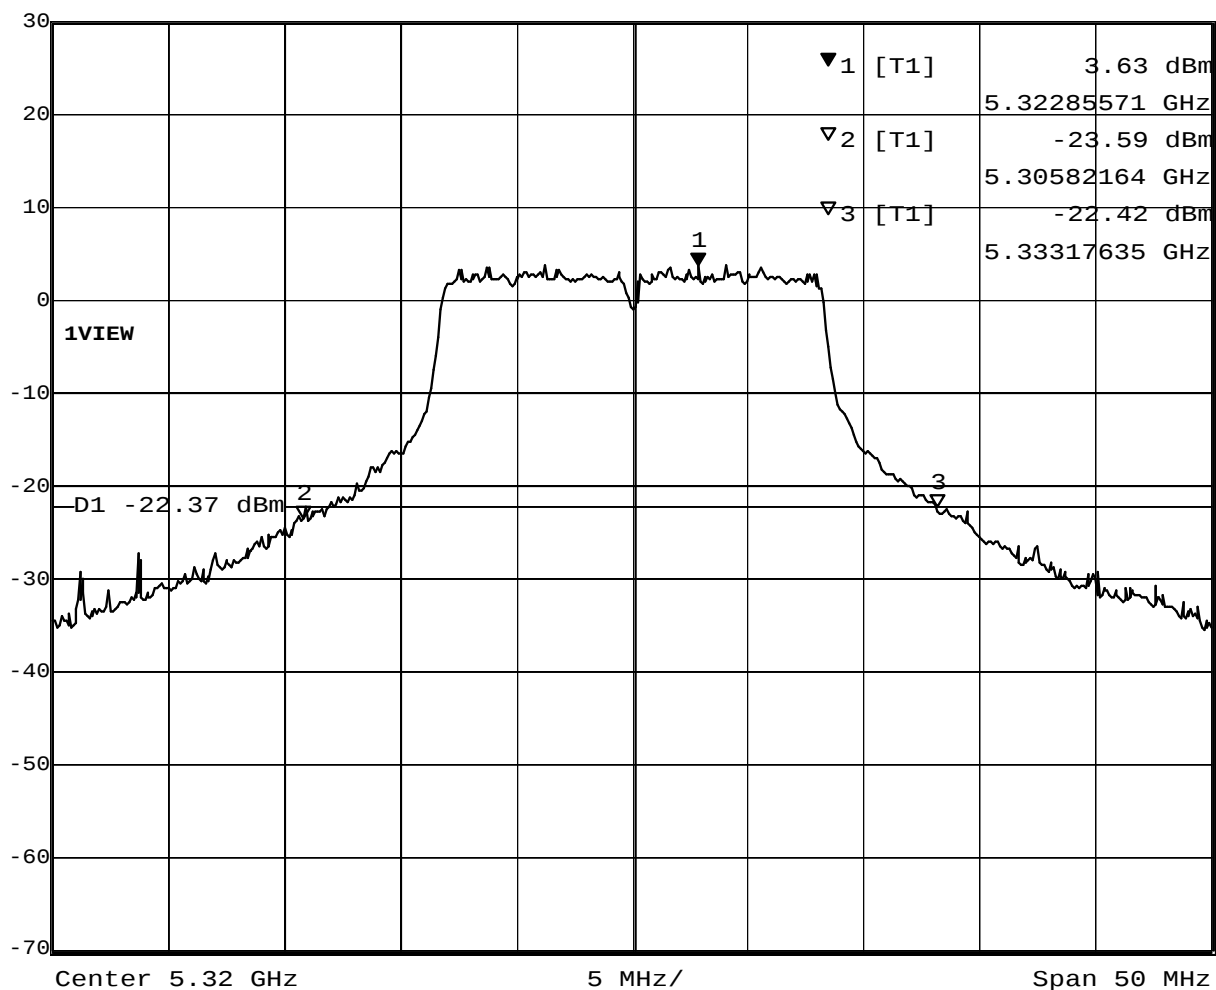

Date: 31.JUL.2003 14:54:25

Plot 1-3. 26dB BW at 5320MHz

2. Peak Conducted Transmit Output Power

[5150-5250MHz: FCC 15.407(a)(1), RSS 6.2.2q1(i) / q1(iV)(b)]

[5250-5350MHz: FCC 15.407(a)(2), RSS 6.2.2q1(ii) / q1(iV)(b)]

2.1 Test Procedure

The test was performed with two kinds of measurement methods as follows.

- 1) using Power meter
- 2) using Spectrum Analyzer according the Method #3 of the FCC Public Notice, DA 02-2138, August/30/2002

2.1.1 Power Meter measurement method

To find the worse case in the implemented transmission modes in each measuring frequency (low, middle, high), the following test was performed with a power meter.

- A transmitter antenna terminal of EUT was connected to the input of a RF power sensor.
- Measurement was performed while EUT was operating in continuous transmission mode at the appropriate center frequencies. The spectrum of the continuous transmission test mode is shown in the Plot 2-0.

Table 2-1-1: Test Instruments of power meter method

Description	Model	Serial Number
Power Meter	HP 437B	3043U03437
Power Sensor	HP 8481A	US41030582
Coax cables: - Power Sensor <=> EUT	Length: 20 cm Loss: 1.2dB	

Notes: - HP: Hewlett Packard




Figure 2-1: Measurement setup of power meter method

2.1.2 Spectrum Analyzer measurement method

The spectrum analyzer was connected to the antenna terminal, while EUT was operating in continuous transmission mode (shown in the Plot 2-0) at the appropriate center frequencies.

The spectrum analyzer was set to :

VBW= 30kHz ($\geq 1/T$, where T is transmission pulse duration. See Plot 2-0.), RBW=1MHz,
Span=30-40MHz encompassing the entire 26dB emission bandwidth of the transmission signal,
Mode= sample detector, Trigger= free run

The band power measurement function was used to measure the peak power of each transmission mode selected by the step 2.1.1. The analyzer computed the peak power by integrating the spectrum across the 26 dB emission bandwidth given by the previous chapter.

Table 2-1-2: Test instruments of spectrum analyzer method

Description	Model	Serial Number
Spectrum Analyzer EMI Test Receiver	R&S ESI26	836119/003
Coax cables: - Spectrum Analyzer <=> EUT	Length: 110 cm Loss: 2.2 dB	

Notes: - R&S: Rohde & Schwarz





Figure 2-2 : Measurement setup of spectrum analyzer method

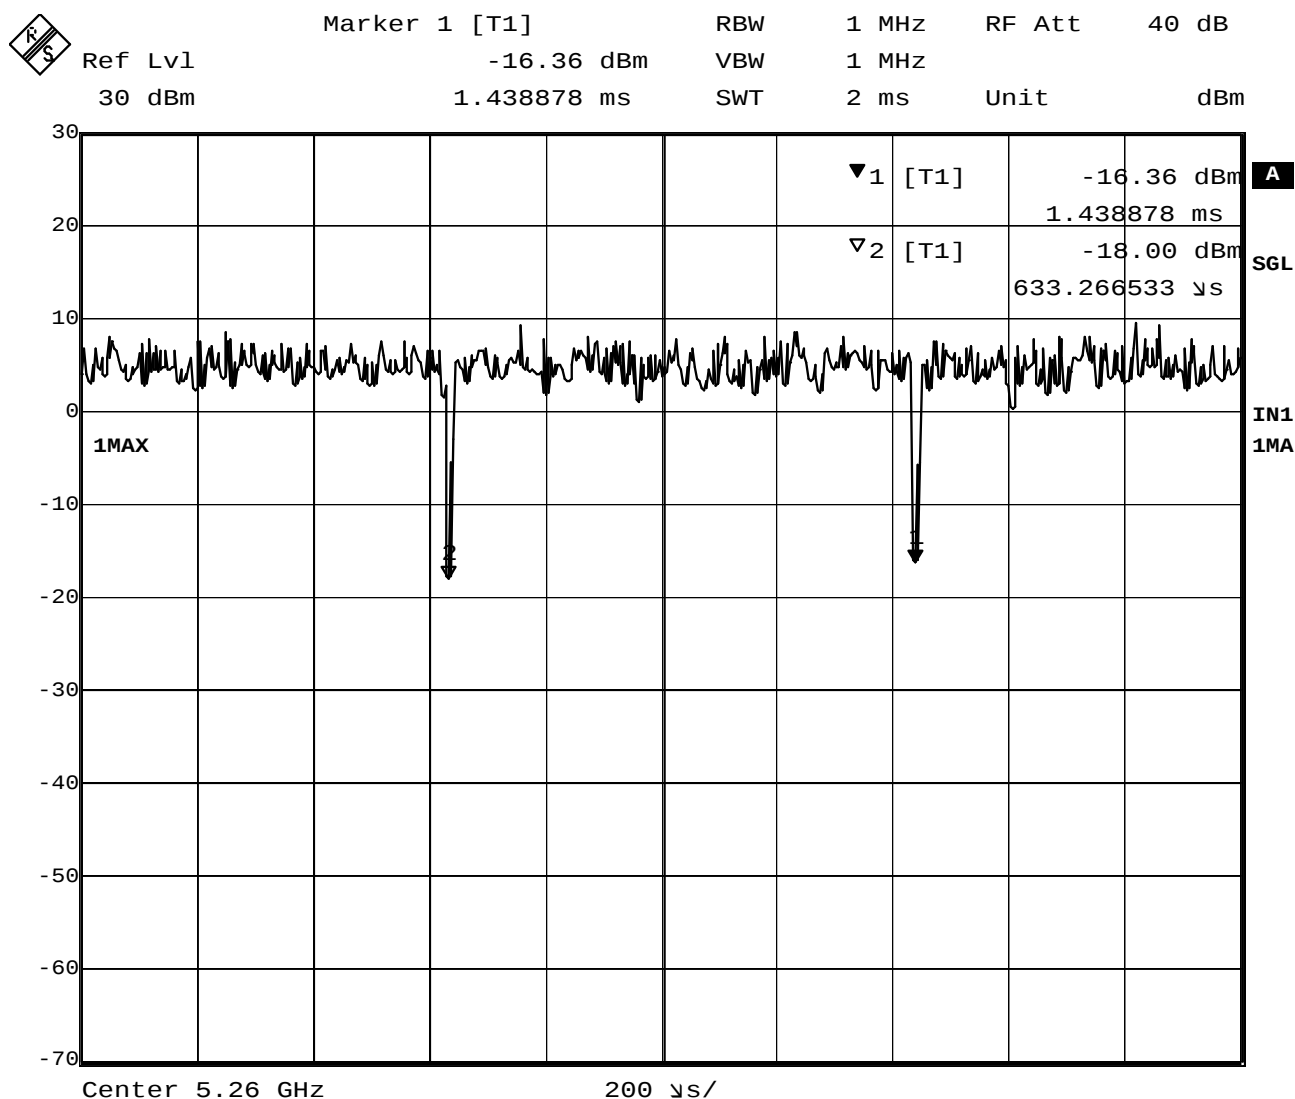

Date: 15.JUL.2003 16:46:27

Plot 2-0 Transmission Pulse Duration

2.2 Measurement Results

Test Date: July 15 and 31, 2003

Table 2-2-1. Power meter measurement results

Operation Frequency [GHz]	Rated output power (conducted) [dBm]							
	6M bps	9M bps	12M bps	18M bps	24M bps	36M bps	48M bps	54M bps
5.180	13.22	13.25	13.28	13.30	13.31	13.24	13.23	-
specification	14							13
5.260	16.01	16.03	16.04	16.08	16.09	-	-	-
specification	17					15	14	13
5.320	13.15	13.22	13.24	13.24	13.25	13.16	13.13	-
specification	14							13


[Calculation table]

Measured Frequency (MHz)	Power Meter Reading (dBm)	Cable Loss (dB)	Results (dBm)	Limit		Peak antenna gain of EUT (dBi)	EIRP (dBm)	IC limit (dBm)
				FCC (dBm)	IC (dBm)			
5180	13.31	1.2	14.51	17	N/A	2.84	17.35	23
5260	16.09	1.2	17.29	24	24		20.13	30
5320	13.25	1.2	14.45	24	24		17.29	30

Table 2-2-2. Spectrum analyzer measurement results

Measured Frequency (MHz)	Analyzer reading (dBm)	Trace number	Cable Loss (dB)	Results (dBm)	Limit		Peak antenna gain of EUT (dBi)	EIRP (dBm)	IC limit (dBm)
					FCC (dBm)	IC (dBm)			
5180	12.37	Plot 2-1	2.2	14.57	17	N/A	2.84	17.41	23
5260	15.21	Plot 2-2	2.2	17.41	24	24		20.25	30
5320	12.31	Plot 2-3	2.2	14.51	24	24		17.35	30

2.3 Trace Data

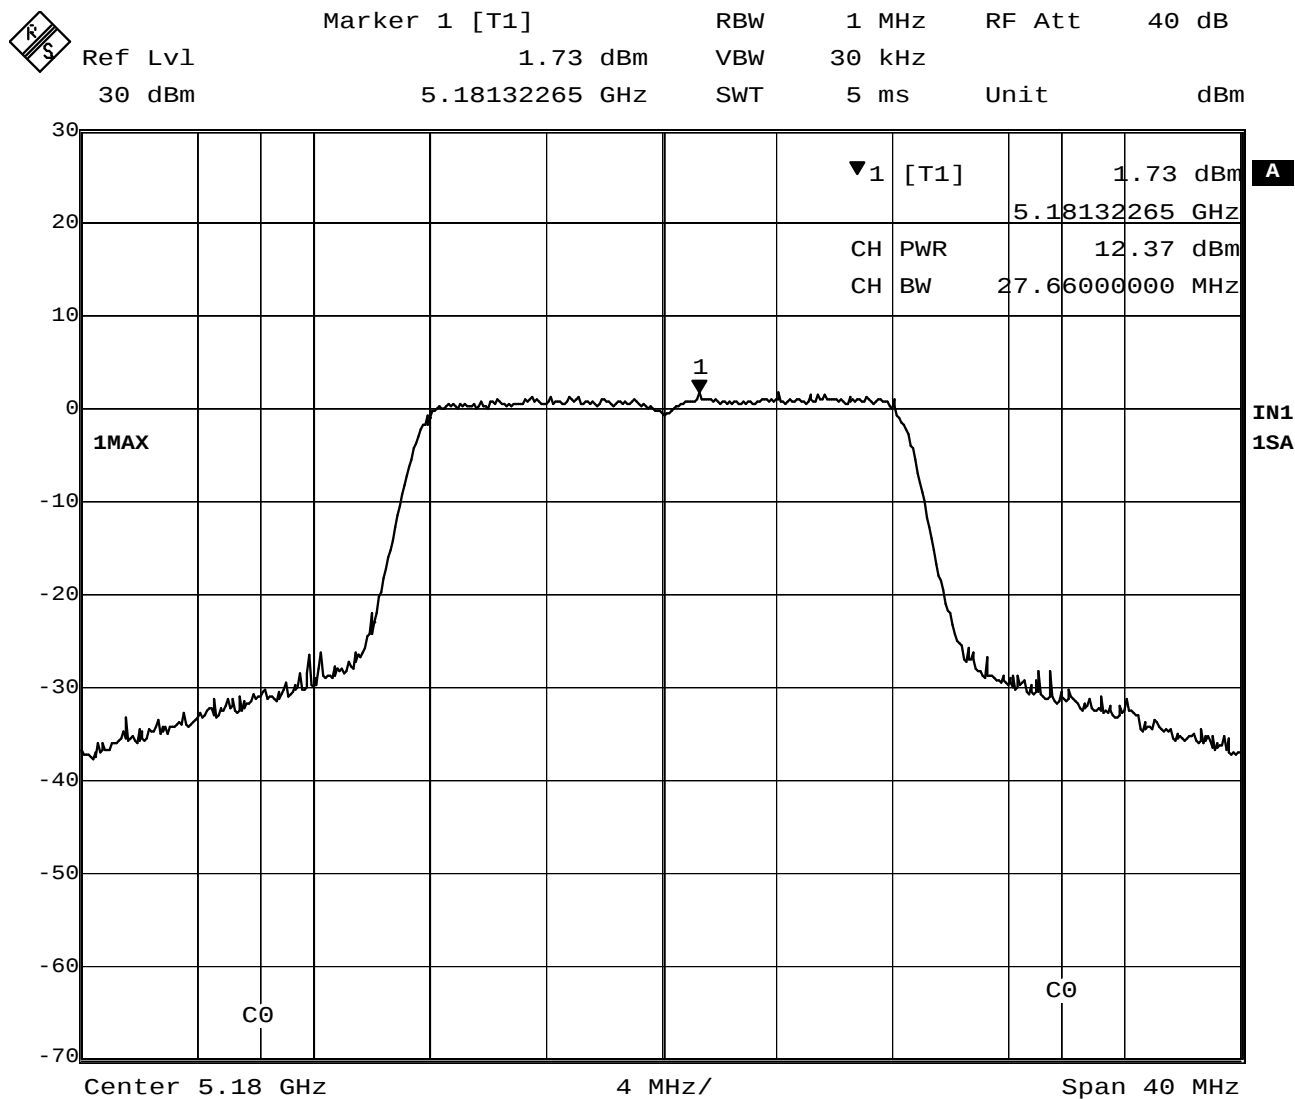


Date: 31.JUL.2003 15:26:04

Plot 2-1 Conducted Peak Power at 5180MHz



Marker 1 [T1] RBW 1 MHz RF Att 40 dB
Ref Lvl 4.21 dBm VBW 30 kHz
30 dBm 5.25571142 GHz SWT 5 ms Unit dBm

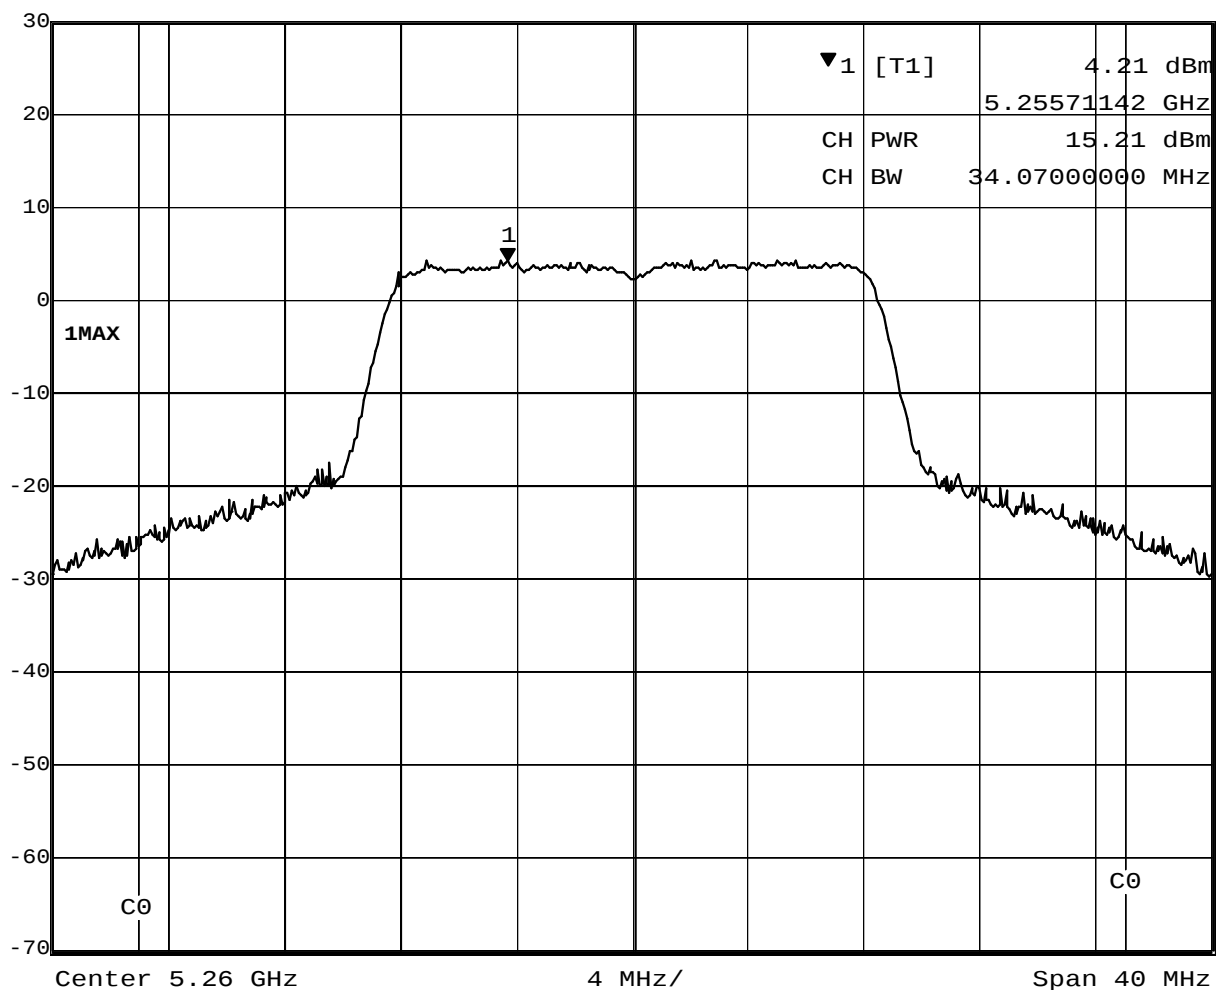


Date: 31.JUL.2003 15:32:11

Plot 2-2 Conducted Peak Power at 5260MHz



Marker 1 [T1] RBW 1 MHz RF Att 40 dB
Ref Lvl 1.39 dBm VBW 30 kHz
30 dBm 5.31755511 GHz SWT 5 ms Unit dBm

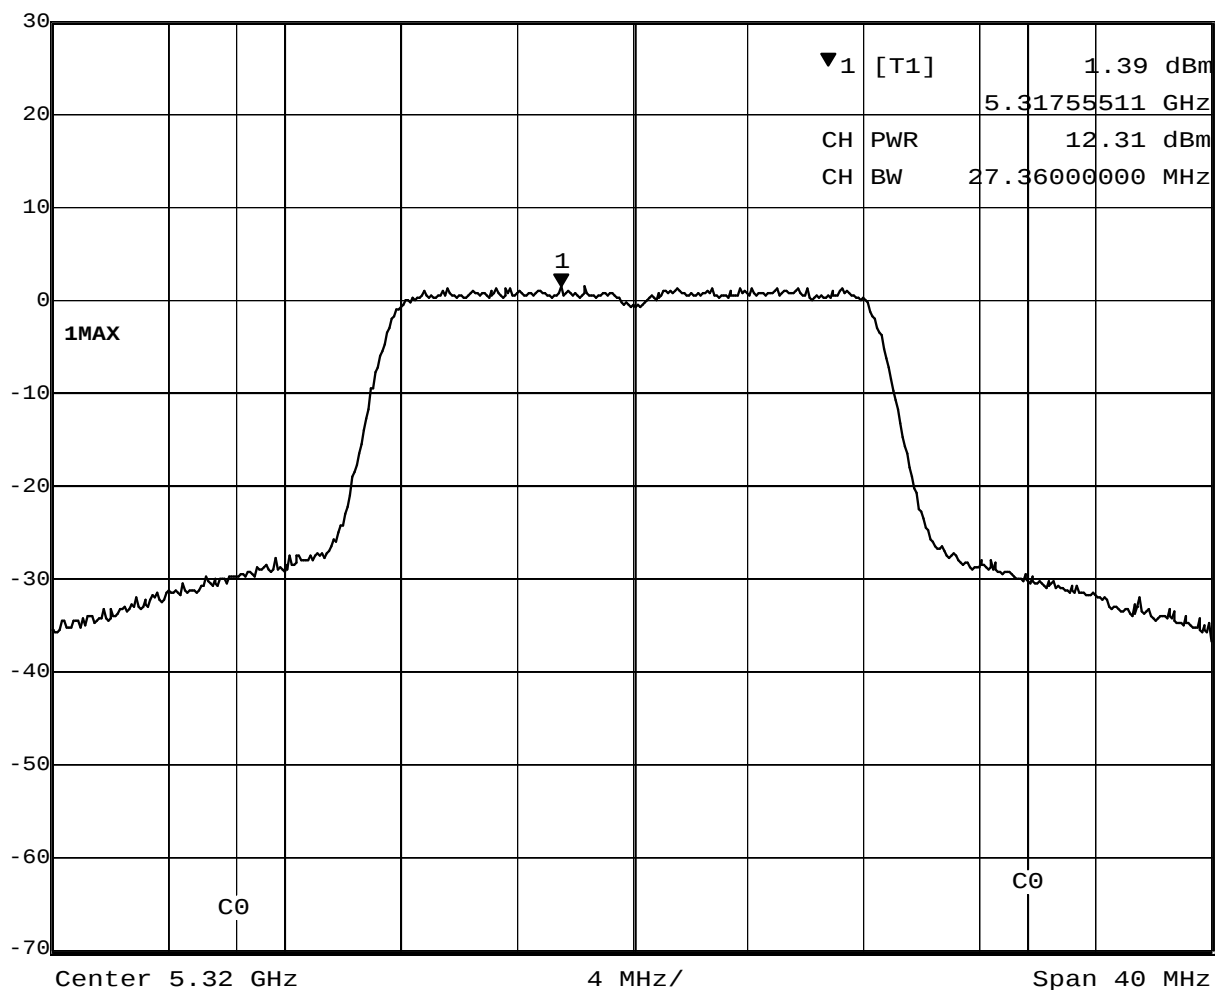

Date: 31.JUL.2003 15:36:07

Plot 2-3 Conducted Peak Power at 5320MHz

3. Peak Power Spectral Density

[5150-5250MHz: FCC 15.407(a)(1), RSS 6.2.2q1(i), (iv)(b)]
 [5250-5350MHz: FCC 15.407(a)(2), RSS 6.2.2q1(ii), (iv)(b)]

3.1 Test Procedure

The measurement was performed in accordance with Method 2 of the FCC Public Notice DA 02-2138. The spectrum analyzer was connected to the antenna terminal, while EUT was operating in continuous transmission mode at the appropriate center frequencies.

The spectrum analyzer was set to :

RBW= 1MHz, VBW=3MHz, Span=20MHz, Mode= sample detector,
 The analyzer averaged 100 traces in averaging mode (power averaging), then the marker was set to the highest position in the spectrum.

Also the Canadian PPSD was examined with the following spectrum analyzer setting.

RBW= 1MHz, VBW=1MHz, Span=20MHz, Mode= sample detector, averaging off

The test instruments and setup configuration are the same as the Table 2-2 and Figure 2-2.

3.2 Measurement Results

Test Date: July 15, 2003

Table 3-1. Measurement results of PPSD


Measured Frequency (MHz)	Analyzer reading (dBm)	Trace number	Cable Loss (dB)	Results (dBm)	FCC Limit (dBm)	IC Limit q1(ii) (dBm)	Peak Antenna Gain (dBm)	IC EIRP (dBm)	IC Limit q1(i) (dBm)
5177.66	-1.20	Plot 3-1	2.2	1.0	4.0	N/A	2.84	3.8	10
5256.13	1.85	Plot 3-2	2.2	4.1	11.0	11.0			N/A
5322.46	-0.87	Plot 3-3	2.2	1.3	11.0	11.0			N/A

Table 3-2. Measurement results of Canadian PPSD

Measured Frequency (MHz)	Analyzer reading (dBm)	Trace number	Cable Loss (dB)	Results (dBm)	IC Limit q1(iv)(b) $3 + 10\log B^*$ (dBm)
5181.58	8.30	Plot 3-4	2.2	10.5	17.42
5264.23	11.46	Plot 3-5	2.2	13.7	18.32
5321.30	8.33	Plot 3-6	2.2	10.5	17.37

* B = 26dB Bandwidth

3.3 Trace Data

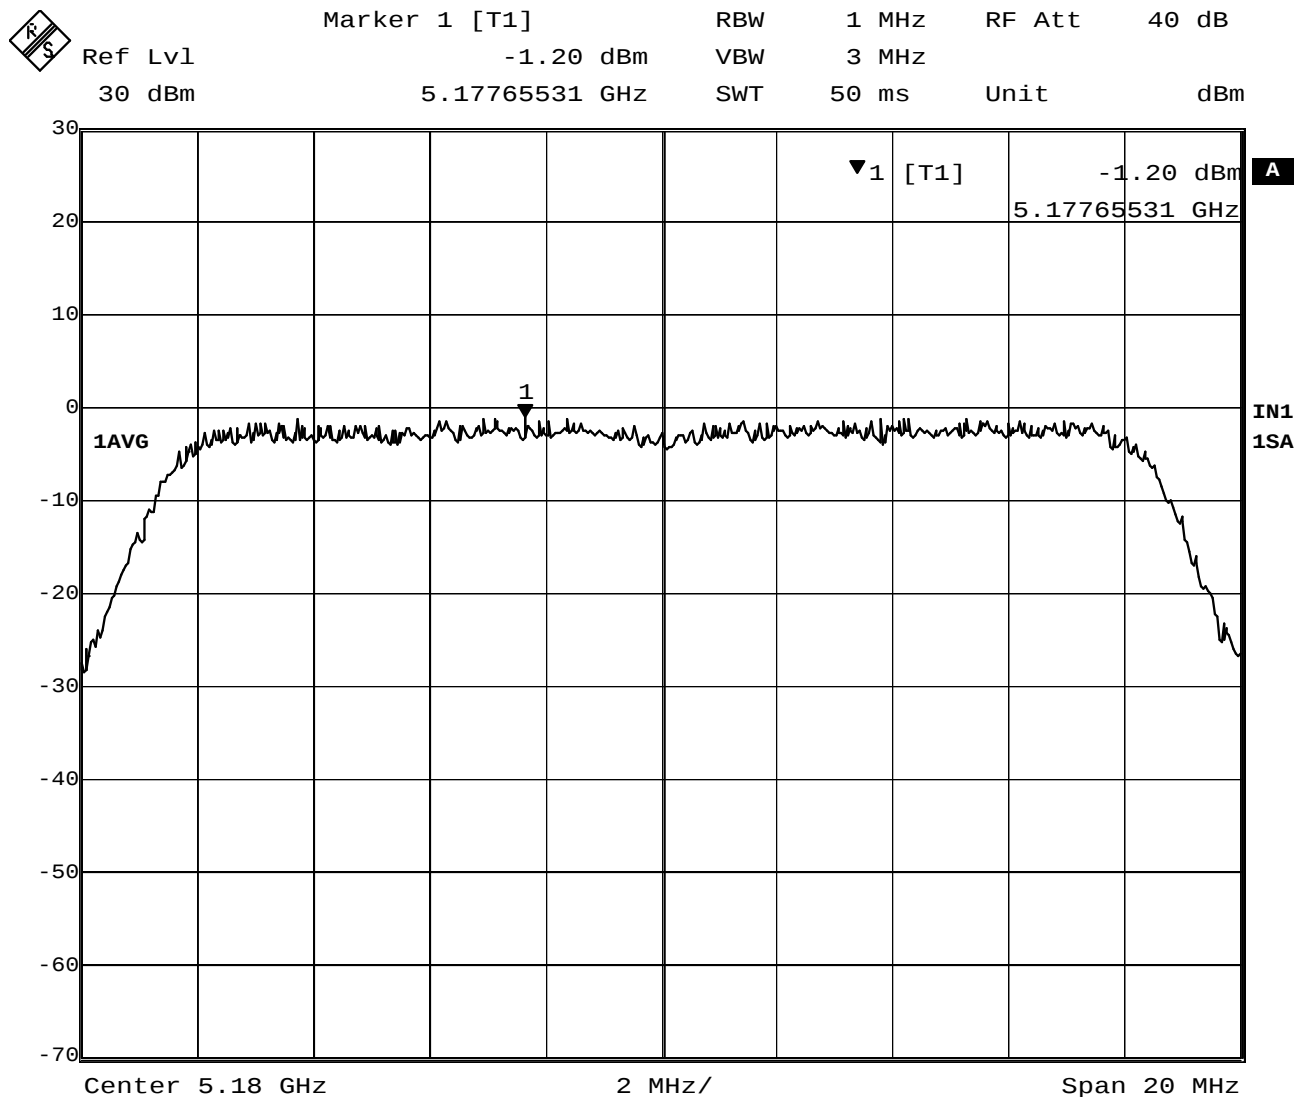


Date: 15.JUL.2003 17:37:16

Plot 3-1 Peak Power Spectral Density at 5180MHz



Marker 1 [T1] RBW 1 MHz RF Att 40 dB
Ref Lvl 1.85 dBm VBW 3 MHz
30 dBm 5.25613226 GHz SWT 50 ms Unit dBm

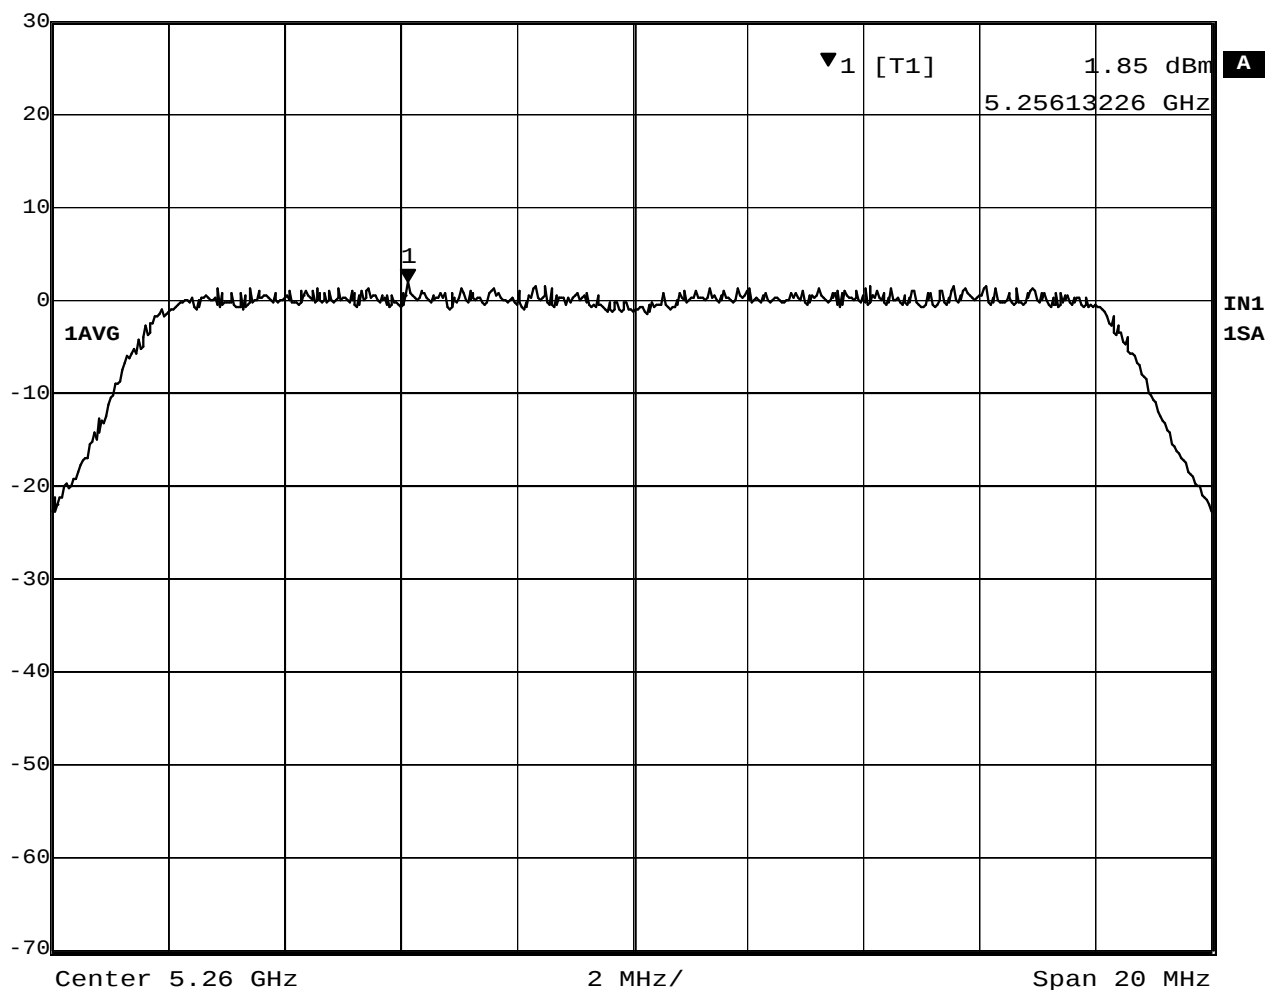


Date: 15.JUL.2003 17:38:22

Plot 3-2 Peak Power Spectral Density at 5260MHz



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	40 dB
30 dBm	-0.87 dBm	VBW	3 MHz		
	5.32246493 GHz	SWT	50 ms	Unit	dBm

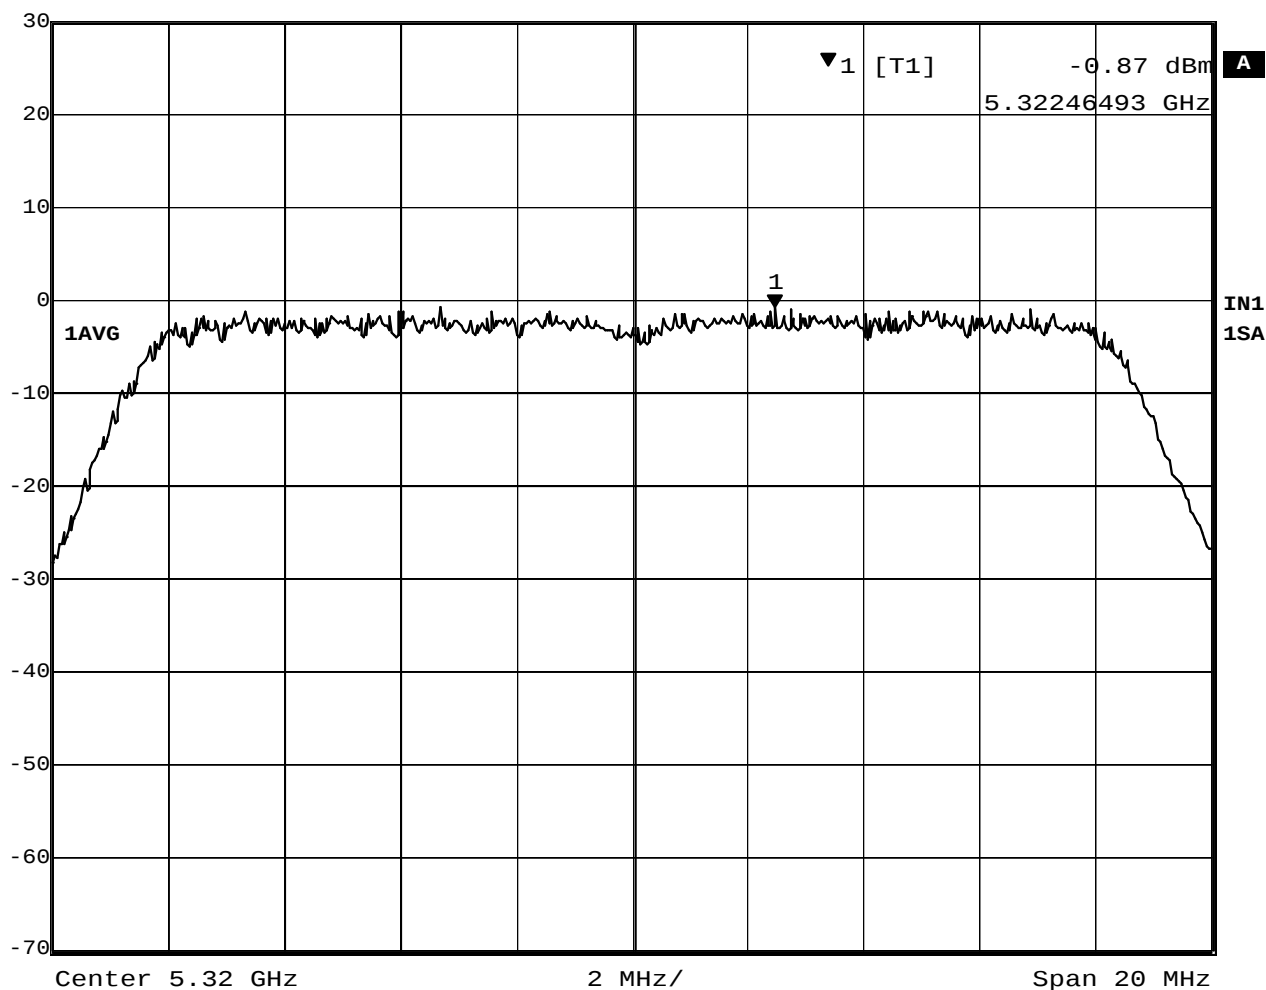


Date: 15.JUL.2003 17:39:44

Plot 3-3 Peak Power Spectral Density at 5320MHz



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	40 dB
30 dBm	8.30 dBm	VBW	1 MHz		
	5.18158317 GHz	SWT	50 ms	Unit	dBm

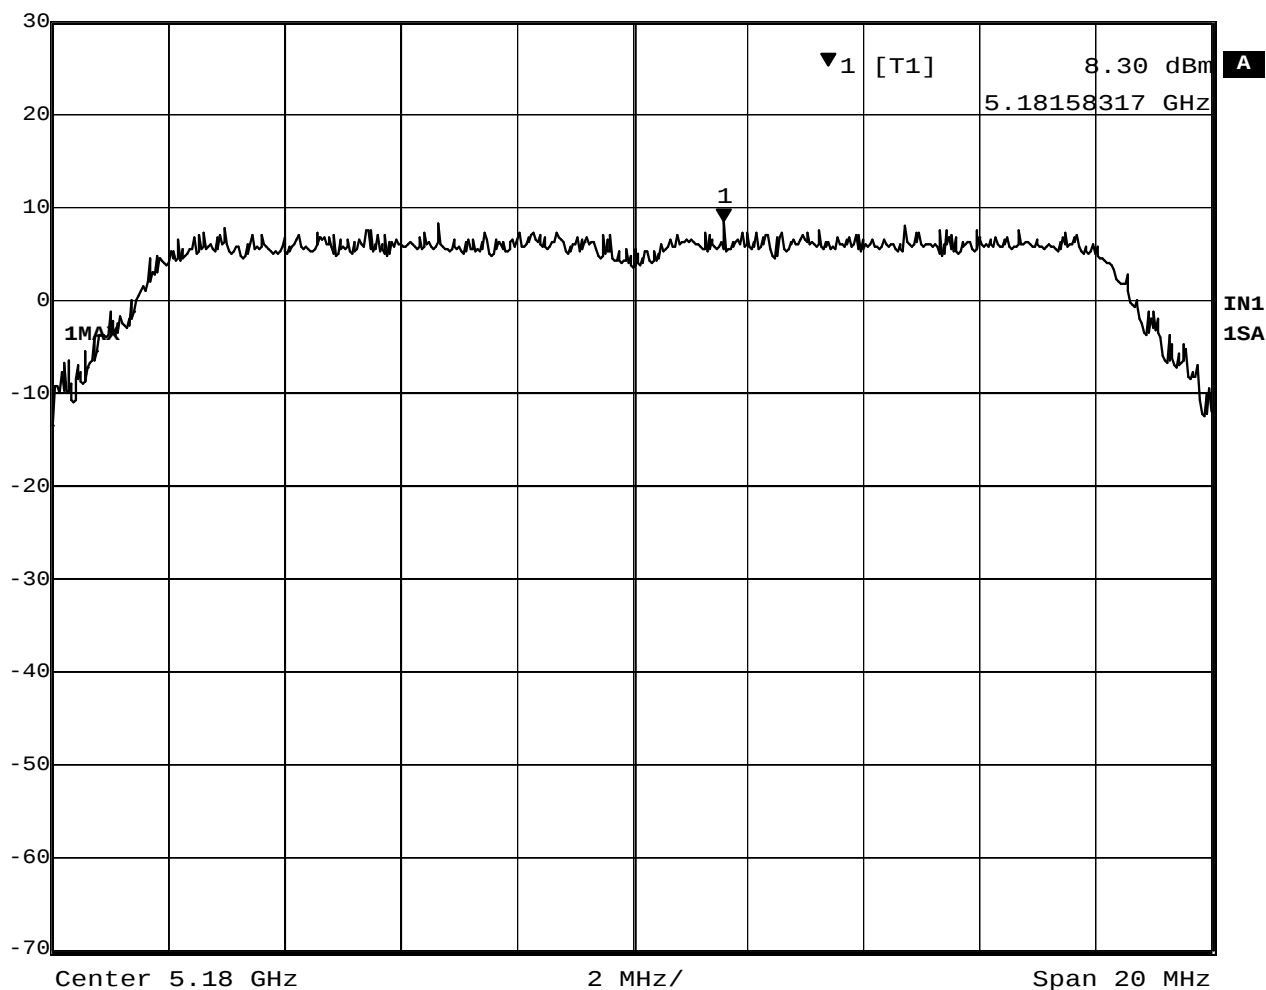


Date: 15.JUL.2003 17:42:45

Plot 3-4 Peak Power Spectral Density at 5180MHz (IC RSS-210)



Marker 1 [T1] RBW 1 MHz RF Att 40 dB
Ref Lvl 11.46 dBm VBW 1 MHz
30 dBm 5.26422846 GHz SWT 50 ms Unit dBm

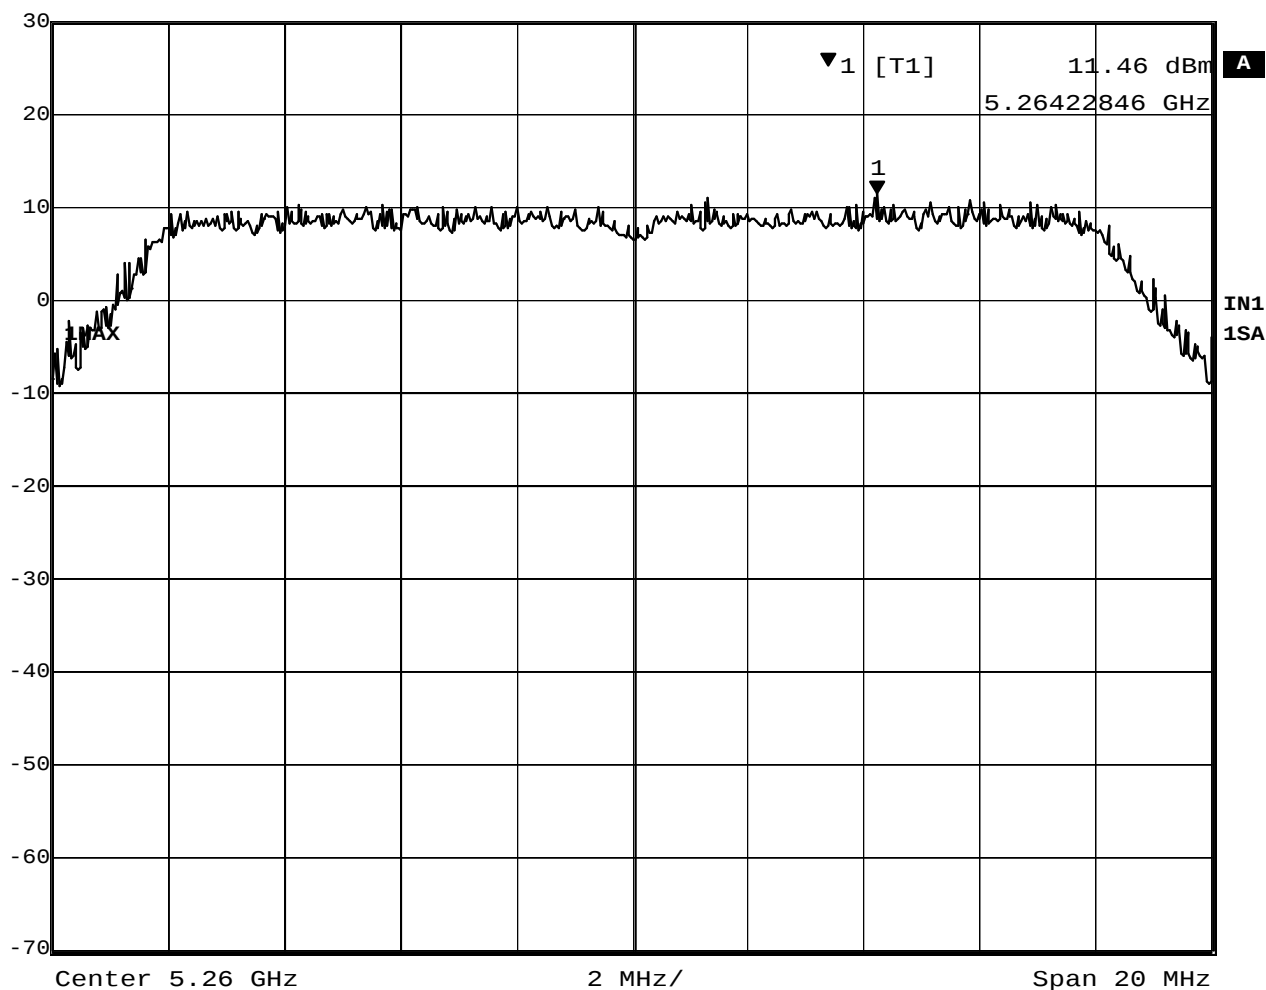


Date: 15.JUL.2003 17:43:59

Plot 3-5 Peak Power Spectral Density at 5260MHz (IC RSS-210)



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	40 dB
30 dBm	8.33 dBm	VBW	1 MHz		
	5.32130261 GHz	SWT	50 ms	Unit	dBm

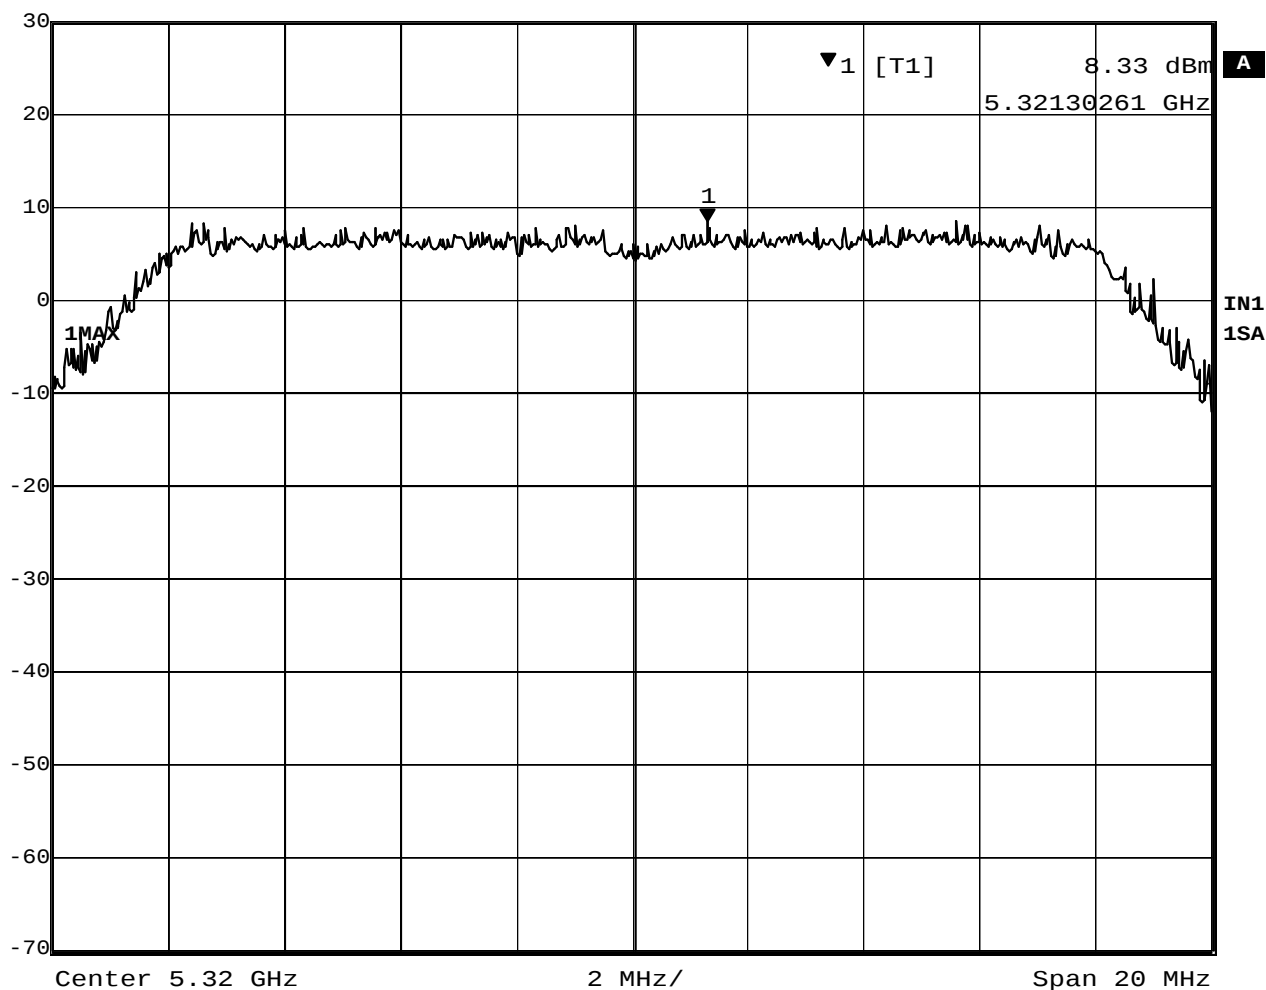

Date: 15.JUL.2003 17:45:22

Plot 3-6 Peak Power Spectral Density at 5320MHz (IC RSS-210)

4. Peak Excursion Ratio

[FCC 15.407(a)(6)]

4.1 Test Procedure

The spectrum analyzer was connected to the antenna terminal, while EUT was operating in continuous transmission mode at the appropriate center frequencies.

- 1st trace :
The spectrum analyzer was set to :
RBW= 1MHz, VBW=3MHz, Mode= peak detector and max hold
then to view.
- 2nd trace :
The measurement result of the peak conducted power in Chapter 2.1.2 tend to present the similar values to the results of power meter, therefore the same setting of spectrum analyzer as the one for the Chapter 2.1.2 was used for the 2nd trace.
i.e. VBW= 30kHz, RBW=1MHz, Span=30-40MHz, Trigger= free run,
Mode= sample detector

The largest difference of amplitude delta between the two trances is the peak excursion.

The test instruments and setup configuration are the same as the Table 2-2 and Figure 2-2.


4.2 Measurement Results

Test Date: July 15, 2003

Table 4-2. Measurement results of Peak Excursion Ratio

Measured Frequency (MHz)	Analyzer Reading delta (dB)	FCC Limit (dB)	Margin (dB)	Trace number
5184.29	10.32	13	2.68	Plot 4-1
5264.45	10.09		2.91	Plot 4-2
5324.45	10.56		2.44	Plot 4-3

4.3 Trace Data

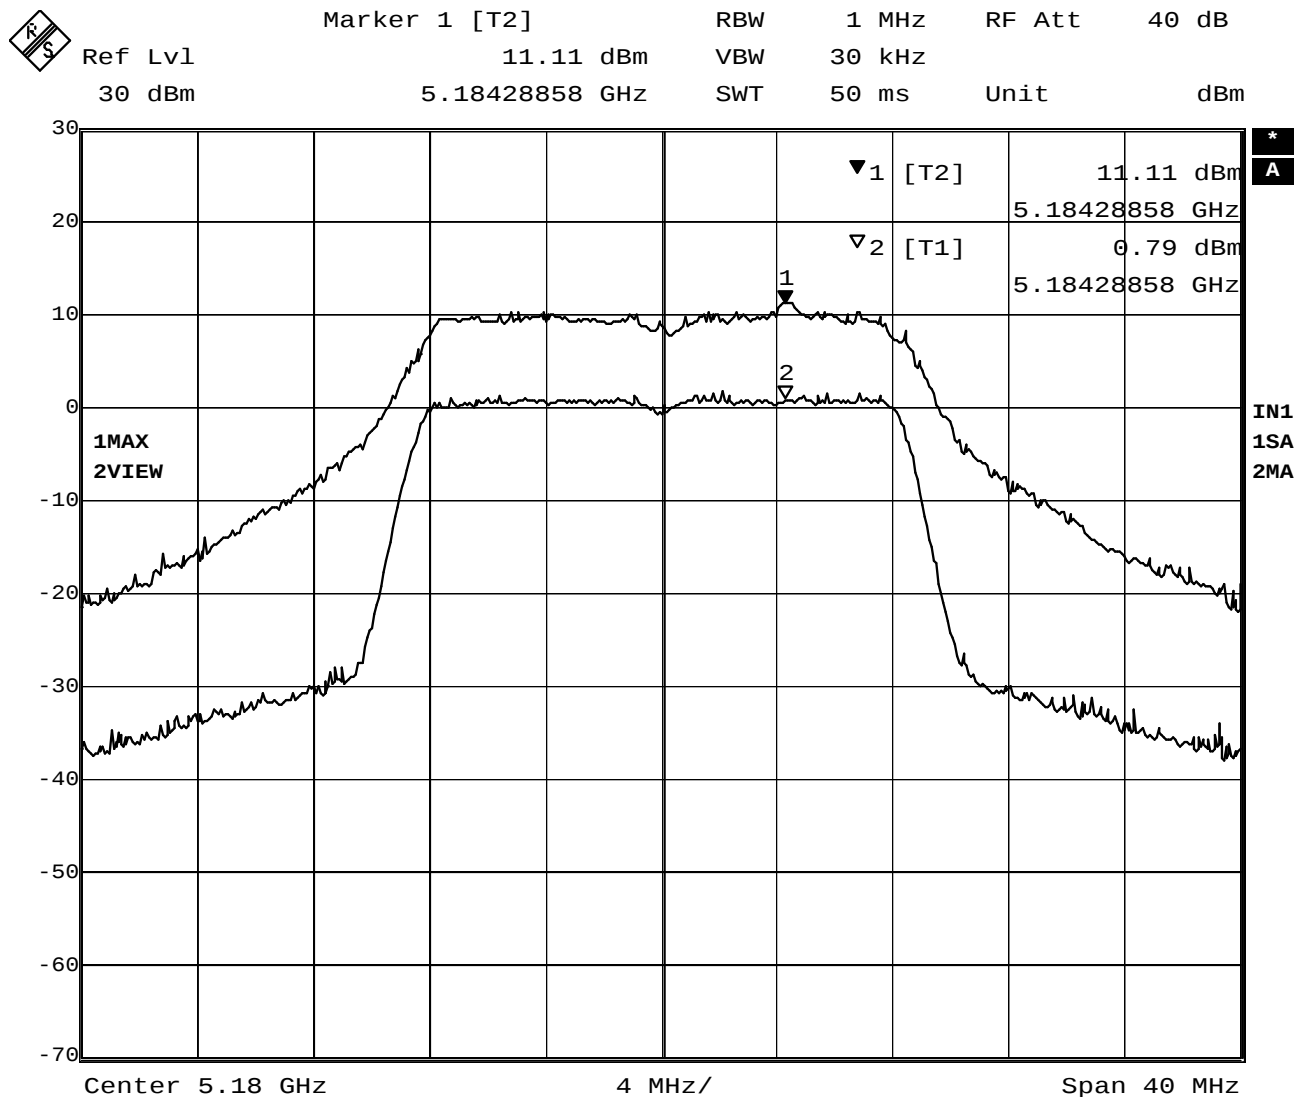


Date: 15.JUL.2003 18:18:48

Plot 4-1 Peak Excursion Ratio at 5180MHz



Marker 1 [T2] RBW 1 MHz RF Att 40 dB
Ref Lvl 13.50 dBm VBW 30 kHz
30 dBm 5.26444890 GHz SWT 50 ms Unit dBm

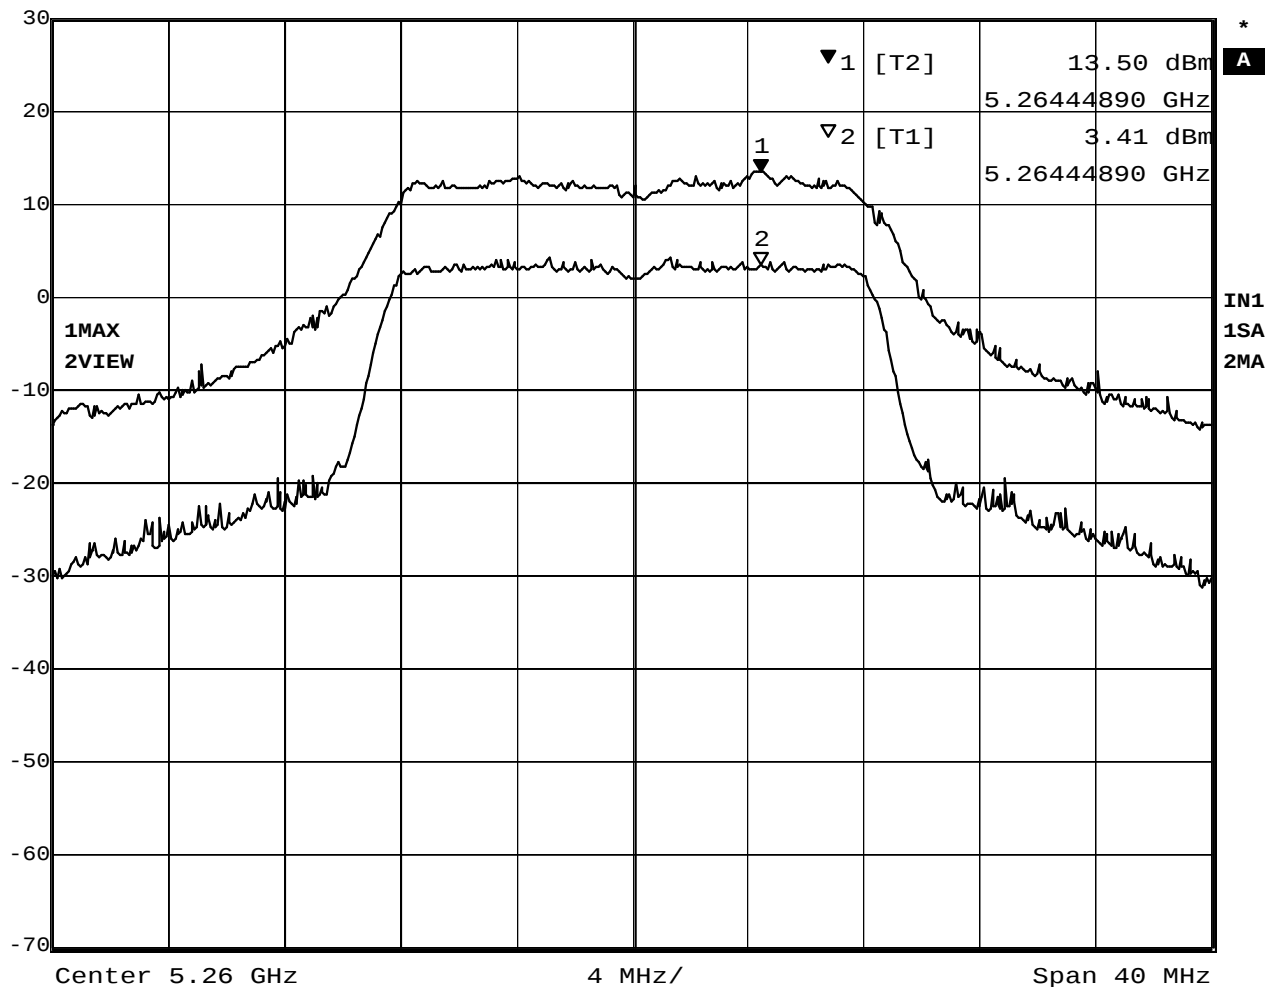


Date: 15.JUL.2003 18:21:43

Plot 4-2 Peak Excursion Ratio at 5260MHz



Marker 1 [T2] RBW 1 MHz RF Att 40 dB
Ref Lvl 11.03 dBm VBW 30 kHz
30 dBm 5.32444890 GHz SWT 50 ms Unit dBm

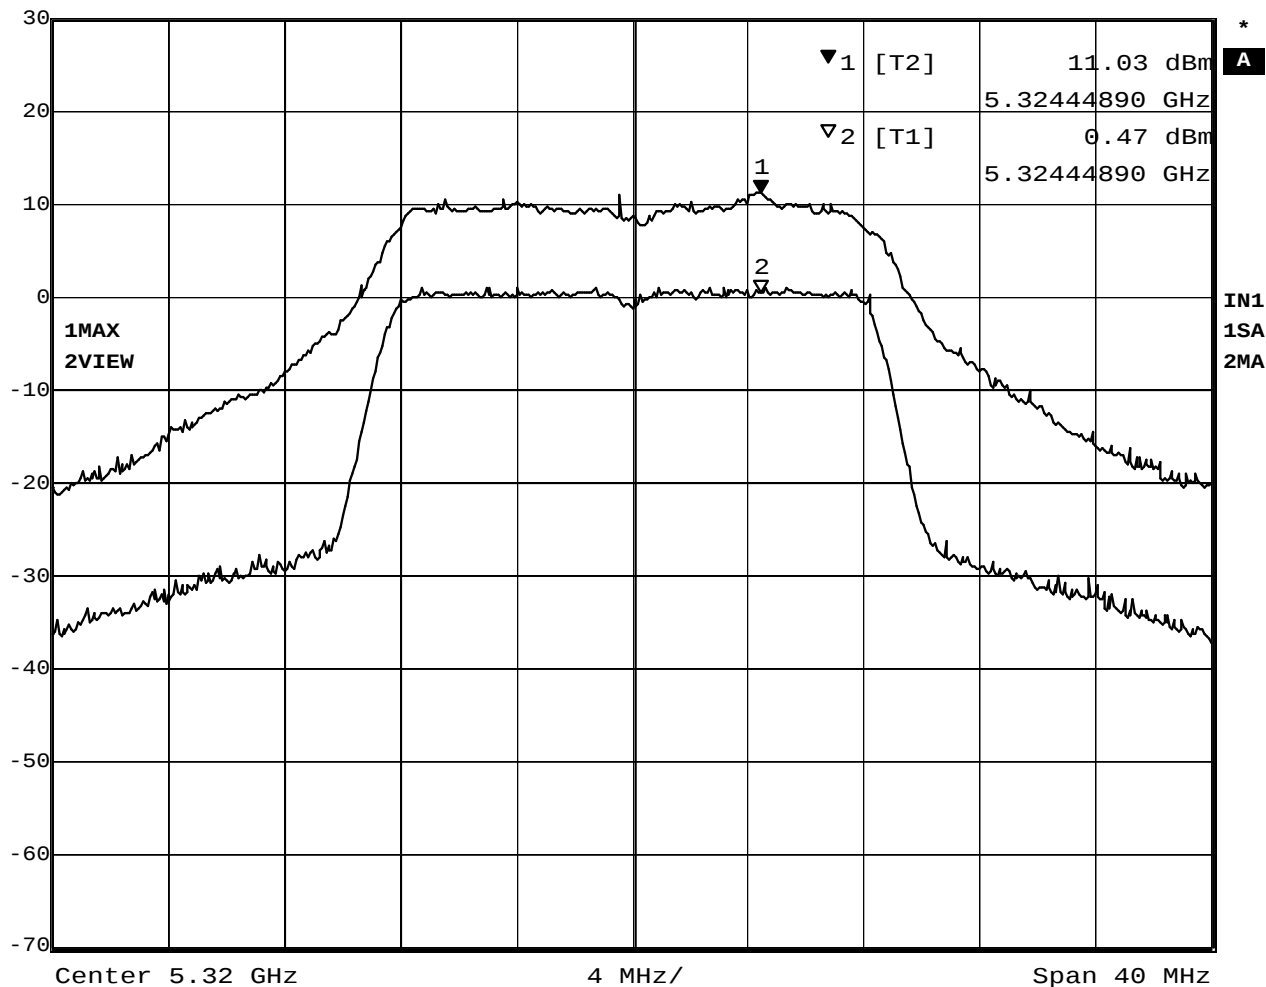

Date: 15.JUL.2003 18:24:13

Plot 4-3 Peak Excursion Ratio at 5320MHz

5. AC WIRELINE CONDUCTED EMISSIONS (150KHz – 30MHz)

[FCC 15.207/ 15.407(b)(5), RSS-210 6.2.2(q1)(v) / 6.6 / 7.4]

5.1 Test Procedure

The conducted emissions are measured in the IBM shielded room with a spectrum analyzer in peak hold. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9KHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.

5.2 Test Instruments and Measurement Setup

Table 5-1. Conducted Emission Test Instrumentation

Description	Model	Serial Number
Computer	IBM 6589-13J	97-15613
Spectrum Analyzer (100Hz-1.5GHz)	HP 85680B	2601A02634
Spectrum Analyzer Display	HP 85662A	2542A12308
Quasi-Peak Adapter	HP 85650A	2043A00062
Receiver (9kHz-30MHz)	R&S ESH3	891806/012
LISN	EMCO 3825/2	1426
Switch/control unit	HP 3488A	2719A17228
Plotter	HP 7550A	2631A33619
Coax cables: - Lisen-L <=> SW/Con.unit (SW100) - Lisen-N <=> SW/Con.unit (SW101) - SW/Con.unit <=> RCVR (Input) - SW/Con.unit<=> Spe Ana.(Signal In)	Length: 4 m 4 m 1 m 1 m	- EMIC-L - EMIC-N - EMIC-R - EMIC-S

Notes: - HP: Hewlett Packard, R&S: Rohde & Schwarz

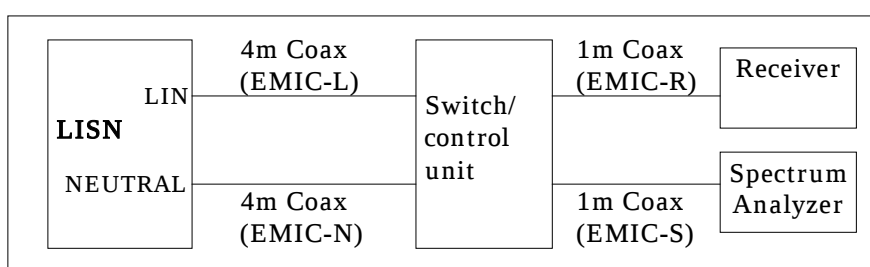


Figure 5. Cables for Conducted Emission Test

5.3 Powerline Voltage Calculation

The powerline voltage is calculated by adding insertion losses of LISN, Cable, Switch control unit and Pulse limiter to the measured reading. All factors are included in the reported data.

$$PV = R + CORR$$

where:

PV = Powerline Voltage (dBμV)

R = Measured Receiver Input Amplitude (dBμV)

CORR = Correction Factor (dB) = LL+CL+SWL+PLL

LL = Insertion loss of LISN (dB)

CL = Insertion loss of Cable (dB)

SWL = Insertion loss of Switch control unit (dB)

PLL = Insertion loss of Pulse Limiter (dB)

Given a Receiver input reading of 50.0 dBμV, LISN loss of 0.6 dB, Cable loss of 0.1dB, Switch control unit loss of 0.1dB and Pulse limiter loss of 0.2dB. The Powerline Voltage of the measured emission is:

$$CORR = 0.6 + 0.1 + 0.1 + 0.2 = 1.0 \text{ (dB)}$$

$$PV = 50.0 + 1.0 = 51.0 \text{ (dBμV)}$$

5.4 Measurement Results

The EUT was found to comply to the limits of FCC Part 15 Subpart E and RSS-210 with a margin of 13.6dB. The 6 highest emissions relative to the limits are reported.

Test Date: July 28, 2003

1) EUT in transmission mode

Table 5-2-1. Ch.36 (5180MHz) **TX** mode 24Mbps

Frequency (MHz)	QP			AV			CISPR22 QP Limit (dB μ V)	CISPR22 AV Limit (dB μ V)	Phase
	Measured Reading (dB μ V)	Corr. Factor (dB)	Powerline Voltage (dB μ V)	Measured Reading (dB μ V)	Corr. Factor (dB)	Powerline Voltage (dB μ V)			
0.2083	48.0	0.4	48.4	39.3	0.4	39.7	63.3	53.3	Neutral
0.2749	38.7	0.5	39.2	31.8	0.5	32.3	61.0	51.0	Line
0.3491	35.0	0.5	35.5	28.2	0.5	28.7	59.0	49.0	Line
0.4176	35.7	0.5	36.2	30.3	0.5	30.8	57.5	47.5	Line
0.6263	25.7	0.5	26.2	21.5	0.5	22.0	56.0	46.0	Line
5.9983	38.2	0.6	38.8	24.4	0.6	25.0	60.0	50.0	Line

Table 5-2-2. Ch.52 (5260MHz) **TX** mode 24Mbps

Frequency (MHz)	QP			AV			CISPR22 QP Limit (dB μ V)	CISPR22 AV Limit (dB μ V)	Phase
	Measured Reading (dB μ V)	Corr. Factor (dB)	Powerline Voltage (dB μ V)	Measured Reading (dB μ V)	Corr. Factor (dB)	Powerline Voltage (dB μ V)			
0.2084	46.2	0.4	46.6	36.7	0.4	37.1	63.3	53.3	Neutral
0.2807	40.1	0.5	40.6	33.1	0.5	33.6	60.8	50.8	Line
0.3452	30.2	0.5	30.7	24.4	0.5	24.9	59.1	49.1	Neutral
0.4173	35.5	0.5	36.0	31.3	0.5	31.8	57.5	47.5	Line
0.6288	26.0	0.5	26.5	22.5	0.5	23.0	56.0	46.0	Line
6.0094	38.4	0.6	39.0	24.6	0.6	25.2	60.0	50.0	Line

Table 5-2-3. Ch.64 (5320MHz) **TX** mode 24Mbps

Frequency (MHz)	QP			AV			CISPR22 QP Limit (dB μ V)	CISPR22 AV Limit (dB μ V)	Phase
	Measured Reading (dB μ V)	Corr. Factor (dB)	Powerline Voltage (dB μ V)	Measured Reading (dB μ V)	Corr. Factor (dB)	Powerline Voltage (dB μ V)			
0.2111	44.7	0.4	45.1	35.8	0.4	36.2	63.2	53.2	Neutral
0.2781	39.8	0.5	40.3	33.4	0.5	33.9	60.9	50.9	Line
0.3500	33.2	0.5	33.7	27.4	0.5	27.9	59.0	49.0	Neutral
0.4190	35.9	0.5	36.4	32.3	0.5	32.8	57.5	47.5	Line
0.6291	26.3	0.5	26.8	23.2	0.5	23.7	56.0	46.0	Line
5.8004	35.9	0.6	36.5	22.9	0.6	23.5	60.0	50.0	Neutral

2) EUT in receiving mode

Table 5-2-4. Ch. 52 (5260MHz) **RX** mode

Frequency (MHz)	QP			AV			CISPR22 QP Limit (dB μ V)	CISPR22 AV Limit (dB μ V)	Phase
	Measured Reading (dB μ V)	Corr. Factor (dB)	Powerline Voltage (dB μ V)	Measured Reading (dB μ V)	Corr. Factor (dB)	Powerline Voltage (dB μ V)			
0.2099	45.5	0.4	45.9	38.1	0.4	38.5	63.2	53.2	Line
0.2797	39.6	0.5	40.1	31.9	0.5	32.4	60.8	50.8	Line
0.3489	37.5	0.5	38.0	31.1	0.5	31.6	59.0	49.0	Neutral
0.4883	31.2	0.5	31.7	27.6	0.5	28.1	56.2	46.2	Line
0.7001	26.8	0.5	27.3	22.8	0.5	23.3	56.0	46.0	Line
6.0270	37.7	0.6	38.3	23.4	0.6	24.0	60.0	50.0	Line

6. RESTRICTED BANDS RADIATIONS (30MHz – 1GHz)

[FCC 15.205&209 / 15.407(b)(1),(2),(5),(6)]
 [RSS-210 6.2.1 / 6.2.2(q1)(i),(ii),(v) / 6.3 / 7.3]

6.1 Test Procedure

Preliminary radiated emissions are measured in the semi-anechoic chamber at a 3 meter distance on every azimuth in both horizontal and vertical polarity. The antennas are also scanned in height. The emissions are recorded with a spectrum analyzer in peak hold mode. The identified emissions are further maximized by a cable manipulation. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120kHz. The highest emissions relative to the limit are listed.

6.2 Test Instruments and Measurement Setup

Table 6-1 Radiated Emission Test Instrumentation

Description	Model	Serial Number
Computer	IBM 6868-30J	97-901X3
Spectrum Analyzer (100Hz-1.5GHz) for 30-200MHz	HP 85680B	2732A03651
Spectrum Analyzer Display for 30-200MHz	HP 85662A	2648A15255
Quasi-Peak Adapter for 30-200MHz	HP 85650A	2521A00968
Spectrum Analyzer (100Hz-1.5GHz) for 200-1000MHz	HP 85680B	2841A04242
Spectrum Analyzer Display for 200-1000MHz	HP 85662A	2816A16827
Quasi-Peak Adapter for 200-1000MHz	HP 85650A	2811A01126
Amplifier (100KHz-1.3GHz)		
- for 30-200MHz	HP 8447D	2805A02919
- for 200-1000MHz	HP 8447D	2727A05190
Biconical Antenna (30-200MHz)	EMCO 3108	2536
Log-Periodic Antenna (200-1000MHz)	EMCO 3146	2849
Receiver (20MHz-1.3GHz)	R&S ESVP	892111/030
Switch/control unit	HP 3488A	2719A17226
N-Coax cables:	Length:	
- Bi-coni Ant <=> 10m Cable	9 m	- EM103L01
- 10m Cable <=> Shield Panel	10 m	- EM103L02
- Shield Panel <=> RF Amp	7 m	- EM103L03
- RF Amp <=> Power Splitter	0.5m	- EM103L04
- Log-peri Ant <=> 10m Cable	9 m	- EM103H01
- 10m Cable <=> Shield Panel	10 m	- EM103H02
- Shield Panel <=> RF Amp	7 m	- EM103H03
- RF Amp <=> Power Splitter	0.5m	- EM103H04
Coax cables:		
- Power Splitter <=> SW/Con.unit (SW110)	1 m	- EM103L05
- Power Splitter <=> SW/Con.unit (SW300)	1 m	- EM103L06
- Power Splitter <=> SW/Con.unit (SW100)	1 m	- EM103H05
- Power Splitter <=> SW/Con.unit (SW301)	1 m	- EM103H06
- SW/Con.unit <=> Receiver (Input)	2 m	- EM1RCV
- SW/Con.unit <=> Spe Ana.(Signal In) for 30- 200MHz	2 m	- EM1SPL
- SW/Con.unit <=> Spe Ana.(Signal In) for 200-1000MHz	2 m	- EM1SPH

Notes:

- HP: Hewlett Packard, R&S: Rohde & Schwarz

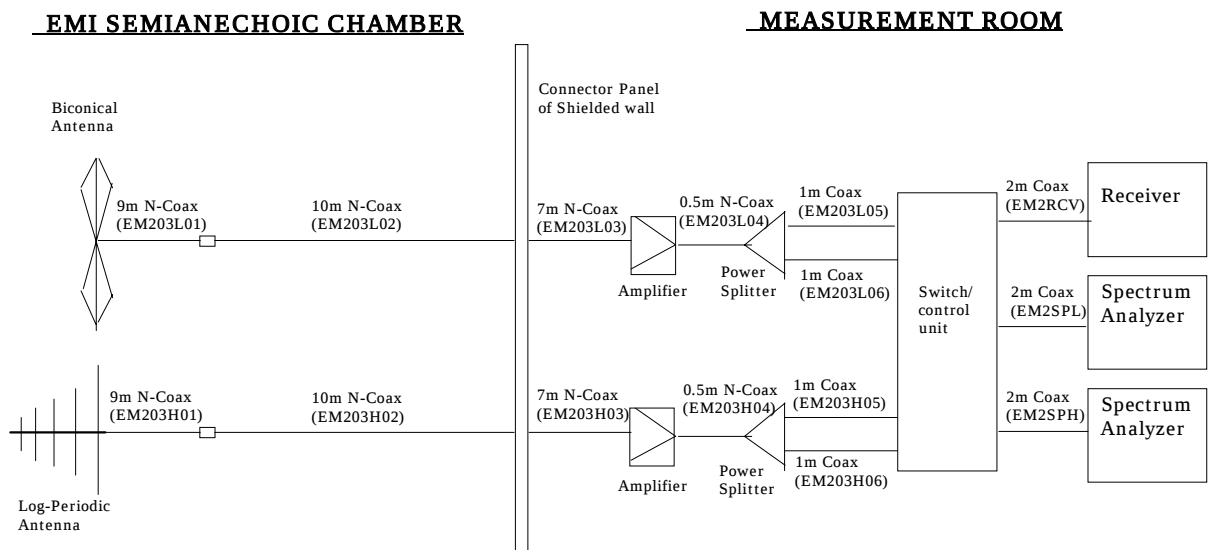


Figure 6 Cables for Radiated Emission Test

6.3 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver. All factors are included in the reported data.

$$FS = R + AF + CORR$$

where:

FS	=	Field Strength
R	=	Measured Receiver Input Amplitude
AF	=	Antenna Factor
CORR	=	Correction Factor = CL - AG
CL	=	Cable Loss
AG	=	Amplifier Gain

For example:

Given a Receiver input reading of 51.5dB μ V; Antenna Factor of 8.5dB/m; Cable Loss of 1.3dB; and an Amplifier Gain of 26dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 = 35.3\text{dB}\mu\text{V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:

$$\text{Level}(\text{dB}\mu\text{V/m}) = 20 \times \text{Log}(\text{Level}(\mu\text{V/m}))$$

$$40\text{dB}\mu\text{V/m} = 100\mu\text{V/m}$$

$$48\text{dB}\mu\text{V/m} = 250\mu\text{V/m}$$

6.4 Measurement Results

The EUT was found to comply to the limits of FCC Part 15 Subpart E and RSS-210 with a margin of 2.3 dB at 30MHz - 1000MHz band.

The 6 highest emissions relative to the limits are reported.

Test Date: July 25, 2003

Table 6-2-1. Ch.36 (5180MHz) **TX** mode 24Mbps

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Field Strength (μ V/m)	Limit (μ V/m)
62.244	V	38.2	9.0	-18.1	29.1	40.0	28.5	100
170.156	H	37.9	12.5	-16.2	34.2	43.5	51.3	150
364.507	V	38.3	14.4	-13.6	39.1	46.0	90.2	200
386.587	V	34.7	14.9	-14.1	35.5	46.0	59.6	200
456.960	V	33.7	16.6	-13.8	36.5	46.0	66.8	200
729.015	V	31.4	21.1	-11.1	41.4	46.0	117.5	200

Table 6-2-2. Ch.52 (5260MHz) **TX** mode 24Mbps

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Field Strength (μ V/m)	Limit (μ V/m)
33.014	V	34.4	12.8	-18.8	28.4	40.0	26.3	100
61.975	V	39.4	9.1	-18.1	30.4	40.0	33.1	100
169.894	H	38.6	12.5	-16.3	34.8	43.5	55.0	150
364.508	V	38.3	14.4	-13.6	39.1	46.0	90.2	200
432.068	V	30.8	15.9	-13.6	33.1	46.0	45.2	200
729.015	V	32.4	21.1	-11.1	42.4	46.0	131.8	200

Table 6-2-3. Ch.64 (5320MHz) **TX** mode 24Mbps

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Field Strength (μ V/m)	Limit (μ V/m)
62.023	V	38.1	9.1	-18.1	29.1	40.0	28.5	100
170.172	H	38.4	12.5	-16.2	34.7	43.5	54.3	150
360.772	V	34.3	14.4	-13.5	35.2	46.0	57.5	200
432.069	V	30.7	15.9	-13.6	33.0	46.0	44.7	200
465.481	V	27.3	16.8	-13.8	30.3	46.0	32.7	200
729.015	V	33.4	21.1	-11.1	43.4	46.0	147.9	200

Table 6-2-4. Ch.52 (5260MHz) **RX** mode

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Field Strength (μ V/m)	Limit (μ V/m)
33.065	V	35.0	12.8	-18.7	29.1	40.0	28.5	100
168.819	H	38.5	12.5	-16.3	34.7	43.5	54.3	150
364.508	V	37.0	14.4	-13.6	37.8	46.0	77.6	200
456.968	V	32.9	16.6	-13.8	35.7	46.0	61.0	200
729.015	V	33.7	21.1	-11.1	43.7	46.0	153.1	200
911.269	V	25.5	22.8	-9.0	39.3	46.0	92.3	200

7. RESTRICTED BANDS RADIATIONS (1GHz – 40GHz)

[FCC 15.205&209 / 15.407(b)(1),(2),(5),(6)]
 [RSS-210 6.2.1 / 6.2.2(q1)(i),(ii),(v) / 6.3 / 7.3]

7.1 Test Procedure

Radiated emissions were measured in the frequency range with 1 GHz to 40GHz in transmitting mode and 1 GHz to 25GHz in receiving mode. All tests were performed in the semi-anechoic chamber at a 3-meter distance (except for the frequency range with 18 GHz to 40 GHz where test distance was reduced to 1 meter) on both horizontal and vertical polarities. The antenna was also scanned in height. The emissions are recorded with a spectrum analyzer in peak hold mode. The identified emissions are further maximized as a function of cable manipulation, azimuth, and antenna height. The emissions closest to the limits are measured in the peak mode with the tuned spectrum analyzer using resolution bandwidth of 1MHz / video bandwidth of 1MHz, and the average setting mode with the tuned spectrum analyzer using resolution bandwidth of 1MHz / video bandwidth of 100Hz or 10Hz. The highest emissions relative to the limit are listed.

7.2 Test Instruments and Measurement Setup

Table 7 Radiated Emission Test Instrumentation (1GHz – 40GHz)

Description	Model	Serial Number
Spectrum Analyzer EMI Test Receiver	R&S ESI26	836119/003
Spectrum Analyzer	HP 8563E	3416A02248
Harmonic Mixer (26.5 – 40GHz)	Agilent 11970A	011269-001
Amplifier (1 - 26.5GHz)	HP 8449B	3008A00582
Amplifier (26.5 – 40GHz)	Agilent 83051A	3950M00193
Horn Antenna (1 - 18GHz)	EMCO 3115	9903-5774
Horn Antenna (3.95 – 5.85GHz)	EMCO 3160-5	1099
Horn Antenna (5.85 – 8.2GHz)	EMCO 3160-6	9712-1044
Horn Antenna (8.2 – 12.4GHz)	EMCO 3160-7	1158
Horn Antenna (12.4 – 18GHz)	EMCO 3160-8	1143
Horn Antenna (18 - 26.5GHz)	EMCO 3160-9	0004-1202
Horn Antenna (26.5 - 40GHz)	EMCO 3160-10	1175
Coaxial cables:	Length:	
- Horn Ant <=> RF Amp. (1-18GHz)	6 m	- EM206SCO
- RF Amp.<=>Spectrum Analyzer (1-12.4GHz)	16 m	- GEM0101
- RF Amp.<=>Spectrum Analyzer (12.4-18GHz)	3m	- SF102-20166
- Horn Ant <=> RF Amp. (18-40GHz)	3m	- SF102-20167
- RF Amp.<=>Spectrum Analyzer (18-40GHz)	1m	- SF102-21105

Notes: - HP: Hewlett Packard, R&S: Rohde & Schwarz

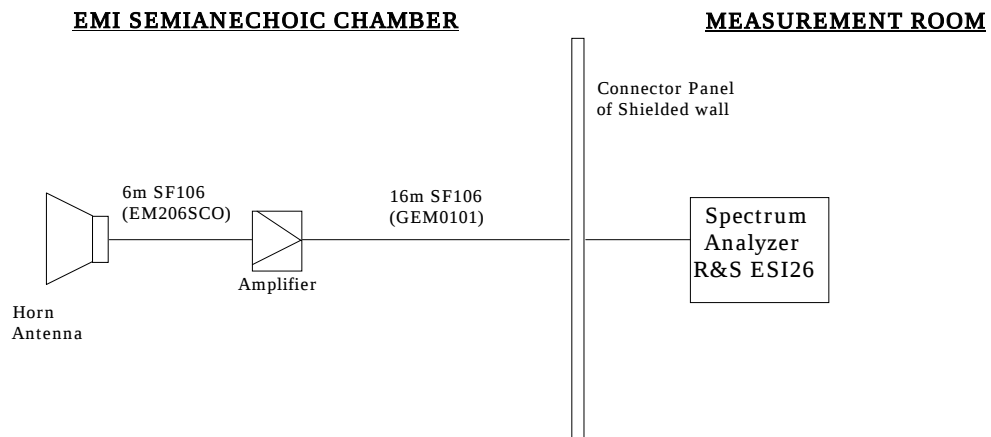


Figure 7-1. Cables for Radiated Emission Test (1 – 12.4 GHz)

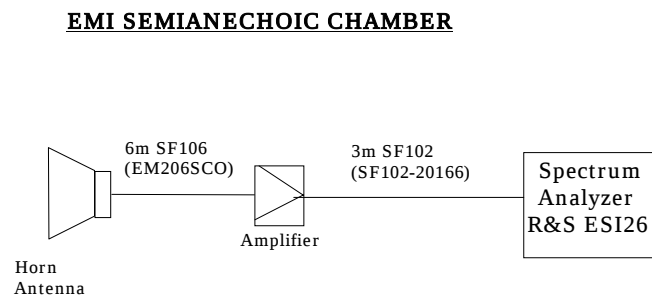


Figure 7-2. Cables for Radiated Emission Test (12.4 - 18GHz)

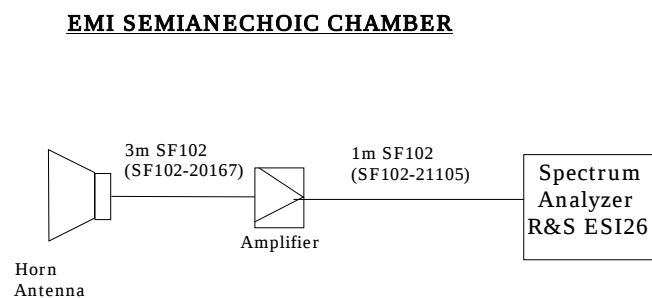


Figure 7-3. Cables for Radiated Emission Test (18 - 26.5GHz)

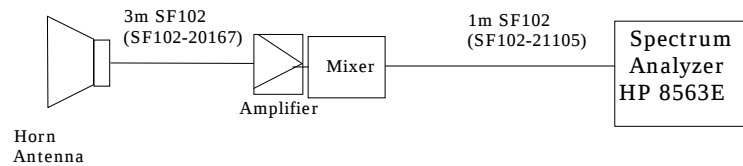
EMI SEMIANECHOIC CHAMBER

Figure 7-4. Cables for Radiated Emission Test (26.5 - 40GHz)

7.3 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where:

FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL-AG

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

For example:

Given a Spectrum Analyzer input reading of 51.5 dB μ V; Antenna Factor of 8.5 dB/m; Cable Loss of 1.3 dB; Falloff Factor of 0 dB; and an Amplifier Gain of 26 dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26 - 0.0 = 35.6 \text{ dB}\mu\text{V/m}$$

Conversions between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as :

$$\text{Level(dB}\mu\text{V/m)} = 20 \times \text{Log}(\text{Level}(\mu\text{V/m}))$$

$$40 \text{ dB}\mu\text{V/m} = 100 \mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250 \mu\text{V/m}$$

7.4 Limits

Table 7-1. Limits for emissions

Limit for emissions in restricted bands	54 dB μ V/m (average)	74 dB μ V/m (peak)
Limit for emissions in non_restricted bands	68.2 dB μ V/m (EIRP< -27 dBm/MHz)	

7.5 Measurement Results

The EUT was found to comply to the limits of FCC Part 15 Subpart E and RSS-210 with a margin of 2.7 dB. The measurement was done for the frequency range of 1 GHz to 40 GHz in TX mode and 1 GHz to 25GHz in RX mode.

Test Date: July 18, 25 and August 7, 2003

Table 7-2-1. Ch.36 (5180MHz) **TX** mode 24Mbps

Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) (<i>peak</i>)	Measured (dB μ V) (<i>average</i>)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dB μ V/m) (<i>peak</i>)	FCC Limit (dB μ V/m) (<i>peak</i>)	Field Strength (dB μ V/m) (<i>average</i>)	FCC Limit (dB μ V/m) (<i>average</i>)
OB										
5.185 bandedge	H	103.6	92.1	33.7	-26.5	0.0	110.8	N/A	99.3	N/A
5.120	H	49.1	38.1	33.7	-26.5	0.0	56.3	74.0	45.3	54.0
5.150	H	61.1	43.3	33.6	-26.5	0.0	68.2	74.0	50.4	54.0
1.066	V	52.4	-	24.6	-32.0	0.0	45.0	74.0	-	54.0
1.092	V	50.7	-	24.4	-31.9	0.0	43.2	74.0	-	54.0
1.196	V	53.4	-	25.2	-31.6	0.0	47.0	74.0	-	54.0
1.277	V	49.6	-	25.6	-31.5	0.0	43.7	68.2	-	NRB
6.016	H	35.6	-	29.8	-25.8	0.0	39.6	68.2	-	NRB
6.048	H	36.0	-	29.8	-25.9	0.0	39.9	68.2	-	NRB
6.080	H	35.7	-	29.8	-25.8	0.0	39.7	68.2	-	NRB
6.216	H	47.9	-	29.9	-25.6	0.0	52.2	68.2	-	NRB
10.361	V	35.7	-	33.5	-21.4	0.0	47.8	68.2	-	NRB

Note: OB means "operation band" (5150-5250MHz).

NRB means "non restricted band": The limit of FCC Part 15.407(b)(1),(2) and RSS-210 6.2.2(q1)(I),(ii) apply.

Table 7-2-2. Ch.52 (5260MHz) **TX** mode 24Mbps

Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) (<i>peak</i>)	Measured (dB μ V) (<i>average</i>)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dB μ V/m) (<i>peak</i>)	FCC Limit (dB μ V/m) (<i>peak</i>)	Field Strength (dB μ V/m) (<i>average</i>)	FCC Limit (dB μ V/m) (<i>average</i>)
OB										
5.265 bandedge	H	105.2	92.9	33.6	-26.4	0.0	112.4	N/A	100.1	N/A
5.350	H	50.9	38.1	33.9	-26.3	0.0	58.5	74.0	45.7	54.0
5.376	H	51.2	38.9	33.9	-26.3	0.0	58.8	74.0	46.5	54.0
5.383	H	50.6	38.8	33.9	-26.3	0.0	58.2	74.0	46.4	54.0
1.066	V	51.4	-	24.6	-32.0	0.0	44.0	74.0	-	54.0
1.092	V	51.2	-	24.4	-31.9	0.0	43.7	74.0	-	54.0
1.196	V	51.2	-	25.2	-31.6	0.0	44.8	74.0	-	54.0
1.277	V	48.7	-	25.6	-31.5	0.0	42.8	68.2	-	NRB
6.016	H	36.4	-	29.8	-25.8	0.0	40.4	68.2	-	NRB
6.048	H	36.4	-	29.8	-25.9	0.0	40.3	68.2	-	NRB
6.080	H	35.3	-	29.8	-25.8	0.0	39.3	68.2	-	NRB
6.313	H	45.8	-	30.0	-25.7	0.0	50.1	68.2	-	NRB
10.521	H	38.8	-	33.5	-20.8	0.0	51.5	68.2	-	NRB

Note: OB means “operation band” (5250-5350MHz).

NRB means “non restricted band”: The limit of FCC Part 15.407(b)(1),(2) and RSS-210 6.2.2(q1)(I),(ii) apply.

Table 7-2-3. Ch.64 (5320MHz) **TX** mode 24Mbps

Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) (<i>peak</i>)	Measured (dB μ V) (<i>average</i>)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dB μ V/m) (<i>peak</i>)	FCC Limit (dB μ V/m) (<i>peak</i>)	Field Strength (dB μ V/m) (<i>average</i>)	FCC Limit (dB μ V/m) (<i>average</i>)
OB										
5.324 bandedge	H	101.9	89.6	33.7	-26.4	0.0	109.2	N/A	96.9	N/A
5.350	H	60.8	43.7	33.9	-26.3	0.0	68.4	74.0	51.3	54.0
5.359	H	59.0	40.3	33.9	-26.3	0.0	66.6	74.0	47.9	54.0
5.376	H	53.2	40.9	33.9	-26.3	0.0	60.8	74.0	48.5	54.0
1.066	V	50.5	-	24.6	-32.0	0.0	43.1	74.0	-	54.0
1.092	V	52.1	-	24.4	-31.9	0.0	44.6	74.0	-	54.0
1.196	V	51.9	-	25.2	-31.6	0.0	45.5	74.0	-	54.0
1.277	V	49.8	-	25.6	-31.5	0.0	43.9	68.2	-	NRB
6.016	H	35.7	-	29.8	-25.8	0.0	39.7	68.2	-	NRB
6.048	H	35.9	-	29.8	-25.9	0.0	39.8	68.2	-	NRB
6.080	H	35.8	-	29.8	-25.8	0.0	39.8	68.2	-	NRB
6.385	H	41.4	-	29.9	-25.7	0.0	45.6	68.2	-	NRB
10.641	H	35.5	-	33.5	-20.7	0.0	48.3	74.0	-	54.0
15.966	H	39.1	-	37.2	-23.1	0.0	53.2	74.0	-	54.0

*Note: OB means “operation band” (5250-5350MHz).

NRB means “non restricted band”: The limit of FCC Part 15.407(b)(1),(2) and RSS-210 6.2.2(q1)(I),(ii) apply.

Table 7-2-4 Ch.52 (5260MHz) **RX** mode


Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) <i>(peak)</i>	Measured (dB μ V) <i>(average)</i>	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dB μ V/m) <i>(peak)</i>	FCC Limit (dB μ V/m) <i>(peak)</i>	Field Strength (dB μ V/m) <i>(average)</i>	FCC Limit (dB μ V/m) <i>(average)</i>
1.066	V	50.6	-	24.6	-32.0	0.0	43.2	74.0	-	54.0
1.092	V	50.7	-	24.4	-31.9	0.0	43.2	74.0	-	54.0
1.196	V	49.7	-	25.2	-31.6	0.0	43.3	74.0	-	54.0
1.277	V	49.5	-	25.6	-31.5	0.0	43.6	68.2	-	NRB

Note: NRB means “non restricted band”: The limit of FCC Part 15.407(b)(1),(2) and RSS-210 6.2.2(q1)(I),(ii) apply.

7.6 Trace Data



Marker 1 [T1] RBW 1 MHz RF Att 20 dB
Ref Lvl 103.63 dBμV VBW 1 MHz
117 dBμV 5.18526052 GHz SWT 5 ms Unit dBμV

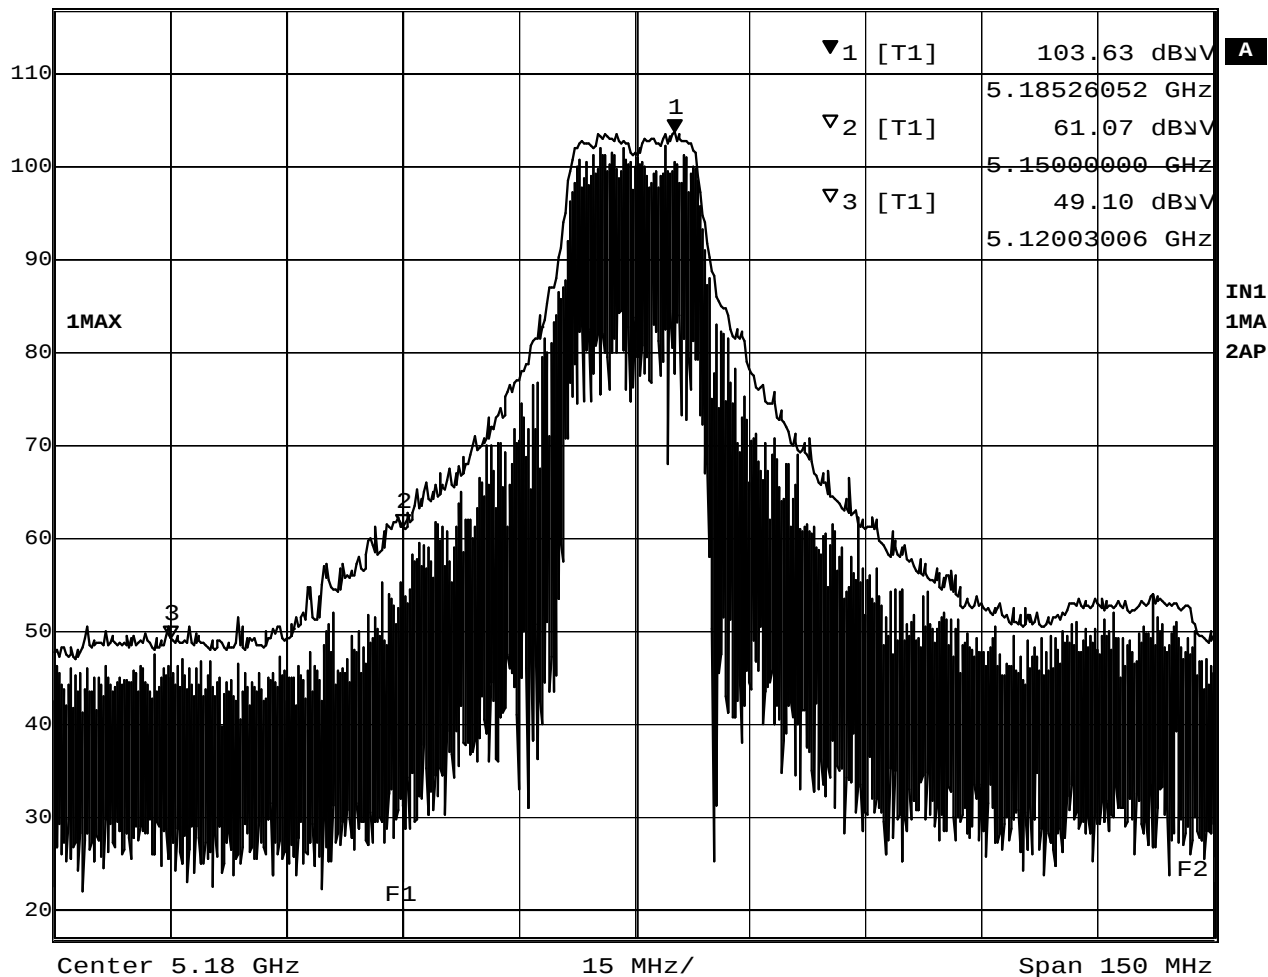


Date: 18.JUL.2003 21:29:05

Plot 7-1-1 5180MHz TX mode (Peak)



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	20 dB
117 dBμV	92.07 dBμV	VBW	10 Hz		
	5.18676353 GHz	SWT	38 s	Unit	dBμV

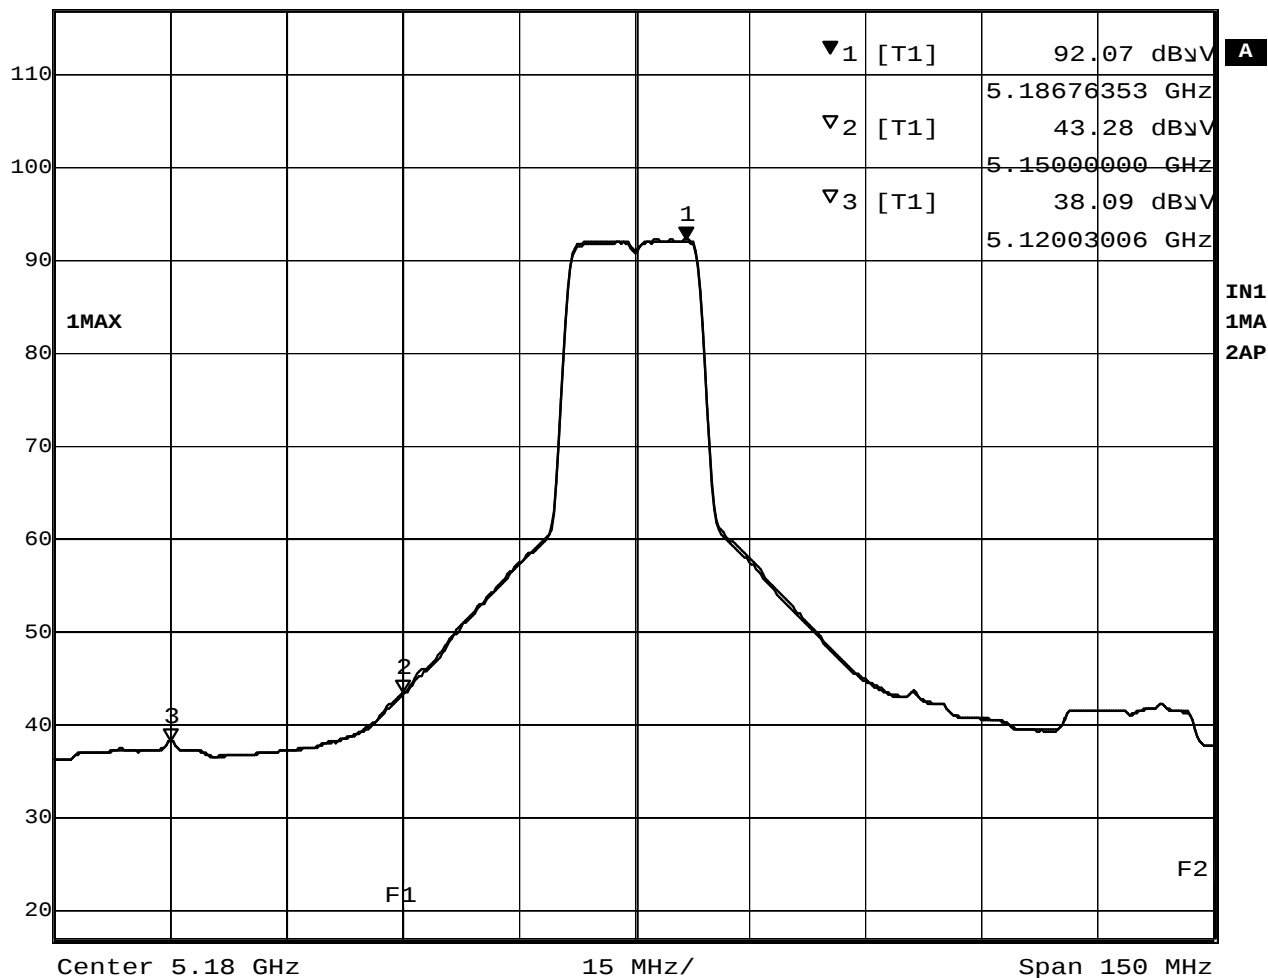


Date: 18.JUL.2003 21:27:53

Plot 7-1-2 5180MHz TX mode (Average)



Marker 1 [T1] RBW 1 MHz RF Att 20 dB
Ref Lvl 105.19 dBμV VBW 1 MHz
117 dBμV 5.26526052 GHz SWT 5 ms Unit dBμV

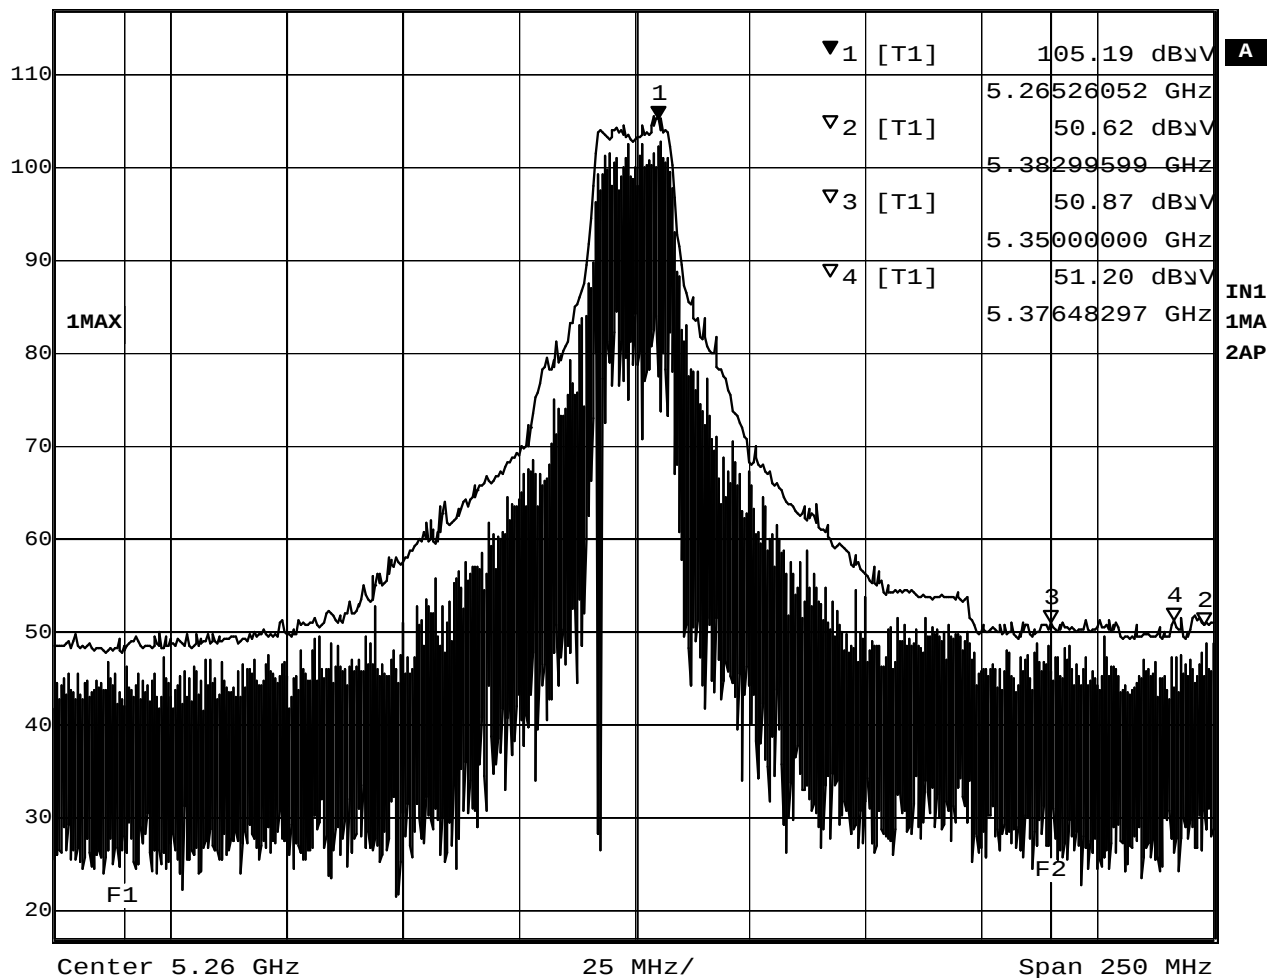


Date: 18.JUL.2003 21:44:20

Plot 7-2-1 5260MHz TX mode (Peak)



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	20 dB
117 dBμV	92.90 dBμV	VBW	10 Hz		
	5.26626253 GHz	SWT	64 s	Unit	dBμV

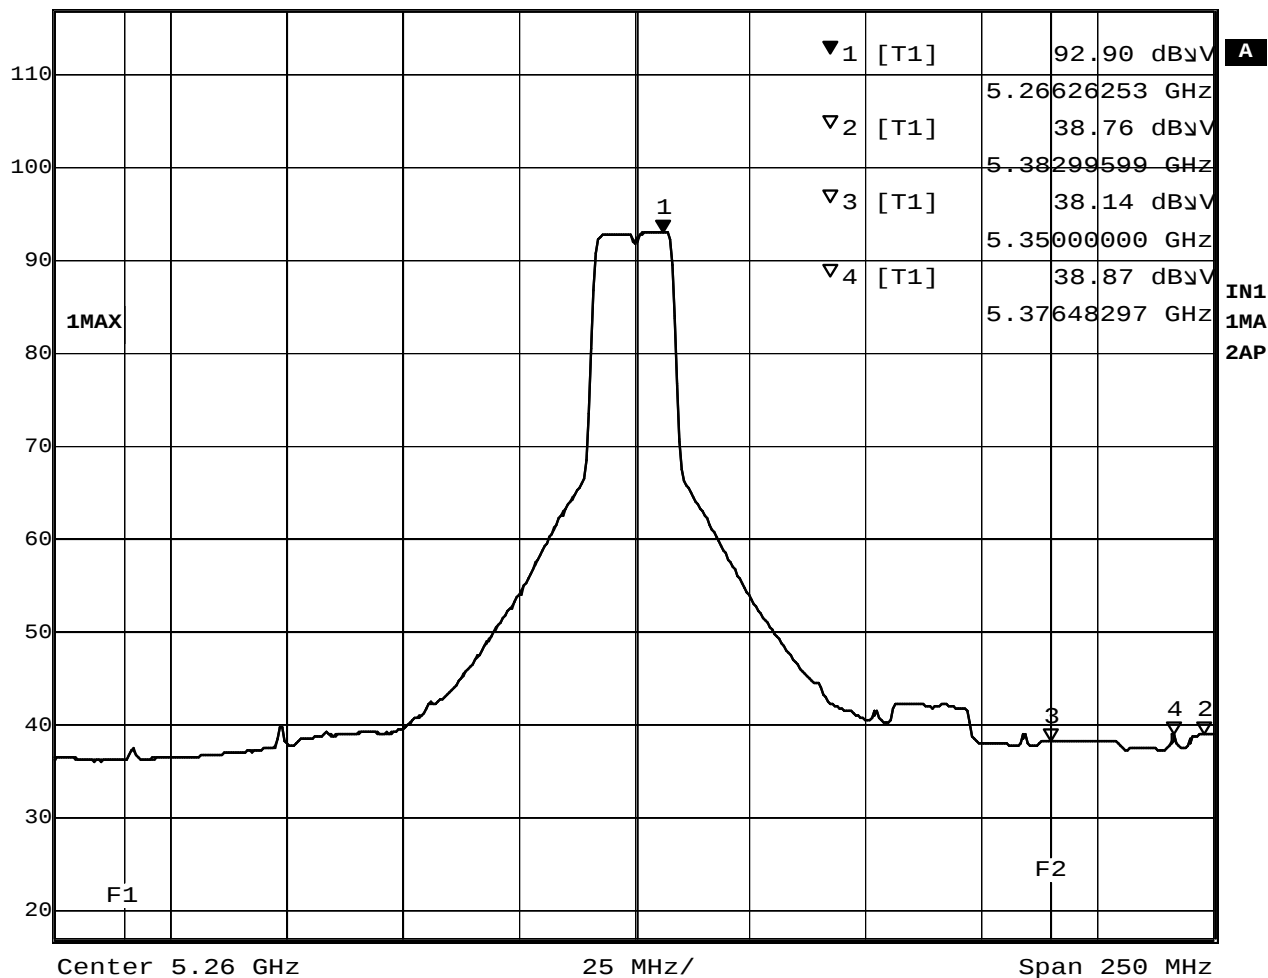


Date: 18.JUL.2003 21:41:16

Plot 7-2-2 5260MHz TX mode (Average)



Marker 1 [T1] RBW 1 MHz RF Att 20 dB
Ref Lvl 101.89 dBμV VBW 1 MHz
117 dBμV 5.32405812 GHz SWT 5 ms Unit dBμV

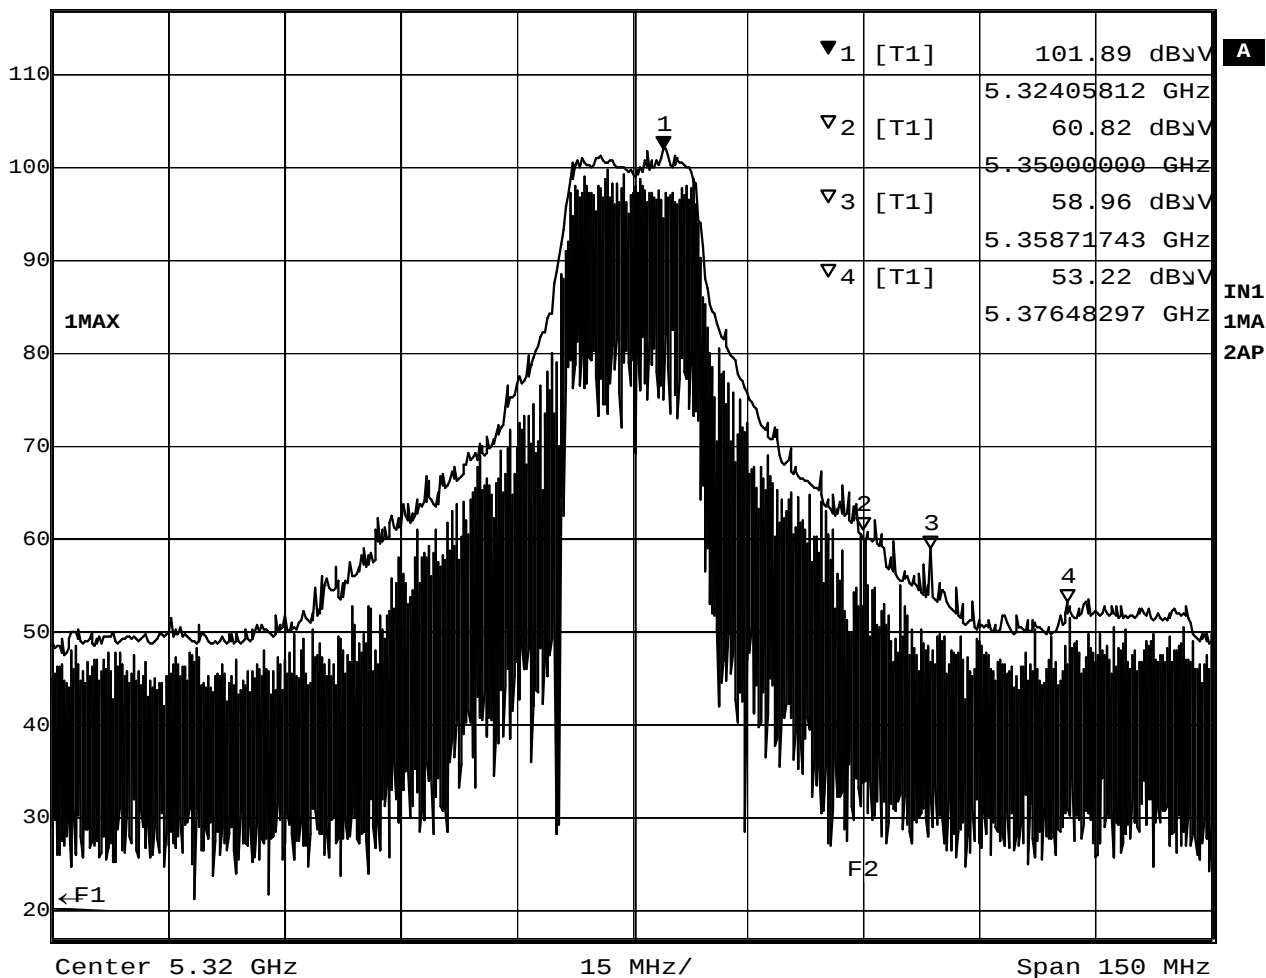


Date: 18.JUL.2003 21:47:58

Plot 7-3-1 5320MHz TX mode (Peak)



Ref Lvl 117 dBμV
Marker 1 [T1] 89.63 dBμV
5.32676353 GHz
RBW 1 MHz
VBW 10 Hz
SWT 38 s
RF Att 20 dB
Unit dBμV

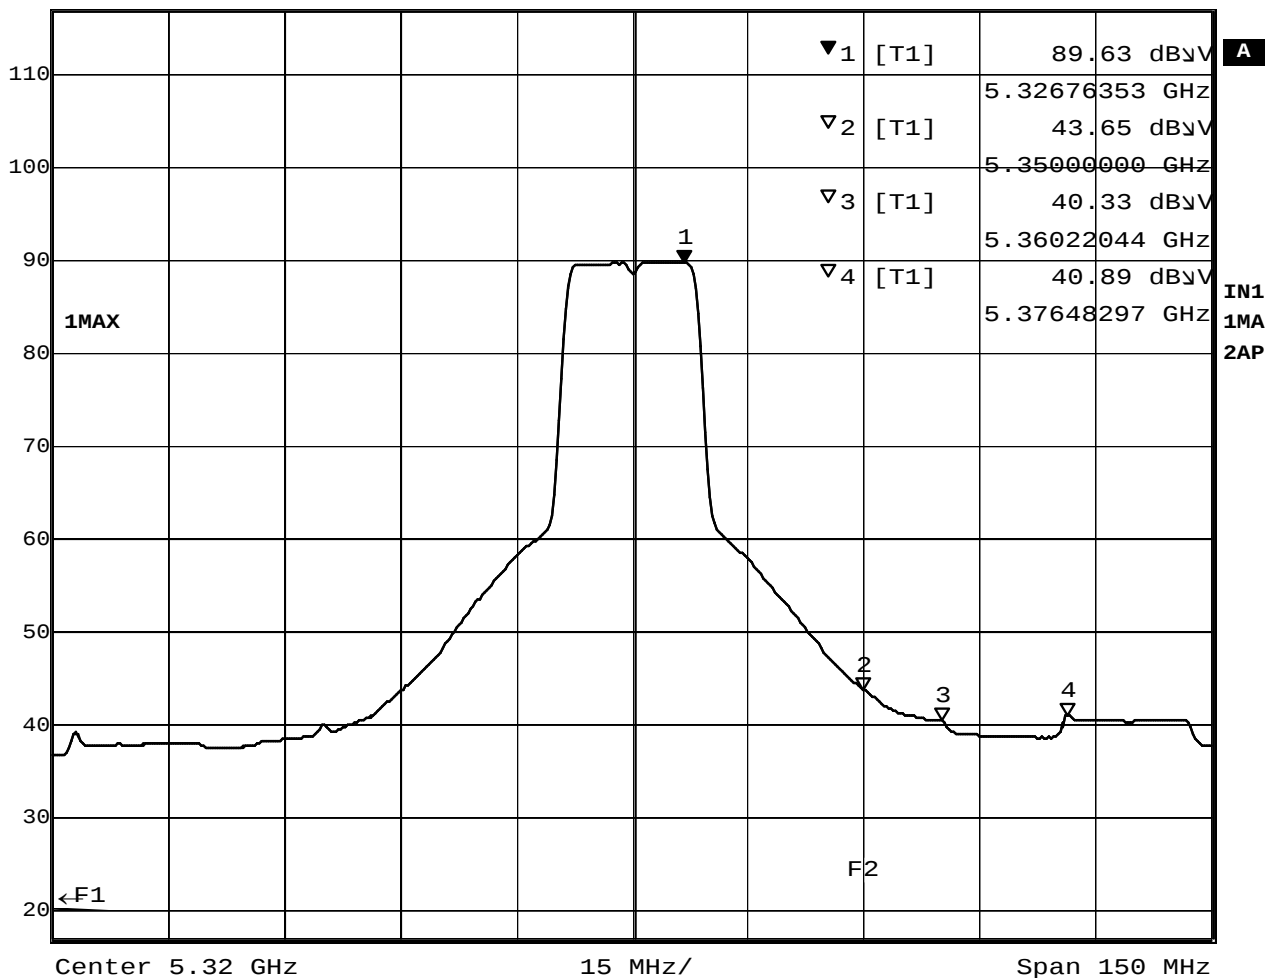

Date: 18.JUL.2003 21:46:49

Plot 7-3-2 5320MHz TX mode (Average)