

Emission Test Report **Standard: FCC Part 15 Subpart C**

Document Number : FCC 19-0168-0

Product: IBM ThinkPad T23 Special Business Use
Included *Wireless LAN Mini-PCI Adapter, CISCO MPI 350 Series*

FCC ID: ANO2PAPATOTR4CSC

February 26, 2002

**Prepared :
EMC Engineer**

Takeshi Asano

Signature: 

**IBM Japan, Ltd.
EMC Engineering
LAB-S59**

**1623-14, Shimotsuruma,
Yamato-shi Kanagawa-ken 242, Japan**

Phone: +81-46-215-4779

Fax: +81-46-273-7420

E-Mail: asano@jp.ibm.com

**Reviewed and Checked :
EMC Staff Engineer**

Toshiya Murota

Signature: 

**IBM Japan, Ltd.
EMC Engineering
LAB-S59**

**1623-14, Shimotsuruma,
Yamato-shi Kanagawa-ken 242, Japan**

Phone: +81-46-215-6574

Fax: +81-46-273-7420

E-Mail: murota@jp.ibm.com

**Approved :
Manager, EMC Engineering**

Akihisa Sakurai

Signature: 

**IBM Japan, Ltd.
EMC Engineering
LAB-S59**

**1623-14, Shimotsuruma,
Yamato-shi Kanagawa-ken 242, Japan**

Phone: +81-46-215-2613

Fax: +81-46-273-7420

E-Mail: akihisa@jp.ibm.com

- Index -

A. GENERAL INFORMATION.....	2
A.1 TEST METHODOLOGY	2
A.2 TEST FACILITY / NVLAP ACCREDITATION	2
A.3 EUT DETAILS	2
B. SUMMARY OF TEST RESULTS	3
C. OPERATION MODE OF EUT.....	4
D. TEST INSTRUMENTS.....	5
E. MEASUREMENT UNCERTAINTY.....	6
1. BANDWIDTH AT 6 DB BELOW.....	7
1.1 TEST PROCEDURE.....	7
1.2 TEST INSTRUMENTS AND MEASUREMENT SETUP.....	7
1.3 MEASUREMENT RESULTS.....	7
1.4 TRACE DATA.....	8
2. OCCUPIED BANDWIDTH / BAND-EDGE (AT 20 DB BELOW), AND OUT OF BAND EMISSIONS	14
2.1 TEST PROCEDURE.....	14
2.2 TEST INSTRUMENTS AND MEASUREMENT SETUP.....	14
2.3 MEASUREMENT RESULTS OF OCCUPIED BANDWIDTH / BAND-EDGE.....	14
2.4 MEASUREMENT RESULTS OF OUT OF BAND EMISSIONS	14
2.5 TRACE DATA OF BAND-EDGE.....	15
2.6 TRACE DATA OF OUT OF BAND EMISSIONS	21
3. TRANSMITTER OUTPUT POWER.....	27
3.1 TEST PROCEDURE.....	27
3.2 MEASUREMENT RESULTS.....	27
4. TRANSMITTER POWER SPECTRAL DENSITY	29
4.1 TEST PROCEDURE.....	29
4.2 TEST INSTRUMENTS AND MEASUREMENT SETUP.....	29
4.3 MEASUREMENT RESULTS.....	29
4.4 TRACE DATA.....	30
5. AC WIRELINE CONDUCTED EMISSIONS (450KHZ – 30MHZ)	36
5.1 TEST PROCEDURE.....	36
5.2 TEST INSTRUMENTS AND MEASUREMENT SETUP.....	36
5.3 MEASUREMENT RESULTS.....	37
6. RESTRICTED BANDS RADIATIONS (30MHZ – 1GHZ)	40
6.1 TEST PROCEDURE.....	40
6.2 TEST INSTRUMENTS AND MEASUREMENT SETUP.....	40
6.3 FIELD STRENGTH CALCULATION.....	42
6.4 MEASUREMENT RESULTS.....	43
7. RESTRICTED BANDS RADIATIONS (1GHZ – 25GHZ)	46
7.1 TEST PROCEDURE.....	46
7.2 TEST INSTRUMENTS AND MEASUREMENT SETUP.....	46
7.3 FIELD STRENGTH CALCULATION.....	47
7.4 MEASUREMENT RESULTS.....	48

A. GENERAL INFORMATION

APPLICANT : IBM Japan Ltd.
 ADDRESS : 1623 – 14 Shimotsuruma, Yamato-shi, Kanagawa 242-8502 Japan
 Tel: +81-46-215-4779, Fax: +81-46-273-7420
 REGULATION : FCC Part 15 Subpart C
 MODEL NUMBER : 2647-4XU (ThinkPad T23 Special Business Use)
 FCC ID : ANO2PAPATOTR4CSC
 SERIAL NUMBER : ZZ-00089
 PHYSICAL CONDITION : Preproduction
 KIND OF EQUIPMENT : Personal computer with a built-in Wireless LAN card
 TESTED DATE : February 12, 13, 18, 20 and 22, 2002
 TEST SITE : IBM Yamato semi-anechoic chamber #2

A.1 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4-1992. Radiated testing was performed at an antenna to EUT distance of 3 meters.

A.2 Test Facility / NVLAP Accreditation

The semi-anechoic chamber #2 used to correct the data are located in Yamato Laboratory, IBM Japan.

- This facility has been fully described in a report dated September 1998, submitted to the FCC office, and accepted in a letter, dated Nov. 2, 1998(31040/SIT).
- This facility is accepted by **Industry Canada** in a letter dated March 19, 2001 as number **IC 349F** for chamber #2, and January 25, 2002 as number **IC 4221** for chamber #1.
- IBM Yamato EMC Engineering is recognized under the National Voluntary Laboratory Accreditation Program for satisfactory compliance with Criteria established in Title 15, Part 285 Code of Federal Regulations.(NVLAP Lab code: 200198-0)

A.3 EUT details

Table A EUT details

Model and S/N	FCC ID	Description	Cable Description
ThinkPad T23 M/T 2647-4XU (s/n ZZ-00089)	ANO2PAPATOTR4CSC	IBM Notebook PC CPU: Intel® Mobile Geyserville® 1133MHz LV	
P/N 02K6750	N/A	Universal AC adapter 72W	Unshielded power cord

B. SUMMARY OF TEST RESULTS

Table-B presents the list of the measurement items for Spread Spectrum, Direct Sequence devices under FCC Part 15 Subpart C and Industry Canada RSS-210.

The section numbers of upper portion are showing FCC number, and the other (lower) ones are for IC.

Table-B List of the measurements

Section(s)	Test Items		Condition	Result
	Transmit mode (TX):			
15.247(a)(2) 5.9.1	Bandwidth at 6 dB below		Conducted	Pass
15.247(c) 5.9.1 6.2.2 (o) (e1)	Occupied BW (or Band-edge) Out of Band Emissions (Bandwidth at 20 dB below)	The radiated emission in any 100KHz of outband shall be at least 20dB below the highest inband spectral density.	Conducted	Pass
15.247(b) 6.2.2 (o) (b)	Transmitter output power	Shall not exceed 1.0 W.	Conducted	Pass
15.247(d) 6.2.2 (o) (b)	Transmitter power spectral Density	Shall not be greater than 8 dBm in any 3KHz band.	Conducted	Pass
15.247(e) 6.2.2 (o) (b)	Processing gain	10 dB	Conducted	Pass*
15.207 6.6	AC Wireline Conducted Emissions 450kHz – 30MHz	Class B: 250uV	Conducted	Pass
15.205 / 209 6.2.1 / 6.3	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Shall not exceed the limits specified in FCC 15.209 or RSS-210 Table3.	Radiated (30MHz - 1GHz)	Pass
			Radiated (1– 25GHz)	Pass
	Receive mode (RX):			
15.207 7.4	AC Wireline Conducted Emissions 450kHz – 30MHz	Class B: 250uV	Conducted	Pass
15.209 7.3	General Field Strength Limits (Radiated Emission Limits)	Shall not exceed the limits specified in RSS-210.	Radiated (30MHz - 1GHz)	Pass
			Radiated (1– 25GHz)	Pass

* See “Processing Gain Report” by CISCO Systems Inc.

C. OPERATION MODE OF EUT

All tests were performed using the “Venus MPI 350 Software”. Three kinds of modulation are used for transmission with appropriate bit rates.

Table C-1 Transmit mode (TX)

Operation Frequency [GHz]	Rated output power (conducted) [dBm]			Test performed*
	Bit rate 2Mbps	Bit rate 5.5Mbps	Bit rate 11Mbps	
2.412 (Ch. 1)	+20	+20	+20	X
2.417 (Ch. 2)	+20	+20	+20	
2.422 (Ch. 3)	+20	+20	+20	
2.427 (Ch. 4)	+20	+20	+20	
2.432 (Ch. 5)	+20	+20	+20	
2.437 (Ch. 6)	+20	+20	+20	X
2.442 (Ch. 7)	+20	+20	+20	
2.447 (Ch. 8)	+20	+20	+20	
2.452 (Ch. 9)	+20	+20	+20	
2.457 (Ch. 10)	+20	+20	+20	
2.462 (Ch. 11)	+20	+20	+20	X

* Full testing with bit rate 11Mbps only

Table C-2 Receive mode (RX)

Operation Frequency [GHz]	Test performed
2.412 (Ch. 1)	
2.417 (Ch. 2)	
2.422 (Ch. 3)	
2.427 (Ch. 4)	
2.432 (Ch. 5)	
2.437 (Ch. 6)	X
2.442 (Ch. 7)	
2.447 (Ch. 8)	
2.452 (Ch. 9)	
2.457 (Ch. 10)	
2.462 (Ch. 11)	

D. TEST INSTRUMENTS

Table-D List of Measuring Instruments

Description	Model	Serial Number	Calibration Date	Calibration Interval
Computer	IBM 5551-L	#4	N/A	N/A
Computer	IBM 6589-13J	97-15613	N/A	N/A
Spectrum Analyzer (100Hz-1.5GHz)	HP 85680B	2841A04242	10/18/01	1 year
Spectrum Analyzer (100Hz-1.5GHz)	HP 85680B	2841A04254	04/26/01	1 year
Spectrum Analyzer (100Hz-1.5GHz)	HP 85680B	3019A05156	04/02/01	1 year
Spectrum Analyzer Display	HP 85662A	2816A16827	10/18/01	1 year
Spectrum Analyzer Display	HP 85662A	2816A16831	04/26/01	1 year
Spectrum Analyzer Display	HP 85662A	3026A19366	04/02/01	1 year
Quasi-Peak Adapter	HP 85650A	2811A01126	10/18/01	1 year
Quasi-Peak Adapter	HP 85650A	2811A01156	04/26/01	1 year
Quasi-Peak Adapter	HP 85650A	2811A01433	04/02/01	1 year
Amplifier (100KHz - 1.3GHz)				
- for 30-200MHz	HP 8447D	2805A02919	04/16/01	1 year
- for 200-1000MHz	HP 8447D	2944A03506	04/16/01	1 year
Amplifier (1GHz - 26.5GHz)	HP 8449B	3008A00582	05/23/01	1 year
Spectrum Analyzer EMI Test Receiver	R&S ESI26	836119/003	07/04/01	1 year
Receiver (9kHz-30MHz)	R&S ESH3	892108/003	10/03/00	1 year
Receiver (20MHz-1.3GHz)	R&S ESVP	892111/030	05/21/01	1 year
Biconical Antenna (30-200MHz)	EMCO 3108	2241	05/11/01	1 year
Log-Periodic Antenna (200-1000MHz)	EMCO 3146	1584	05/10/01	1 year
Horn Antenna (1- 18GHz)	EMCO 3115	9903-5774	04/23/01	1 year
Horn Antenna (3.95- 5.85GHz)	EMCO 3160-5	1099	04/26/01	1 year
Horn Antenna (5.85- 8.20GHz)	EMCO 3160-6	9712-1044	04/26/01	1 year
Horn Antenna (18- 26.5GHz)	EMCO 3160-9	0004-1202	05/01/01	1 year
LISN	EMCO 3825/2	1426	09/01/01	1 year
Power Meter	HP 436A	2604A24192	09/06/01	1 year
Power Sensor	HP 8482A	2607A10987	09/07/01	1 year
Switch/control unit	HP 3488A	2719A17226	N/A	N/A
		2719A17228	N/A	N/A
Plotter	HP 7550A	2631A33619	N/A	N/A
SF106 cables:	Length:			
- Horn Ant <=> RF Amp.	6 m	- EM206SCO	08/07/01	1 year
- RF Amp.<=>Spectrum Analyzer	15m	- EM215SCO	08/07/01	1 year
N-Coax cables:				
- Bi-coni Ant <=> 10m Cable	9 m	- EM203L01	04/16/01	1 year
- 10m Cable <=> Shield Panel	10 m	- EM203L02	04/16/01	1 year
- Shield Panel <=> RF Amp	7 m	- EM203L03	04/16/01	1 year
- RF Amp <=> Power Splitter	0.5m	- EM203L04	04/16/01	1 year
- Log-peri Ant <=> 10m Cable	9 m	- EM203H01	04/16/01	1 year

- 10m Cable <=> Shield Panel	10 m	- EM203H02	04/16/01	1 year
- Shield Panel <=> RF Amp	7 m	- EM203H03	04/16/01	1 year
- RF Amp <=> Power Splitter	0.5m	- EM203H04	04/16/01	1 year
Coax cables:				
- Lisn-L <=> SW/Con.unit (SW100)	4 m	- EMIC-L	04/16/01	1 year
- Lisn-N <=> SW/Con.unit (SW101)	4 m	- EMIC-N	04/16/01	1 year
- SW/Con.unit <=> RCVR (Input)	1 m	- EMIC-R	04/16/01	1 year
- SW/Con.unit<=> Spe Ana.(Signal In)	1 m	- EMIC-S	04/16/01	1 year
- Power Splitter <=> SW/Con.unit (SW110)	1 m	- EM203L05	04/16/01	1 year
- Power Splitter <=> SW/Con.unit (SW300)	1 m	- EM203L06	04/16/01	1 year
- Power Splitter <=> SW/Con.unit (SW100)	1 m	- EM203H05	04/16/01	1 year
- Power Splitter <=> SW/Con.unit (SW301)	1 m	- EM203H06	04/16/01	1 year
- SW/Con.unit <=> Receiver (Input)	2 m	- EM2RCV	04/16/01	1 year
- SW/Con.unit <=> Spe Ana.(Signal In) for 30- 200MHz	2 m	- EM2SPL	04/16/01	1 year
- SW/Con.unit <=> Spe Ana.(Signal In) for 200-1000MHz	2 m	- EM2SPH	04/16/01	1 year

Notes.

- The above equipment calibration is traceable to National standards.
- HP: Hewlett Packard, R&S: Rohde & Schwarz

E. MEASUREMENT UNCERTAINTY

Uncertainties of the both, the Yamato EMI radiated test facilities (EMI chambers, #1 and #2) and the Yamato EMI conducted test facility are derived with the NIS 81 "Treatment of uncertainty in EMC measurements" 1994.

Estimated site uncertainty values are as follows.

EMI chamber #1 : 4.17dB

EMI chamber #2 : 4.18dB

EMI conducted measurement system : 2.4dB

Detail should be referred to "Treatment of Uncertainty, Calculations and Policy" report, document number TCR 10-0015.

1. Bandwidth at 6 dB below

1.1 Test Procedure

The bandwidth at 6 dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to :

RBW=100KHz, VBW=100KHz*1, Span=30MHz, Sweep=suitable duration based on the EUT specification

*1: To be adjusted accordingly based on the spectrum stability

1.2 Test Instruments and Measurement Setup

Table 1-1: 6 dB Bandwidth Test Instruments

Description	Model	Serial Number
Spectrum Analyzer EMI Test Receiver	R&S ESI26	836119/003
Coax cables: - Spectrum Analyzer <=> EUT	Length: 120 cm Loss: 1.7 dB	

Notes: - R&S: Rohde & Schwarz




Figure 1: Measurement setup for 6dB bandwidth test

1.3 Measurement Results

Test Date: February 22, 2002

- A0 port (for Right antenna) of the card

Table 1-2-1. EUT: M/T 2647-4XU, s/n ZZ-00089 , A0 port (Right antenna), TX mode 11Mbps

Center Frequency (MHz)	Lower frequency (MHz)	Upper frequency (MHz)	Bandwidth at 6 dB below (MHz)
2412 (ch. 1)	2407.82	2417.56	9.74
2437 (ch. 6)	2432.40	2442.50	10.10
2462 (ch. 11)	2457.40	2467.50	10.10


- A1 port (for Left antenna) of the card

Table 1-2-2. EUT: M/T 2647-4XU, s/n ZZ-00089 , A1 port (Left antenna), TX mode 11Mbps

Center Frequency (MHz)	Lower frequency (MHz)	Upper frequency (MHz)	Bandwidth at 6 dB below (MHz)
2412 (ch. 1)	2407.40	2417.50	10.10
2437 (ch. 6)	2432.40	2442.50	10.10
2462 (ch. 11)	2457.40	2467.50	10.10

1.4 Trace Data


- A0 port (for Right antenna)

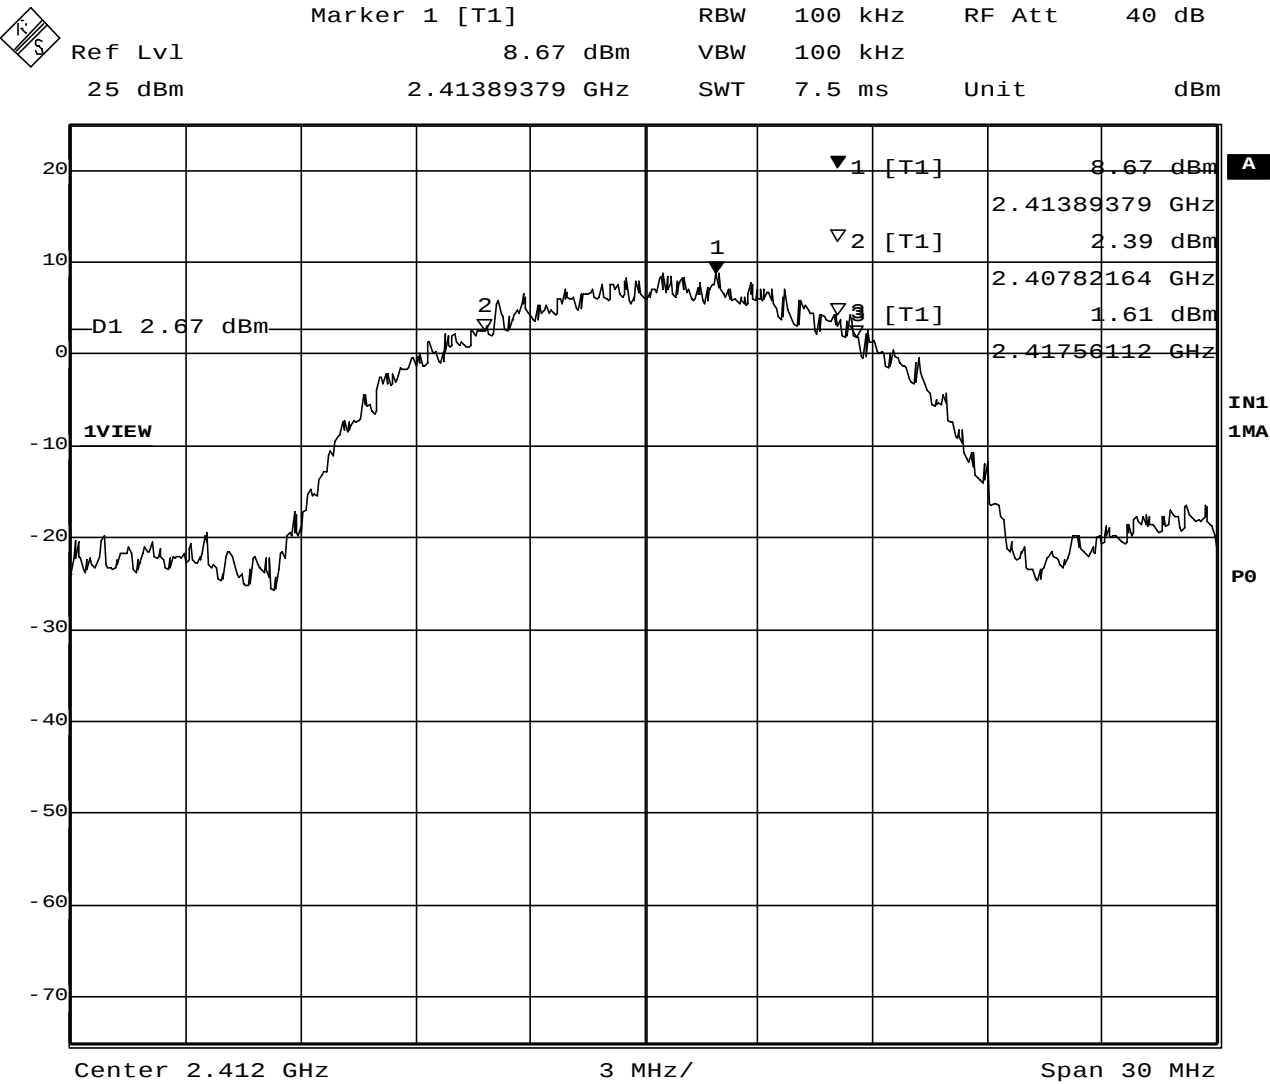

Date: 22.FEB.2002 13:26:23



Marker 1 [T1] RBW 100 kHz RF Att 40 dB
Ref Lvl 8.02 dBm VBW 100 kHz
25 dBm 2.43745090 GHz SWT 7.5 ms Unit dBm

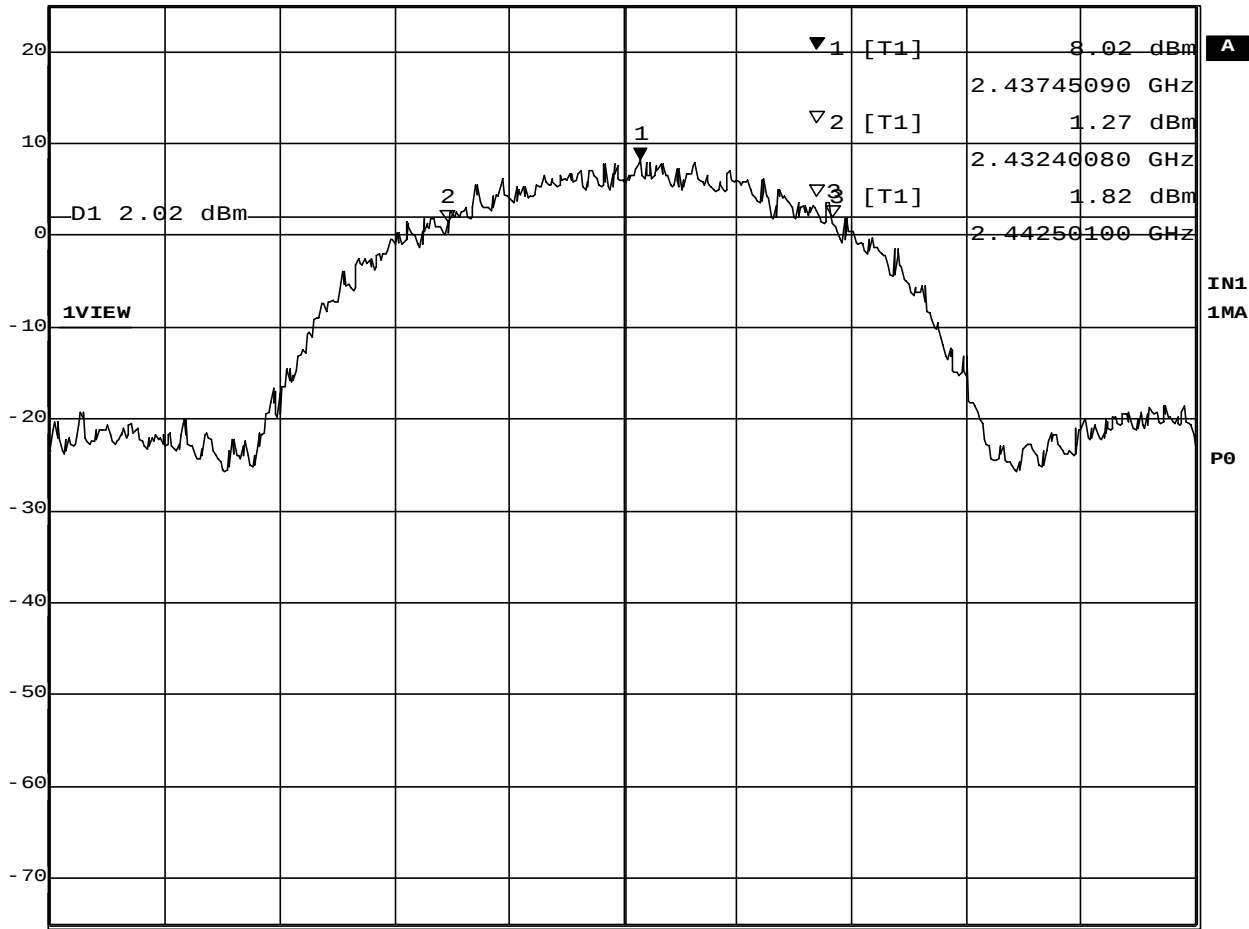


Center 2.437 GHz 3 MHz/ Span 30 MHz

Date: 22.FEB.2002 13:31:39




Marker 1 [T1] RBW 100 kHz RF Att 40 dB
 Ref Lvl 7.64 dBm VBW 100 kHz
 25 dBm 2.46245090 GHz SWT 7.5 ms Unit dBm

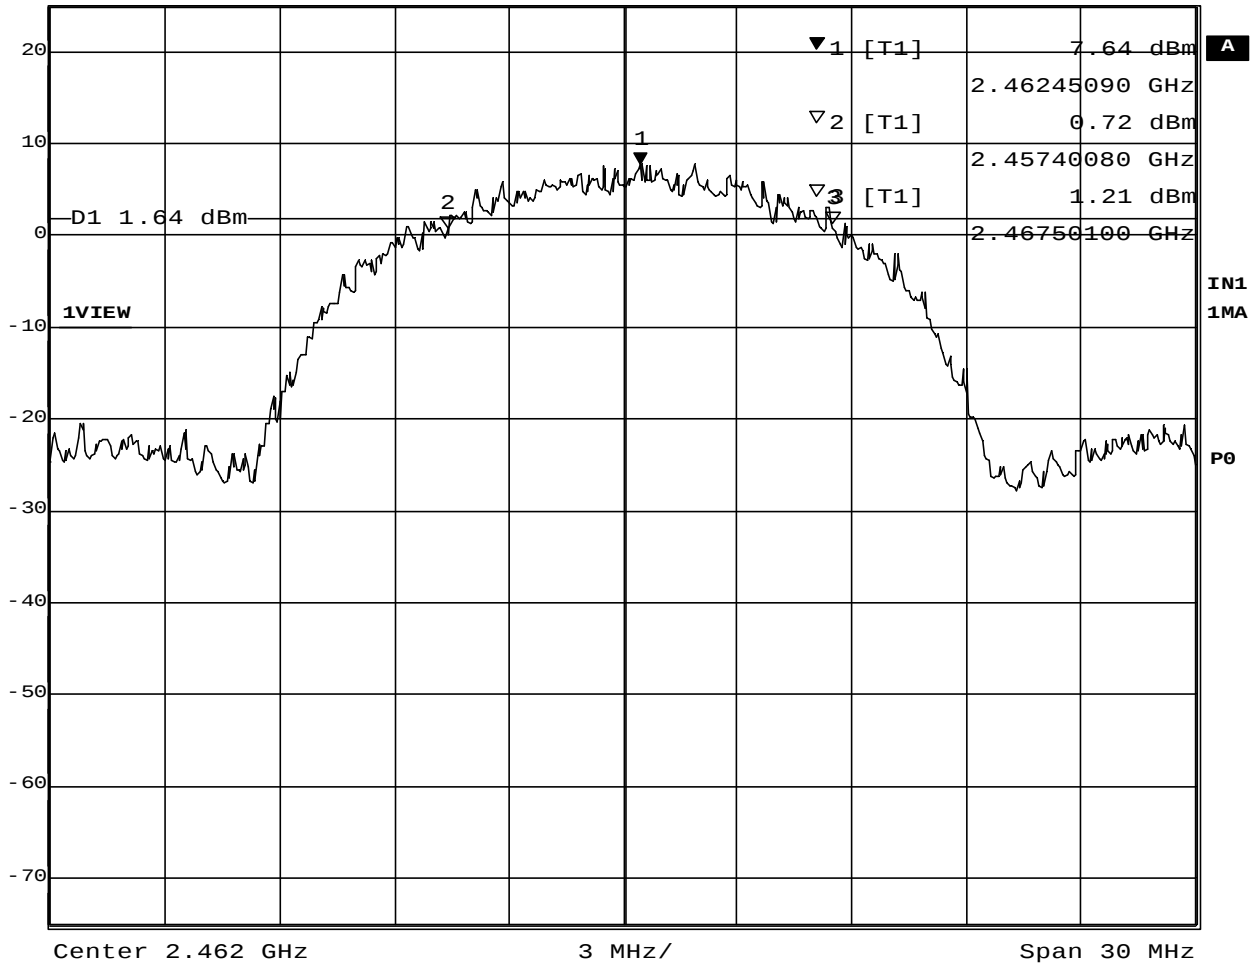


Date: 22.FEB.2002 13:34:32

● A1 port (for Left antenna)

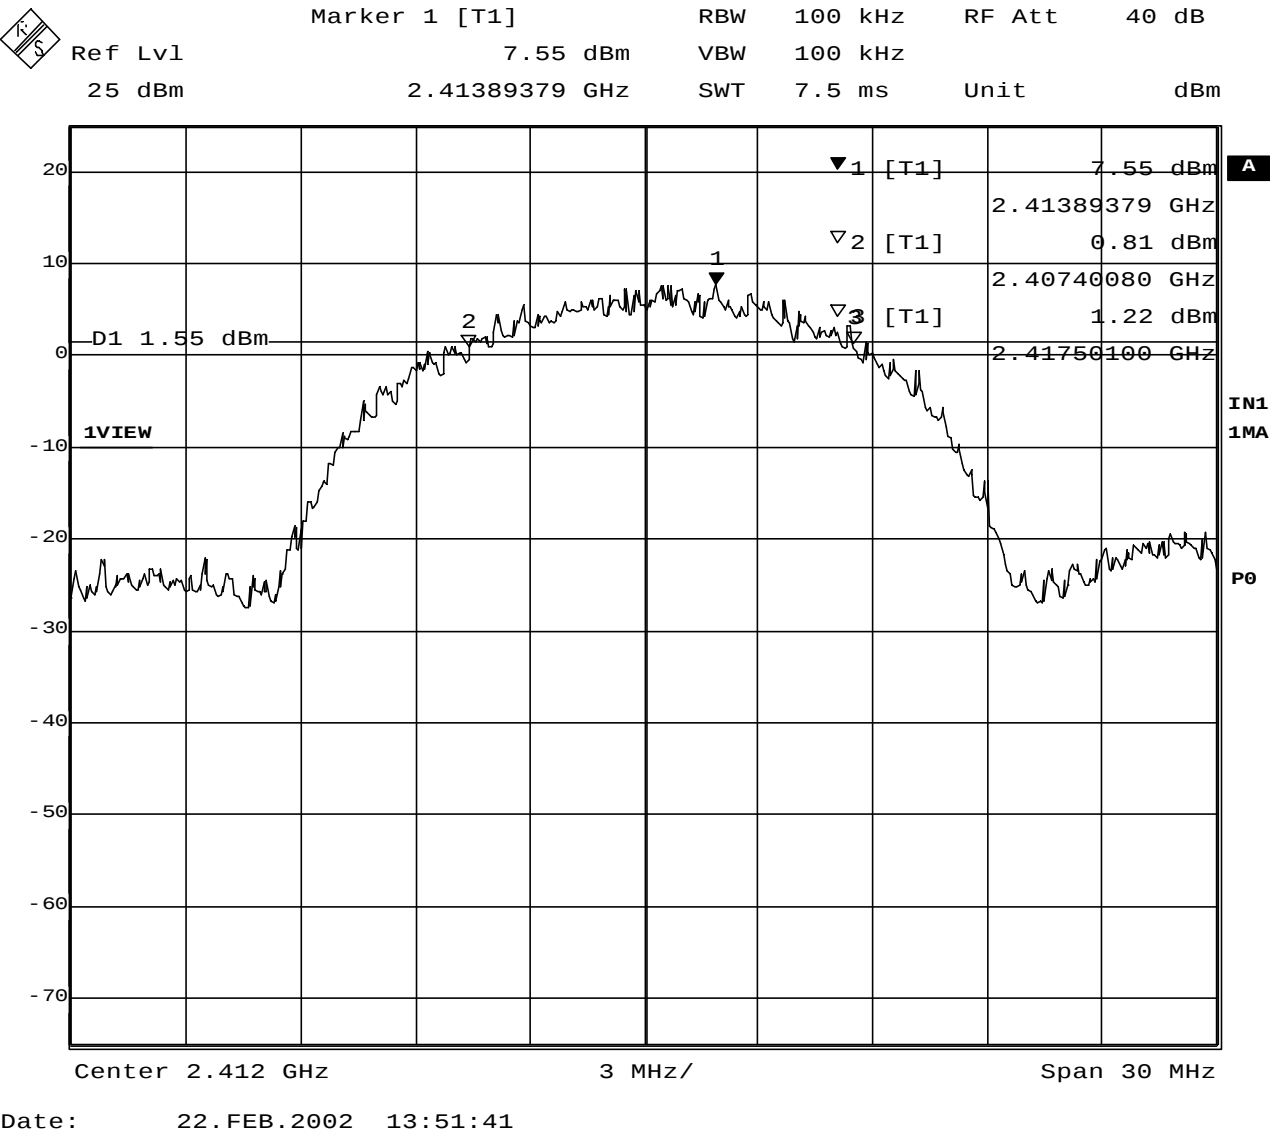



Marker 1 [T1] RBW 100 kHz RF Att 40 dB
Ref Lvl 7.42 dBm VBW 100 kHz
25 dBm 2.43745090 GHz SWT 7.5 ms Unit dBm

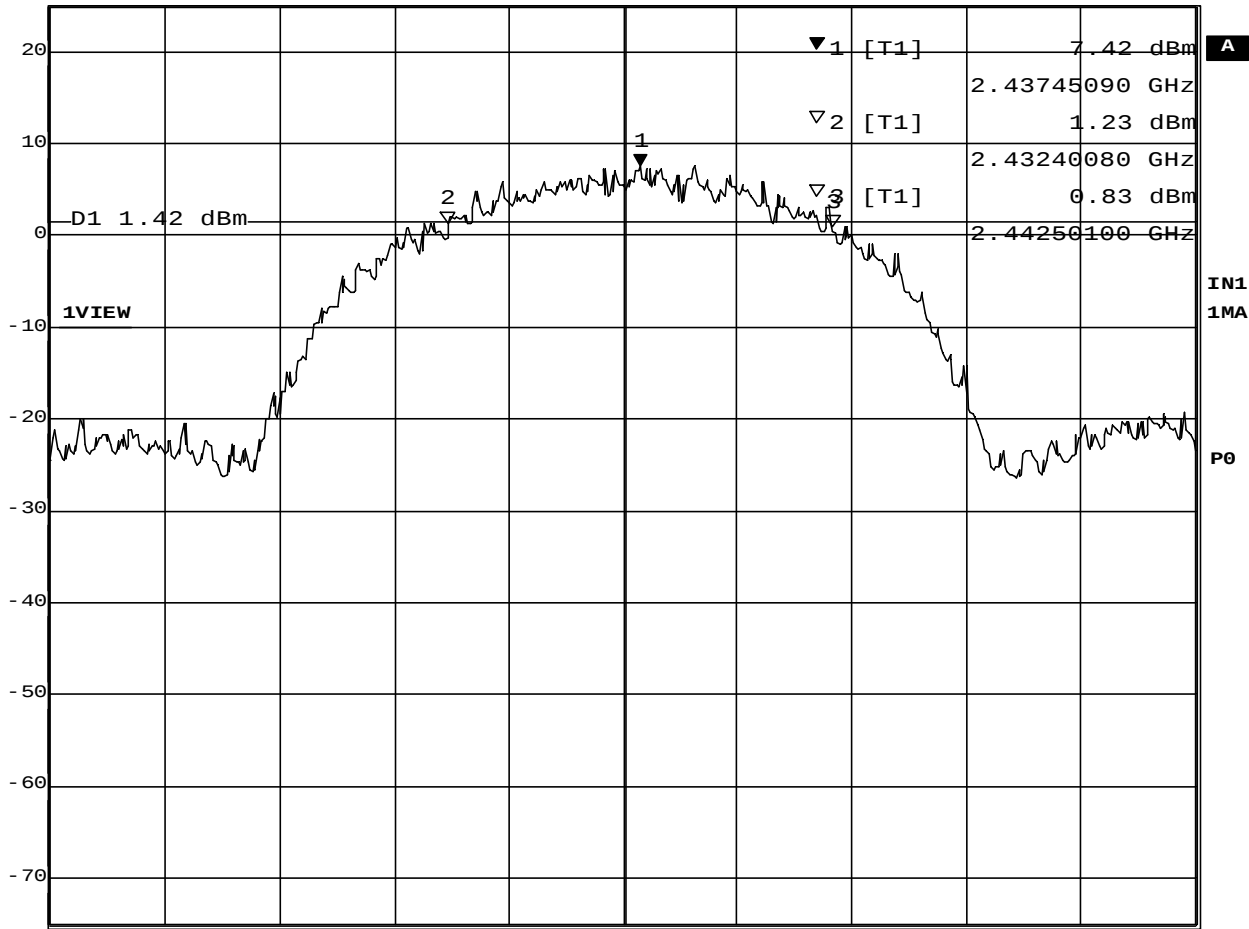


Center 2.437 GHz 3 MHz/ Span 30 MHz

Date: 22.FEB.2002 13:56:21



Marker 1 [T1] RBW 100 kHz RF Att 40 dB
Ref Lvl 6.90 dBm VBW 100 kHz
25 dBm 2.46245090 GHz SWT 7.5 ms Unit dBm

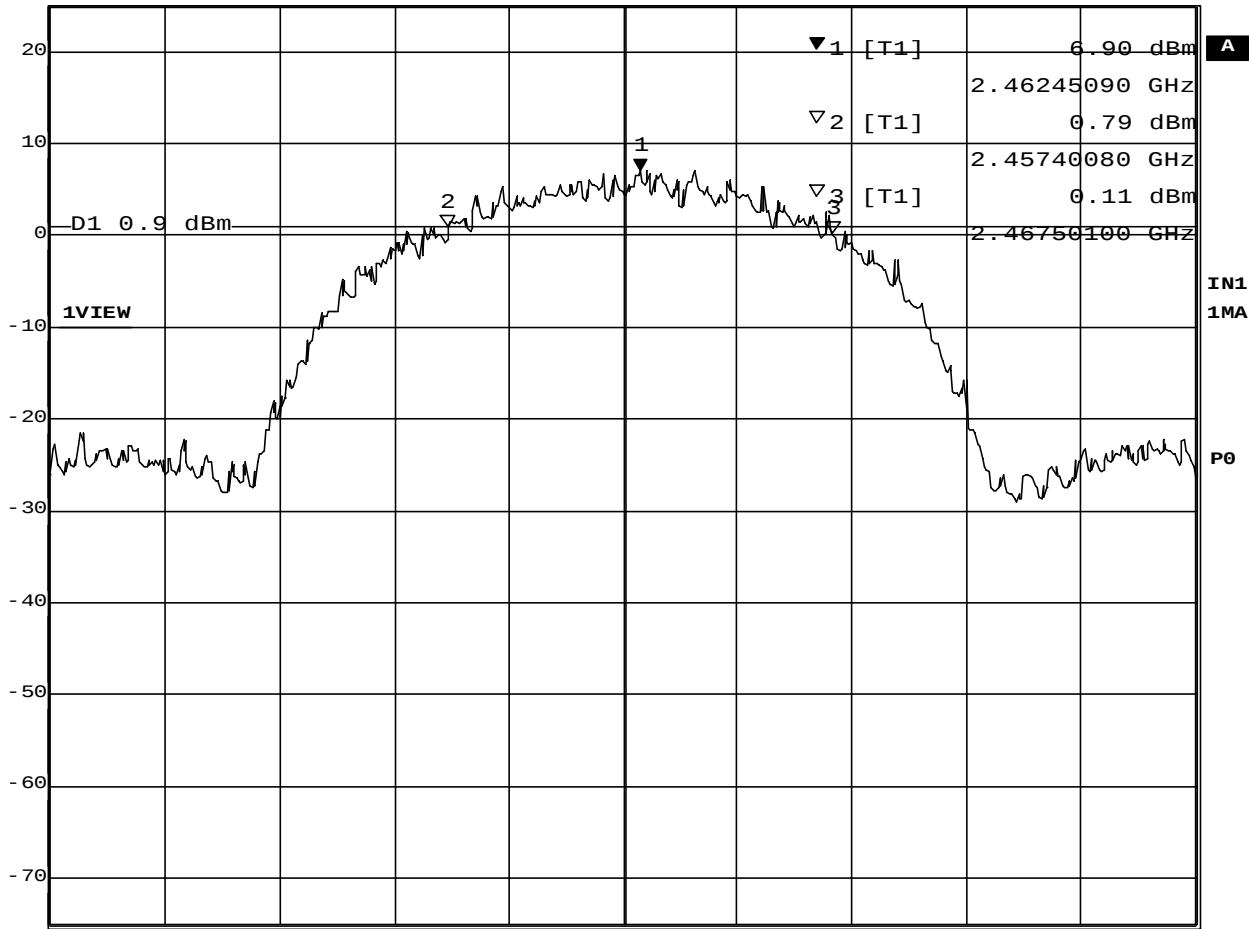

Date: 22.FEB.2002 14:00:12

2. Occupied Bandwidth / Band-edge (at 20 dB below), and Out of Band Emissions

2.1 Test Procedure

The bandwidth at 20 dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to :

RBW=100KHz, VBW=100KHz*1, Span=30MHz, Sweep=suitable duration based on the EUT specification

*1: To be adjusted accordingly based on the spectrum stability

2.2 Test Instruments and Measurement Setup

Same as the Chapter 1(Table 1-1 & Figure 1).

2.3 Measurement Results of Occupied Bandwidth / Band-edge

Test Date: February 22, 2002

- A0 port (for Right antenna) of the card

Table 2-1-1. EUT: M/T 2647-4XU, s/n ZZ-00089 , A0 port (Right antenna), TX mode 11Mbps

Center Frequency (MHz)	Lower Frequency (MHz)	Upper Frequency (MHz)	Bandwidth at 20 dB below (MHz)	Margin to Lower limit (MHz)	Margin to Upper limit (MHz)
2412 (ch. 1)	2403.67	2420.69	17.02	3.67	
2437 (ch. 6)	2428.67	2445.54	16.87		
2462 (ch. 11)	2453.67	2470.39	16.72		13.11

- A1 port (for Left antenna) of the card

Table 2-1-2. EUT: M/T 2647-4XU, s/n ZZ-00089 , A1 port (Left antenna), TX mode 11Mbps

Center Frequency (MHz)	Lower Frequency (MHz)	Upper Frequency (MHz)	Bandwidth at 20 dB below (MHz)	Margin to Lower limit (MHz)	Margin to Upper limit (MHz)
2412 (ch. 1)	2403.67	2420.45	16.78	3.67	
2437 (ch. 6)	2428.67	2445.39	16.72		
2462 (ch. 11)	2453.67	2470.39	16.72		13.11

2.4 Measurement Results of Out of Band Emissions


All conducted emission in any 100kHz bandwidth outside of the spread spectrum band was at least 20dB lower than the highest inband spectral density.

Test Date: February 22, 2002

Prepared by T. Asano

2.5 Trace Data of Band-edge


- A0 port (for Right antenna)

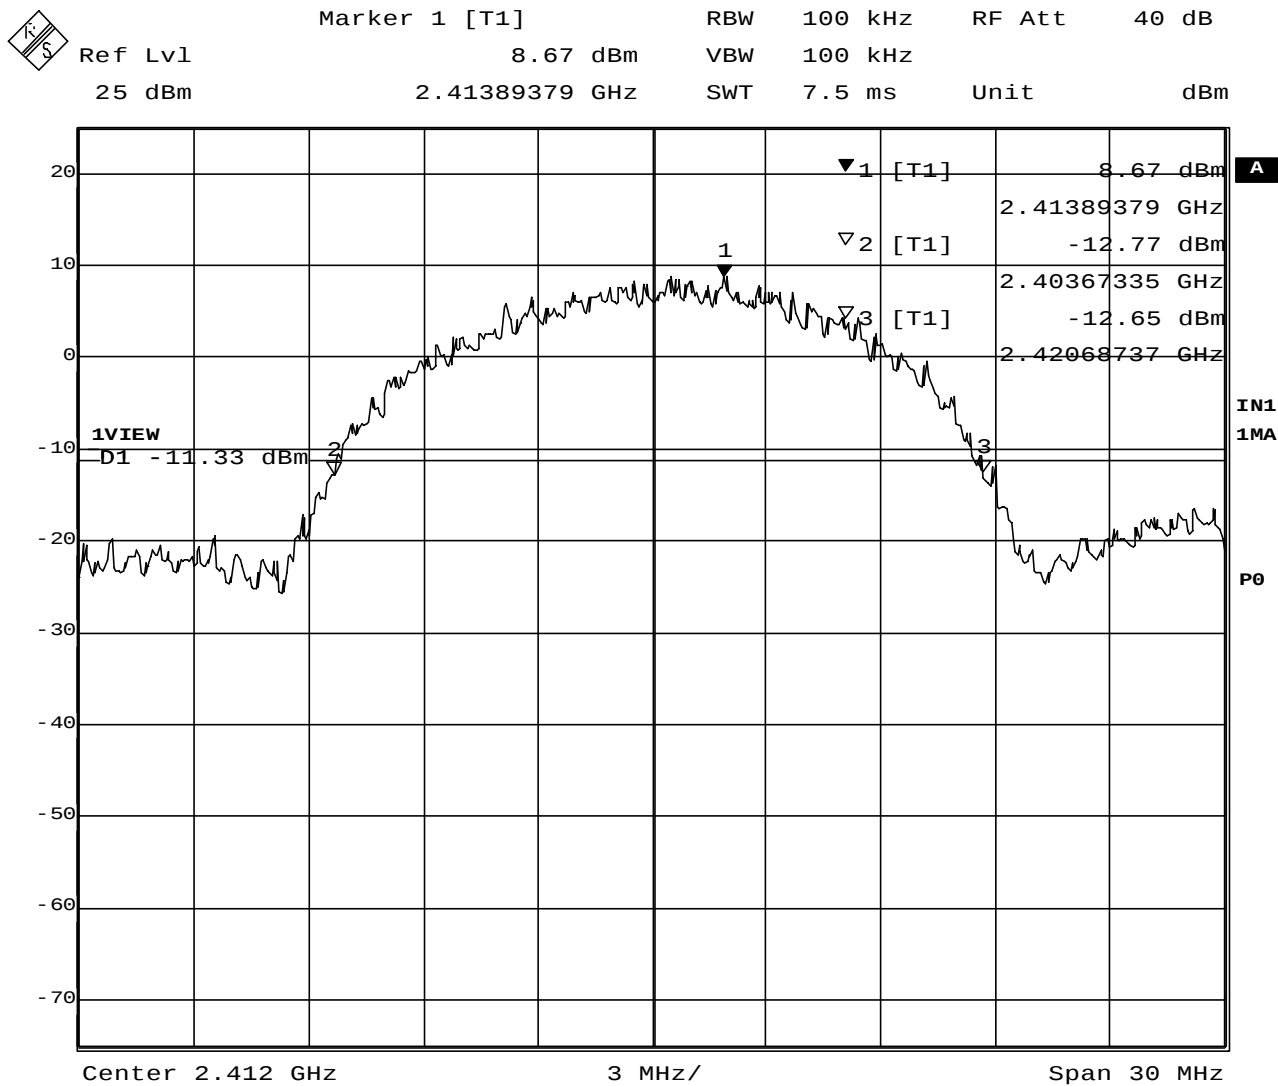

Date: 22.FEB.2002 13:28:00



Marker 1 [T1] RBW 100 kHz RF Att 40 dB
Ref Lvl 8.02 dBm VBW 100 kHz
25 dBm 2.43745090 GHz SWT 7.5 ms Unit dBm

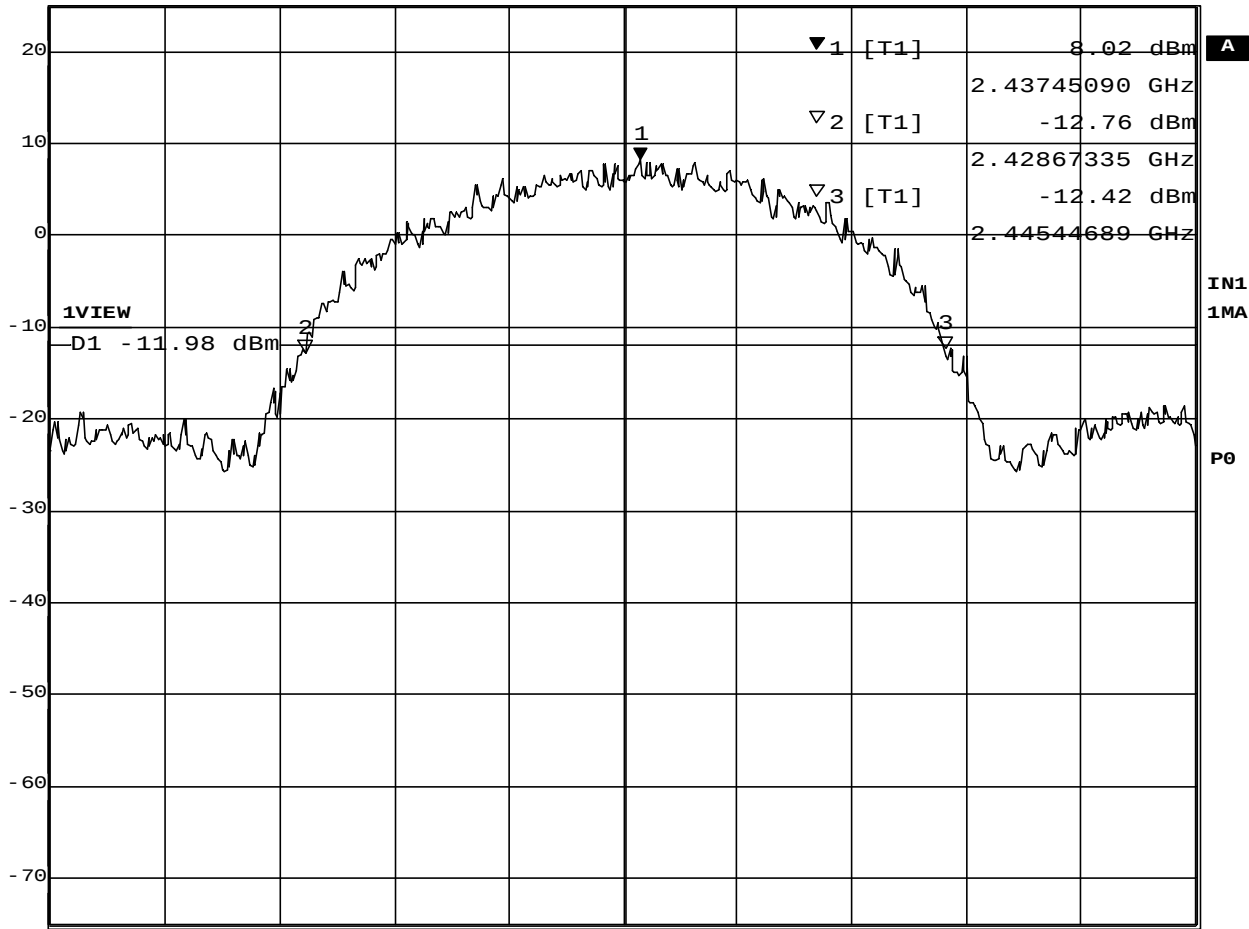


Center 2.437 GHz 3 MHz/ Span 30 MHz

Date: 22.FEB.2002 13:32:38




Ref Lvl	Marker 1 [T1]	RBW	100 kHz	RF Att	40 dB
25 dBm	7.64 dBm	VBW	100 kHz		
	2.46245090 GHz	SWT	7.5 ms	Unit	dBm

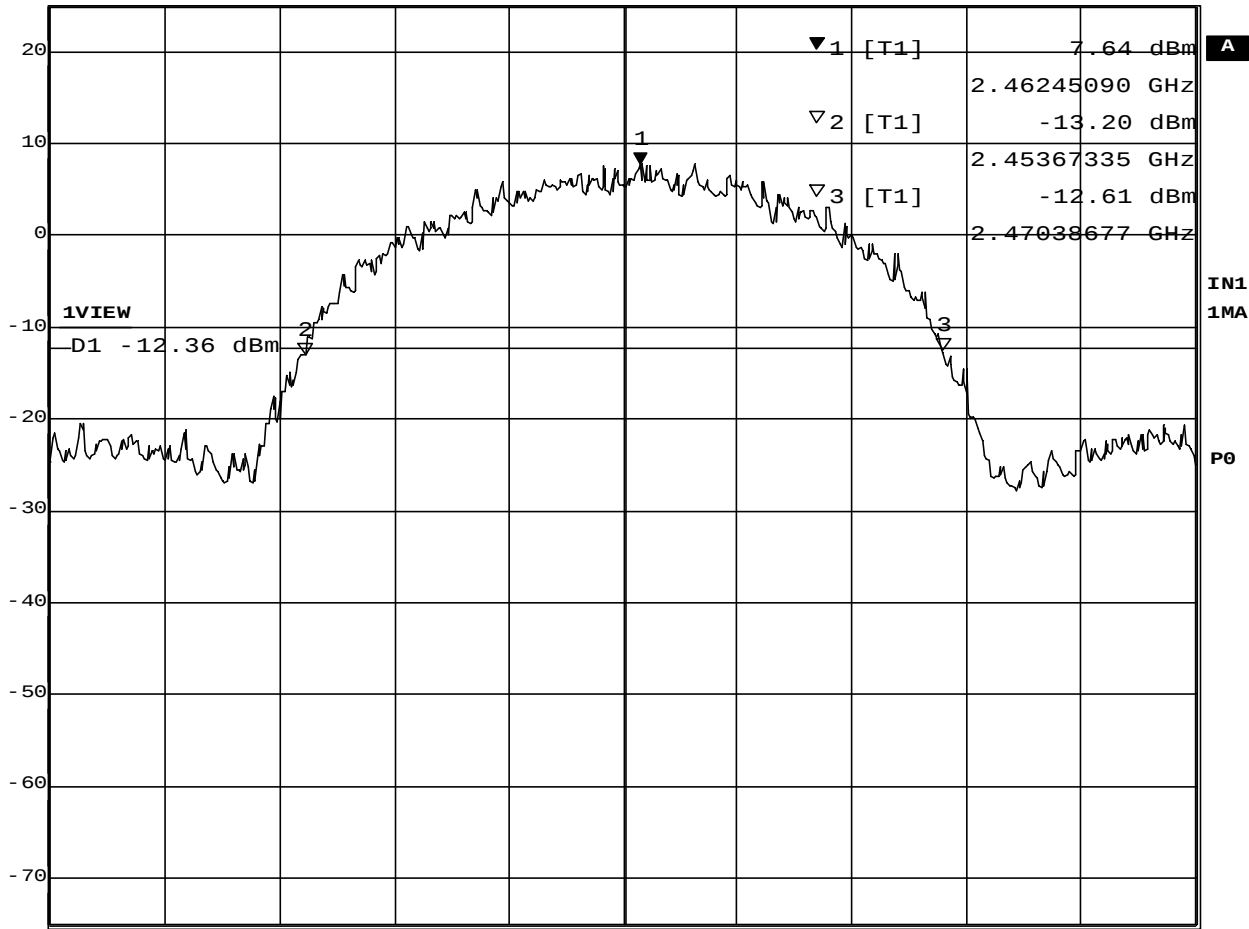

Center 2.462 GHz 3 MHz/ Span 30 MHz

Date: 22.FEB.2002 13:35:26


● A1 port (for Left antenna)

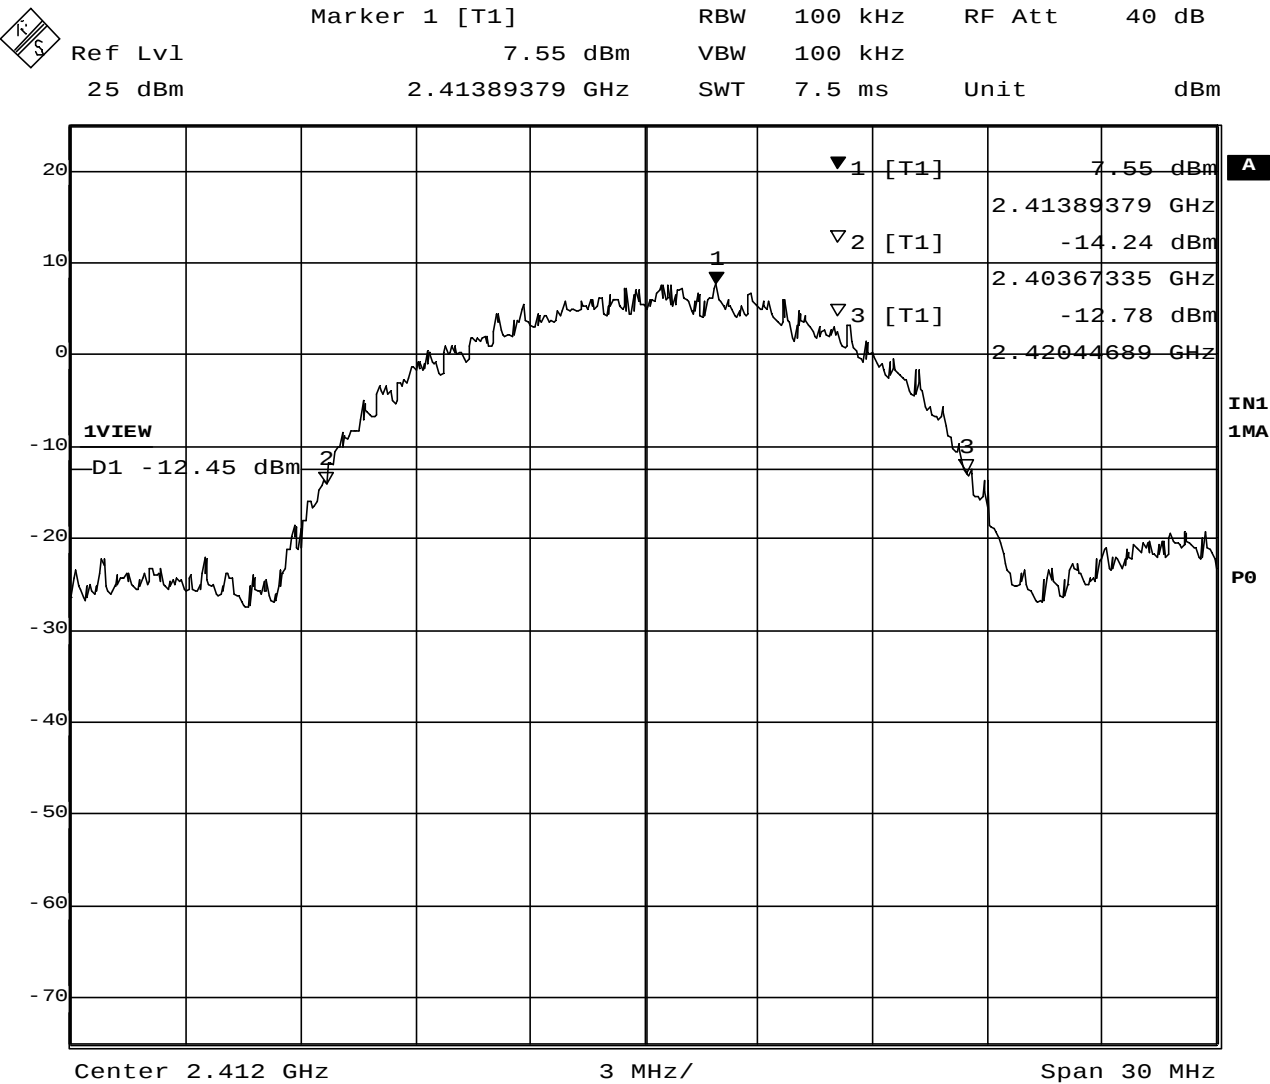

Date: 22.FEB.2002 13:54:22



Ref Lvl	Marker 1 [T1]	RBW	100 kHz	RF Att	40 dB
25 dBm	7.42 dBm	VBW	100 kHz		
	2.43745090 GHz	SWT	7.5 ms	Unit	dBm

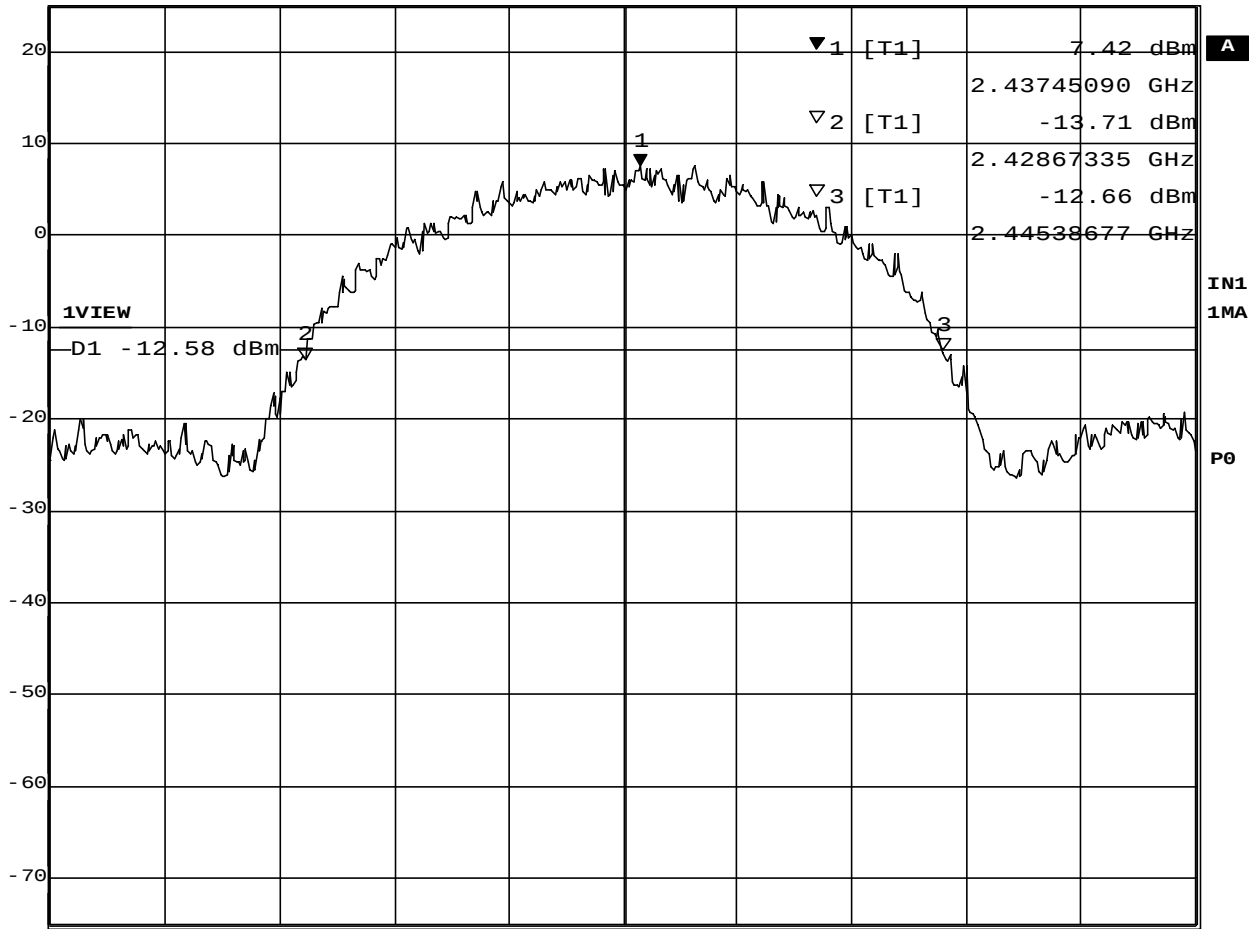


Center 2.437 GHz 3 MHz/ Span 30 MHz

Date: 22.FEB.2002 13:57:37



Marker 1 [T1] RBW 100 kHz RF Att 40 dB
Ref Lvl 6.90 dBm VBW 100 kHz
25 dBm 2.46245090 GHz SWT 7.5 ms Unit dBm

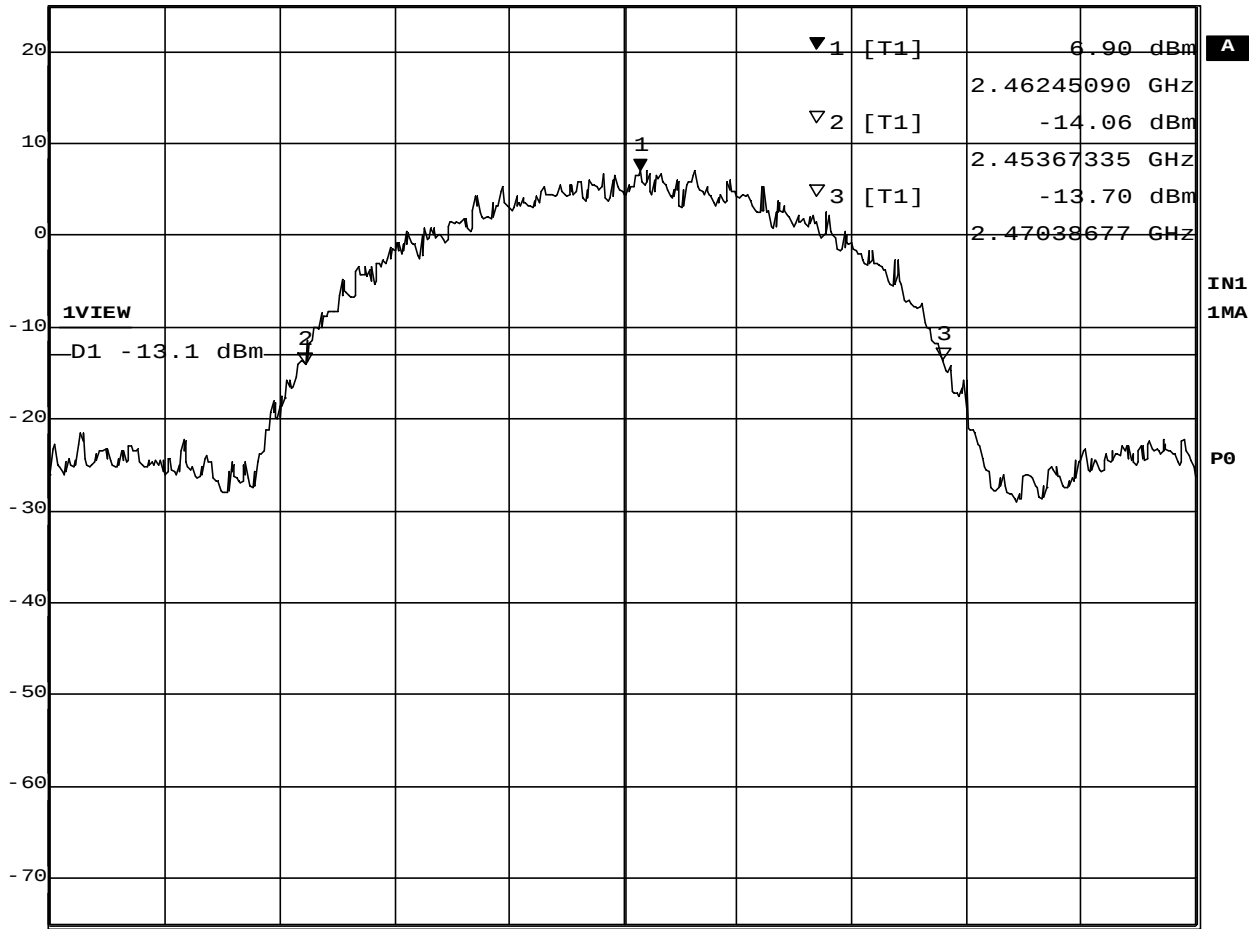


Center 2.462 GHz 3 MHz/ Span 30 MHz

Date: 22.FEB.2002 14:01:08

2.6 Trace Data of Out of Band Emissions


- A0 port (for Right antenna)

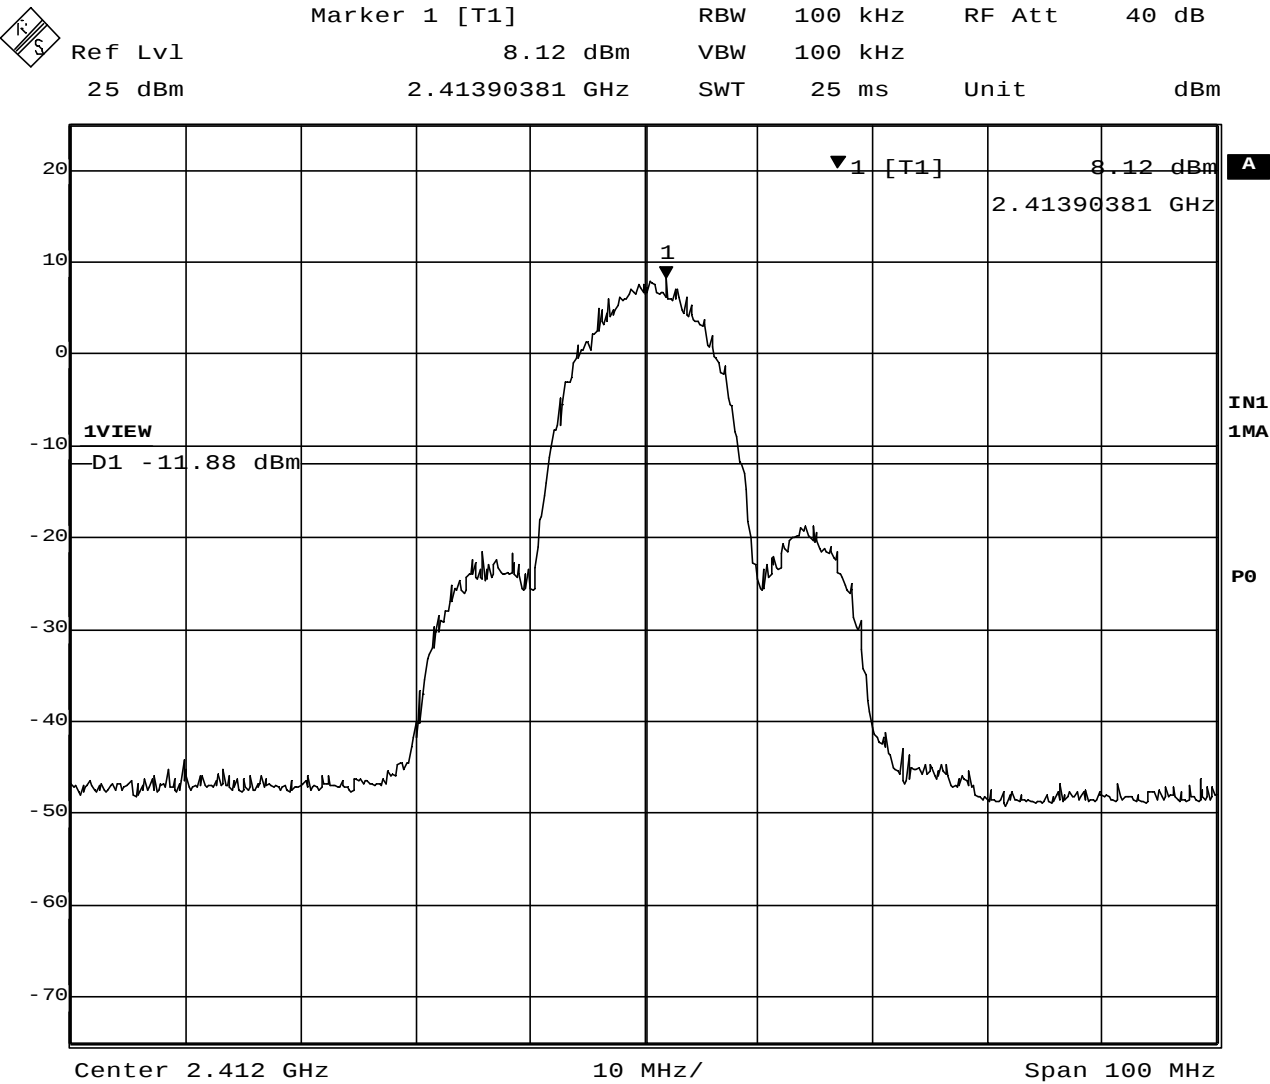

Date: 22.FEB.2002 13:39:29



Ref Lvl	Marker 1 [T1]	RBW	100 kHz	RF Att	40 dB
25 dBm	7.96 dBm	VBW	100 kHz		
	2.43890381 GHz	SWT	25 ms	Unit	dBm

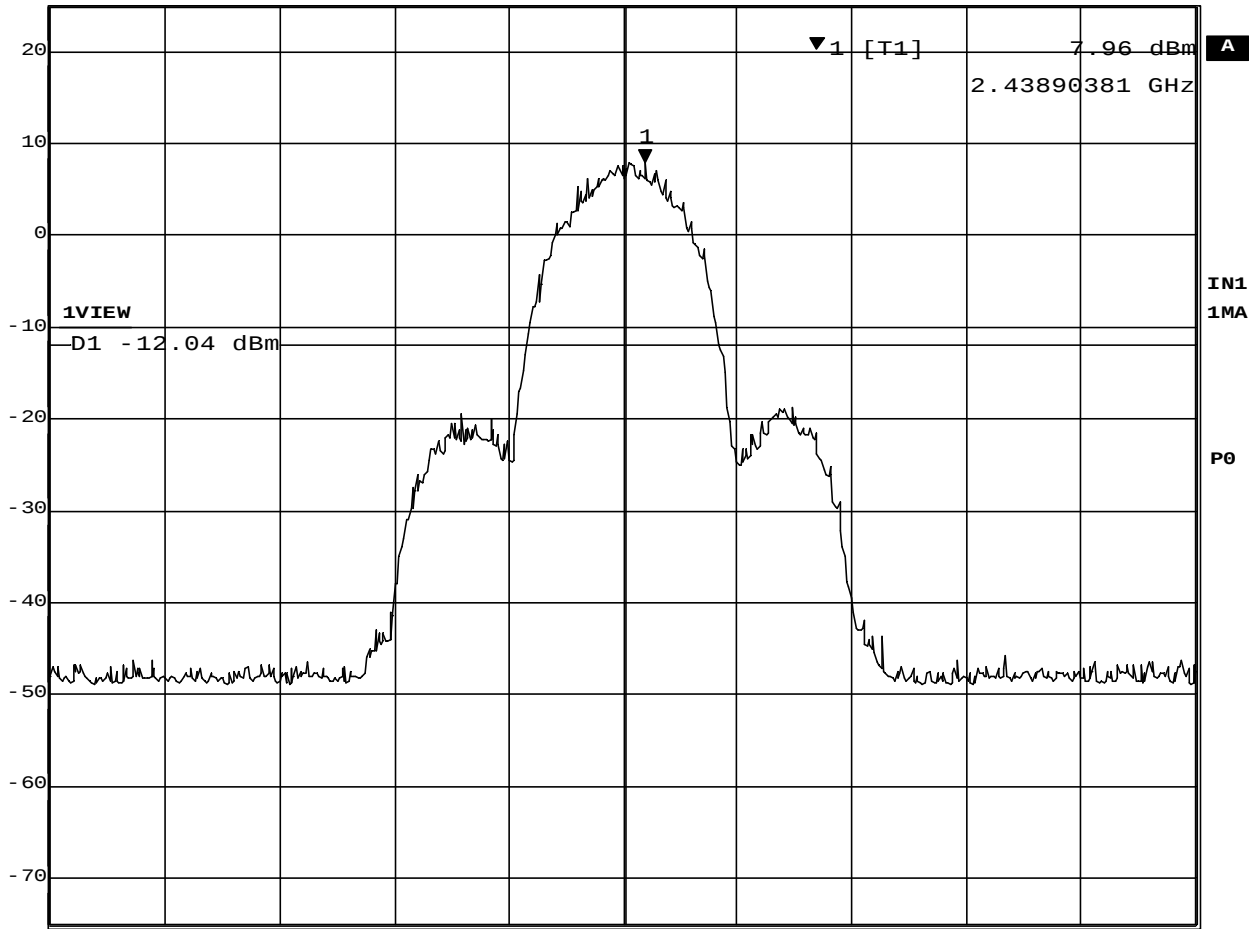


Center 2.437 GHz 10 MHz/ Span 100 MHz

Date: 22.FEB.2002 13:38:10




Marker 1 [T1] RBW 100 kHz RF Att 40 dB
Ref Lvl 7.42 dBm VBW 100 kHz
25 dBm 2.46390381 GHz SWT 25 ms Unit dBm

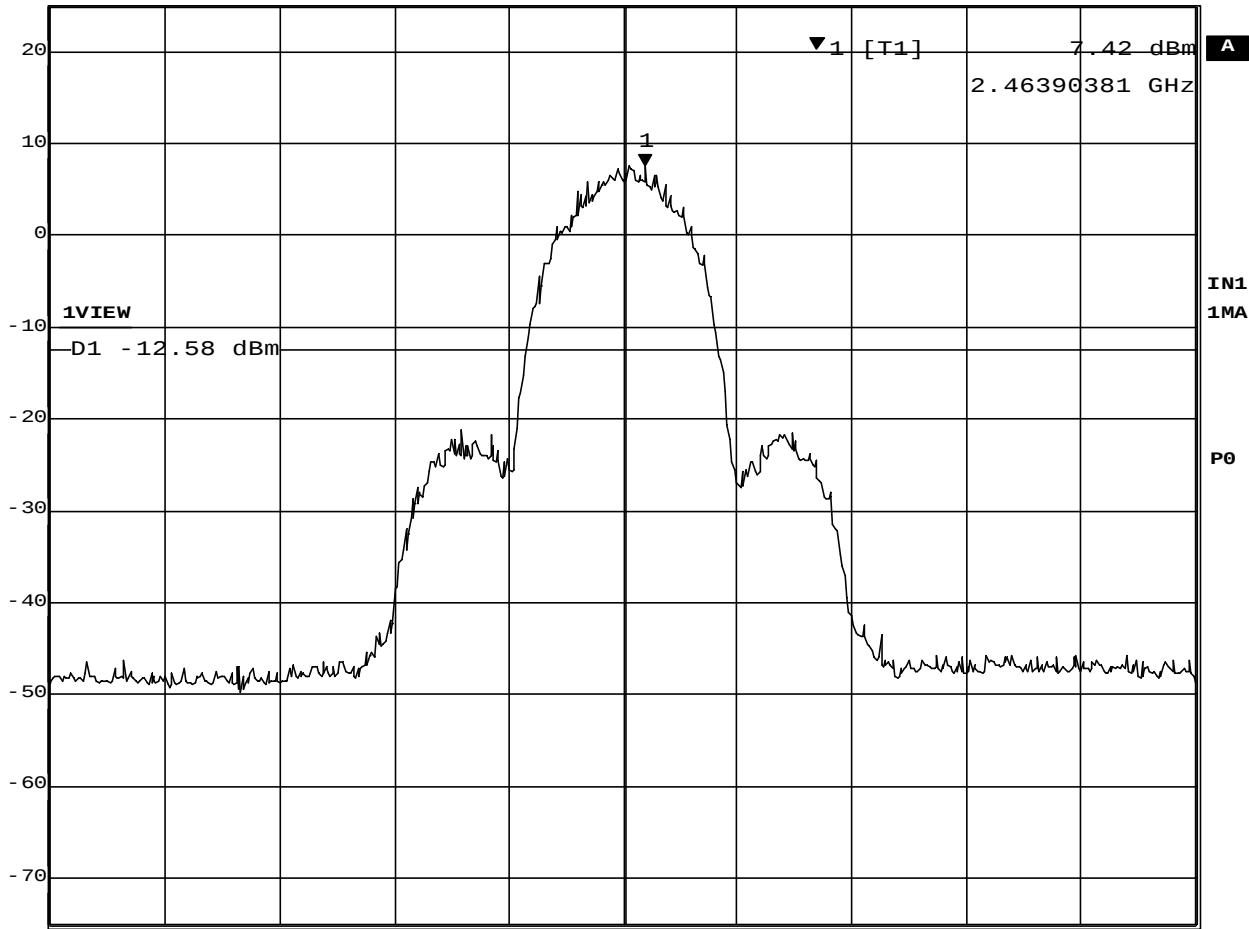

Center 2.462 GHz 10 MHz/ Span 100 MHz

Date: 22.FEB.2002 13:36:46


● A1 port (for Left antenna)

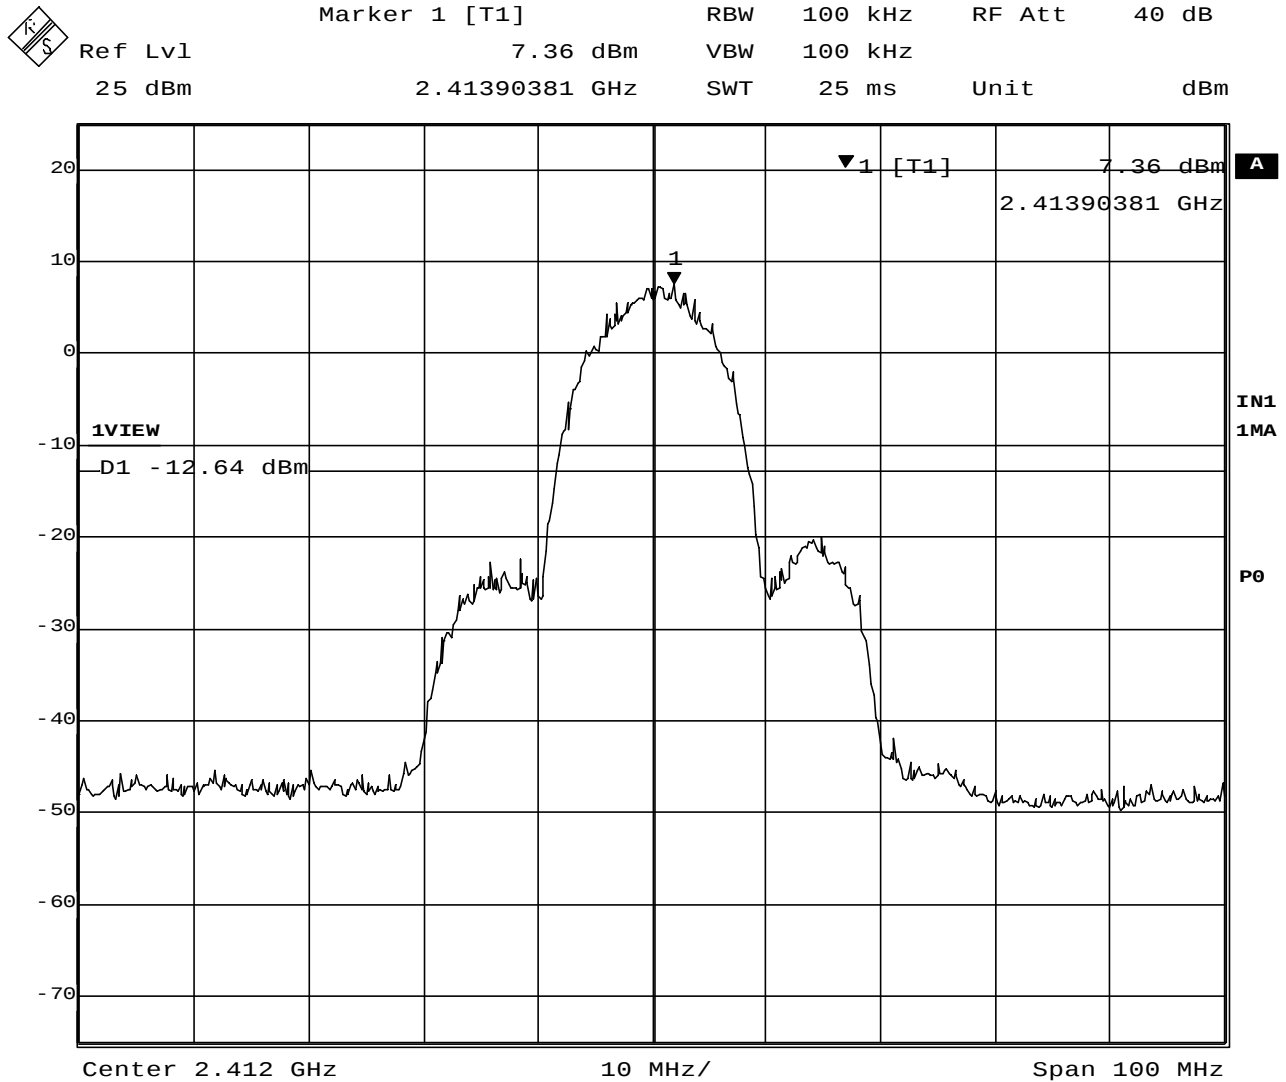

Date: 22.FEB.2002 14:05:24



Ref Lvl	Marker 1 [T1]	RBW	100 kHz	RF Att	40 dB
25 dBm	7.26 dBm	VBW	100 kHz		
	2.43890381 GHz	SWT	25 ms	Unit	dBm

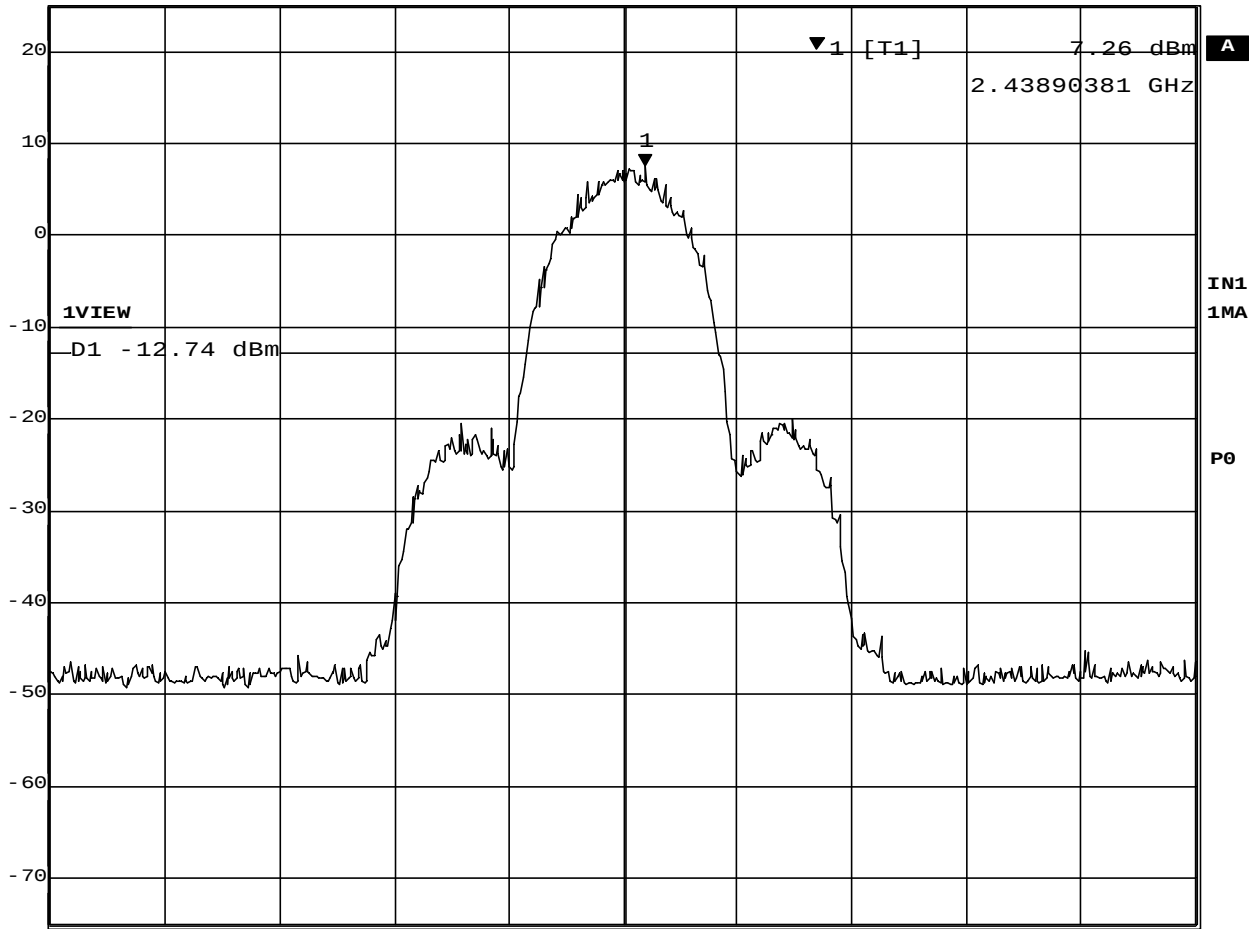


Center 2.437 GHz 10 MHz/ Span 100 MHz

Date: 22.FEB.2002 14:03:54



Marker 1 [T1] RBW 100 kHz RF Att 40 dB
Ref Lvl 6.77 dBm VBW 100 kHz
25 dBm 2.46390381 GHz SWT 25 ms Unit dBm

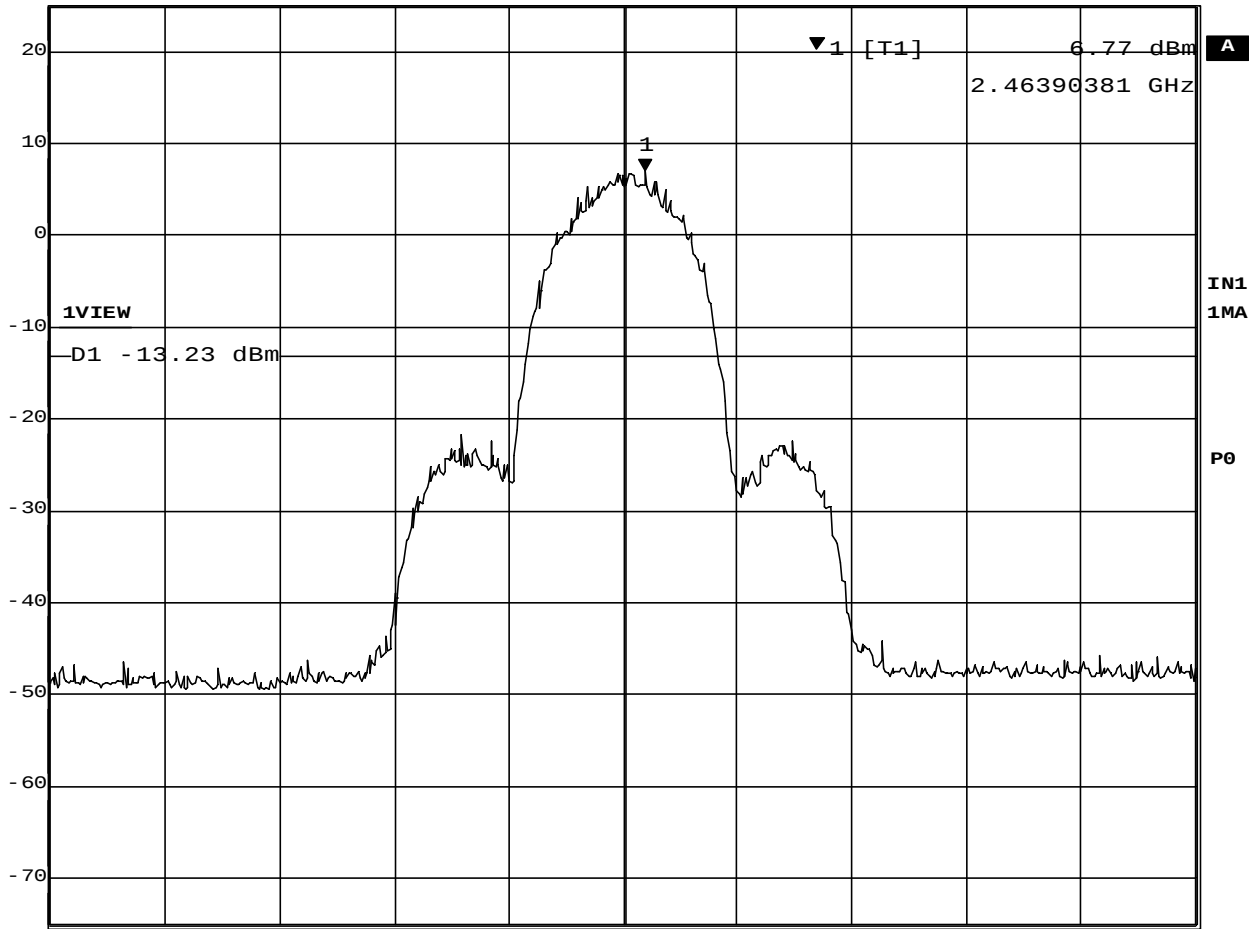

Center 2.462 GHz 10 MHz/ Span 100 MHz

Date: 22.FEB.2002 14:02:21

3. Transmitter Output Power

3.1 Test Procedure

- A transmitter antenna terminal of EUT is connected to the input of a RF power sensor.
- Measurement is made while EUT is operating in transmission mode at the appropriate center frequency.

Table 3-1 : 6 dB Bandwidth Test Instruments

Description	Model	Serial Number
Power Meter	HP 436A	2604A24192
Power Sensor	HP 8482A	2607A10987
Coax cables: - Power Sensor <=> EUT	Length: 30 cm Loss: 1.1dB	

Notes: - HP: Hewlett Packard




Figure 3: Measurement setup for RF output power

3.2 Measurement Results

Test Date: February 12, 2002

- A0 port (for Right antenna) of the card

Table 3-2-1. EUT: M/T 2647-4XU, s/n ZZ-00089, A0 port (Right antenna), TX mode 11Mbps

Measured Frequency (MHz)	Power Meter Reading (dBm)	Cable Loss (dB)	Results		Limit [1W] (dBm)	Margin (dB)
			(dBm)	(W)		
2412 (ch. 1)	19.4	1.1	20.5	0.1122	30.0	9.5
2437 (ch. 6)	19.4	1.1	20.5	0.1122	30.0	9.5
2462 (ch. 11)	19.0	1.1	20.1	0.1023	30.0	9.9

Table 3-3-1. EUT: M/T 2647-4XU, s/n ZZ-00089, A0 port (Right antenna), TX mode 2Mbps

Measured Frequency (MHz)	Power Meter Reading (dBm)	Cable Loss (dB)	Results		Limit [1W] (dBm)	Margin (dB)
			(dBm)	(W)		
2412 (ch. 1)	19.4	1.1	20.5	0.1122	30.0	9.5
2437 (ch. 6)	19.1	1.1	20.2	0.1047	30.0	9.8
2462 (ch. 11)	18.7	1.1	19.8	0.0955	30.0	10.2

- A1 port (for Left antenna) of the card

Table 3-2-2. EUT: M/T 2647-4XU, s/n ZZ-00089, A1 port (Left antenna), TX mode 11Mbps

Measured Frequency (MHz)	Power Meter Reading (dBm)	Cable Loss (dB)	Results		Limit [1W] (dBm)	Margin (dB)
			(dBm)	(W)		
2412 (ch. 1)	19.4	1.1	20.5	0.1122	30.0	9.5
2437 (ch. 6)	19.3	1.1	20.4	0.1096	30.0	9.6
2462 (ch. 11)	18.8	1.1	19.9	0.0977	30.0	10.1

Table 3-3-2. EUT: M/T 2647-4XU, s/n ZZ-00089, A1 port (Left antenna), TX mode 2Mbps

Measured Frequency (MHz)	Power Meter Reading (dBm)	Cable Loss (dB)	Results		Limit [1W] (dBm)	Margin (dB)
			(dBm)	(W)		
2412 (ch. 1)	19.2	1.1	20.3	0.1072	30.0	9.7
2437 (ch. 6)	19.2	1.1	20.3	0.1072	30.0	9.7
2462 (ch. 11)	18.7	1.1	19.8	0.0955	30.0	10.2

4. Transmitter Power Spectral Density

4.1 Test Procedure

The peak power density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to:

RBW= 3KHz, VBW=100KHz, Span=10MHz, Sweep = 2.8 seconds

4.2 Test Instruments and Measurement Setup

Same as the Chapter 1(Table 1-1 & Figure 1).

4.3 Measurement Results

Test Date: February 22, 2002

- A0 port (for Right antenna) of the card

Table 4-1-1. EUT: M/T 2647-4XU, s/n ZZ-00089 , A0 port (Right antenna), TX mode 11Mbps

Ch No.	Frequency (MHz)	Spectrum Analyzer Reading (dBm)	Cable loss (dB)	Result (dBm)	Limit (dBm)	Margin (dB)
1	2413.39	-4.5	1.7	-2.8	8.0	10.8
6	2438.39	-4.7	1.7	-3.0	8.0	11.0
11	2463.39	-5.1	1.7	-3.4	8.0	11.4


- A1 port (for Left antenna) of the card

Table 4-1-2. EUT: M/T 2647-4XU, s/n ZZ-00089 , A1 port (Left antenna), TX mode 11Mbps

Ch No.	Frequency (MHz)	Spectrum Analyzer Reading (dBm)	Cable loss (dB)	Result (dBm)	Limit (dBm)	Margin (dB)
1	2413.39	-4.7	1.7	-3.0	8.0	11.0
6	2438.39	-4.7	1.7	-3.0	8.0	11.0
11	2463.41	-4.8	1.7	-3.1	8.0	11.1

4.4 Trace Data


- A0 port (for Right antenna)

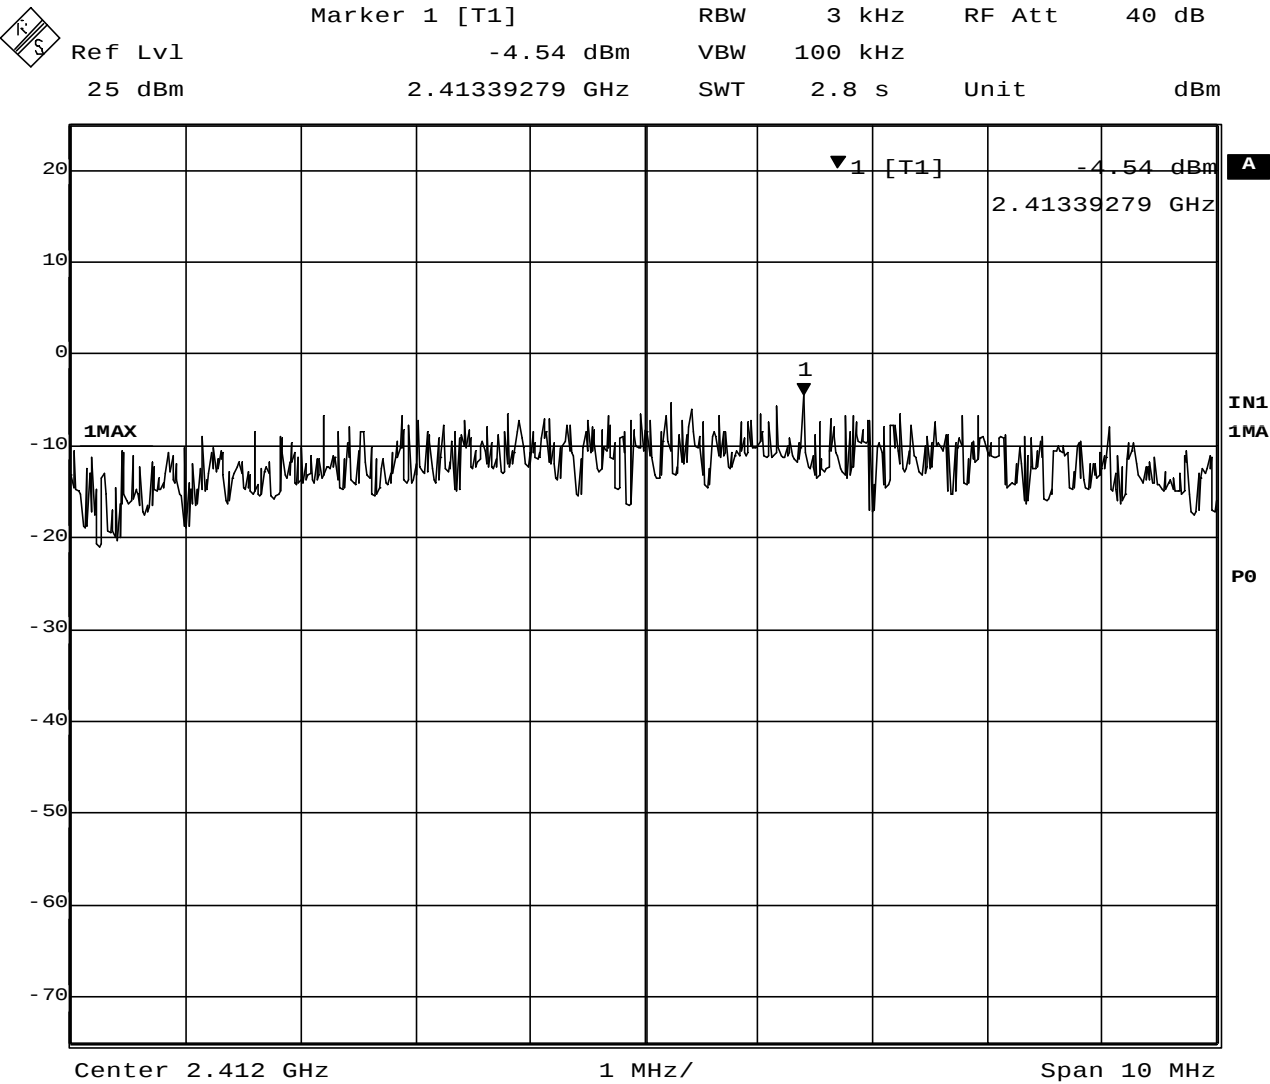

Date: 22.FEB.2002 13:41:22



Ref Lvl	Marker 1 [T1]	RBW	3 kHz	RF Att	40 dB
25 dBm	-4.65 dBm	VBW	100 kHz		
	2.43839279 GHz	SWT	2.8 s	Unit	dBm

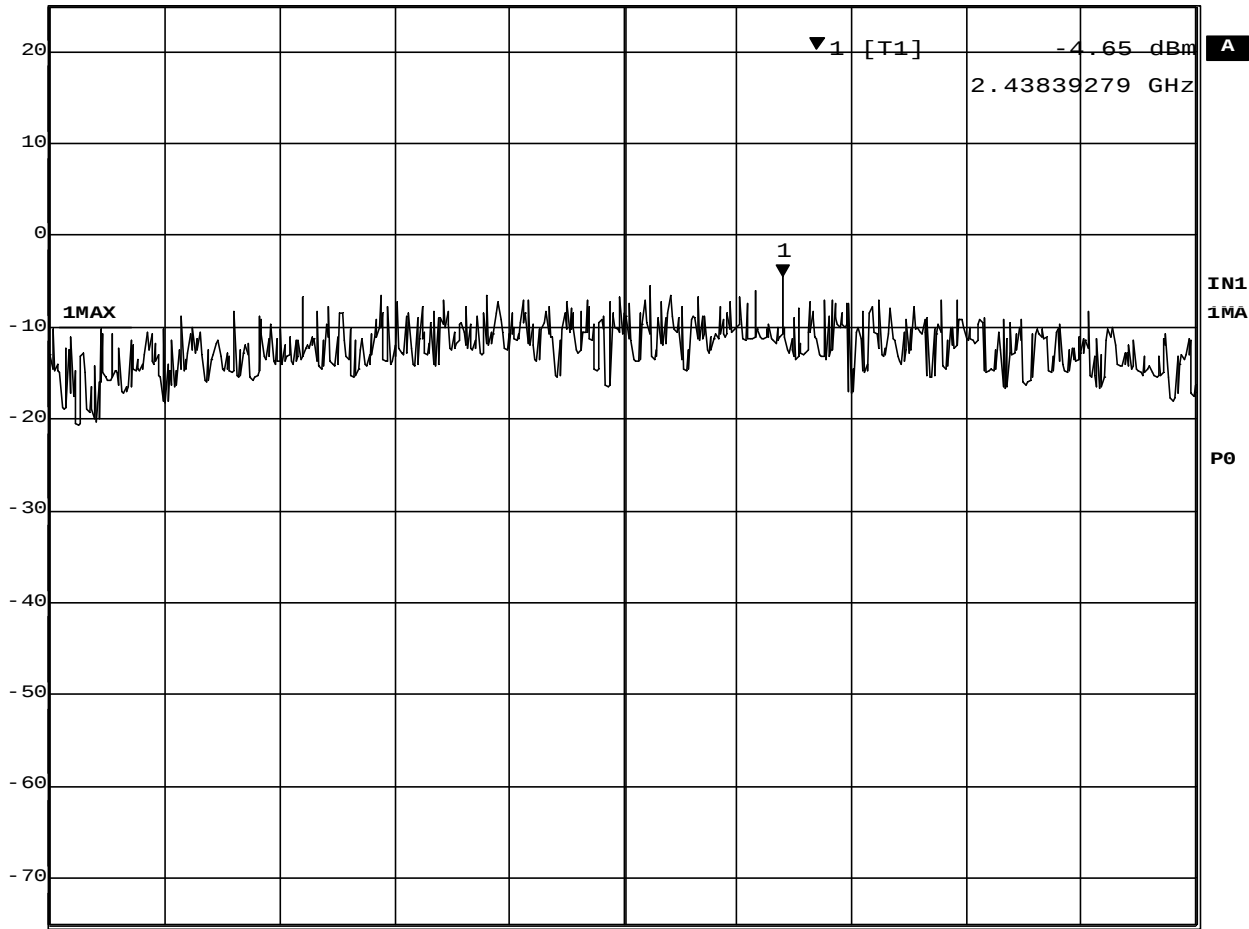


Center 2.437 GHz 1 MHz/ Span 10 MHz

Date: 22.FEB.2002 13:42:34




Ref Lvl	Marker 1 [T1]	RBW	3 kHz	RF Att	40 dB
25 dBm	-5.08 dBm	VBW	100 kHz		
	2.46339279 GHz	SWT	2.8 s	Unit	dBm

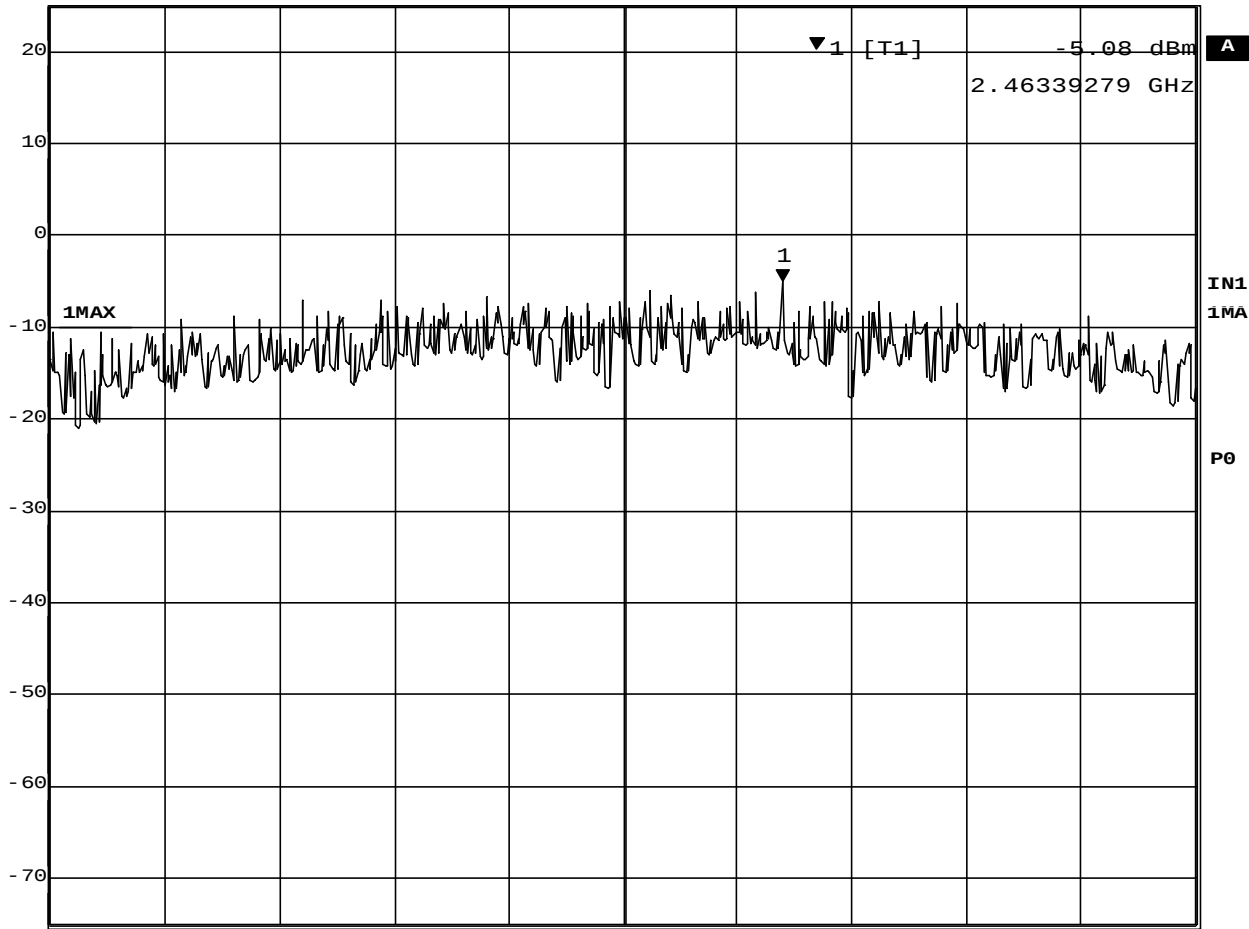

Center 2.462 GHz 1 MHz/ Span 10 MHz

Date: 22.FEB.2002 13:43:21


- A1 port (for Left antenna)

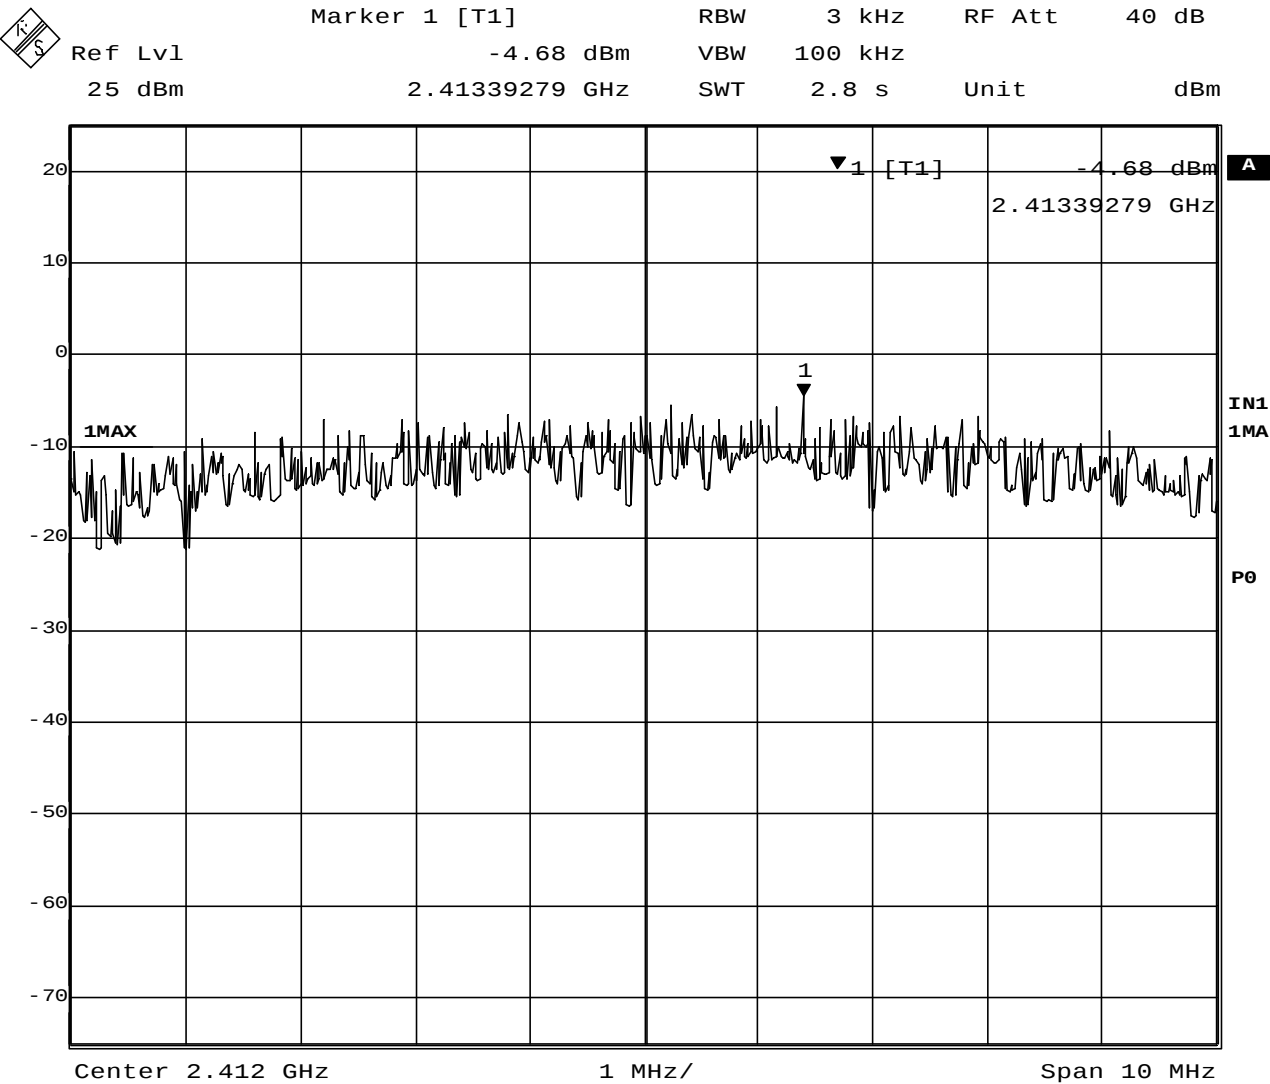

Date: 22.FEB.2002 13:48:36



Ref Lvl	Marker 1 [T1]	RBW	3 kHz	RF Att	40 dB
25 dBm	-4.71 dBm	VBW	100 kHz		
	2.43839279 GHz	SWT	2.8 s	Unit	dBm

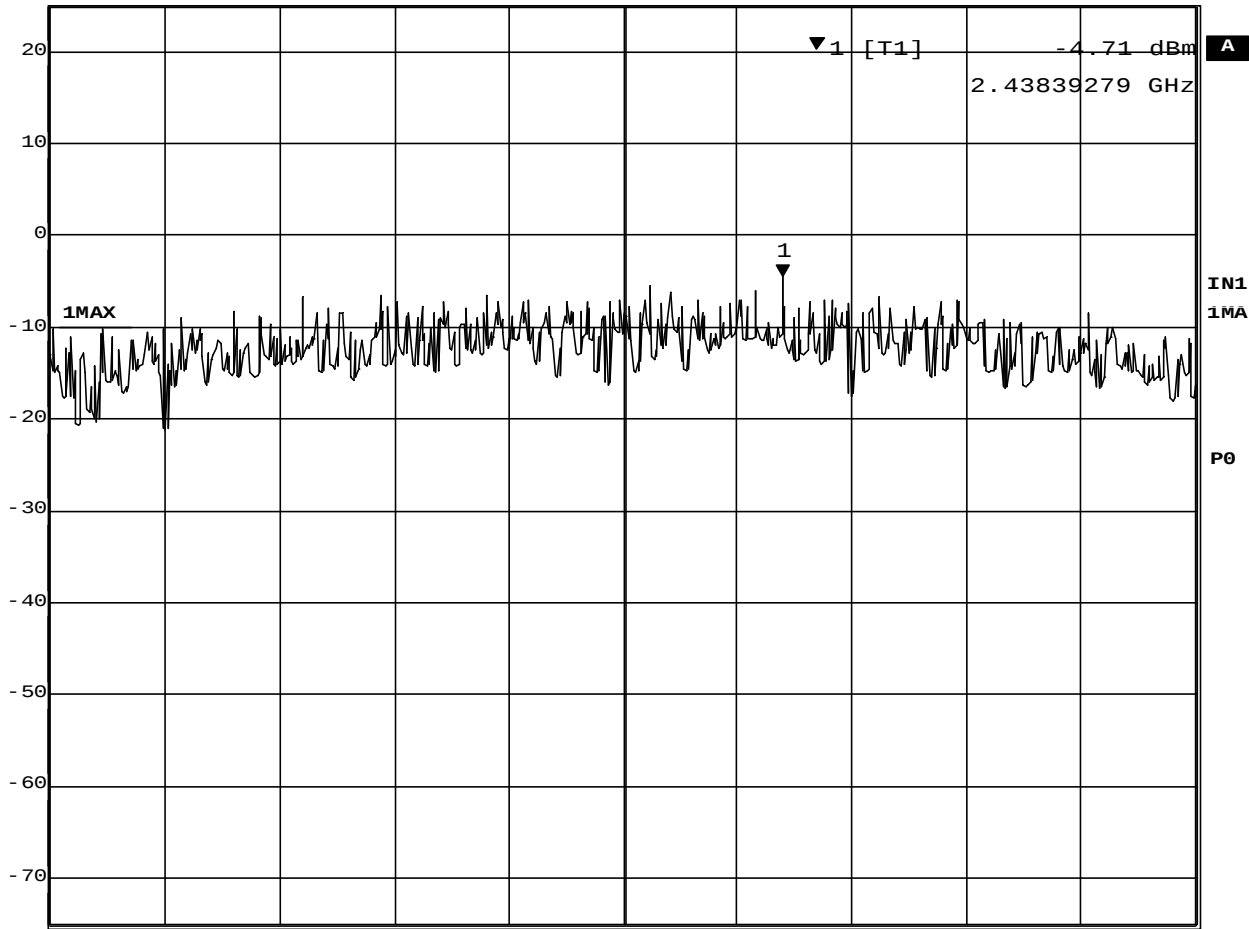


Center 2.437 GHz 1 MHz/ Span 10 MHz

Date: 22.FEB.2002 13:47:57



Ref Lvl	Marker 1 [T1]	RBW	3 kHz	RF Att	40 dB
25 dBm	-4.75 dBm	VBW	100 kHz		
	2.46341283 GHz	SWT	2.8 s	Unit	dBm

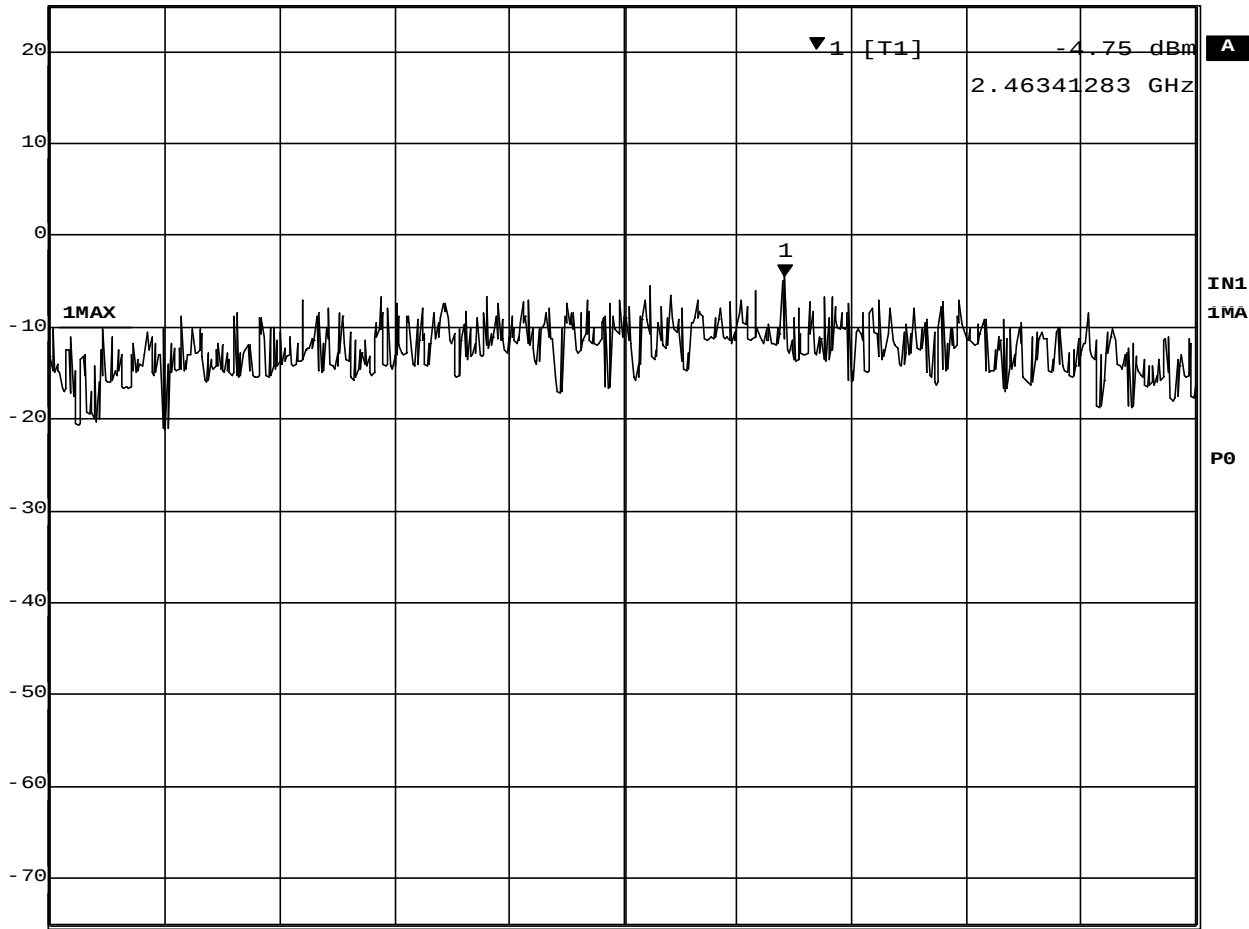

Center 2.462 GHz 1 MHz/ Span 10 MHz

Date: 22.FEB.2002 13:47:11

5. AC WIRELINE CONDUCTED EMISSIONS (450KHz – 30MHz)

5.1 Test Procedure

The conducted emissions are measured in the IBM shielded room with a spectrum analyzer in peak hold. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9KHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.

5.2 Test Instruments and Measurement Setup

Table 5-1. Conducted Emission Test Instrumentation

Description	Model	Serial Number
Computer	IBM 6589-13J	97-15613
Spectrum Analyzer (100Hz-1.5GHz)	HP 8568B	2841A04242
Spectrum Analyzer Display	HP 8568B	2816A16827
Quasi-Peak Adapter	HP 85650A	2811A01126
Receiver (9kHz-30MHz)	R&S ESH3	892108/003
LISN	EMCO 3825/2	1426
Switch/control unit	HP 3488A	2719A17228
Plotter	HP 7550A	2631A33619
Coax cables: - Liscn-L <=> SW/Con.unit (SW100) - Liscn-N <=> SW/Con.unit (SW101) - SW/Con.unit <=> RCVR (Input) - SW/Con.unit<=> Spe Ana.(Signal In)	Length: 4 m 4 m 1 m 1 m	- EMIC-L - EMIC-N - EMIC-R - EMIC-S

Notes: - HP: Hewlett Packard, R&S: Rohde & Schwarz

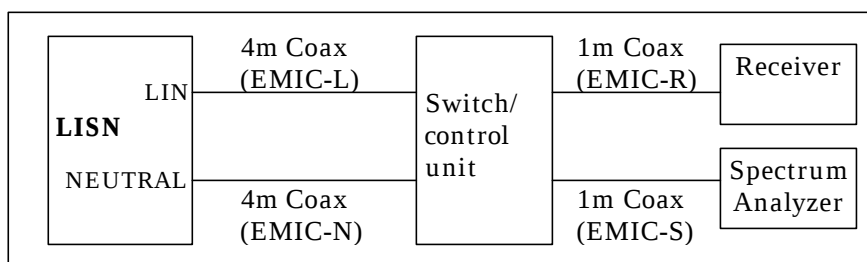


Figure 5. Cables for Conducted Emission Test

5.3 Measurement Results

The EUT was found to comply to the limits of FCC Part 15 Subpart C and RSS-210 with a margin of 2.1 dB. The 6 highest emissions relative to the limits are reported.

Test Date: February 22, 2002

1) EUT in transmission mode

- Right antenna (A0 port)

Table 5-2-1. EUT: M/T 2647-4XU, s/n ZZ-00089, Right antenna, Ch.1(2412MHz) TX mode 11Mbps

Frequency (MHz)	QP Voltage (dB μ V)	QP Limit (dB μ V)	QP Voltage (μ V)	QP Limit (μ V)	Phase
0.4559	39.2	48	91.2	250	LINE
0.5092	35.1	48	56.9	250	LINE
0.5914	39.7	48	96.6	250	LINE
0.6368	32.2	48	40.7	250	LINE
0.8505	30	48	31.6	250	LINE
0.9158	30.1	48	32.0	250	LINE

Table 5-2-2. EUT: M/T 2647-4XU, s/n ZZ-00089 , Right antenna, Ch.6(2437MHz) TX mode 11Mbps

Frequency (MHz)	QP Voltage (dB μ V)	QP Limit (dB μ V)	QP Voltage (μ V)	QP Limit (μ V)	Phase
0.4576	39.3	48	92.3	250	LINE
0.5084	35.4	48	58.9	250	LINE
0.5896	40.8	48	109.6	250	LINE
0.6335	35.2	48	57.5	250	LINE
0.7199	30.6	48	33.9	250	LINE
26.6503	26.7	48	21.6	250	LINE

Table 5-2-3. EUT: M/T 2647-4XU, s/n ZZ-00089, Right antenna, Ch.11(2462MHz) TX mode 11Mbps

Frequency (MHz)	QP Voltage (dB μ V)	QP Limit (dB μ V)	QP Voltage (μ V)	QP Limit (μ V)	Phase
0.5087	37.1	48	71.6	250	LINE
0.5836	41.2	48	114.8	250	LINE
0.6506	35.3	48	58.2	250	LINE
0.7188	31.9	48	39.4	250	LINE
1.6937	26	48	20.0	250	LINE
26.2911	24.8	48	17.4	250	LINE

● Left antenna (A1 port)

Table 5-3-1. EUT: M/T 2647-4XU, s/n ZZ-00089, Left antenna, Ch.1(2412MHz) TX mode 11Mbps

Frequency (MHz)	QP Voltage (dB μ V)	QP Limit (dB μ V)	QP Voltage (μ V)	QP Limit (μ V)	Phase
0.4563	40.4	48	104.7	250	LINE
0.5033	35	48	56.2	250	LINE
0.5684	41.7	48	121.6	250	NEUTRAL
0.6953	32.7	48	43.2	250	NEUTRAL
17.4008	21.5	48	11.9	250	LINE
25.15	26.2	48	20.4	250	LINE

Table 5-3-2. EUT: M/T 2647-4XU, s/n ZZ-00089, Left antenna, Ch.6(2437MHz) TX mode 11Mbps

Frequency (MHz)	QP Voltage (dB μ V)	QP Limit (dB μ V)	QP Voltage (μ V)	QP Limit (μ V)	Phase
0.4541	43.5	48	149.6	250	LINE
0.5048	40.7	48	108.4	250	LINE
0.5686	45.9	48	197.2	250	NEUTRAL
0.6967	35.8	48	61.7	250	NEUTRAL
0.7578	37.6	48	75.9	250	NEUTRAL
26.1434	25.3	48	18.4	250	LINE

Table 5-3-3. EUT: M/T 2647-4XU, s/n ZZ-00089, Left antenna, Ch.11(2462MHz) TX mode 11Mbps

Frequency (MHz)	QP Voltage (dB μ V)	QP Limit (dB μ V)	QP Voltage (μ V)	QP Limit (μ V)	Phase
0.4548	40.6	48	107.2	250	LINE
0.5181	37.5	48	75.0	250	NEUTRAL
0.5835	41.3	48	116.1	250	LINE
0.6335	34	48	50.1	250	LINE
0.7588	33.9	48	49.5	250	NEUTRAL
24.9986	27.5	48	23.7	250	LINE

2) EUT in receiving mode

● Right antenna (A0 port)

Table 5-2-4. EUT: M/T 2647-4XU, s/n ZZ-00089, Right antenna, RX mode

Frequency (MHz)	QP Voltage (dB μ V)	QP Limit (dB μ V)	QP Voltage (μ V)	QP Limit (μ V)	Phase
0.4532	39.3	48	92.3	250	LINE
0.5064	37.5	48	75.0	250	LINE
0.5857	41.7	48	121.6	250	LINE
0.7182	32.4	48	41.7	250	LINE
1.0458	28.6	48	26.9	250	LINE
27.7509	22.9	48	14.0	250	NEUTRAL

● Left antenna (A1 port)

Table 5-2-4. EUT: M/T 2647-4XU, s/n ZZ-00089, Left antenna, RX mode

Frequency (MHz)	QP Voltage (dB μ V)	QP Limit (dB μ V)	QP Voltage (μ V)	QP Limit (μ V)	Phase
0.4561	40.2	48	102.3	250	LINE
0.5696	41.9	48	124.5	250	NEUTRAL
0.636	33.1	48	45.2	250	LINE
0.8917	22.6	48	13.5	250	NEUTRAL
17.3388	24.1	48	16.0	250	LINE
25.5798	26.3	48	20.7	250	LINE

6. RESTRICTED BANDS RADIATIONS (30MHz – 1GHz)

6.1 Test Procedure

Preliminary radiated emissions are measured in the semi-anechoic chamber at a 3 meter distance on every azimuth in both horizontal and vertical polarity. The antennas are also scanned in height. The emissions are recorded with a spectrum analyzer in peak hold mode. The identified emissions are further maximized by a cable manipulation. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120kHz. The highest emissions relative to the limit are listed.

6.2 Test Instruments and Measurement Setup

Table 6-1 Radiated Emission Test Instrumentation

Description	Model	Serial Number
Computer	IBM 5551-L	#4
Spectrum Analyzer (100Hz-1.5GHz) for 30-200MHz	HP 85680B	3019A05155
Spectrum Analyzer Display for 30-200MHz	HP 85662A	3026A19353
Quasi-Peak Adapter for 30-200MHz	HP 85650A	3033A01449
Spectrum Analyzer (100Hz-1.5GHz) for 200-1000MHz	HP 85680B	3019A05156
Spectrum Analyzer Display for 200-1000MHz	HP 85662A	3026A19366
Quasi-Peak Adapter for 200-1000MHz	HP 85650A	2811A01433
Amplifier (100KHz-1.3GHz)		
- for 30-200MHz	HP 8447D	2805A02919
- for 200-1000MHz	HP 8447D	2944A03506
Biconical Antenna (30-200MHz)	EMCO 3108	2241
Log-Periodic Antenna (200-1000MHz)	EMCO 3146	1584
Receiver (20MHz-1.3GHz)	R&S ESVP	89211/030
Switch/control unit	HP 3488A	2719A17226
N-Coax cables:	Length:	
- Bi-coni Ant <=> 10m Cable	9 m	- EM203L01
- 10m Cable <=> Shield Panel	10 m	- EM203L02
- Shield Panel <=> RF Amp	7 m	- EM203L03
- RF Amp <=> Power Splitter	0.5m	- EM203L04
- Log-peri Ant <=> 10m Cable	9 m	- EM203H01
- 10m Cable <=> Shield Panel	10 m	- EM203H02
- Shield Panel <=> RF Amp	7 m	- EM203H03
- RF Amp <=> Power Splitter	0.5m	- EM203H04
Coax cables:		
- Power Splitter <=> SW/Con.unit (SW110)	1 m	- EM203L05
- Power Splitter <=> SW/Con.unit (SW300)	1 m	- EM203L06
- Power Splitter <=> SW/Con.unit (SW100)	1 m	- EM203H05
- Power Splitter <=> SW/Con.unit (SW301)	1 m	- EM203H06
- SW/Con.unit <=> Receiver (Input)	2 m	- EM2RCV

- SW/Con.unit <=> Spe Ana.(Signal In) for 30- 200MHz	2 m	- EM2SPL
- SW/Con.unit <=> Spe Ana.(Signal In) for 200-1000MHz	2 m	- EM2SPH

Notes:

- HP: Hewlett Packard, R&S: Rohde & Schwarz

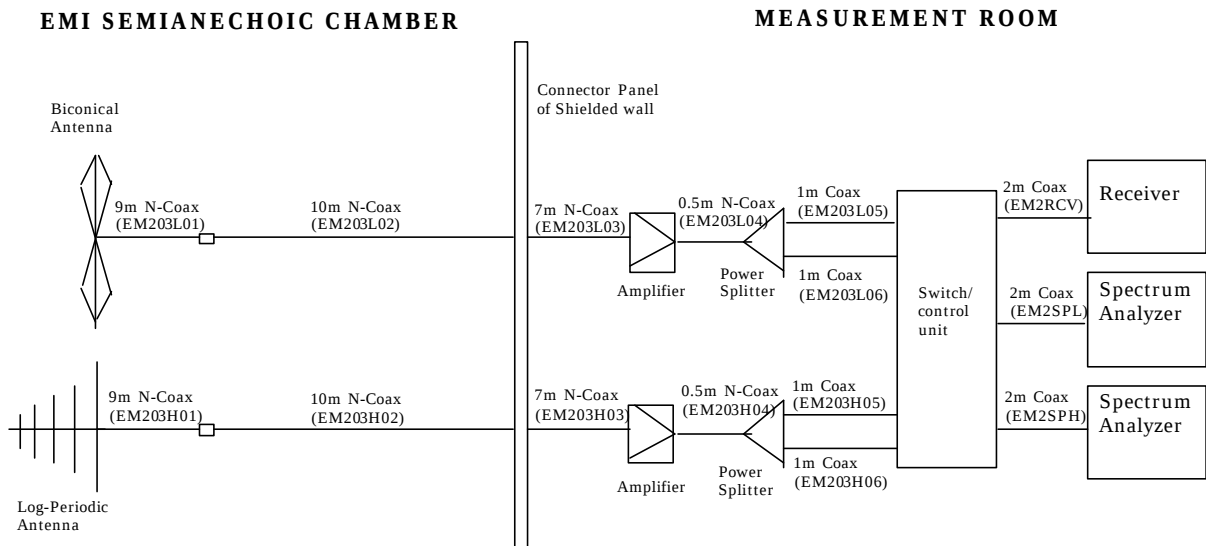


Figure 6 Cables for Radiated Emission Test

6.3 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver. All factors are included in the reported data.

$$FS = R + AF + CORR$$

where:

FS	=	Field Strength
R	=	Measured Receiver Input Amplitude
AF	=	Antenna Factor
CORR	=	Correction Factor = CL - AG
CL	=	Cable Loss
AG	=	Amplifier Gain

For example:

Given a Receiver input reading of 51.5dB μ V; Antenna Factor of 8.5dB/m; Cable Loss of 1.3dB; and an Amplifier Gain of 26dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 = 35.3\text{dB}\mu\text{V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:

$$\text{Level}(\text{dB}\mu\text{V/m}) = 20 \times \text{Log}(\text{Level}(\mu\text{V/m}))$$

$$40\text{dB}\mu\text{V/m} = 100\mu\text{V/m}$$

$$48\text{dB}\mu\text{V/m} = 250\mu\text{V/m}$$

6.4 Measurement Results

The EUT was found to comply to the limits of FCC Part 15 Subpart C and RSS-210 with a margin of 4.3 dB at 30MHz - 1000MHz band.

The 6 highest emissions relative to the limits are reported.

Test Date: February 12 and 13, 2002

1) EUT in transmission mode

● Right antenna (A0 port)

Table 6-2-1. EUT: M/T 2647-4XU, s/n ZZ-00089, Right antenna, Ch.1(2412MHz) TX mode 11Mbps

Frequency (MHz)	Polarity (H/V)	Measured (dBμV)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dBμV/m)	Limit (dBμV/m)	Field Strength (μV/m)	Limit (μV/m)
399.494	V	40.3	15.2	-14.8	40.7	46.0	108.4	200
429.530	V	33.6	15.6	-14.5	34.7	46.0	54.3	200
431.970	V	34.5	15.7	-14.6	35.6	46.0	60.3	200
665.709	V	35.5	20.2	-14.1	41.6	46.0	120.2	200
715.883	V	30.8	20.7	-13.0	38.5	46.0	84.1	200
732.378	V	31.3	20.5	-13.4	38.4	46.0	83.2	200

Table 6-2-2. EUT: M/T 2647-4XU, s/n ZZ-00089, Right antenna, Ch.6(2437MHz) TX mode 11Mbps

Frequency (MHz)	Polarity (H/V)	Measured (dBμV)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dBμV/m)	Limit (dBμV/m)	Field Strength (μV/m)	Limit (μV/m)
133.123	H	39.7	12.1	-18.7	33.1	43.5	45.2	150
399.492	V	39.3	15.2	-14.8	39.7	46.0	96.6	200
431.970	V	35.0	15.7	-14.6	36.1	46.0	63.8	200
665.710	V	31.1	20.2	-14.1	37.2	46.0	72.4	200
715.883	V	32.2	20.7	-13.0	39.9	46.0	98.9	200
931.987	H	23.7	23	-11.5	35.2	46.0	57.5	200

Table 6-2-3. EUT: M/T 2647-4XU, s/n ZZ-00089, Right antenna, Ch.11(2462MHz) TX mode 11Mbps

Frequency (MHz)	Polarity (H/V)	Measured (dBμV)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dBμV/m)	Limit (dBμV/m)	Field Strength (μV/m)	Limit (μV/m)
133.124	H	40.6	12.1	-18.7	34.0	43.5	50.1	150
399.493	V	37.8	15.2	-14.8	38.2	46.0	81.3	200
429.530	V	34.5	15.6	-14.5	35.6	46.0	60.3	200
665.708	V	30.9	20.2	-14.1	37.0	46.0	70.8	200
715.883	V	32.9	20.7	-13.0	40.6	46.0	107.2	200
931.895	V	24.4	23	-11.5	35.9	46.0	62.4	200

● Left antenna (A1 port)

Table 6-3-1. EUT: M/T 2647-4XU, s/n ZZ-00089, Left antenna, Ch.1(2412MHz) TX mode 11Mbps

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Field Strength (μ V/m)	Limit (μ V/m)
399.034	V	38.6	15.2	-14.9	38.9	46.0	88.1	200
431.970	V	34.4	15.7	-14.6	35.5	46.0	59.6	200
499.342	V	30.9	17.8	-14.5	34.2	46.0	51.3	200
665.924	V	34.4	20.2	-14.1	40.5	46.0	105.9	200
715.883	V	31.7	20.7	-13.0	39.4	46.0	93.3	200
932.659	V	24.4	23	-11.2	36.2	46.0	64.6	200

Table 6-3-2. EUT: M/T 2647-4XU, s/n ZZ-00089, Left antenna, Ch.6(2437MHz) TX mode 11Mbps

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Field Strength (μ V/m)	Limit (μ V/m)
399.554	V	38.4	15.2	-14.8	38.8	46.0	87.1	200
429.530	V	34.3	15.6	-14.5	35.4	46.0	58.9	200
500.046	V	31.4	17.8	-14.5	34.7	46.0	54.3	200
666.108	V	34.0	20.2	-14.1	40.1	46.0	101.2	200
715.883	V	29.4	20.7	-13.0	37.1	46.0	71.6	200
932.079	V	25.4	23	-11.2	37.2	46.0	72.4	200

Table 6-3-3. EUT: M/T 2647-4XU, s/n ZZ-00089, Left antenna, Ch.11(2462MHz) TX mode 11Mbps

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Field Strength (μ V/m)	Limit (μ V/m)
399.493	V	37.8	15.2	-14.8	38.2	46.0	81.3	200
429.530	V	35.2	15.6	-14.5	36.3	46.0	65.3	200
500.046	V	30.9	17.8	-14.5	34.2	46.0	51.3	200
665.771	V	33.7	20.2	-14.1	39.8	46.0	97.7	200
715.883	V	32.8	20.7	-13.0	40.5	46.0	105.9	200
932.293	V	23.7	23	-11.2	35.5	46.0	59.6	200

2) EUT in receiving mode

● Right antenna (A0 port)

Table 6-2-4. EUT: M/T 2647-4XU, s/n ZZ-00089, Right antenna, RX mode

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Field Strength (μ V/m)	Limit (μ V/m)
133.123	H	40.8	12.1	-18.7	34.2	43.5	51.3	150
399.492	V	37.4	15.2	-14.8	37.8	46.0	77.6	200
429.530	V	35.4	15.6	-14.5	36.5	46.0	66.8	200
666.169	V	31.3	20.2	-14.1	37.4	46.0	74.1	200
715.883	V	32.1	20.7	-13.0	39.8	46.0	97.7	200
931.987	V	24.2	23	-11.5	35.7	46.0	61.0	200

● Left antenna (A1 port)

Table 6-3-4. EUT: M/T 2647-4XU, s/n ZZ-00089, Left antenna, RX mode

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Field Strength (μ V/m)	Limit (μ V/m)
399.615	V	37.0	15.2	-14.8	37.4	46.0	74.1	200
429.529	V	35.0	15.6	-14.5	36.1	46.0	63.8	200
665.984	V	31.2	20.2	-14.1	37.3	46.0	73.3	200
715.883	V	34.0	20.7	-13.0	41.7	46.0	121.6	200
732.195	V	29.6	20.5	-13.4	36.7	46.0	68.4	200
932.813	V	24.0	23	-11.3	35.7	46.0	61.0	200

7. RESTRICTED BANDS RADIATIONS (1GHz – 25GHz)

7.1 Test Procedure

Radiated emissions were measured in the frequency range with 1 GHz to 25GHz in transmitting mode and 1 GHz to 12.5 GHz in receiving mode. All tests were performed in the semi-anechoic chamber at a 3-meter distance (except for the frequency range with 18 GHz to 25 GHz where test distance was reduced to 1 meter) on both horizontal and vertical polarities. The antenna was also scanned in height. The emissions are recorded with a spectrum analyzer in peak hold mode. The identified emissions are further maximized as a function of cable manipulation, azimuth, and antenna height. The emissions closest to the limits are measured in the peak mode with the tuned spectrum analyzer using a bandwidth of 1MHz and the average setting mode with the tuned spectrum analyzer using resolution bandwidth of 1MHz / video bandwidth of 1kHz. The highest emissions relative to the limit are listed.

7.2 Test Instruments and Measurement Setup

Table 7 Radiated Emission Test Instrumentation (1GHz – 25GHz)

Description	Model	Serial Number
Spectrum Analyzer EMI Test Receiver	R&S ESI26	836119/003
Amplifier (1-26.5GHz)	HP 8449B	3008A00582
Horn Antenna (1- 18GHz)	EMCO 3115	9903-5774
Horn Antenna (3.95 – 5.85GHz)	EMCO 3160-5	1099
Horn Antenna (5.85 – 8.20GHz)	EMCO 3160-6	9712-1044
Horn Antenna (18- 26.5GHz)	EMCO 3160-9	0004-1202
SF106 cables: - Horn Ant <=> RF Amp. - RF Amp.<=>Spectrum Analyzer	Length: 6 m 15 m	- EM206SCO - EM215SCO

Notes: - HP: Hewlett Packard, R&S: Rohde & Schwarz

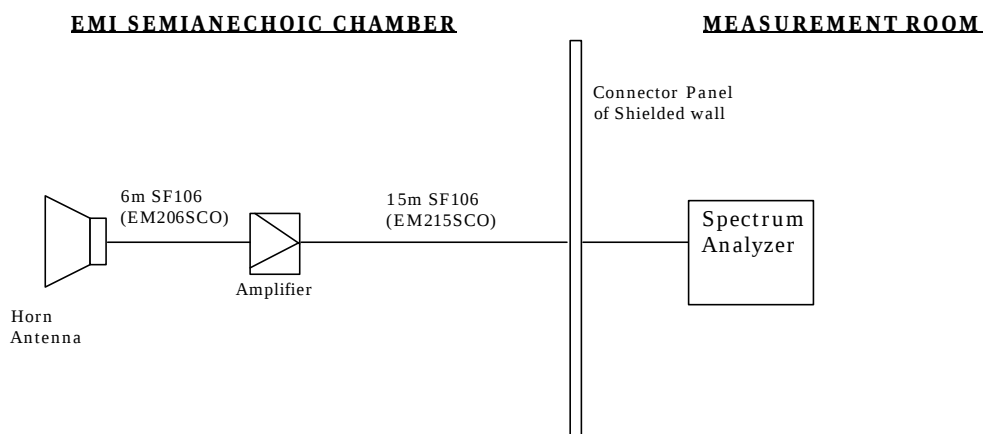


Figure 7 Cables for Radiated Emission Test

7.3 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where:

FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL-AG

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

For example:

Given a Spectrum Analyzer input reading of 51.5 dB μ V; Antenna Factor of 8.5 dB/m; Cable Loss of 1.3 dB; Falloff Factor of 0 dB; and an Amplifier Gain of 26 dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26 - 0.0 = 35.6 \text{ dB}\mu\text{V/m}$$

Conversions between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as :

$$\text{Level(dB}\mu\text{V/m)} = 20 \times \text{Log (Level}(\mu\text{V/m))}$$

$$40 \text{ dB}\mu\text{V/m} = 100 \mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250 \mu\text{V/m}$$

7.4 Measurement Results

The EUT was found to comply to the limits of FCC Part 15 Subpart C and RSS-210 with a margin of 1.2 dB. The measurement was done for the frequency range of 1 GHz to 25 GHz in TX mode and 1 GHz to 12.5GHz in RX mode.

Test Date: February 18, 20 and 22, 2002

1) EUT in transmission mode

● Right antenna (A0 port)

Table 7-2-1. EUT: M/T 2647-4XU, s/n ZZ-00089, Right antenna, Ch.1(2412MHz) TX mode 11Mbps

Frequency (GHz)	Polarity (H/V)	Measured (dBμV) (<i>peak</i>)	Measured (dBμV) (<i>average</i>)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dBμV/m) (<i>peak</i>)	FCC Limit (dBμV/m) (<i>peak</i>)	Field Strength (dBμV/m) (<i>average</i>)	FCC Limit (dBμV/m) (<i>average</i>)
1.001	V	61.7	53.7	24.1	-31.6	0.0	54.2	74.0	46.2	54.0
1.065	V	64.5	52.3	24.2	-31.5	0.0	57.2	74.0	45.0	54.0
1.198	V	63.7	50.7	24.6	-31.2	0.0	57.1	74.0	44.1	54.0
1.289	V	57.7	-	24.8	-30.9	0.0	51.6	74.0	-	54.0
2.039	V	58.0	46.9	27.5	-29.5	0.0	56.0	74.0	44.9	54.0
2.377	V	58.1	46.8	28.2	-28.5	0.0	57.8	74.0	46.5	54.0
2.389	H	62.1	49.5	28.2	-28.5	0.0	61.8	74.0	49.2	54.0
2.398	H	86.1	78.2	28.2	-28.4	0.0	85.9	NRB*	78.0	NRB*
2.413	H	115.3	107.3	28.2	-28.4	0.0	115.1	OB*	107.1	OB*
4.826	V	50.4	40.1	27.4	-23.7	0.0	54.1	74.0	43.8	54.0
6.115	V	37.7	-	29.8	-23.0	0.0	44.5	74.0	-	54.0
7.238	H	45.9	-	30	-24.6	0.0	51.3	74.0	-	54.0

*Note: OB means “operation band” (2400-2483.5MHz); in this case limit is 1W (measured conducted with power meter).
NRB means “non restricted band”.

Table 7-2-2. EUT: M/T 2647-4XU, s/n ZZ-00089, Right antenna, Ch.6(2437MHz) TX mode 11Mbps

Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) (<i>peak</i>)	Measured (dB μ V) (<i>average</i>)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dB μ V/m) (<i>peak</i>)	FCC Limit (dB μ V/m) (<i>peak</i>)	Field Strength (dB μ V/m) (<i>average</i>)	FCC Limit (dB μ V/m) (<i>average</i>)
1.001	V	60.8	-	24.1	-31.6	0.0	53.3	74.0	-	54.0
1.065	V	64.5	52.2	24.2	-31.5	0.0	57.2	74.0	44.9	54.0
1.198	V	64.5	50.9	24.6	-31.2	0.0	57.9	74.0	44.3	54.0
1.289	V	56.9	-	24.8	-30.9	0.0	50.8	74.0	-	54.0
2.064	V	57.0	46.0	27.5	-29.4	0.0	55.1	74.0	44.1	54.0
2.383	H	57.5	46.0	28.2	-28.5	0.0	57.2	74.0	45.7	54.0
2.438	H	114.6	106.9	28.3	-28.4	0.0	114.5	OB*	106.8	OB*
2.486	H	56.8	45.6	28.4	-28.2	0.0	57.0	74.0	45.8	54.0
4.878	V	47.6	-	27.4	-23.7	0.0	51.3	74.0	-	54.0
6.190	V	38.4	-	29.9	-23.1	0.0	45.2	74.0	-	54.0
7.313	H	45.7	-	29.9	-24.8	0.0	50.8	74.0	-	54.0

*Note: OB means “operation band” (2400-2483.5MHz); in this case limit is 1W (measured conducted with power meter).

Table 7-2-3. EUT: M/T 2647-4XU, s/n ZZ-00089, Right antenna, Ch.11(2462MHz) TX mode 11Mbps

Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) (<i>peak</i>)	Measured (dB μ V) (<i>average</i>)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dB μ V/m) (<i>peak</i>)	FCC Limit (dB μ V/m) (<i>peak</i>)	Field Strength (dB μ V/m) (<i>average</i>)	FCC Limit (dB μ V/m) (<i>average</i>)
1.001	V	61.8	55.1	24.1	-31.6	0.0	54.3	74.0	47.6	54.0
1.065	V	64.5	51.7	24.2	-31.5	0.0	57.2	74.0	44.4	54.0
1.198	V	64.9	51.0	24.6	-31.2	0.0	58.3	74.0	44.4	54.0
1.289	V	56.8	-	24.8	-30.9	0.0	50.7	74.0	-	54.0
2.089	V	56.9	46.2	27.6	-29.3	0.0	55.2	74.0	44.5	54.0
2.364	V	57.1	45.9	28.1	-28.6	0.0	56.6	74.0	45.4	54.0
2.383	H	57.3	46.0	28.2	-28.5	0.0	57.0	74.0	45.7	54.0
2.463	H	114.6	106.9	28.3	-28.3	0.0	114.6	OB*	106.9	OB*
2.486	H	56.8	45.6	28.4	-28.2	0.0	57.0	74.0	45.8	54.0
4.926	V	50.3	39.1	27.4	-23.6	0.0	54.1	74.0	42.9	54.0
6.190	V	37.4	-	29.9	-23.1	0.0	44.2	74.0	-	54.0
7.390	V	44.2	-	29.8	-25.0	0.0	49.0	74.0	-	54.0

*Note: OB means “operation band” (2400-2483.5MHz); in this case limit is 1W (measured conducted with power meter).

● Left antenna (A1 port)

Table 7-3-1. EUT: M/T 2647-4XU, s/n ZZ-00089, Left antenna, Ch.1(2412MHz) TX mode 11Mbps

Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) (<i>peak</i>)	Measured (dB μ V) (<i>average</i>)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dB μ V/m) (<i>peak</i>)	FCC Limit (dB μ V/m) (<i>peak</i>)	Field Strength (dB μ V/m) (<i>average</i>)	FCC Limit (dB μ V/m) (<i>average</i>)
1.001	V	62.4	56.1	24.1	-31.6	0.0	54.9	74.0	48.6	54.0
1.065	V	63.8	51.2	24.2	-31.5	0.0	56.5	74.0	43.9	54.0
1.198	V	65.0	51.1	24.6	-31.2	0.0	58.4	74.0	44.5	54.0
1.289	V	57.2	-	24.8	-30.9	0.0	51.1	74.0	-	54.0
2.038	V	59.8	46.6	27.5	-29.5	0.0	57.8	74.0	44.6	54.0
2.376	V	58.4	46.8	28.2	-28.5	0.0	58.1	74.0	46.5	54.0
2.389	H	62.5	49.9	28.2	-28.5	0.0	62.2	74.0	49.6	54.0
2.398	H	85.8	78.4	28.2	-28.4	0.0	85.6	NRB*	78.2	NRB*
2.413	H	114.9	107.2	28.2	-28.4	0.0	114.7	OB*	107.0	OB*
4.828	V	55.3	45.4	27.4	-23.7	0.0	59.0	74.0	49.1	54.0
6.115	V	37.1	-	29.8	-23.0	0.0	43.9	74.0	-	54.0
7.237	V	43.5	-	30	-24.6	0.0	48.9	74.0	-	54.0

*Note: OB means “operation band” (2400-2483.5MHz); in this case limit is 1W (measured conducted with power meter).

NRB means “non restricted band”.

Table 7-3-2. EUT: M/T 2647-4XU, s/n ZZ-00089, Left antenna, Ch.6(2437MHz) TX mode 11Mbps

Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) (<i>peak</i>)	Measured (dB μ V) (<i>average</i>)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dB μ V/m) (<i>peak</i>)	FCC Limit (dB μ V/m) (<i>peak</i>)	Field Strength (dB μ V/m) (<i>average</i>)	FCC Limit (dB μ V/m) (<i>average</i>)
1.001	V	62.7	55.8	24.1	-31.6	0.0	55.2	74.0	48.3	54.0
1.065	V	63.2	51.3	24.2	-31.5	0.0	55.9	74.0	44.0	54.0
1.198	V	64.9	51.7	24.6	-31.2	0.0	58.3	74.0	45.1	54.0
1.289	V	57.6	-	24.8	-30.9	0.0	51.5	74.0	-	54.0
2.064	V	57.3	45.9	27.5	-29.4	0.0	55.4	74.0	44.0	54.0
2.372	V	57.5	46.3	28.2	-28.5	0.0	57.2	74.0	46.0	54.0
2.383	H	58.0	46.4	28.2	-28.5	0.0	57.7	OB*	46.1	OB*
2.438	H	114.8	106.6	28.3	-28.4	0.0	114.7	74.0	106.5	54.0
4.876	V	50.7	38.9	27.4	-23.7	0.0	54.4	74.0	42.6	54.0
6.190	V	38.4	-	29.9	-23.1	0.0	45.2	74.0	-	54.0
7.313	V	43.9	-	29.9	-24.8	0.0	49.0	74.0	-	54.0

*Note: OB means “operation band” (2400-2483.5MHz); in this case limit is 1W (measured conducted with power meter).

Table 7-3-3. EUT: M/T 2647-4XU, s/n ZZ-00089, Left antenna, Ch.11(2462MHz) TX mode 11Mbps

Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) (<i>peak</i>)	Measured (dB μ V) (<i>average</i>)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dB μ V/m) (<i>peak</i>)	FCC Limit (dB μ V/m) (<i>peak</i>)	Field Strength (dB μ V/m) (<i>average</i>)	FCC Limit (dB μ V/m) (<i>average</i>)
1.001	V	62.2	56.1	24.1	-31.6	0.0	54.7	74.0	48.6	54.0
1.065	V	63.8	51.2	24.2	-31.5	0.0	56.5	74.0	43.9	54.0
1.198	V	64.6	50.9	24.6	-31.2	0.0	58.0	74.0	44.3	54.0
1.289	V	57.8	-	24.8	-30.9	0.0	51.7	74.0	-	54.0
2.089	V	57.2	46.0	27.6	-29.3	0.0	55.5	74.0	44.3	54.0
2.375	V	57.9	45.9	28.1	-28.6	0.0	57.4	74.0	45.4	54.0
2.463	H	115.2	107.3	28.3	-28.3	0.0	115.2	OB*	107.3	OB*
2.484	H	62.9	52.6	28.4	-28.2	0.0	63.1	74.0	52.8	54.0
2.495	H	58.2	46.4	28.4	-28.2	0.0	58.4	74.0	46.6	54.0
4.926	V	46.8	-	27.4	-23.6	0.0	50.6	74.0	-	54.0
6.190	V	39.0	-	29.9	-23.1	0.0	45.8	74.0	-	54.0
7.390	V	42.2	-	29.8	-25.0	0.0	47.0	74.0	-	54.0

*Note: OB means “operation band” (2400-2483.5MHz); in this case limit is 1W (measured conducted with power meter).

2) EUT in receiving mode

● Right antenna (A0 port)

Table 7-2-4. EUT: M/T 2647-4XU, s/n ZZ-00089, Right antenna, RX mode

Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) (<i>peak</i>)	Measured (dB μ V) (<i>average</i>)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dB μ V/m) (<i>peak</i>)	FCC Limit (dB μ V/m) (<i>peak</i>)	Field Strength (dB μ V/m) (<i>average</i>)	FCC Limit (dB μ V/m) (<i>average</i>)
1.001	V	60.8	-	24.1	-31.6	0.0	53.3	74.0	-	54.0
1.065	V	64.5	52.2	24.2	-31.5	0.0	57.2	74.0	44.9	54.0
1.198	V	64.5	50.9	24.6	-31.2	0.0	57.9	74.0	44.3	54.0
1.289	V	56.9	-	24.8	-30.9	0.0	50.8	74.0	-	54.0

● Left antenna (A1 port)

Table 7-3-4. EUT: M/T 2647-4XU, s/n ZZ-00089, Left antenna, RX mode

Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) (<i>peak</i>)	Measured (dB μ V) (<i>average</i>)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dB μ V/m) (<i>peak</i>)	FCC Limit (dB μ V/m) (<i>peak</i>)	Field Strength (dB μ V/m) (<i>average</i>)	FCC Limit (dB μ V/m) (<i>average</i>)
1.001	V	61.9	55.6	24.1	-31.6	0.0	54.4	74.0	48.1	54.0
1.065	V	64.0	51.5	24.2	-31.5	0.0	56.7	74.0	44.2	54.0
1.198	V	65.3	51.5	24.6	-31.2	0.0	58.7	74.0	44.9	54.0
1.289	V	57.8	-	24.8	-30.9	0.0	51.7	74.0	-	54.0