

FCC ID: ANZ-IC-315Z  
Report No.: T190327W07-RP

ISED: 11194A-IC315Z

Page: 1 / 29  
Rev.: 02

# FCC RADIO TEST REPORT

## FCC 47 CFR PART 15 SUBPART C

<b>Test Standard</b>	FCC Part 15.231+ IC RSS-210 Issue 9
<b>Trade name</b>	CHANG TJER MACHINERY CO., LTD.
<b>Product name</b>	Dust Collector Remote Control
<b>Model No.</b>	IC-315Z
<b>Operation Freq.</b>	TX: 315 MHz
<b>Test Result</b>	Pass

The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this report.

The test Report of full or partial shall not copy. Without written approval of SGS Compliance Certification Services Inc. (Wugu Laboratory)


Approved by:



---

Kevin Tsai  
Deputy Manager

Reviewed by:

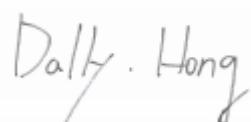

---

Dally Hong  
Engineer

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部分複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

## Revision History

Rev.	Issue Date	Revisions	Effect page	Revised By
00	April 30, 2019	Initial Issue	ALL	Allison Chen
01	May 7, 2019	1. Revised antenna information in section 1.3. 2. Added restricted bands in section 3.3 3. Revised test procedure in section 4.2.2 and 4.4.2. 4. Revised test limit in section 4.3.1. 5. Revised test voltage.	P.1, 5, 11-12, 15, 17, 21, 24-27	Allison Chen
02	May 9, 2019	1. Revised description in section 4.4.1 and 4.4.4.	P.20, 23	Allison Chen

## Table of contents

<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
<b>1.1 EUT INFORMATION .....</b>	<b>4</b>
<b>1.2 EUT CHANNEL INFORMATION .....</b>	<b>5</b>
<b>1.3 ANTENNA INFORMATION .....</b>	<b>5</b>
<b>1.4 MEASUREMENT UNCERTAINTY .....</b>	<b>6</b>
<b>1.5 FACILITIES AND TEST LOCATION .....</b>	<b>7</b>
<b>1.6 INSTRUMENT CALIBRATION .....</b>	<b>7</b>
<b>1.7 SUPPORT AND EUT ACCESSORIES EQUIPMENT .....</b>	<b>8</b>
<b>1.8 TEST METHODOLOGY AND APPLIED STANDARDS .....</b>	<b>8</b>
<b>2. TEST SUMMERY .....</b>	<b>9</b>
<b>3. DESCRIPTION OF TEST MODES .....</b>	<b>10</b>
<b>3.1 THE WORST MODE OF OPERATING CONDITION .....</b>	<b>10</b>
<b>3.2 THE WORST MODE OF MEASUREMENT .....</b>	<b>10</b>
<b>3.3 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS .....</b>	<b>11</b>
<b>3.4 EUT DUTY CYCLE .....</b>	<b>13</b>
<b>4. TEST RESULT .....</b>	<b>14</b>
<b>4.1 AC POWER LINE CONDUCTED EMISSION .....</b>	<b>14</b>
<b>4.2 EMISSION BANDWIDTH .....</b>	<b>15</b>
<b>4.3 FIELD STRENGTH OF FUNDAMENTAL .....</b>	<b>17</b>
<b>4.4 RADIATION UNWANTED EMISSION .....</b>	<b>20</b>
<b>4.5 OPERATION RESTRICTION .....</b>	<b>28</b>
<b>APPENDIX 1 – PHOTOGRAPHS OF EUT</b>	

## 1. GENERAL INFORMATION

### 1.1 EUT INFORMATION

Applicant	CHANG TJER MACHINERY CO., LTD. No. 525, SEC. 5, CHONGDE RD., TANZI DIST., TAICHUNG, 42748, TAIWAN, R.O.C.
Manufacturer	Shing Jiing Electronic Technology Co., LTD. No. 147, Houzhuang 3rd St., Beitun Dist., Taichung City 406, Taiwan (R.O.C.)
Equipment	Dust Collector Remote Control
Model Name	IC-315Z
Model Discrepancy	N/A
Received Date	March 27, 2019
Date of Test	April 3 ~ 17, 2019
Periodic operation	<input checked="" type="checkbox"/> (1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released. <input type="checkbox"/> (2) A transmitter activated automatically shall cease transmission within 5 seconds after activation <input type="checkbox"/> (3) Periodic transmissions at regular predetermined intervals are not permitted. <input type="checkbox"/> (4) Periodic transmissions (lower field strength): each transmission is not greater than 1 sec and the silent period between transmissions is at least 30 times the duration of the transmission but in no case less than 10 sec.
Power Operation	Power from battery: DC 9V
Operation Frequency	TX: 315 MHz
S/W Version	Version 1
H/W Version	Version 1

## 1.2 EUT CHANNEL INFORMATION

Frequency Range	315 MHz
Modulation Type	ASK
Bandwidth	189.58 KHz
Number of Channels	1 channel

**Remark:**

Refer as ANSI 63.10:2013 clause 5.6.1 Table 4 for test channels

Number of frequencies to be tested		
Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
<input checked="" type="checkbox"/> 1 MHz or less	1	Middle
<input type="checkbox"/> 1 MHz to 10 MHz	2	1 near top and 1 near bottom
<input type="checkbox"/> More than 10 MHz	3	1 near top, 1 near middle, and 1 near bottom

## 1.3 ANTENNA INFORMATION

Antenna Type	Coil antenna
Antenna Gain	1.0 dBi
Antenna Connector	N/A

## 1.4 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575
Emission bandwidth, 20dB bandwidth	+/- 0.0014
RF output power, conducted	+/- 1.14
Power density, conducted	+/- 1.40
3M Semi Anechoic Chamber / 30M~200M	+/- 4.12
3M Semi Anechoic Chamber / 200M~1000M	+/- 4.68
3M Semi Anechoic Chamber / 1G~8G	+/- 5.18
3M Semi Anechoic Chamber / 8G~18G	+/- 5.47
3M Semi Anechoic Chamber / 18G~26G	+/- 3.81
3M Semi Anechoic Chamber / 26G~40G	+/- 3.87

**Remark:**

1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$
2. ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report.

Report No.: T190327W07-RP

## 1.5 FACILITIES AND TEST LOCATION

All measurement facilities used to collect the measurement data are located at  
 No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.)

Test site	Test Engineer	Remark
AC Conduction Room	-	Not applicable, because EUT doesn't connect to AC Main Source direct.
Radiation	Dally Hong	-
RF Conducted	Dally Hong	-

**Remark:** The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

## 1.6 INSTRUMENT CALIBRATION

RF Conducted Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
Signal Analyzer	R&S	FSV 40	101073	09/27/2018	09/26/2019

3M 966 Chamber Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
Bilog Antenna	Sunol Sciences	JB3	A030105	07/13/2018	07/12/2019
Cable	HUBER SUHNER	SUCOFLEX 104PEA	25157	02/26/2019	02/25/2020
Cable	HUBER SUHNER	SUCOFLEX 104PEA	20995	02/26/2019	02/25/2020
Digital Thermo-Hygro Meter	WISEWIND	1206	D07	01/30/2019	01/29/2020
double Ridged Guide Horn Antenna	ETC	MCTD 1209	DRH13M02003	08/20/2018	08/19/2019
High Pass Filter	SOLVANG TECHNOLOGY INC.	STI15	9923	02/26/2019	02/25/2020
Loop Ant	COM-POWER	AL-130	121051	03/22/2019	03/21/2020
Pre-Amplifier	EMEC	EM330	060609	02/26/2019	02/25/2020
Pre-Amplifier	HP	8449B	3008A00965	02/26/2019	02/25/2020
PSA Series Spectrum Analyzer	Agilent	E4446A	MY46180323	05/31/2018	05/30/2019
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R
<b>Software</b>	e3 6.11-20180413				

**Remark:** Each piece of equipment is scheduled for calibration once a year.

Report No.: T190327W07-RP

## 1.7 SUPPORT AND EUT ACCESSORIES EQUIPMENT

There are no accessories and support equipment be used during the test.

EUT Accessories Equipment					
No.	Equipment	Brand	Model	Series No.	FCC ID
	N/A				

Support Equipment					
No.	Equipment	Brand	Model	Series No.	FCC ID
	N/A				

## 1.8 TEST METHODOLOGY AND APPLIED STANDARDS

The test methodology, setups and results comply with all requirements in accordance with ANSI C63.10:2013, FCC 15.231, IC RSS-210, IC RSS-Gen Rules.

Report No.: T190327W07-RP

## 2. TEST SUMMARY

FCC Standard Sec.	IC Standard Sec.	Chapter	Test Item	Result
15.203	RSS-GEN Sec. 8.3	1.3	Antenna Requirement	Pass
15.207	RSS-GEN Sec. 8.8	4.1	AC Power-line Conducted Emission	Not applicable
15.231(c)	RSS-210 A.1.3	4.2	Emission Bandwidth	Pass
15.231(b)	RSS-210 A.1.2	4.3	Fundamental Emission	Pass
15.209(b)	RSS-GEN Sec. 8.9	4.4	Transmitter Radiated Emission	Pass
15.231(a)(1)	RSS-210 A.1.2	4.5	Operation Restriction	Pass

### 3. DESCRIPTION OF TEST MODES

#### 3.1 THE WORST MODE OF OPERATING CONDITION

Operation mode	315 MHz
RF Filed strength	<b>ASK</b> <u>Peak: 65.73 dBuv/m</u> <u>Average : 64.93 dBuv/m</u>

Remark: Field strength performed Average level at 3m.

#### 3.2 THE WORST MODE OF MEASUREMENT

Radiated Emission Measurement Above 1G	
Test Condition	Band edge, Emission for Unwanted and Fundamental
Power supply Mode	Mode 1:EUT power by battery(DC 9V)
Worst Mode	<input checked="" type="checkbox"/> Mode 1 <input type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4
Worst Position	<input type="checkbox"/> Placed in fixed position. <input type="checkbox"/> Placed in fixed position at X-Plane (E2-Plane) <input type="checkbox"/> Placed in fixed position at Y-Plane (E1-Plane) <input checked="" type="checkbox"/> Placed in fixed position at Z-Plane (H-Plane)
Worst Polarity	<input checked="" type="checkbox"/> Horizontal <input checked="" type="checkbox"/> Vertical

Radiated Emission Measurement Below 1G	
Test Condition	Radiated Emission Below 1G
Power supply Mode	Mode 1:EUT power by battery(DC 9V)
Worst Mode	<input checked="" type="checkbox"/> Mode 1 <input type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4

Remark:

1. The worst mode was record in this test report.
2. EUT pre-scanned in three axis ,X, Y, Z and two polarity, Horizontal and Vertical for radiated measurement. The worst case(Z-Plane and Vertical) were recorded in this report

### 3.3 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

According to FCC 15.231(b), 15.231(e),

(b) In addition to the provisions of §15.205, the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emissions (microvolts/meter)
40.66-40.70	2,250	225
70-130	1,250	125
130-174	<sup>1</sup> 1,250 to 3,750	<sup>1</sup> 125 to 375
174-260	3,750	375
260-470	<sup>1</sup> 3,750 to 12,500	<sup>1</sup> 375 to 1,250
Above 470	12,500	1,250

<sup>1</sup>Linear interpolations.

(1) The above field strength limits are specified at a distance of 3 meters. The tighter limits apply at the band edges.

(2) Intentional radiators operating under the provisions of this section shall demonstrate compliance with the limits on the field strength of emissions, as shown in the above table, based on the average value of the measured emissions. As an alternative, compliance with the limits in the above table may be based on the use of measurement instrumentation with a CISPR quasi-peak detector. The specific method of measurement employed shall be specified in the application for equipment authorization. If average emission measurements are employed, the provisions in §15.35 for averaging pulsed emissions and for limiting peak emissions apply. Further, compliance with the provisions of §15.205 shall be demonstrated using the measurement instrumentation specified in that section.

(3) The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in §15.209, whichever limit permits a higher field strength.

(e) Intentional radiators may operate at a periodic rate exceeding that specified in paragraph (a) of this section and may be employed for any type of operation, including operation prohibited in paragraph (a) of this section, provided the intentional radiator complies with the provisions of paragraphs (b) through (d) of this section, except the field strength table in paragraph (b) of this section is replaced by the following:

Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emissions (microvolts/meter)
40.66-40.70	1,000	100
70-130	500	50
130-174	500 to 1,500 <sup>1</sup>	50 to 150 <sup>1</sup>
174-260	1,500	150
260-470	1,500 to 5,000 <sup>1</sup>	150 to 500 <sup>1</sup>
Above 470	5,000	500

<sup>1</sup>Linear interpolations.


In addition, devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

Report No.: T190327W07-RP

### 3.4 EUT DUTY CYCLE

#### 315MHz

Duty Cycle			
TX ON (ms)	TX All(ms)	Duty Cycle	Duty Factor(dB)
91.19	107.13	85.12%	-0.8

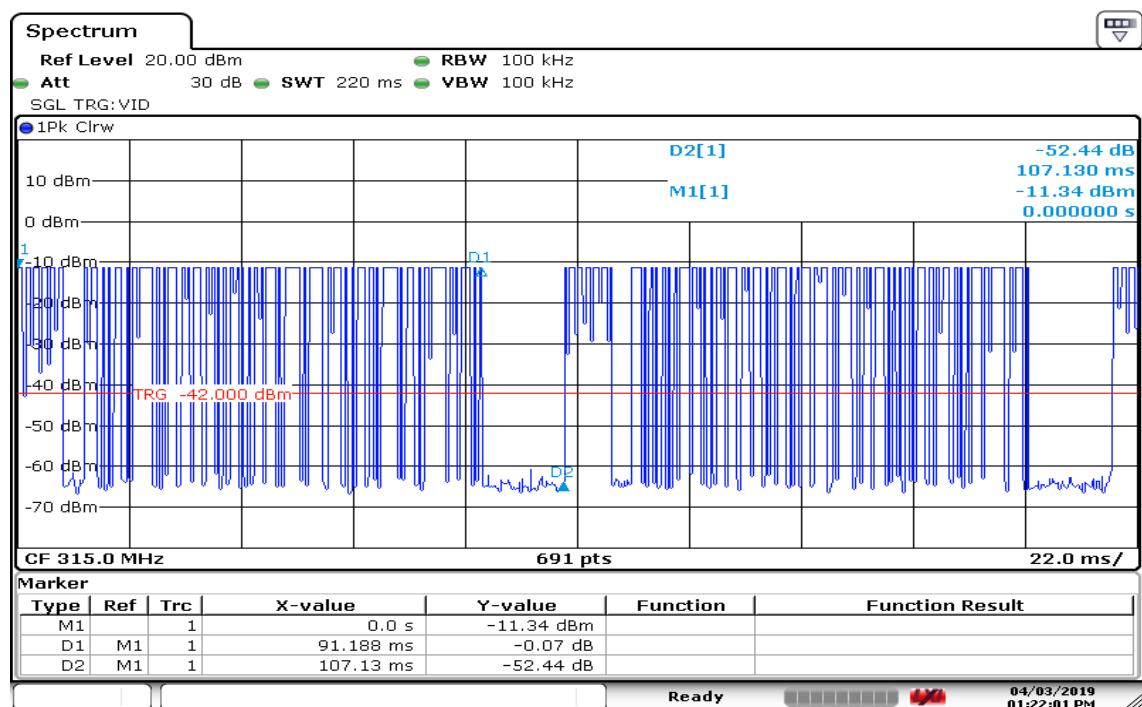

Date: 3 APR 2019 13:22:01

04/03/2019  
01:22:01 PM

#### Notes:

1. The transmitter duty cycle was measured using a spectrum analyser in the time domain and calculated by  $20 \log (\text{Time}_{\text{on}}) / [\text{Period or } 100 \text{ ms whichever is the lesser}]$
2. The EUT transmits for a Time(on) of 91.19 milliseconds.  
 $20 \log (\text{Time}_{\text{on}}) / [\text{Period or } 100 \text{ ms whichever is the lesser}]$ .  
 $20 \log (91.19/100) = -0.8 \text{ dB}$

## 4. TEST RESULT

### 4.1 AC POWER LINE CONDUCTED EMISSION

#### 4.1.1 Test Limit

According to §15.207(a), RSS-Gen Sec.8.8,

Frequency Range (MHz)	Limits(dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50


\* Decreases with the logarithm of the frequency.

#### 4.1.2 Test Procedure

Test method Refer as ANSI 63.10:2013 clause 6.2,

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete

#### 4.1.3 Test Setup

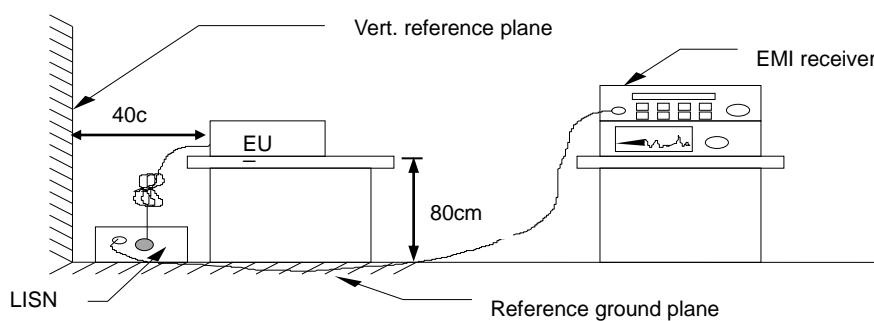

#### 4.1.4 Test Result

Not applicable

## 4.2 EMISSION BANDWIDTH

### 4.2.1 Test Limit

According to §15.231(c), RSS-210 A.1.3 ,

Limit	<input checked="" type="checkbox"/> 70 MHz – 900 MHz : $F_c * 0.25\%$ <input type="checkbox"/> Above 900 MHz : $F_c * 0.5\%$
-------	---


### 4.2.2 Test Procedure

Test method Refer as ANSI 63.10:2013 clause 6.9.2,

The Loop antenna connected to the spectrum analyzer, was touching to the transmitter antenna. Set the RBW=20KHz, VBW=30KHz, Detector = Peak, Trace mode = Max hold, Sweep = Auto. Measure the maximum width of the emission that is constrained by the frequencies associated with the 20dB Bandwidth.

The Loop antenna connected to the spectrum analyzer, was touching to the transmitter antenna. SA set RBW = 1% ~ 5% OBW, VBW = three times the RBW and Detector = Peak, Trace mode = Max hold, Sweep = Auto. Measure the maximum width of the emission that is constrained by the frequencies associated with the Occupied Bandwidth (99%).

### 4.2.3 Test Setup

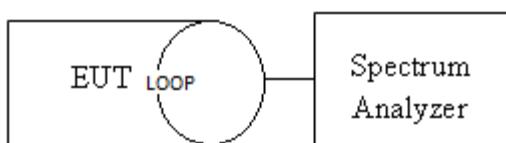


### 4.2.4 Test Result

Spectrum Bandwidth				
Frequency (MHz)	20dB Bandwidth (KHz)	20dB Bandwidth Limits (MHz)	99% Occupied BW (KHz)	99% Bandwidth Limits (MHz)
315	125.9	0.7875	189.58	0.7875


## Test Data

### 20dB Bandwidth

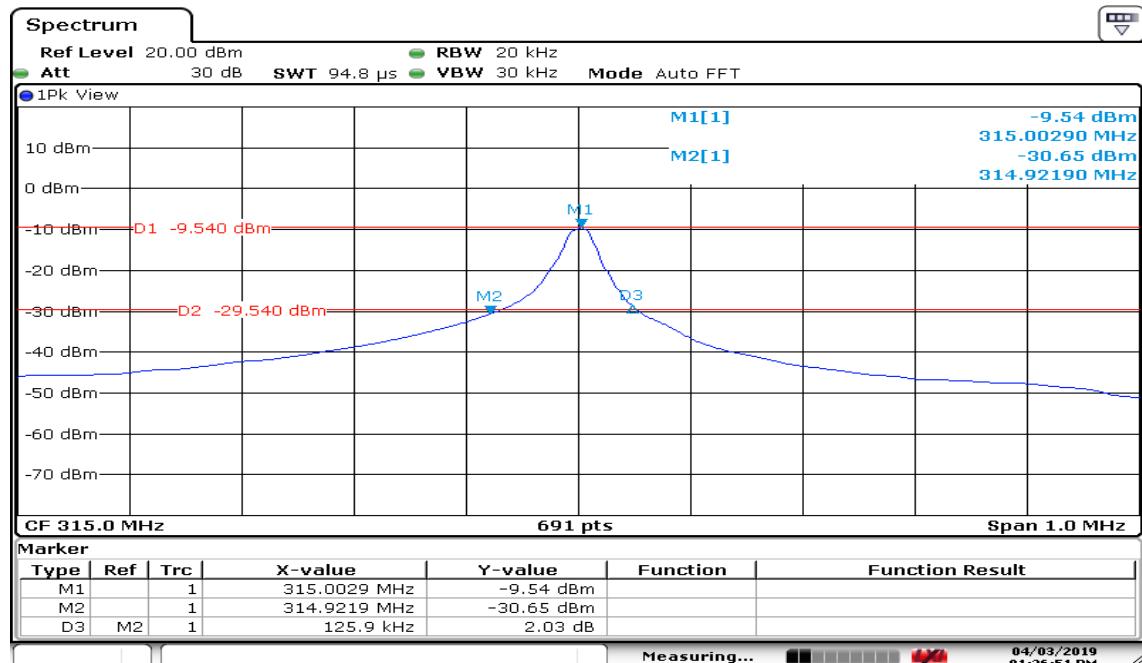

Date: 3 APR 2019 13:26:51

### 99% Occupied BW

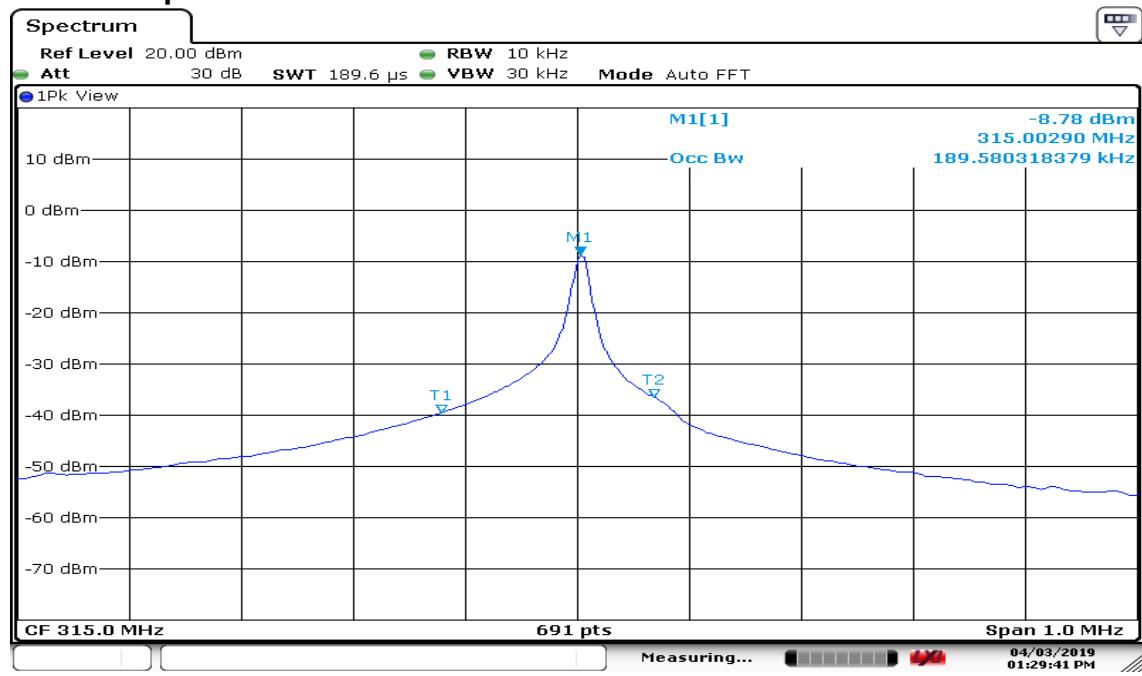

Date: 3 APR 2019 13:29:41

## 4.3 FIELD STRENGTH OF FUNDAMENTAL

### 4.3.1 Test Limit

According to §15.231(b)

Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of fundamental (microvolts/meter)
40.66-40.70	2,250	225
70-130	1,250	125
130-174	<sup>1</sup> 1,250 to 3,750	<sup>1</sup> 125 to 375
174-260	3,750	375
260-470	<sup>1</sup> 3,750 to 12,500	<sup>1</sup> 375 to 1,250
Above 470	12,500	1,250

According to RSS-210 A.1.2

Table A1—Permissible Field Strength Limits for Momentarily Operated Devices

Fundamental Frequency (MHz), Excluding Restricted Frequency Bands Specified in RSS-Gen	Field Strength of the Fundamental Emissions ( $\mu$ V/m at 3 m)
70-130	1,250
130-174	1,250 to 3,750*
174-260 (Note 1)	3,750
260-470 (Note 1)	3,750 to 12,500*
Above 470	12,500

\* Linear interpolation with frequency, f, in MHz:

For 130-174 MHz: Field Strength ( $\mu$ V/m) = (56.82  $\times$  f) - 6136

For 260-470 MHz: Field Strength ( $\mu$ V/m) = (41.67  $\times$  f) - 7083


**Note 1:** Frequency bands 225-328.6 MHz and 335.4-399.9 MHz are designated for the exclusive use of the Government of Canada. Manufacturers should be aware of possible harmful interference and degradation of their licence-exempt radio equipment in these frequency bands.

### 4.3.2 Test Procedure

Test method Refer as ANSI 63.10:2013 clause 4.1.4 and clause 6.5

clause 4.1.4	<input checked="" type="checkbox"/> 4.1.4.2.2: Measurement Peak value. <input type="checkbox"/> 4.1.4.2.3: Duty cycle $\geq$ 100%. <input checked="" type="checkbox"/> 4.1.4.2.4: Measurement Average value.
--------------	--

### 4.3.3 Test Setup

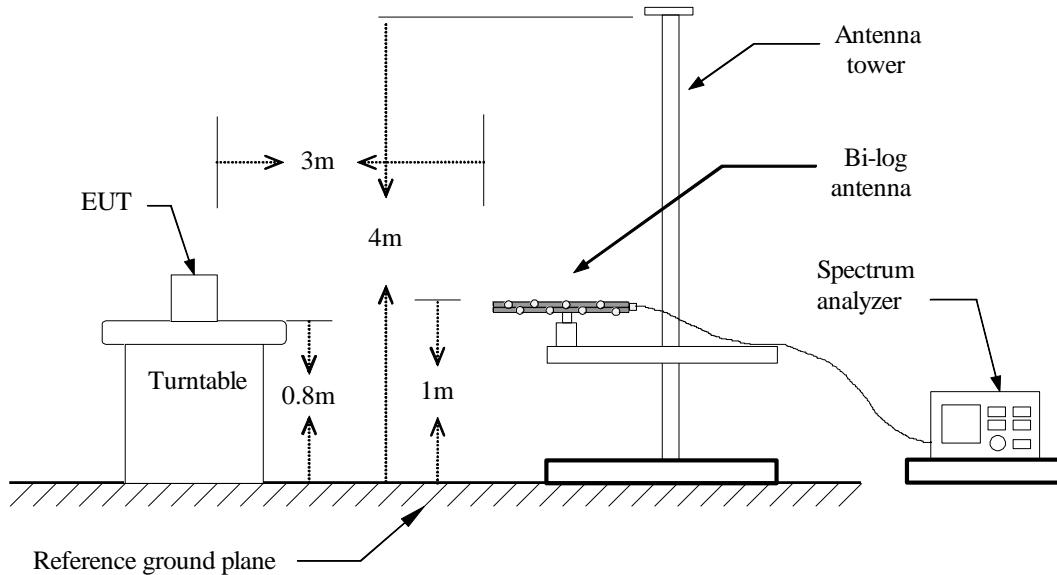

### 4.3.4 Test Result


Field Strength					
Frequency (MHz)	Fundamental (dBuV/m) at 3m	Limit (dBuV/m) at 3m	Margin (dB)	Axis/Pol.	Remark
315.03	64.93	75.62	-10.69	Z/V	AVG

**Remark:**

1. Fundamental measured method setting on spectrum,  $RBW=100\text{ kHz}$ ,  $VBW=100\text{kHz}$  and  $Detector=Peak$ .
2. Average result = Peak result + Duty factor =  $65.73\text{ dBuV/m} - 0.8 = 64.93\text{dBuV/m}$
3.  $260\text{MHz} \sim 470\text{MHz}$  limit is  $41.6667 * (Frequency, \text{MHz}) - 7083.3333$   
 $Limit = 41.6667 * (315.03 \text{ MHz}) - 7083.3333$   
 $= 6041.6772 (\mu\text{V/m})$   
 $\text{dBuV/m} = 20 \text{ Log}(\mu\text{V/m}) = 20 \text{ Log}(6041.6772 \mu\text{V/m}) = 75.62\text{dBuV/m}$
4. The worst modulation was the ASK of field strength of fundamental, we selected worst modulation to performed the radiation unwanted emission test.

**Test Data**

Test Mode:	TX-315MHz	Temp/Hum	23(°C)/ 62%RH
Test Item	Fundamental	Test Date	2019/04/17
Axis/Polarize	Z-Plane/Ver.	Test Engineer	Dally Hong
Detector	Peak & AVG	Test Voltage:	9Vdc

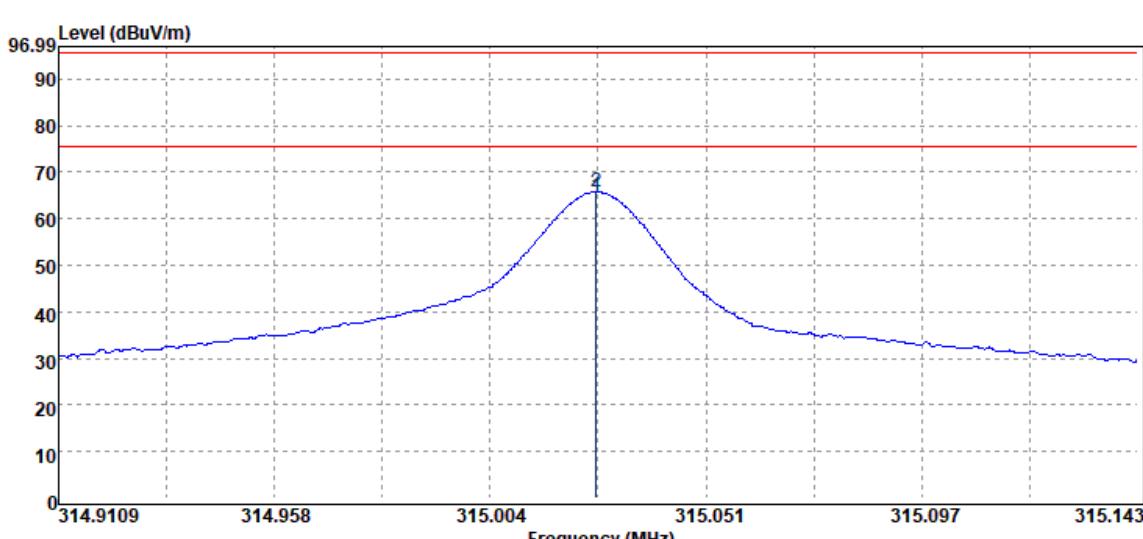No	Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit @3m (dBuV/m)	Margin (dB)
1	315.03	Average	-	-0.80	64.93	75.62	-10.69
2	315.03	Peak	73.41	-7.68	65.73	95.62	-29.89

## 4.4 RADIATION UNWANTED EMISSION

### 4.4.1 Test Limit

According to §15.231(b) and §15.209, §15.205

Unwanted emissions limit follow the table or the FCC Part 15.209, whichever limit permits higher field strength.

According to RSS-210 A1.2 and RSS-GEN Sec. 8.9

Unwanted emissions shall comply with the general field strength limits specified in RSS-Gen or 10 times below the fundamental emissions field strength limit in table as below, whichever is less stringent.

According to §15.231(b)

Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of fundamental (microvolts/meter)
40.66-40.70	2,250	225
70-130	1,250	125
130-174	<sup>1</sup> 1,250 to 3,750	<sup>1</sup> 125 to 375
174-260	3,750	375
260-470	<sup>1</sup> 3,750 to 12,500	<sup>1</sup> 375 to 1,250
Above 470	12,500	1,250

<sup>1</sup>Linear interpolations.

### Below 30MHz

Frequency (MHz)	Field Strength				
	( $\mu$ V/m)	(dB $\mu$ V/m)	Measurement Distance (meter)	(dB $\mu$ V/m)	Measurement Distance (meter)
0.009 - 0.490	2400/F(kHz)	48.52 – 13.80	300	128.52–104.84	3
0.490 - 1.705	24000/F(kHz)	33.80 – 22.97	30	73.80– 62.97	3
1.705 – 30.0	30	29.54	30	69.54	3

### Above 30MHz

Frequency (MHz)	Field Strength		Measurement Distance (meter)
	( $\mu$ V/m)	(dB $\mu$ V/m)	
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

#### 4.4.2 Test Procedure

Test method Refer as ANSI 63.10:2013

<input checked="" type="checkbox"/> Unwanted Emission	<input checked="" type="checkbox"/> clause 4.1.4.2.2: Measurement Peak value. <input type="checkbox"/> clause 4.1.4.2.3: Duty cycle $\geq 100\%$ . <input checked="" type="checkbox"/> clause 4.1.4.2.4: Measurement Average value.
<input checked="" type="checkbox"/> Radiated Emission	<input checked="" type="checkbox"/> clause 6.4: below 30 MHz and test distance is 3m. <input checked="" type="checkbox"/> clause 6.5: below 30 MHz -1 GHz and test distance is 3m. <input checked="" type="checkbox"/> clause 6.6: Above 30 MHz and test distance is 3m.

1. The EUT is placed on a turntable, which is 0.8m for test below 1GHz and 1.5m for test above 1GHz, above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

(a)PEAK: RBW=1MHz / VBW=3MHz / Sweep=AUTO

(b)AVERAGE: RBW=1MHz,


7. Repeat above procedures until the measurements for all frequencies are complete.

*Remark.*


1. *Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.*
2. *No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).*


#### 4.4.3 Test Setup

##### 9kHz ~ 30MHz

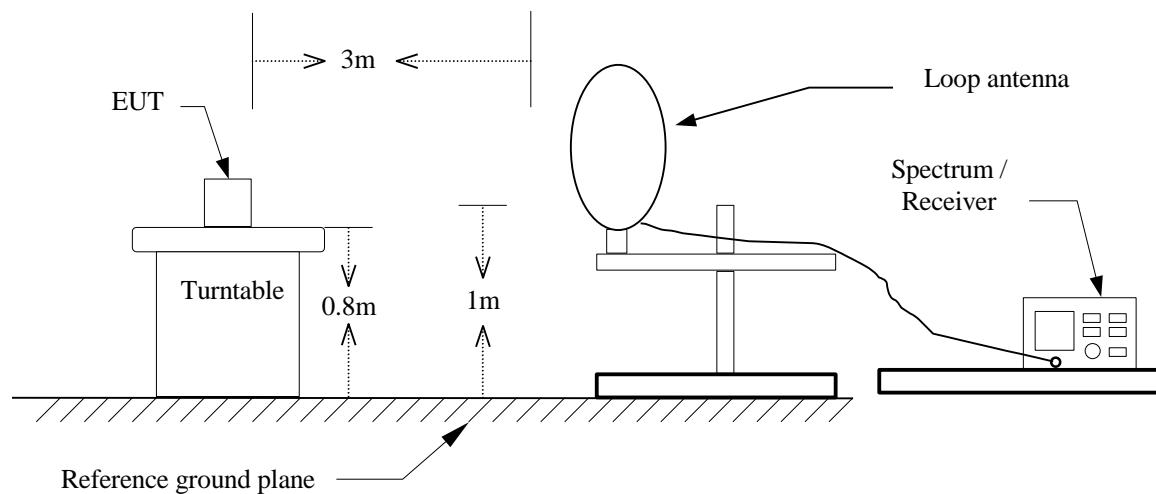

##### 30MHz ~ 1 GHz

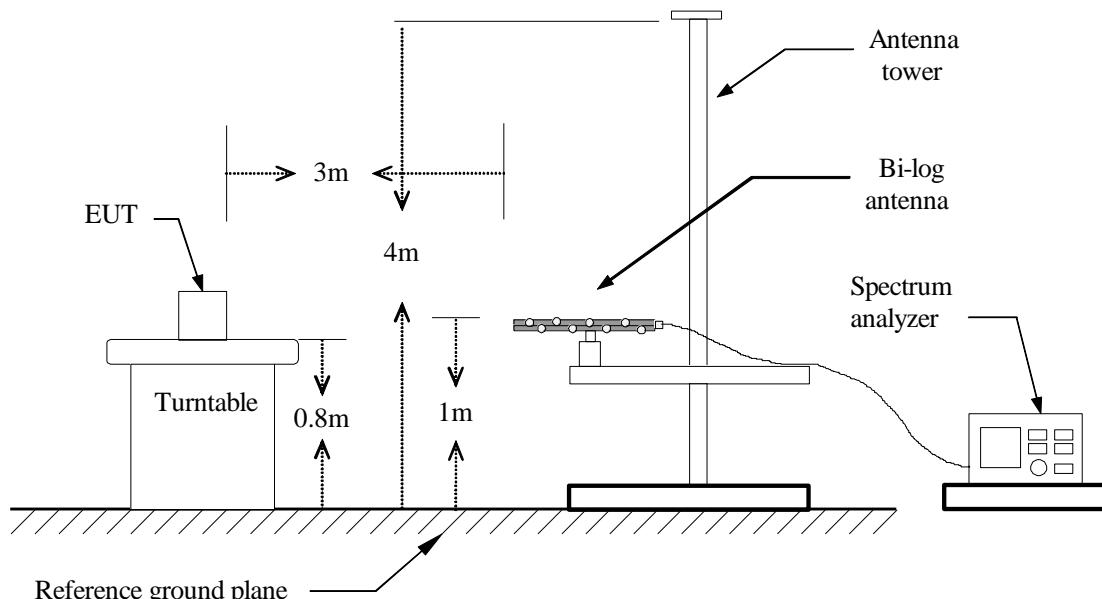

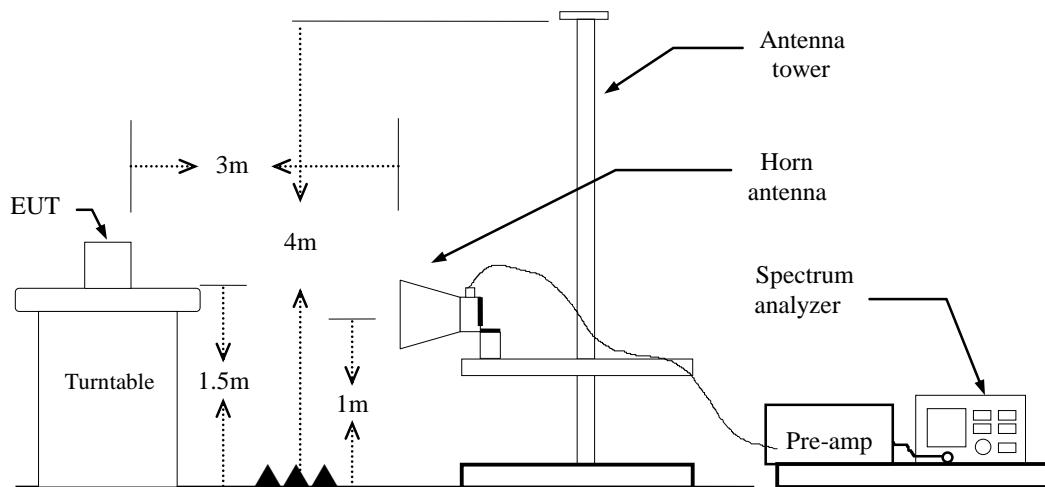**Above 1 GHz**

#### 4.4.4 Test Result

The worst modulation was the ASK of field strength of fundamental, we selected worst modulation to performed the testing of the radiation unwanted emission and the emission within the restricted bands.

**Pass.**


**Test Data****Below 1GHz**

Test Mode:	TX-315MHz	Temp/Hum	21.4(°C)/ 62%RH
Test Item	Below 1GHz	Test Date	2019/04/17
Polarize	Vertical	Test Engineer	Dally Hong
Detector	Peak	Test Voltage:	9Vdc

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit @3m (dBuV/m)	Margin (dB)
119.24	Peak	37.91	-8.94	28.97	43.50	-14.53
214.30	Peak	40.29	-11.49	28.80	43.50	-14.70
449.04	Peak	35.70	-3.88	31.82	46.00	-14.18
630.00	Peak	43.30	-0.57	42.73	46.00	-3.27
839.95	Peak	35.55	3.58	39.13	46.00	-6.87
945.00	Peak	39.77	4.06	43.83	46.00	-2.17


Test Mode:	TX-315MHz	Temp/Hum	21.4(°C)/ 62%RH
Test Item	Below 1GHz	Test Date	2019/04/17
Polarize	Horizontal	Test Engineer	Dally Hong
Detector	Peak	Test Voltage:	9Vdc

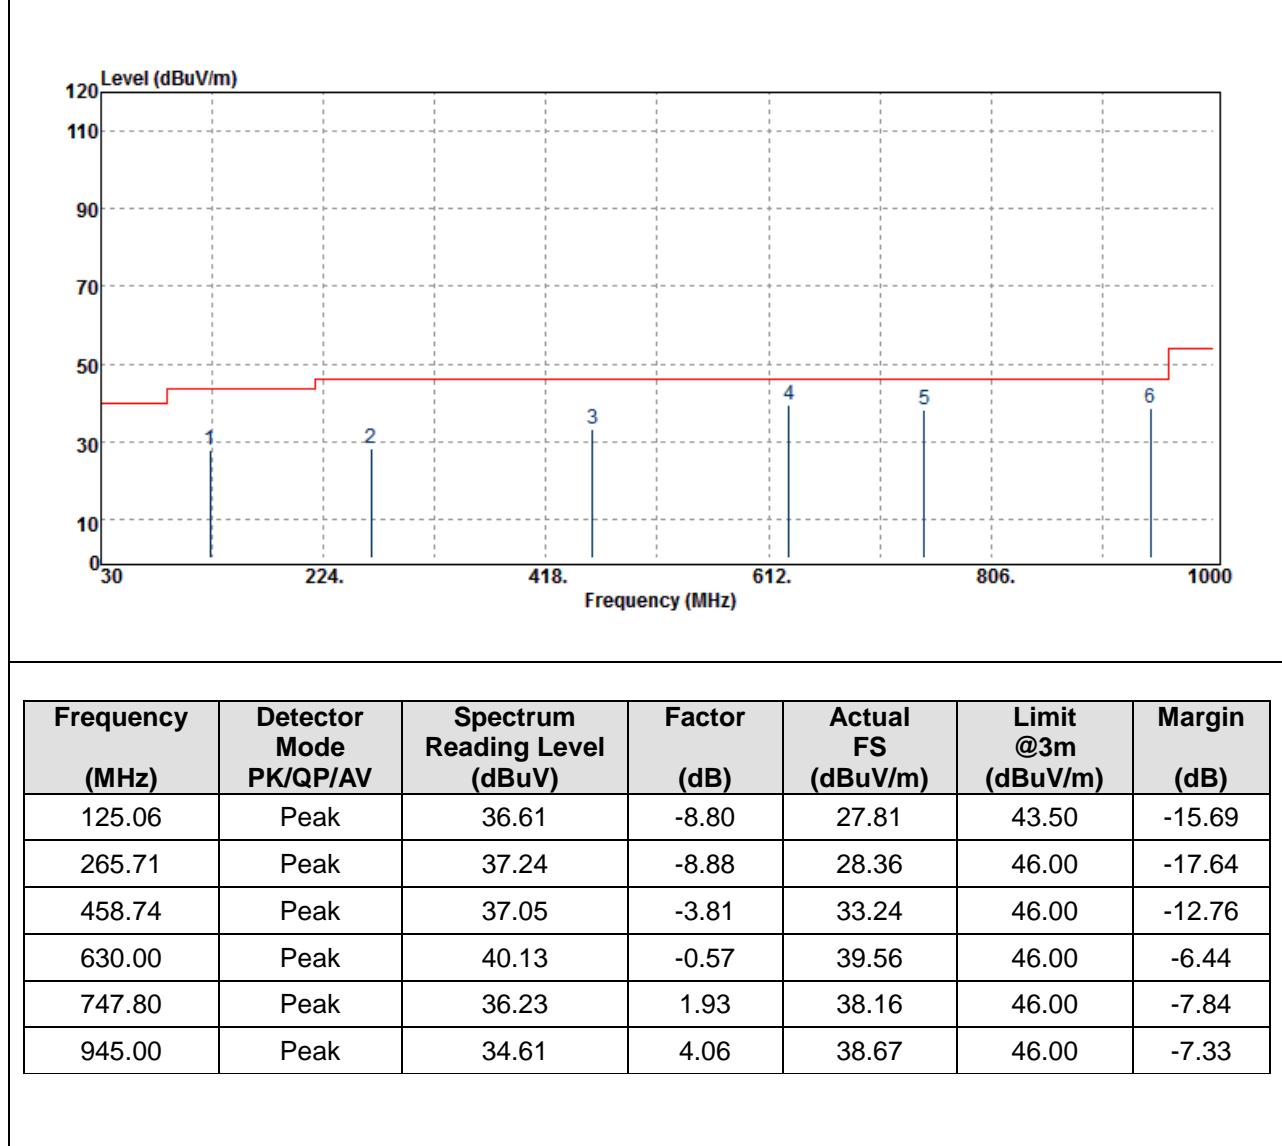

Report No.: T190327W07-RP

**Above 1GHz**

Test Mode:	TX-315MHz	Temp/Hum	21.4(°C)/ 62%RH
Test Item	Above 1GHz	Test Date	2019/04/17
Polarize	Vertical	Test Engineer	Dally Hong
Detector	Peak	Test Voltage:	9Vdc

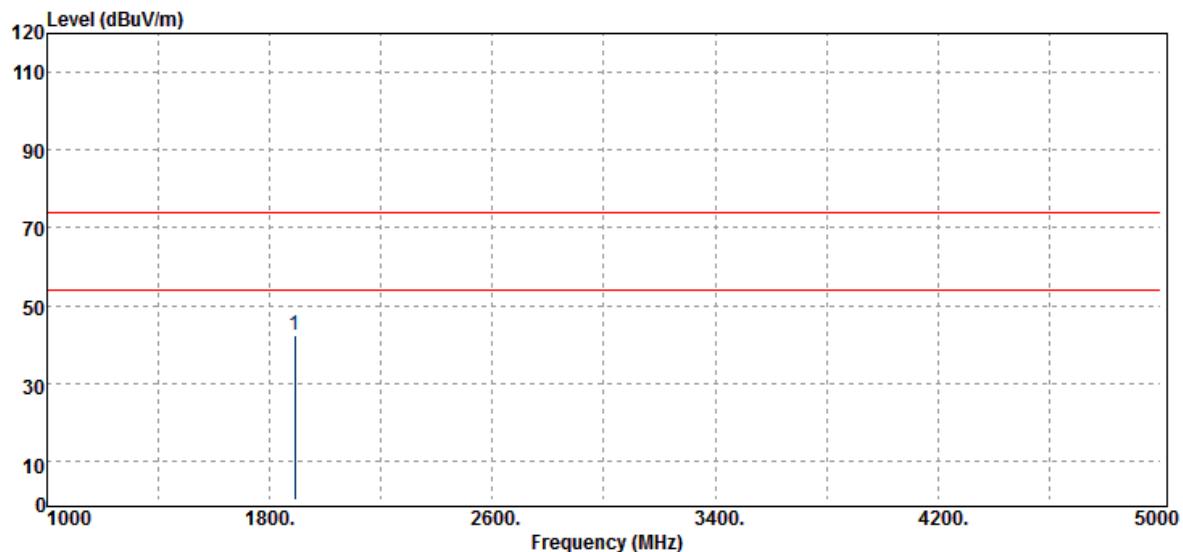


Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit @3m (dBuV/m)	Margin (dB)
1890.00	Peak	47.76	-5.61	42.15	74.00	-31.85
N/A						

***Remark:***

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode:	TX-315MHz	Temp/Hum	21.4(°C)/ 62%RH
Test Item	Above 1GHz	Test Date	2019/04/17
Polarize	Horizontal	Test Engineer	Dally Hong
Detector	Peak	Test Voltage:	9Vdc

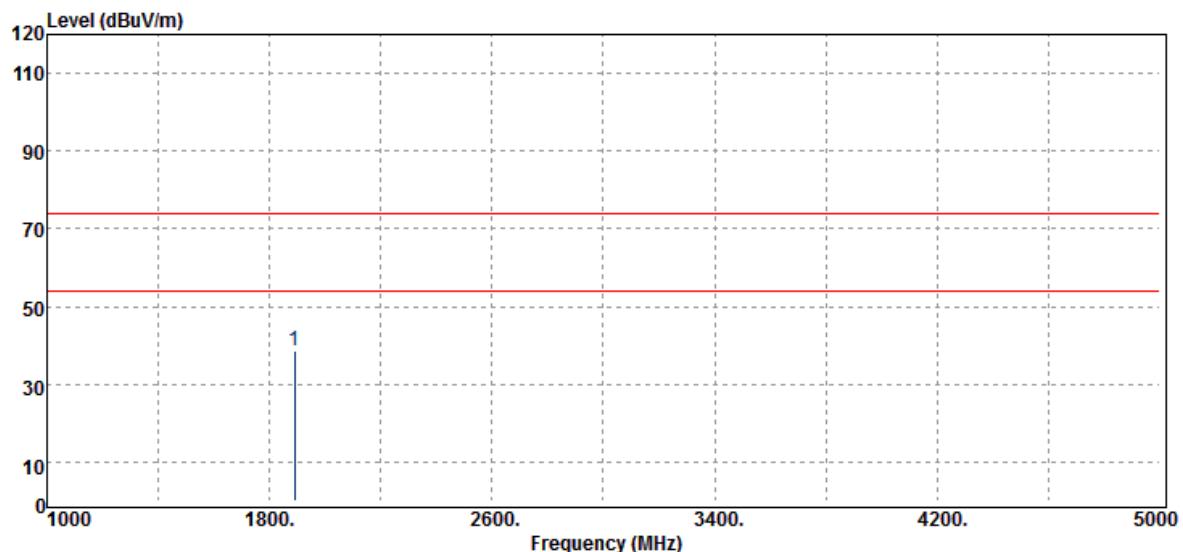

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit @3m (dBuV/m)	Margin (dB)
1890.00	Peak	44.18	-5.61	38.57	74.00	-35.43
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

## 4.5 OPERATION RESTRICTION

### 4.5.1 Test Limit

15.231(a)(1),

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

RSS-210 A1.2,


However, devices that are designed for limited use for the purpose of initial programming, reprogramming or installing, and not for regular operations, may operate for up to 5 seconds, provided such devices are used only occasionally in connection with each unit being programmed or installed.

### 4.5.2 Test Procedure

Test method Refer as ANSI 63.10:2013 clause 7.4

The Loop antenna connected to the spectrum analyzer, was touching to the transmitter antenna. Set the RBW=1MHz, VBW=1MHz, Detector = Peak, Trace mode = Max hold, Sweep = 1s. Measure


### 4.5.3 Test Setup

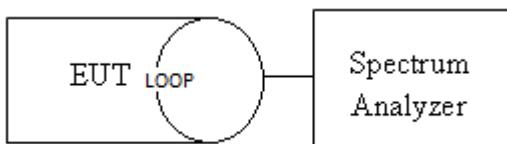

### 4.5.4 Test Result

Dwell Time			
Operation condition	Pulse On Time (ms)	Limits	Result
manually operated	186.96ms	5 sec	PASS

## Test Data

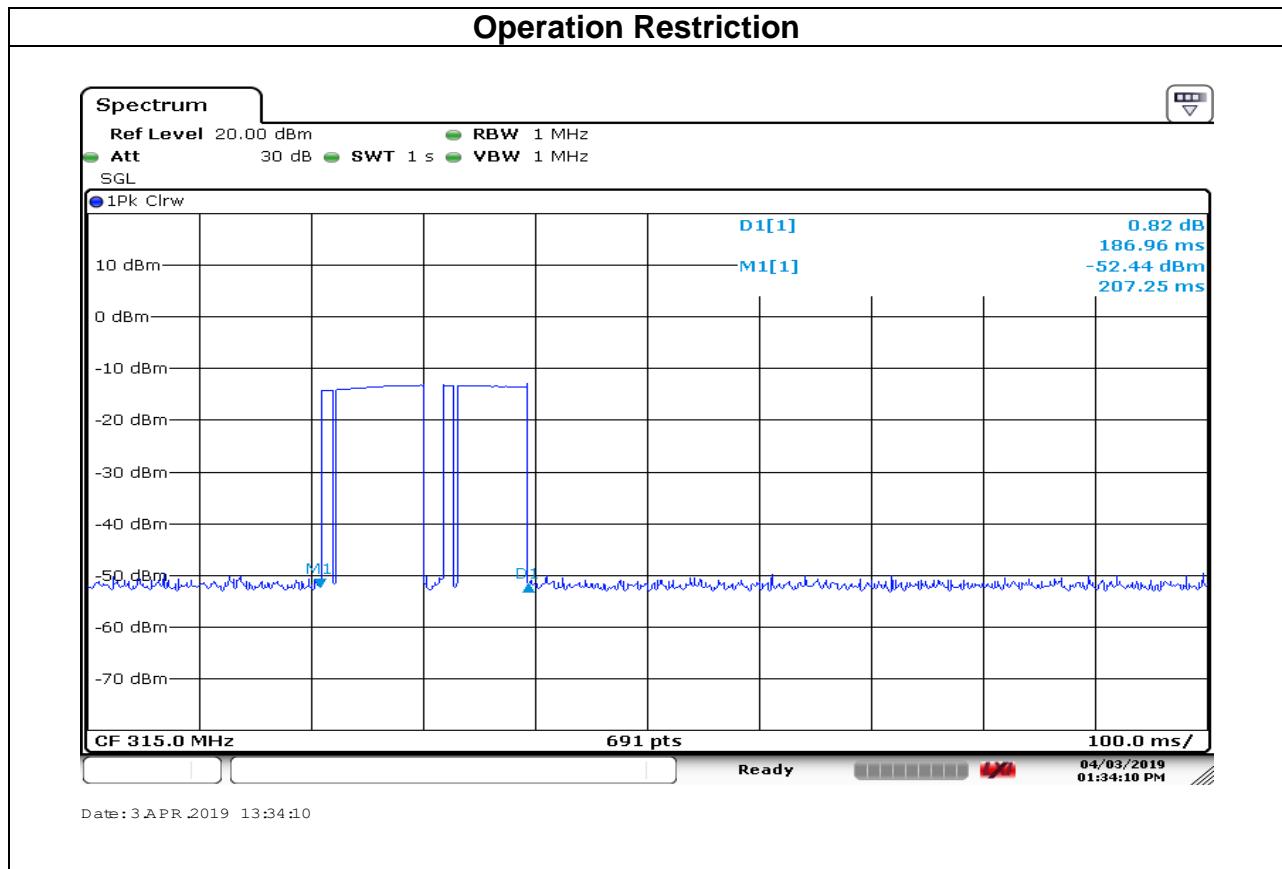

- End of Test Report -