

SHEN ZHEN ZHIKE COMMUNICATION CO.,LTD

GSM Mobile Phone

Main Model: i5180

Serial Model: i5180 Pro

August 07, 2012

Report No.: 12070154-FCC-E

(This report supersedes NONE)



Modifications made to the product : None

This Test Report is Issued Under the Authority of:

Chris Bi Compliance Engineer	Alex Liu Technical Manager	

This test report may be reproduced in full only.
Test result presented in this test report is applicable to the representative sample only.

EMC Test Report

To: FCC Part 15 Subpart B Class B; 2012, ANSI C63.4; 2009

SIEMIC, INC.
Accessing global markets

**SIEMIC, INC.**

Title: EMC Test Report for GSM Mobile Phone
Main Model: i5180
Serial Model: i5180 Pro
To: FCC Part 15 Subpart B Class B: 2012, ANSI C63.4: 2009

Report No: 12070154-FCC-E
Issue Date: August 07, 2012
Page: 2 of 27
www.siemic.com.cn

Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management through out a project. Our extensive experience with China, Asia Pacific, North America, European, and international compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Accreditation Body	Scope
USA	FCC, A2LA	EMC , RF/Wireless , Telecom
Canada	IC, A2LA, NIST	EMC, RF/Wireless , Telecom
Taiwan	BSMI , NCC , NIST	EMC, RF, Telecom , Safety
Hong Kong	OFTA , NIST	RF/Wireless , Telecom
Australia	NATA, NIST	EMC, RF, Telecom , Safety
Korea	KCC/RRA, NIST	EMI, EMS, RF , Telecom, Safety
Japan	VCCI, JATE, TELEC, RFT	EMI, RF/Wireless, Telecom
Mexico	NOM, COFETEL, Caniety	Safety, EMC , RF/Wireless, Telecom
Europe	A2LA, NIST	EMC, RF, Telecom , Safety

Accreditations for Product Certifications

Country/Region	Accreditation Body	Scope
USA	FCC TCB, NIST	EMC , RF , Telecom
Canada	IC FCB , NIST	EMC , RF , Telecom
Singapore	iDA, NIST	EMC , RF , Telecom
EU	NB	EMC & R&TTE Directive
Japan	MIC, (RCB 208)	RF , Telecom
Hong Kong	OFTA (US002)	RF , Telecom



SIEMIC, INC.

Accessing global markets

Title: EMC Test Report for GSM Mobile Phone

Main Model: i5180

Serial Model: i5180 Pro

To: FCC Part 15 Subpart B Class B: 2012, ANSI C63.4: 2009

Report No: 12070154-FCC-E

Issue Date: August 07, 2012

Page: 3 of 27

www.siemic.com.cn

This page has been left blank intentionally.



CONTENTS

1	EXECUTIVE SUMMARY & EUT INFORMATION	5
2	TECHNICAL DETAILS	6
3	MODIFICATION	7
4	TEST SUMMARY	8
5	MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	9
ANNEX A.	TEST INSTRUMENT & METHOD	15
ANNEX B.	EUT AND TEST SETUP PHOTOGRAPHS	20
ANNEX C.	TEST SETUP AND SUPPORTING EQUIPMENT	21
ANNEX D.	USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PART LIST	25
ANNEX E.	DECLARATION OF SIMILARITY	26

**SIEMIC, INC.**

Title: EMC Test Report for GSM Mobile Phone
Main Model: i5180
Serial Model: i5180 Pro
To: FCC Part 15 Subpart B Class B: 2012, ANSI C63.4: 2009

Report No: 12070154-FCC-E
Issue Date: August 07, 2012
Page: 5 of 27
www.siemic.com.cn

1 EXECUTIVE SUMMARY & EUT INFORMATION

The purpose of this test programme was to demonstrate compliance of the SHEN ZHEN ZHIKE COMMUNICATION CO.,LTD, GSM Mobile Phone and model: i5180 against the current Stipulated Standards. The GSM Mobile Phone has demonstrated compliance with the FCC Part 15 Subpart B Class B: 2012, ANSI C63.4: 2009.

EUT Information

EUT Description : **GSM Mobile Phone**

Main Model : **i5180**

Serial Model : **i5180 Pro**

Travel Charger

Model: TC-01

Input: AC 100-240V 50/60Hz 150mA

Output: DC 5.0V 500mA

Input Power : **Li-ion Battery**

Model: BL-4D 1200mAh

Restrictive Voltage: 4.2V

Charging Voltage: 3.7V

Classification Per Stipulated Test Standard : **Class B Emission Product Per FCC Part 15 Subpart B Class B: 2012, ANSI C63.4: 2009**

Revision Number	Report Number	Description of Revision	Date of Revision	Model
0	11070196-FCC-15B	Original Report	January 13, 2012	i5 Pro
1	12070154-FCC-E	Amended Report	August 07, 2012	i5180

Note1: This is the amended report application (12070154-FCC-E) of the device, the original submission (11070196-FCC-15B) was granted on January 13, 2012. The difference between the original device and the current one was as following the detail information:

The difference of these two models is for different color and antenna of GSM.

All above were explained in the attached Declaration Letter. And based on the letter the difference between them will not affect any test items, so in this report we revised the EUT photos.

Note2: in this report, we test the model i5180, the model i5180 has the same electrical as i5180 Pro, the difference of these two models is for different logo and color.

**SIEMIC, INC.**

Accessing global markets

Title: EMC Test Report for GSM Mobile Phone
Main Model: i5180
Serial Model: i5180 Pro
To: FCC Part 15 Subpart B Class B: 2012, ANSI C63.4: 2009

Report No: 12070154-FCC-E
Issue Date: August 07, 2012
Page: 6 of 27
www.siemic.com.cn

2 TECHNICAL DETAILS

Purpose	Compliance testing of GSM Mobile Phone with stipulated standard
Applicant / Client	SHEN ZHEN ZHIKE COMMUNICATION CO.,LTD 1805,Tower A , Phase I, Tianan High-Tech Plaza, Futian District, Shenzhen China
Manufacturer	SHENZHEN GSTAR TELECOMMUNICATION CO., LTD ROOM 501, NO.88 PAIBANG XINGWANG ROAD, SILIAN COMMUNITY, HENGGANG STREET, LONGGANG DISTRICT, SHENZHEN, P. R. CHINA
Laboratory performing the tests	SIEMIC Nanjing (China) Laboratories NO.2-1,Longcang Dadao, Yuhua Economic Development Zone, Nanjing, China Tel:+86(25)86730128/86730129 Fax:+86(25)86730127 Email:info@siemic.com
Test report reference number	12070154-FCC-E
Date EUT received	January 06, 2012
Standard applied	FCC Part 15 Subpart B Class B: 2012, ANSI C63.4: 2009
Dates of test	N/A
No of Units	#1
Equipment Category	Class B Emission Product
Trade Name	 iPro i love Pro...
RF Operating Frequency (ies)	GSM850 TX : 824.2 ~ 848.8 MHz; RX : 869.2 ~ 893.8 MHz PCS1900 TX : 1850.2 ~ 1909.8 MHz; RX : 1930.2 ~ 1989.8 MHz Bluetooth: 2402-2480MHz
Number of Channels	300CH (PCS1900) and 125CH (GSM850) Bluetooth: 79 CH
Modulation	GSM / GPRS: GMSK Bluetooth: GFSK
FCC ID	AODIPROI5180



SIEMIC, INC.

Accessing global markets

Title: EMC Test Report for GSM Mobile Phone

Main Model: i5180

Serial Model: i5180 Pro

To: FCC Part 15 Subpart B Class B: 2012, ANSI C63.4: 2009

Report No: 12070154-FCC-E

Issue Date: August 07, 2012

Page: 7 of 27

www.siemic.com.cn

3 MODIFICATION

NONE

**SIEMIC, INC.**

Accessing global markets

Title: EMC Test Report for GSM Mobile Phone
Main Model: i5180
Serial Model: i5180 Pro
To: FCC Part 15 Subpart B Class B: 2012, ANSI C63.4: 2009

Report No: 12070154-FCC-E
Issue Date: August 07, 2012
Page: 8 of 27
www.siemic.com.cn

4 TEST SUMMARY

The product was tested in accordance with the following specifications.
All testing has been performed according to below product classification:

Class B Emission Product

Test Results Summary

Emissions			
Test Standard	Description	Product Class	Pass / Fail
FCC Part 15 Subpart B Class B: 2012, ANSI C63.4: 2009	AC Line Conducted Emissions	See Above	Pass
FCC Part 15 Subpart B Class B: 2012, ANSI C63.4: 2009	Radiated Emissions	See Above	Pass

All measurement uncertainty is not taken into consideration for all presented test result.

**SIEMIC, INC.**

Accessing global markets

Title: EMC Test Report for GSM Mobile Phone
Main Model: i5180
Serial Model: i5180 Pro
To: FCC Part 15 Subpart B Class B: 2012, ANSI C63.4: 2009

Report No: 12070154-FCC-E
Issue Date: August 07, 2012
Page: 9 of 27
www.siemic.com.cn

5 MEASUREMENTS, EXAMINATION AND DERIVED RESULTS

5.1 AC Line Conducted Emissions Test Result

Note:

1. All possible modes of operation were investigated. Only the 6 worst case emissions measured, using the correct CISPR and Average detectors, are reported. All other emissions were relatively insignificant.
2. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
3. Conducted Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 9kHz – 30MHz (Average & Quasi-peak) is ± 3.86 dB.
4. Environmental Conditions Temperature 16°C
 Relative Humidity 50%
 Atmospheric Pressure 1009mbar
5. Test date : N/A
Tested By : Chris Bi

Test Result: Pass

The following result is referenced from 11070196-FCC-15B, FCC ID: AODZKTXIPROI5.

**SIEMIC, INC.**

Accessing global markets

Title: EMC Test Report for GSM Mobile Phone

Main Model: i5180

Serial Model: i5180 Pro


To: FCC Part 15 Subpart B Class B: 2012, ANSI C63.4: 2009

Report No: 12070154-FCC-E

Issue Date: August 07, 2012

Page: 10 of 27

www.siemic.com.cn

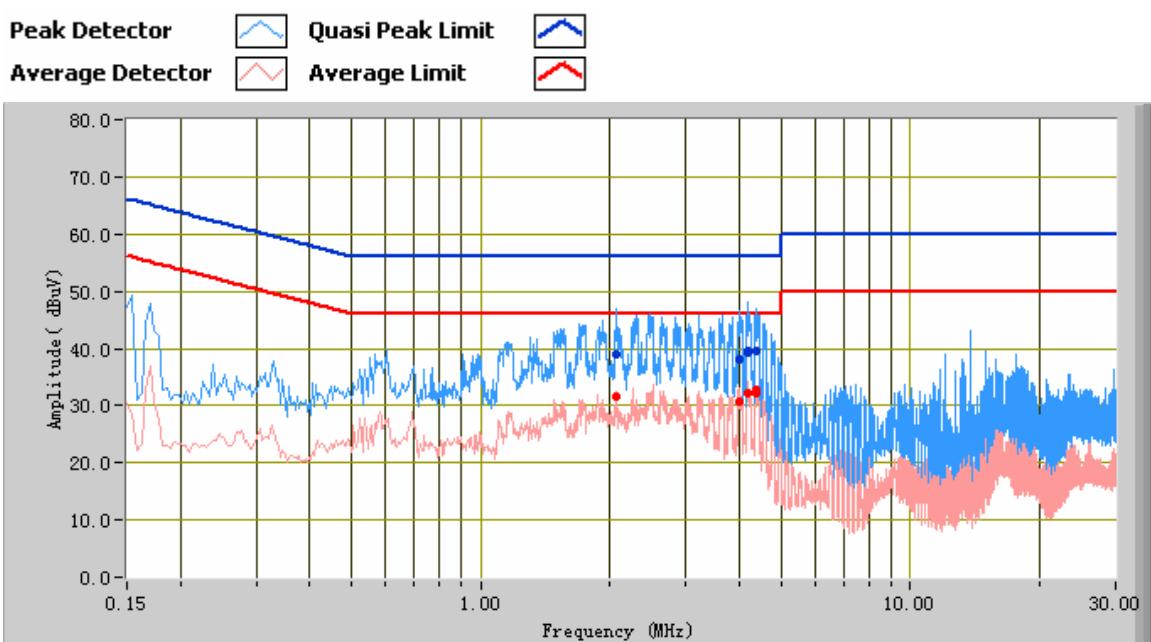Test Mode:**Charging & Downloading****Test Data****Phase Line Plot at 120Vac, 60Hz**

Frequency (MHz)	Quasi Peak (dB μ V)	Limit (dB μ V)	Margin (dB)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Factors (dB)
4.19	39.48	56.00	-16.52	32.29	46.00	-13.71	10.48
2.07	39.10	56.00	-16.90	31.52	46.00	-14.48	10.20
4.36	39.53	56.00	-16.47	32.68	46.00	-13.32	10.45
4.38	39.45	56.00	-16.55	32.29	46.00	-13.71	10.44
4.17	39.18	56.00	-16.82	32.08	46.00	-13.92	10.48
4.00	37.98	56.00	-18.02	30.79	46.00	-15.21	10.51

**SIEMIC, INC.**

Accessing global markets

Title: EMC Test Report for GSM Mobile Phone

Main Model: i5180

Serial Model: i5180 Pro


To: FCC Part 15 Subpart B Class B: 2012, ANSI C63.4: 2009

Report No: 12070154-FCC-E

Issue Date: August 07, 2012

Page: 11 of 27

www.siemic.com.cn

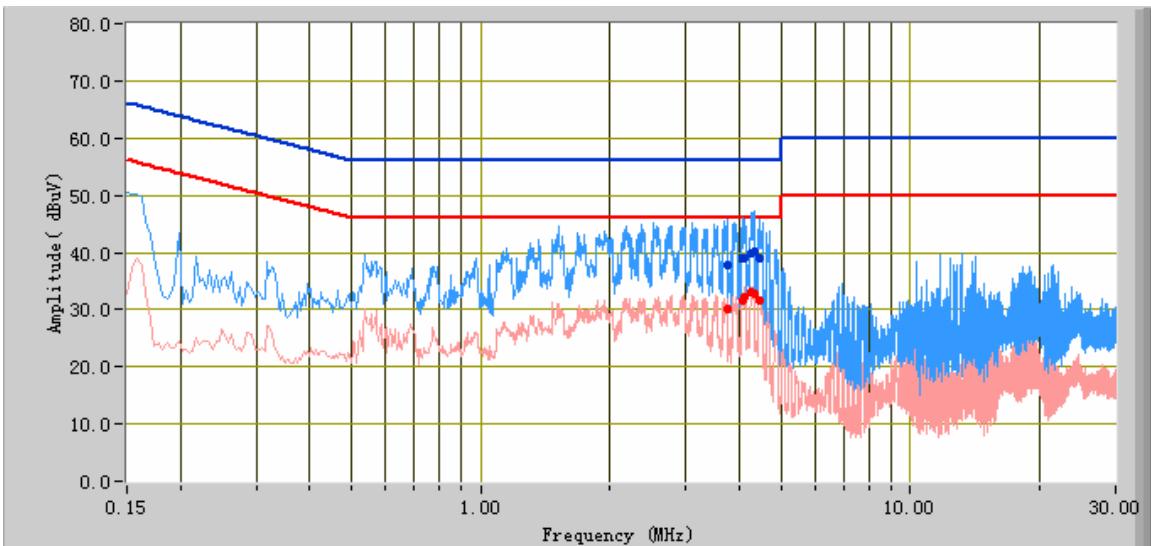Test Mode:**Charging & Downloading****Peak Detector****Quasi Peak Limit****Average Detector****Average Limit****Test Data****Phase Neutral Plot at 120Vac, 60Hz**

Frequency (MHz)	Quasi Peak (dBμV)	Limit (dBμV)	Margin (dB)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Factors (dB)
4.31	40.25	56.00	-15.75	32.90	46.00	-13.10	10.45
4.25	39.96	56.00	-16.04	32.93	46.00	-13.07	10.46
4.05	38.84	56.00	-17.16	31.72	46.00	-14.28	10.50
4.47	38.85	56.00	-17.15	31.68	46.00	-14.32	10.43
4.09	39.03	56.00	-16.97	32.19	46.00	-13.81	10.49
3.74	37.79	56.00	-18.21	29.98	46.00	-16.02	10.43

5.2 Radiated Emissions Test Result

Note:


Test Result: Pass

The following result is referenced from 11070196-FCC-15B, FCC ID: AODZKTXIPROI5.

**SIEMIC, INC.**

Title: EMC Test Report for GSM Mobile Phone
Main Model: i5180
Serial Model: i5180 Pro
To: FCC Part 15 Subpart B Class B: 2012, ANSI C63.4: 2009

Report No: 12070154-FCC-E
Issue Date: August 07, 2012
Page: 13 of 27
www.siemic.com.cn

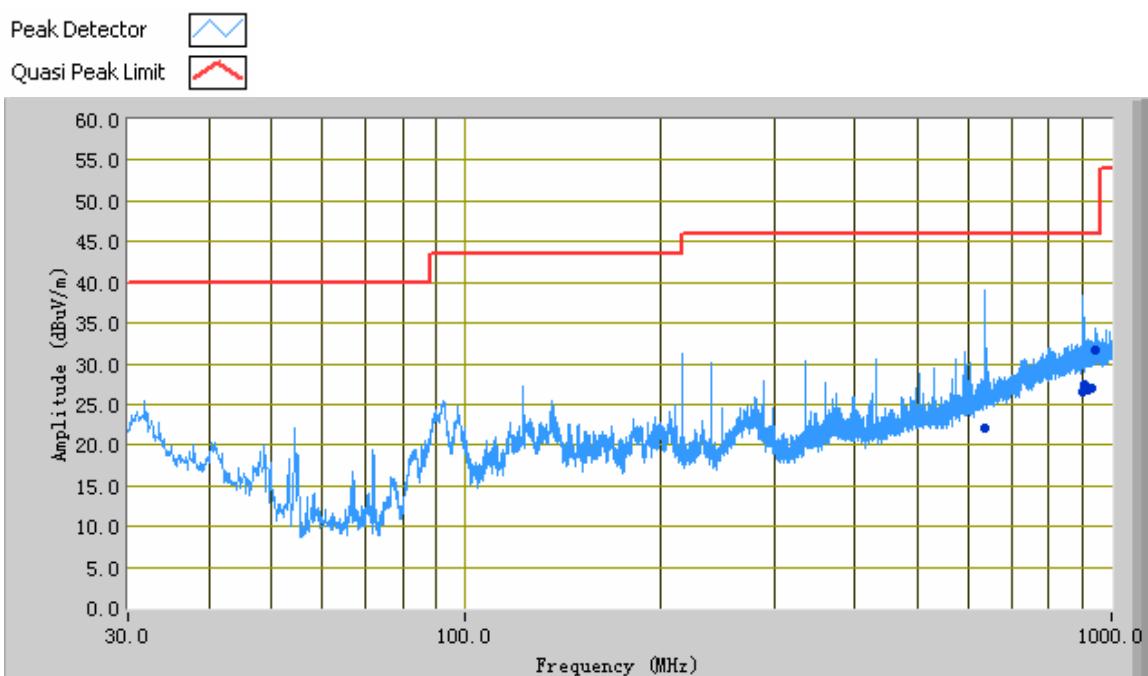
Test Mode:**Charging & Downloading***Below 1GHz***Test Data****Vertical Polarity Plot @3m**

Frequency (MHz)	Quasi Peak (dB μ V/m)	Azimuth	Polarity (H/V)	Height (cm)	Factors (dB)	Limit (dB μ V/m)	Margin (dB)
638.39	22.14	10.00	V	360.00	-21.08	46.00	-23.86
900.37	26.64	218.00	V	241.00	-15.13	46.00	-19.36
904.92	27.40	209.00	V	274.00	-15.16	46.00	-18.60
945.27	31.77	171.00	V	100.00	-15.50	46.00	-14.23
916.97	26.73	75.00	V	328.00	-15.25	46.00	-19.27
932.17	26.98	19.00	V	100.00	-15.47	46.00	-19.02

**SIEMIC, INC.**

Title: EMC Test Report for GSM Mobile Phone
Main Model: i5180
Serial Model: i5180 Pro
To: FCC Part 15 Subpart B Class B: 2012, ANSI C63.4: 2009

Report No: 12070154-FCC-E
Issue Date: August 07, 2012
Page: 14 of 27
www.siemic.com.cn

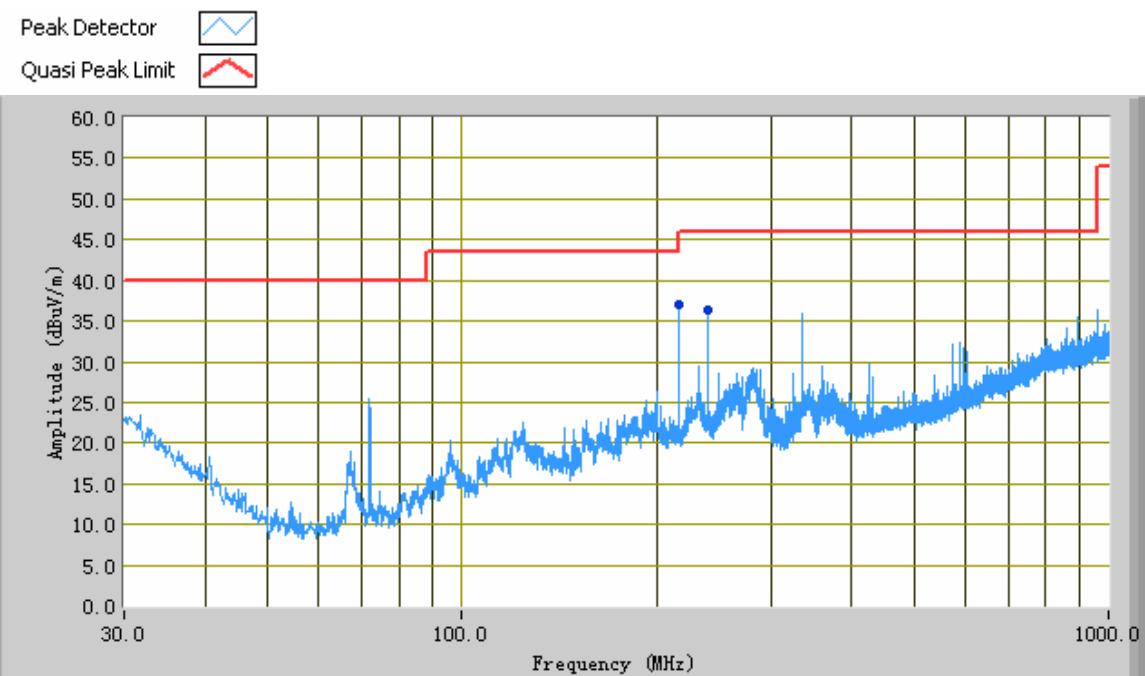Test Mode: Charging & Downloading***Below 1GHz******Test Data*****Horizontal Polarity Plot @3m**

Frequency (MHz)	Quasi Peak (dB μ V/m)	Azimuth	Polarity (H/V)	Height (cm)	Factors (dB)	Limit (dB μ V/m)	Margin (dB)
216.43	37.12	229.00	H	116.00	-32.08	46.00	-8.88
240.00	36.32	302.00	H	120.00	-31.52	46.00	-9.68

Note: The data above 1 GHz which below 20 dB to the limit was not recorded.

**SIEMIC, INC.**

Accessing global markets

Title: EMC Test Report for GSM Mobile Phone
Main Model: i5180
Serial Model: i5180 Pro
To: FCC Part 15 Subpart B Class B: 2012, ANSI C63.4: 2009

Report No: 12070154-FCC-E
Issue Date: August 07, 2012
Page: 15 of 27
www.siemic.com.cn

Annex A. TEST INSTRUMENT & METHOD

Annex A.i. TEST INSTRUMENTATION & GENERAL PROCEDURES

Instrument	Model	Calibration Date	Calibration Due Date
AC Line Conducted Emissions			
R&S EMI Test Receiver	ESPI3	08/26/2011	08/25/2012
Com-Power LISN	LI-115	05/26/2011	05/25/2012
Com-Power Transient Limiter	LIT-153	05/26/2011	05/25/2012
Radiated Emissions			
Hp Spectrum Analyzer	8563E	01/11/2011	01/10/2012
R&S EMI Receiver	ESPI3	08/26/2011	08/25/2012
Antenna (30MHz~2GHz)	JB1	10/04/2011	10/03/2012
ETS-Lindgren Antenna(1 ~18GHz)	3115	10/04/2011	10/03/2012
A-INFOMW Antenna(1 ~18GHz)	JXTXLB-10180	06/25/2011	06/24/2012
Horn Antenna (18~40GHz)	AH-840	07/23/2011	07/22/2012
Microwave Pre-Amp (18~40GHz)	PA-840	Every 2000 Hours	
Hp Agilent Pre-Amplifier	8447F	05/26/2011	05/25/2012
MITEQ Pre-Amplifier(1 ~ 18GHz)	AMF-7D-00101800-30-10P	05/26/2011	05/25/2012
Chamber	3m	04/14/2011	04/13/2012

**SIEMIC, INC.**


Title: EMC Test Report for GSM Mobile Phone
Main Model: i5180
Serial Model: i5180 Pro
To: FCC Part 15 Subpart B Class B: 2012, ANSI C63.4: 2009

Report No: 12070154-FCC-E
Issue Date: August 07, 2012
Page: 16 of 27
www.siemic.com.cn

Annex A.ii. AC LINE CONDUCTED EMISSIONS TEST DESCRIPTION

Test Set-up

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table, as shown in Annex B.
2. The power supply for the EUT was fed through a $50\Omega/50\mu\text{H}$ EUT LISN, connected to filtered mains.
3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.
4. All other supporting equipments were powered separately from another main supply.

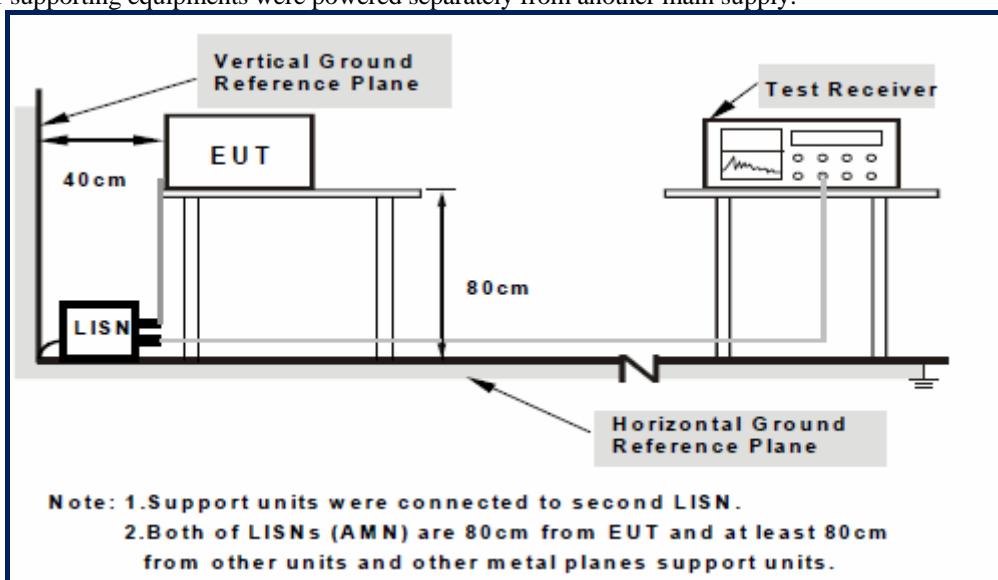

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration1

Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver.
3. High peaks, relative to the limit line, were then selected.
4. The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz. For FCC tests, only Quasi-peak measurements were made; while for CISPR/EN tests, both Quasi-peak and Average measurements were made.
5. Steps 2 to 4 were then repeated for the LIVE line (for AC mains) or DC line (for DC power).

Description of Conducted Emission Program

This EMC Measurement software run LabView automation software and offers a common user interface for electromagnetic interference (EMI) measurements. This software is a modern and powerful tool for controlling and monitoring EMI test receivers and EMC test systems. It guarantees reliable collection, evaluation, and documentation of measurement results. Basically, this program will run a pre-scan measurement before it proceeds with the final measurement. The pre-scan routine will run the common scan range from 150 kHz to 30 MHz; the program will first start a peak and average scan on selectable measurement time and step size. After the program complete the pre-scan, this program will perform the Quasi Peak and Average measurement, based on the pre-scan peak data reduction result.



Sample Calculation Example

At 20 MHz

limit = 250 μ V = 47.96 dB μ V

Transducer factor of LISN, pulse limiter & cable loss at 20 MHz = 11.20 dB

Q-P reading obtained directly from EMI Receiver = 40.00 dB μ V
(Calibrated for system losses)

Therefore, Q-P margin = $47.96 - 40.00 = 7.96$ i.e. **7.96 dB below limit**

**SIEMIC, INC.**

Title: EMC Test Report for GSM Mobile Phone
Main Model: i5180
Serial Model: i5180 Pro
To: FCC Part 15 Subpart B Class B: 2012, ANSI C63.4: 2009

Report No: 12070154-FCC-E
Issue Date: August 07, 2012
Page: 18 of 27
www.siemic.com.cn

Annex A.iii. RADIATED EMISSIONS TEST DESCRIPTION


EUT Characterisation

EUT characterisation, over the frequency range from 30MHz to 10th Harmonic, was done in order to minimise radiated emissions testing time while still maintaining high confidence in the test results.

The EUT was placed in the chamber, at a height of about 0.8m on a turntable. Its radiated emissions frequency profile was observed, using a spectrum analyzer / receiver with the appropriate broadband antenna placed 3m away from the EUT. Radiated emissions from the EUT were maximised by rotating the turntable manually, changing the antenna polarisation and manipulating the EUT cables while observing the frequency profile on the spectrum analyzer / receiver. Frequency points at which maximum emissions occurred, clock frequencies and operating frequencies were then noted for the formal radiated emissions test at the Open Area Test Site (OATS) or 3m EMC chamber.

Test Set-up

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m X 1.0m X 0.8m high, non-metallic table.
2. The filtered power supply for the EUT and supporting equipment were tapped from the appropriate power sockets located on the turntable.
3. The relevant broadband antenna was set at the required test distance away from the EUT and supporting equipment boundary.

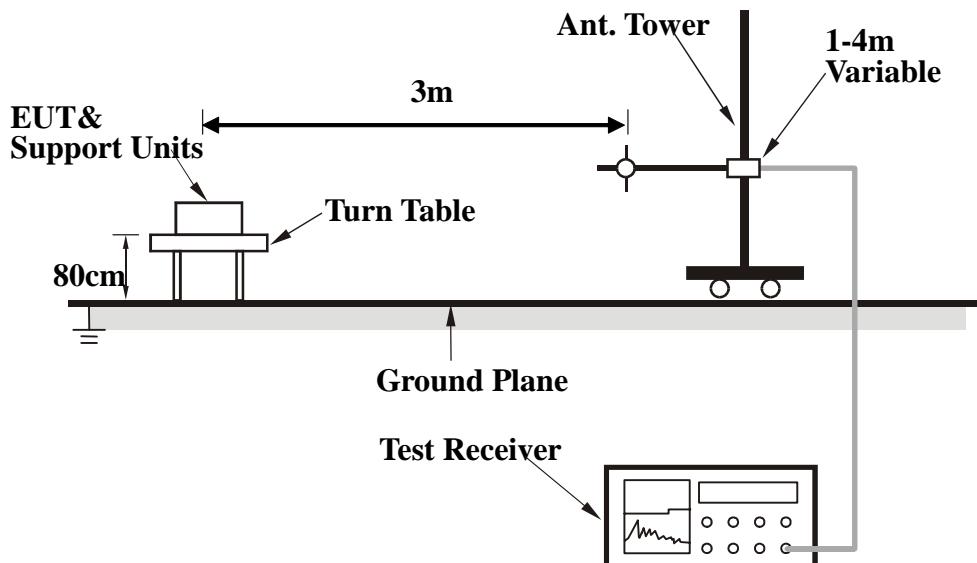

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration2

Test Method

The following procedure was performed to determine the maximum emission axis of EUT:

1. With the receiving antenna is H polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
2. With the receiving antenna is V polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
3. Compare the results derived from above two steps. So, the axis of maximum emission from EUT was determined and the configuration was used to perform the final measurement.

Final Radiated Emission Measurement

1. Setup the configuration according to figure 1. Turn on EUT and make sure that it is in normal function.
2. For emission frequencies measured below 1 GHz, a pre-scan is performed in a shielded chamber to determine the accurate frequencies of higher emissions will be checked on a open test site. As the same purpose, for emission frequencies measured above 1 GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
3. For emission frequencies measured below and above 1 GHz, set the spectrum analyzer on a 100 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0° to 360° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading.
5. Repeat step 4 until all frequencies need to be measured was complete.
6. Repeat step 5 with search antenna in vertical polarized orientations.

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	Peak	100 kHz	100 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Sample Calculation Example

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. For the limit is employed average value, therefore the peak value can be transferred to average value by subtracting the duty factor. The basic equation with a sample calculation is as follows:

$$\text{Peak} = \text{Reading} + \text{Corrected Factor}$$

where

$$\text{Corr. Factor} = \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain (if any)}$$

And the average value is

$$\text{Average} = \text{Peak Value} + \text{Duty Factor or}$$

$$\text{Set RBW} = 1 \text{ MHz}, \text{VBW} = 10 \text{ Hz}.$$

Note:

If the measured frequencies are fall in the restricted frequency band, the limit employed must be quasi peak value when frequencies are below or equal to 1 GHz. And the measuring instrument is set to quasi peak detector function.

Radiated emission test facilities for frequencies above 1 GHz

(ANSI C63.4-2009 Chapter 5.5)

Currently, test site reference validation requirements above 1 GHz have not been established. However, facilities suitable for measurements in the frequency range 30 MHz to 1000 MHz are considered suitable for the frequency range 1 GHz to 40 GHz with RF absorbing material covering the ground plane such that the site validation criterion called out in CISPR 16-1-4:2007 is met, or alternatively covering a minimum area of 2.4 m by 2.4 m (for a 3 m test distance) between the antenna and the EUT using RF absorbing material with a minimum-rated attenuation of 20 dB (for normal incidence) up to 18 GHz. For separation distances greater than 3 m, a proportional increase in the area of suitable absorbing material is required.



SIEMIC, INC.

Accessing global markets

Title: EMC Test Report for GSM Mobile Phone

Main Model: i5180

Serial Model: i5180 Pro

To: FCC Part 15 Subpart B Class B: 2012, ANSI C63.4: 2009

Report No: 12070154-FCC-E

Issue Date: August 07, 2012

Page: 20 of 27

www.siemic.com.cn

Annex B. EUT AND TEST SETUP PHOTOGRAPHS

Please see attachment

**SIEMIC, INC.**

Accessing global markets

Title: EMC Test Report for GSM Mobile Phone

Main Model: i5180

Serial Model: i5180 Pro

To: FCC Part 15 Subpart B Class B: 2012, ANSI C63.4: 2009

Report No: 12070154-FCC-E

Issue Date: August 07, 2012

Page: 21 of 27

www.siemic.com.cn

Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

EUT TEST CONDITIONS

Annex B. i. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Equipment Description (Including Brand Name)	Model & Serial Number	Cable Description (List Length, Type & Purpose)
Gateway Laptop	MS2288 & LXWHF02013951C3CA92200	N/A



SIEMIC, INC.

Accessing global markets

Title: EMC Test Report for GSM Mobile Phone

Main Model: i5180

Serial Model: i5180 Pro

To: FCC Part 15 Subpart B Class B: 2012, ANSI C63.4: 2009

Report No: 12070154-FCC-E


Issue Date: August 07, 2012

Page: 22 of 27

www.siemic.com.cn

Block Configuration Diagram for AC Line Conducted Emissions

Mode 1: Charging & Downloading

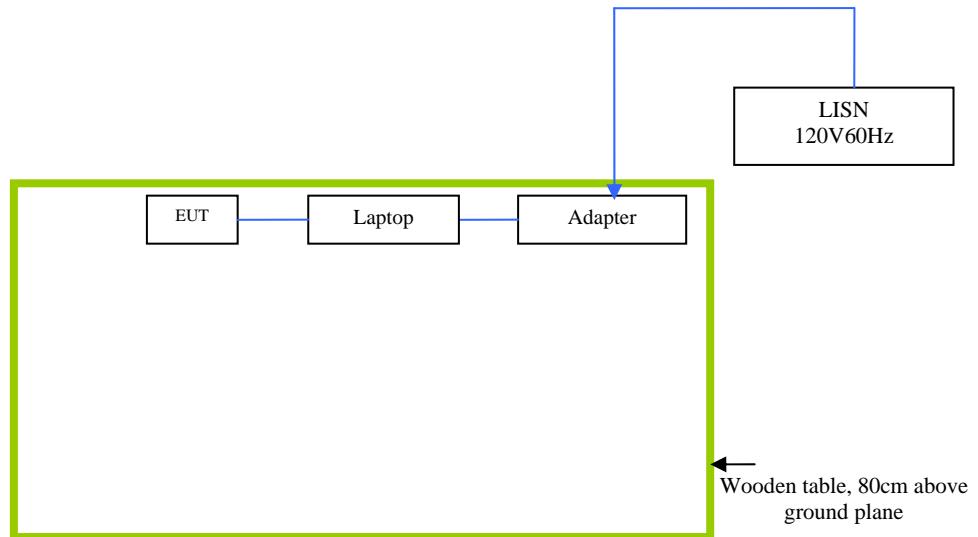



SIEMIC, INC.

Accessing global markets

Title: EMC Test Report for GSM Mobile Phone

Main Model: i5180

Serial Model: i5180 Pro

To: FCC Part 15 Subpart B Class B: 2012, ANSI C63.4: 2009

Report No: 12070154-FCC-E


Issue Date: August 07, 2012

Page: 23 of 27

www.siemic.com.cn

Block Configuration Diagram for Radiated Emissions

Mode 1: Charging & Downloading

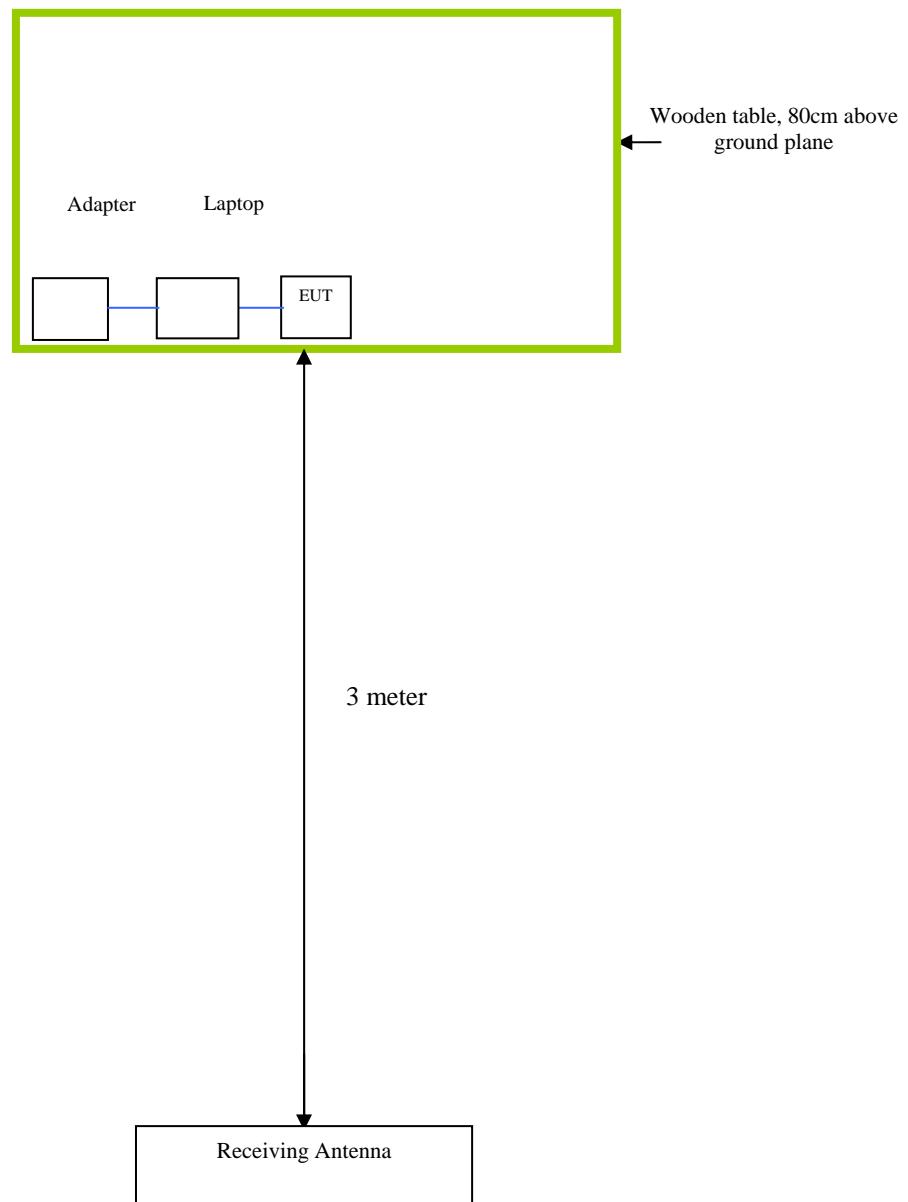

**SIEMIC, INC.**

Accessing global markets

Title: EMC Test Report for GSM Mobile Phone
Main Model: i5180
Serial Model: i5180 Pro
To: FCC Part 15 Subpart B Class B: 2012, ANSI C63.4: 2009

Report No: 12070154-FCC-E
Issue Date: August 07, 2012
Page: 24 of 27
www.siemic.com.cn

Annex C.ii. EUT OPERATING CONDITIONS

The following is the description of how the EUT is exercised during testing.

Test	Description Of Operation
Emissions Testing	Charging & Downloading



SIEMIC, INC.

Accessing global markets

Title: EMC Test Report for GSM Mobile Phone

Main Model: i5180

Serial Model: i5180 Pro

To: FCC Part 15 Subpart B Class B: 2012, ANSI C63.4: 2009

Report No: 12070154-FCC-E

Issue Date: August 07, 2012

Page: 25 of 27

www.siemic.com.cn

Annex D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PART LIST

Please see attachment



SIEMIC, INC.

Accessing global markets

Title: EMC Test Report for GSM Mobile Phone

Main Model: i5180

Serial Model: i5180 Pro

To: FCC Part 15 Subpart B Class B: 2012, ANSI C63.4: 2009

Report No: 12070154-FCC-E

Issue Date: August 07, 2012

Page: 26 of 27

www.siemic.com.cn

Annex E. DECLARATION OF SIMILARITY



To: SIEMIC, 2206 Ringwood Avenue, San Jose, C, USA


Declaration Letter

Dear Sir,

We declare that there is no electrical change has been made to the equipment that alters the compliance characteristics. The difference between model i5180 and original model i5 in the report 11070196 which was granted by SIEMIC are following:

1. Change the appearance of material;
2. Change the GSM antenna.

Thank you!



Printed name/title: sissy / Manager

Tel: 0755-83496450

Fax: 0755-83496050

Address: 1805, Tower A, Phase I, Tianan High-Tech Plaza, Futian District, Shenzhen China



SIEMIC, INC.

Accessing global markets

Title: EMC Test Report for GSM Mobile Phone

Main Model: i5180

Serial Model: i5180 Pro

To: FCC Part 15 Subpart B Class B: 2012, ANSI C63.4: 2009

Report No: 12070154-FCC-E

Issue Date: August 07, 2012

Page: 27 of 27

www.siemic.com.cn



To: SIEMIC, 2206 Ringwood Avenue, San Jose, C, USA

Declaration letter

Dear Sir,


For our business issue and marketing requirement, we would like to list 2 model numbers on the FCC certificates and reports, as following:

Model No.: i5180, i5180 Pro

We declare that there is no electrical change has been made to the equipment that alters the compliance characteristics. The difference of these two models is for different logo and color. Please kindly handle on the project.

Thank you!

Signature:



Printed name/title: sissy / Manager

Tel: 0755-83496450

Fax: 0755-83496050

Address: 1805, Tower A, Phase I, Tiaman High-Tech Plaza, Futian District, Shenzhen China