

# SHEN ZHEN ZHIKE COMMUNICATION CO.,LTD

## GSM Mobile Phone

**Main Model: F6 Pro**

**Serial Model: F6**

**17th July, 2012**

**Report No.: 12070143-FCC-R1**

(This report supersedes NONE)




**Modifications made to the product : None**

**This Test Report is Issued Under the Authority of:**

Back Huang Compliance Engineer	Alex Liu Technical Manager	

**This test report may be reproduced in full only.  
Test result presented in this test report is applicable to the representative sample only.**

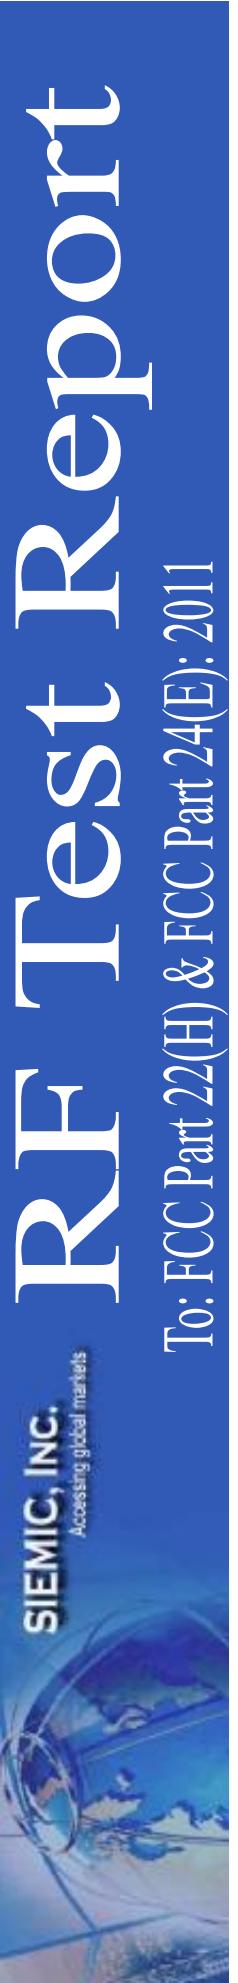

**SIEMIC, INC.**

Title: RF Test Report for GSM Mobile Phone  
 Main Model: F6 Pro  
 Serial Model: F6  
 To: FCC Part 22(H) & FCC Part 24(E): 2011

Report No: 12070143-FCC-R1  
 Issue Date: 17th July, 2012  
 Page: 2 of 37  
[www.siemic.com.cn](http://www.siemic.com.cn)

## Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to [testing](#) and [certification](#), SIEMIC provides initial design reviews and [compliance management](#) through out a project. Our extensive experience with [China](#), [Asia Pacific](#), [North America](#), [European](#), and [international](#) compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the [global markets](#).

### Accreditations for Conformity Assessment

Country/Region	Accreditation Body	Scope
USA	FCC, A2LA	EMC , RF/Wireless , Telecom
Canada	IC, A2LA, NIST	EMC, RF/Wireless , Telecom
Taiwan	BSMI , NCC , NIST	EMC, RF, Telecom , Safety
Hong Kong	OFTA , NIST	RF/Wireless , Telecom
Australia	NATA, NIST	EMC, RF, Telecom , Safety
Korea	KCC/RRA, NIST	EMI, EMS, RF , Telecom, Safety
Japan	VCCI, JATE, TELEC, RFT	EMI, RF/Wireless, Telecom
Mexico	NOM, COFETEL, Caniety	Safety, EMC , RF/Wireless, Telecom
Europe	A2LA, NIST	EMC, RF, Telecom , Safety

### Accreditations for Product Certifications

Country/Region	Accreditation Body	Scope
USA	FCC TCB, NIST	EMC , RF , Telecom
Canada	IC FCB , NIST	EMC , RF , Telecom
Singapore	iDA, NIST	EMC , RF , Telecom
EU	NB	EMC & R&TTE Directive
Japan	MIC, (RCB 208)	RF , Telecom
Hong Kong	OFTA (US002)	RF , Telecom



# SIEMIC, INC.

Accessing global markets

**Title:** RF Test Report for GSM Mobile Phone  
**Main Model:** F6 Pro  
**Serial Model:** F6  
**To:** FCC Part 22(H) & FCC Part 24(E): 2011

**Report No:** 12070143-FCC-R1  
**Issue Date:** 17th July, 2012  
**Page:** 3 of 37  
[www.siemic.com.cn](http://www.siemic.com.cn)

This page has been left blank intentionally.

## CONTENTS

<b>1. EXECUTIVE SUMMARY &amp; EUT INFORMATION</b>	<b>5</b>
<b>2. TECHNICAL DETAILS</b>	<b>6</b>
<b>3. MODIFICATION</b>	<b>7</b>
<b>4. TEST SUMMARY</b>	<b>8</b>
<b>5. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS</b>	<b>9</b>
<b>ANNEX A. TEST INSTRUMENT &amp; METHOD</b>	<b>29</b>
<b>ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS</b>	<b>32</b>
<b>ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT</b>	<b>33</b>
<b>ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PART LIST</b>	<b>36</b>
<b>ANNEX E. DECLARATION OF SIMILARITY</b>	<b>37</b>

## **1. EXECUTIVE SUMMARY & EUT INFORMATION**

**The purpose of this test programmed was to demonstrate compliance of the SHEN ZHEN ZHIKE COMMUNICATION CO.,LTD GSM Mobile Phone and model: F6 Pro against the current Stipulated Standards. The GSM Mobile Phone has demonstrated compliance with the FCC Part 22(H) & FCC Part 24(E): 2011.**

### **EUT Information**

**EUT**

**Description** : GSM Mobile Phone

**Main Model** : F6 Pro

**Serial Model** : F6

**Antenna Gain** : GSM850: 1 dBi  
PCS1900: 1 dBi  
Bluetooth: 0 dBi

**Input Power** : Li-ion Battery  
Model: BL-4S  
Voltage: 3.7 V  
Capacity: 900 mAh

**Maximum Conducted Peak Power to Antenna** : GSM850: 31.58 dBm  
PCS1900: 28.89 dBm

**Maximum Radiated ERP/EIRP** : GSM850: 29.71 dBm / ERP  
PCS1900: 27.44 dBm / EIRP

**Classification Per Stipulated Test Standard** : FCC Part 22(H) & FCC Part 24(E): 2011

## 2. TECHNICAL DETAILS

Purpose	Compliance testing of GSM Mobile Phone with stipulated standard
Applicant / Client	SHEN ZHEN ZHIKE COMMUNICATION CO.,LTD 1805,Tower A , Phase I, Tianan High-Tech Plaza, Futian District, Shenzhen China
Manufacturer	SHENZHEN GSTAR TELECOMMUNICATION CO., LTD ROOM 501, NO.88 PAIBANG XINGWANG ROAD, SILIAN COMMUNITY, HENGGANG STREET, LONGGANG DISTRICT, SHENZHEN, P. R. CHINA
Laboratory performing the tests	SIEMIC Nanjing (China) Laboratories NO.2-1,Longcang Dadao, Yuhua Economic Development Zone, Nanjing, China Tel:+86(25)86730128/86730129 Fax:+86(25)86730127 Email: <a href="mailto:info@siemic.com">info@siemic.com</a>
Test report reference number	12070143-FCC-R1
Date EUT received	2nd July, 2012
Standard applied	FCC Part 22(H) & FCC Part 24(E): 2011
Dates of test	9th July, 2012 to 11th July, 2012
No of Units	#1
Equipment Category	PCE
Trade Name	 iPro Have Pro...
RF Operating Frequency (ies)	GSM850 TX : 824.2 ~ 848.8 MHz; RX : 869.2 ~ 893.8 MHz PCS1900 TX : 1850.2 ~ 1909.8 MHz; RX : 1930.2 ~ 1989.8 MHz Bluetooth : 2402-2480 MHz
Number of Channels	299CH (PCS1900) and 124CH (GSM850) Bluetooth: 79CH
Modulation	GSM / GPRS: GMSK Bluetooth: GFSK
GPRS Multi-slot class	8/10
FCC ID	AODZKTXIPROF6

### **3. MODIFICATION**

**NONE**

## 4. TEST SUMMARY

The product was tested in accordance with the following specifications.  
 All testing has been performed according to below product classification:

### PCE

#### Test Results Summary

Test Standard	Description	Product Class	Pass / Fail
§ 1.1307, § 2.1093	RF Exposure (SAR)	See Above	Pass
§ 2.1046; § 22.913 (a); § 24.232 (c)	RF Output Power	See Above	Pass
§ 2.1047	Modulation Characteristics	See Above	N/A
§ 2.1049; § 22.905 § 22.917; § 24.238	99% & -26 dB Occupied Bandwidth	See Above	Pass
§ 2.1051, § 22.917 (a); § 24.238 (a)	Spurious Emissions at Antenna Terminal	See Above	Pass
§ 2.1053 § 22.917 (a); § 24.238 (a)	Field Strength of Spurious Radiation	See Above	Pass
§ 22.917 (a); § 24.238 (a)	Out of band emission, Band Edge	See Above	Pass
§ 2.1055 § 22.355; § 24.235	Frequency stability vs. temperature Frequency stability vs. voltage	See Above	Pass

*Note: Testing was performed by configuring EUT to maximum output power status, the declared output power class for different.*

## **5. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS**

### **5.1 §1.1307, §2.1093- RF Exposure (SAR)**

#### **Test Result: Pass**

The EUT is a portable device, thus requires SAR evaluation;  
please refer to SIEMIC SAR Report: 12070143-H

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for GSM Mobile Phone  
Main Model: F6 Pro  
Serial Model: F6  
To: FCC Part 22(H) & FCC Part 24(E): 2011

Report No: 12070143-FCC-R1  
Issue Date: 17th July, 2012  
Page: 10 of 37  
www.siemic.com.cn

## **5.2 §2.1046 ; §22.913 (a); §24.232 (c)- RF Output Power**

1. Conducted Measurement  
EUT was set for low, mid, high channel with modulated mode and highest RF output power.  
The spectrum analyzer was connected to the antenna terminal.
2. Conducted Emissions Measurement Uncertainty  
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is  $\pm 1.5$ dB.
3. Environmental Conditions  

Temperature	25°C
Relative Humidity	50%
Atmospheric Pressure	1017mbar
4. Test date : 9th July , 2012  
Tested By : Back Huang

### **Procedures:**

#### **For Conducted Power:**

1. The transmitter output port was connected to base station.
2. Set EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different test mode.

#### **For ERP/EIRP:**

1. The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB =  $10 \lg (\text{TXpwr in Watts}/0.001)$  – the absolute level

Spurious attenuation limit in dB =  $43 + 10 \log_{10} (\text{power out in Watts})$

### **Test Result: Pass**

**Remark:** Conducted Burst Average power for reporting purposes only



## Conducted Power

Burst Average Power (dBm)								
Band	GSM850				GSM1900			
Channel	128	190	251	Tune up Power tolerant	512	661	810	Tune up Power tolerant
Frequency (MHz)	824.2	836.6	848.8	/	1850.2	1880	1909.8	/
GSM Voice (1 uplink)	<b>31.58</b>	31.45	31.35	31.5±1	28.54	28.78	<b>28.89</b>	28.5±1
GPRS Multi-Slot Class 8 (1 uplink)	31.48	31.37	31.26	31.5±1	28.46	28.73	28.83	28.5±1
GPRS Multi-Slot Class 10 (2 uplink)	31.41	31.27	31.14	31.5±1	28.22	28.33	28.43	28.5±1
GPRS Multi-Slot Class 12 (4 uplink)	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

Remark :  
 GPRS, CS1 coding scheme.  
 Multi-Slot Class 8 , Support Max 4 downlink, 1 uplink , 5 working link  
 Multi-Slot Class 10 , Support Max 4 downlink, 2 uplink , 5 working link  
 Multi-Slot Class 12 , Support Max 4 downlink, 4 uplink , 5 working link

Note: Since GSM mode has higher power, so the test items below were not performed to GPRS mode.

## ERP & EIRP (worst case)

### ERP for Cellular Band (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Factors (dB)	Absolute Level (dBm)	Limit (dBm)
824.20	30.33	V	-1.20	29.13	38.45
824.20	30.91	H	-1.20	<b>29.71</b>	38.45
836.60	30.27	V	-1.20	29.07	38.45
836.60	30.75	H	-1.20	29.55	38.45
848.80	30.16	V	-1.20	28.96	38.45
848.80	30.63	H	-1.20	29.43	38.45

### EIRP for PCS Band (Part 24E)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Factors (dB)	Absolute Level (dBm)	Limit (dBm)
1850.20	20.76	V	6.30	27.06	33.00
1850.20	20.81	H	6.30	27.11	33.00
1880.00	20.99	V	6.30	27.29	33.00
1880.00	21.01	H	6.30	27.31	33.00
1909.80	21.05	V	6.30	27.35	33.00
1909.80	21.14	H	6.30	<b>27.44</b>	33.00

Note: Factors= Antenna Gain Correction-Cable Loss



**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for GSM Mobile Phone  
Main Model: F6 Pro  
Serial Model: F6  
To: FCC Part 22(H) & FCC Part 24(E); 2011

Report No: 12070143-FCC-R1  
Issue Date: 17th July, 2012  
Page: 12 of 37  
[www.siemic.com.cn](http://www.siemic.com.cn)

## **5.3 §2.1047 - Modulation Characteristic**

According to FCC § 2.1047(d), Part 22H & 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

## **5.4 §2.1049, §22.917, §22.905 & §24.238 - Occupied Bandwidth**

### 1. Conducted Measurement

EUT was set for low, mid, high channel with modulated mode and highest RF output power. The spectrum analyser was connected to the antenna terminal.

2.	Environmental Conditions	Temperature	25°C
		Relative Humidity	50%
		Atmospheric Pressure	1020mbar

### 3. Conducted Emissions Measurement Uncertainty

All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is  $\pm 1.5$ dB.

4. Test date : 10th July , 2012

Tested By : Back Huang

### **Procedures:**

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The 99% and 26 dB occupied bandwidth (BW) of the middle channel for the highest RF powers.

### **Test Results: Pass**

#### Cellular Band (Part 22H)



Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
128	824.2	242.8982	318.898
190	836.6	244.4232	317.255
251	848.8	243.0996	315.911

#### PCS Band (Part 24E)


Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
512	1850.2	248.0170	318.825
661	1880.0	249.2864	320.904
810	1909.8	244.9788	317.405

Please refer to the following plots.

## Cellular Band (Part 22H)

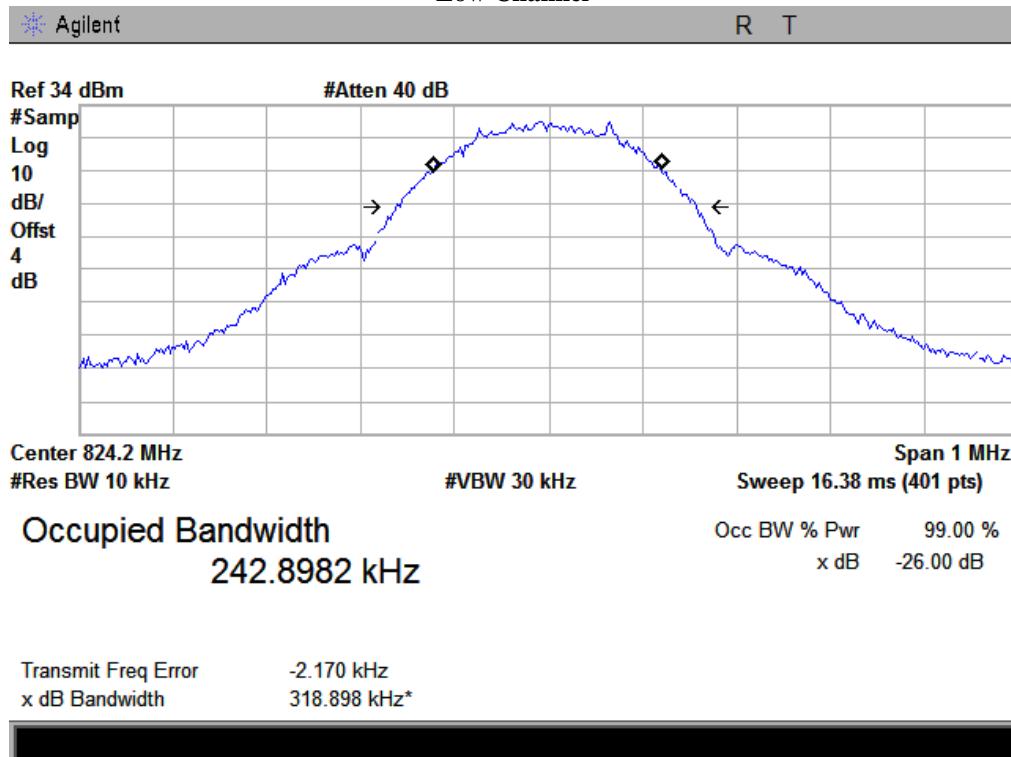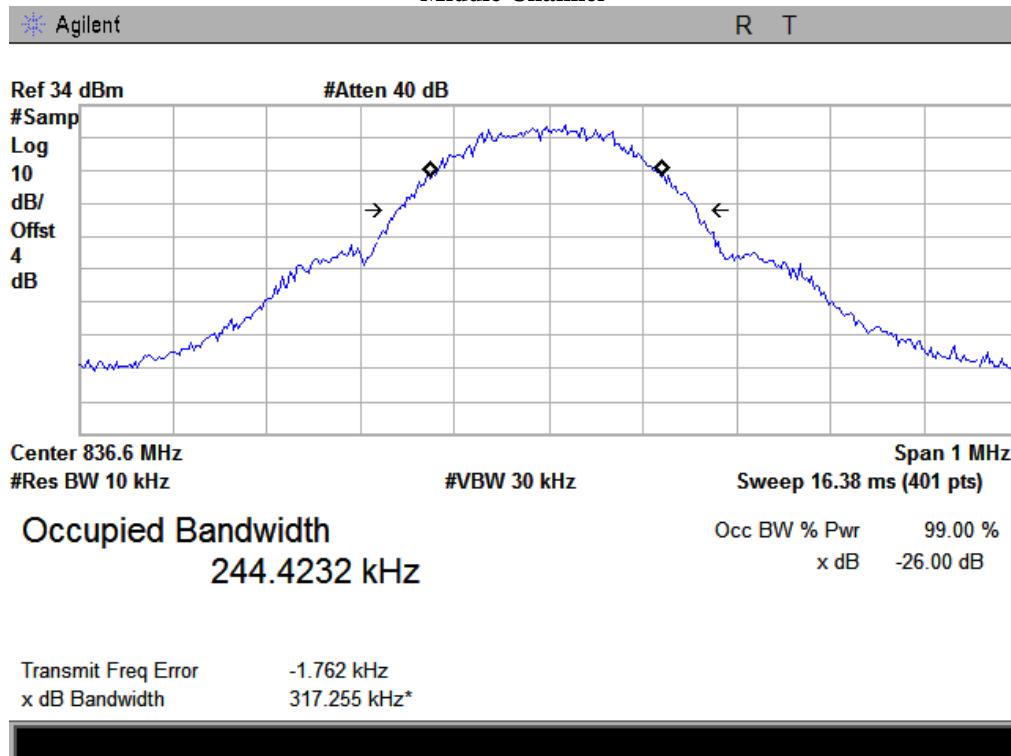**99% Occupied Bandwidth & 26 dB Bandwidth****Low Channel****Middle Channel**

## High Channel

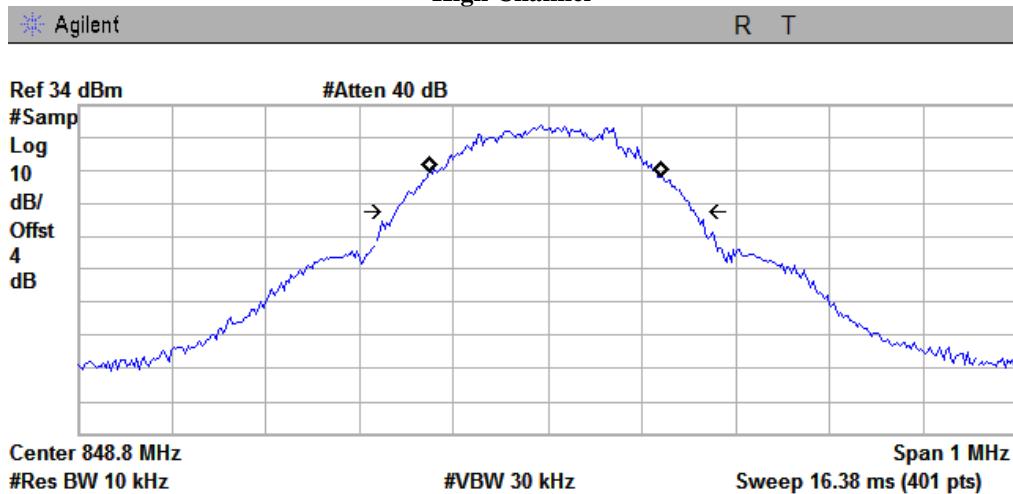


Transmit Freq Error -2.566 kHz  
 x dB Bandwidth 315.911 kHz\*

## PCS Band (Part 24E)


## 99% Occupied Bandwidth &amp; 26 dB Bandwidth

## Low Channel

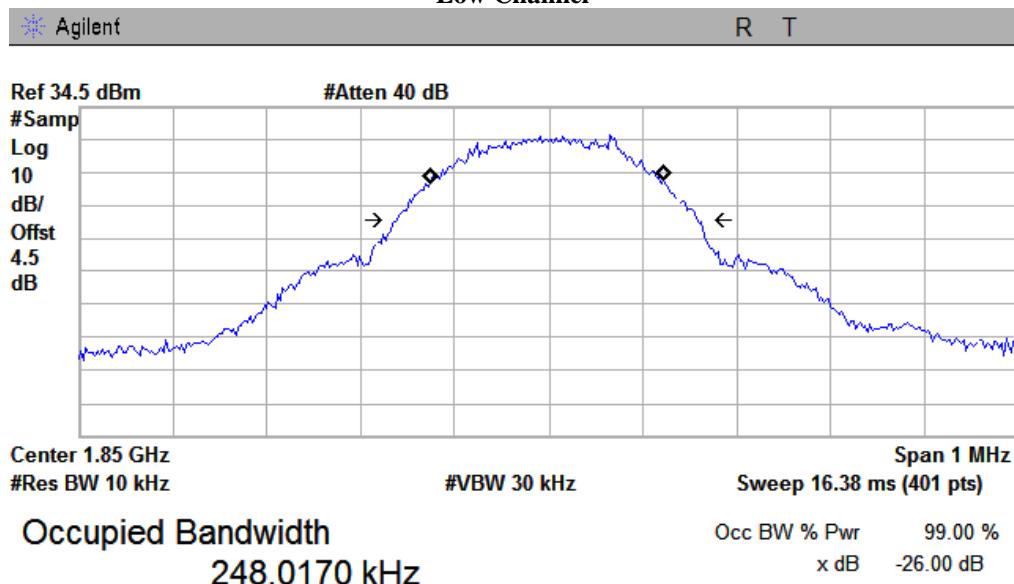


Transmit Freq Error -2.156 kHz  
 x dB Bandwidth 318.825 kHz\*

## Middle Channel

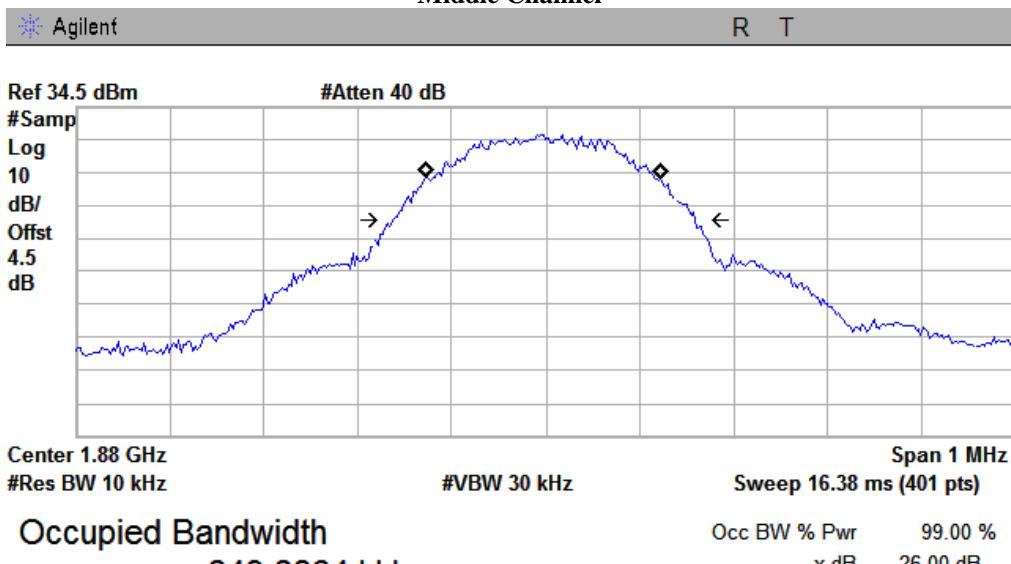

Transmit Freq Error -2.337 kHz  
x dB Bandwidth 320.904 kHz\*

## High Channel

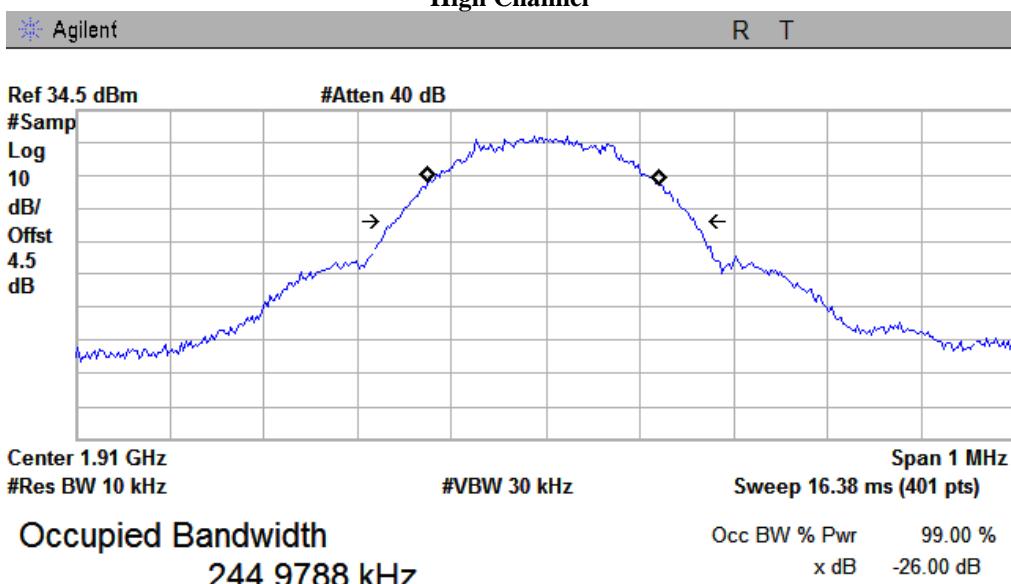

Transmit Freq Error -1.835 kHz  
x dB Bandwidth 317.405 kHz\*

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for GSM Mobile Phone  
Main Model: F6 Pro  
Serial Model: F6  
To: FCC Part 22(H) & FCC Part 24(E): 2011

Report No: 12070143-FCC-R1  
Issue Date: 17th July, 2012  
Page: 17 of 37  
www.siemic.com.cn

## **5.5 §2.1051, §22.917(a) & §24.238(a) - Spurious Emissions at Antenna Terminals**

### 1. Conducted Measurement

EUT was set for low, mid, high channel with modulated mode and highest RF output power. The spectrum analyzer was connected to the antenna terminal.

### 2. Conducted Emissions Measurement Uncertainty

All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is  $\pm 1.5$ dB.

### 3. Environmental Conditions

Temperature	25°C
Relative Humidity	50%
Atmospheric Pressure	1020mbar

### 4. Test date : 10th July , 2012

Tested By : Back Huang

### **Standard Requirement:**

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

### **Procedures:**

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The Band Edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly BW/100.


### **Test Result: Pass**

Refer to the attached plots.


## Cellular Band (Part 22H)

30MHz-10G – GSM850


## Low Channel

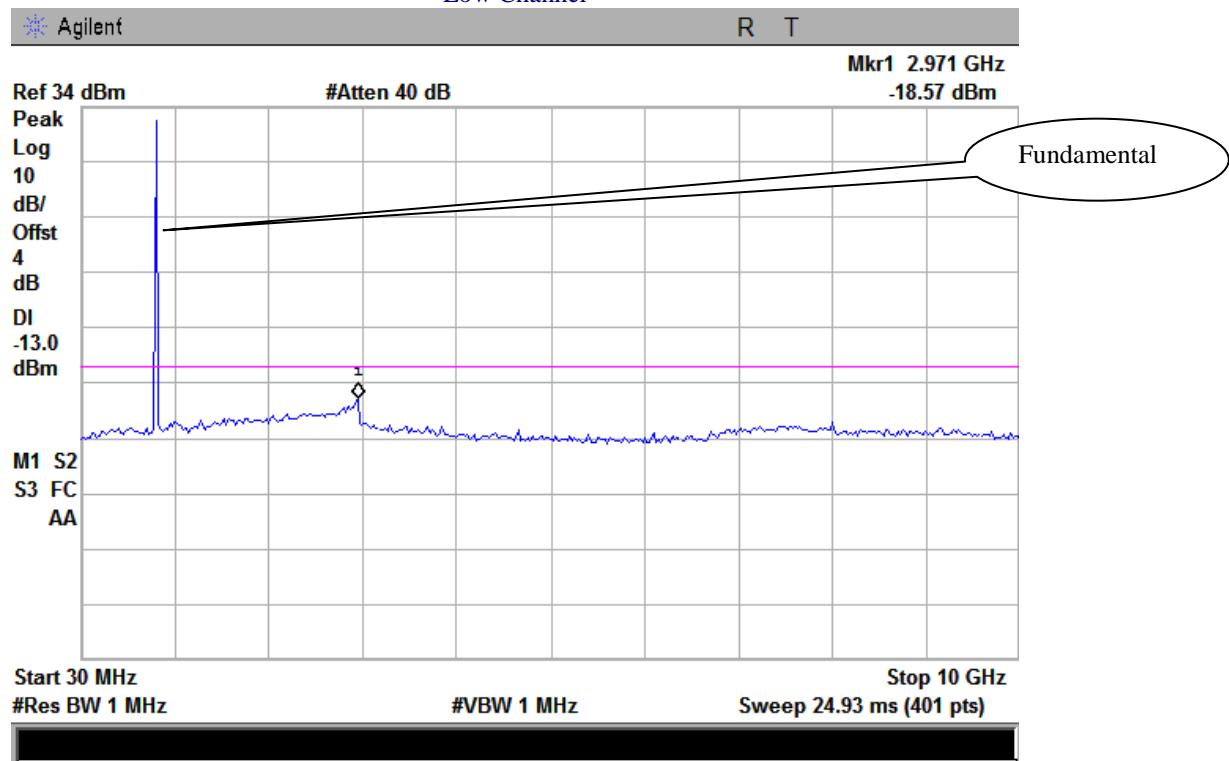

## Middle Channel

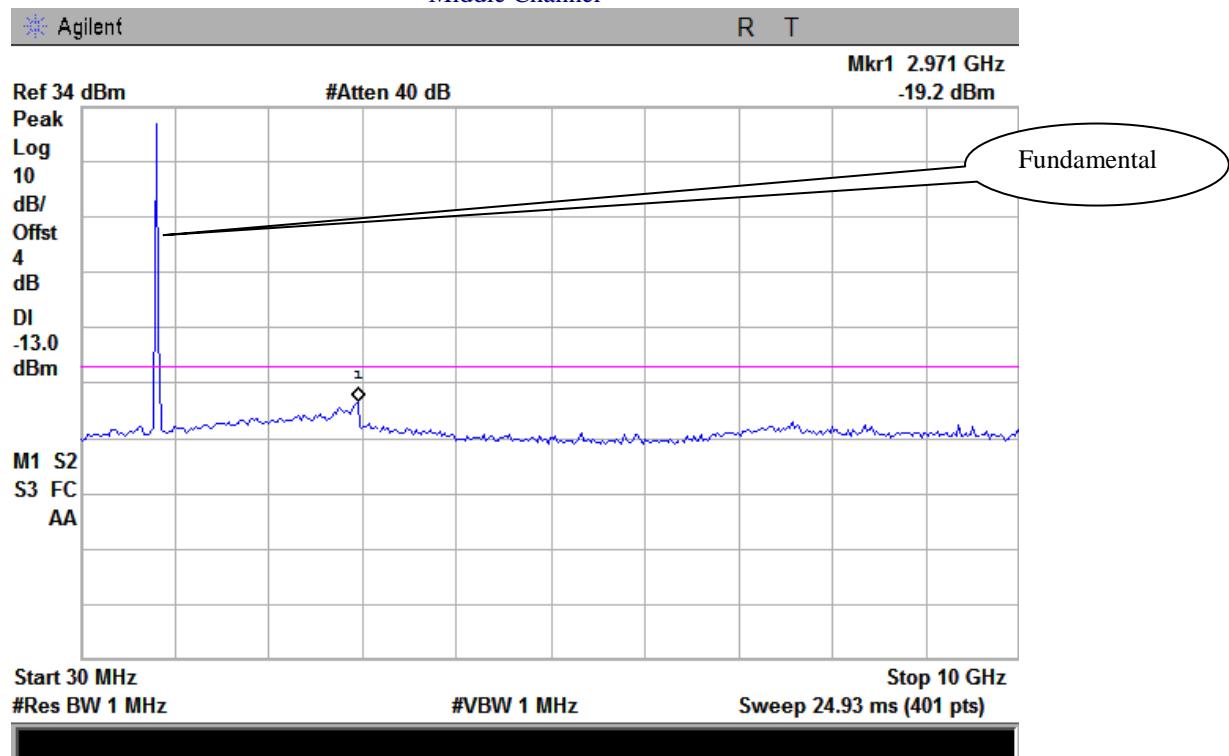


## High Channel

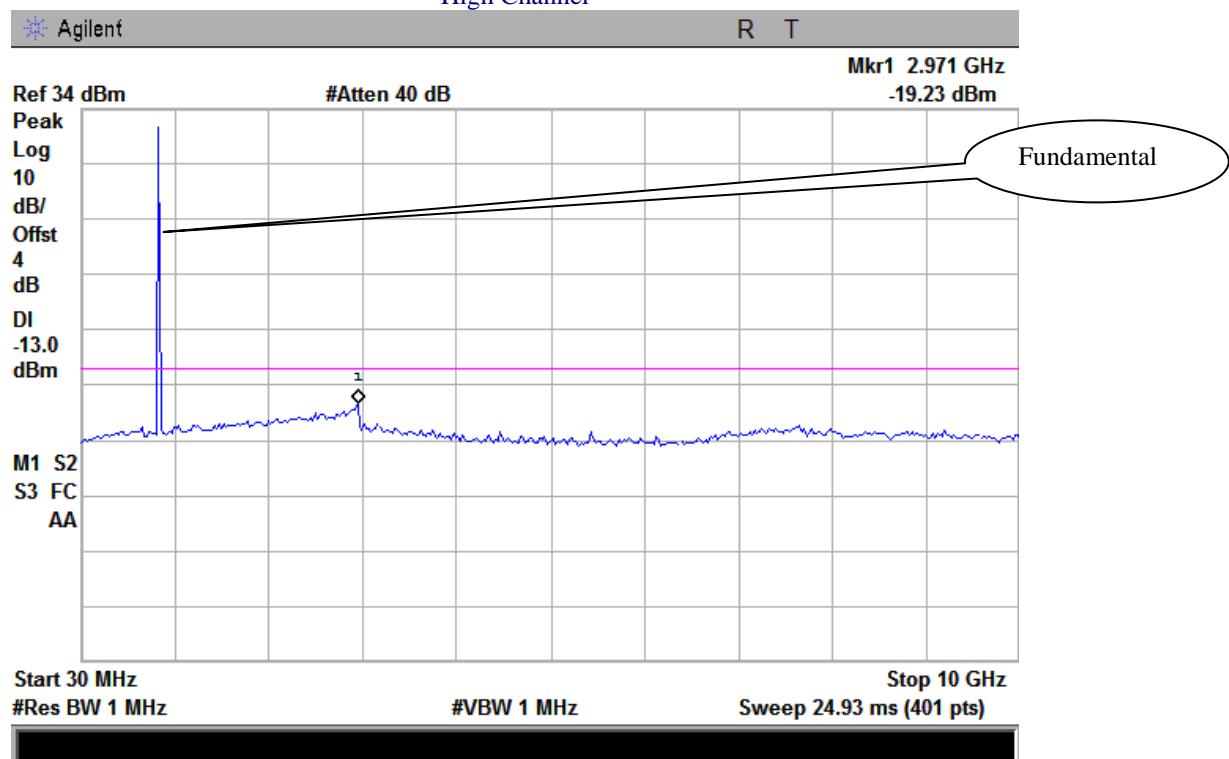


## PCS Band (Part24E)

30MHz-20G – PCS1900


## Low Channel

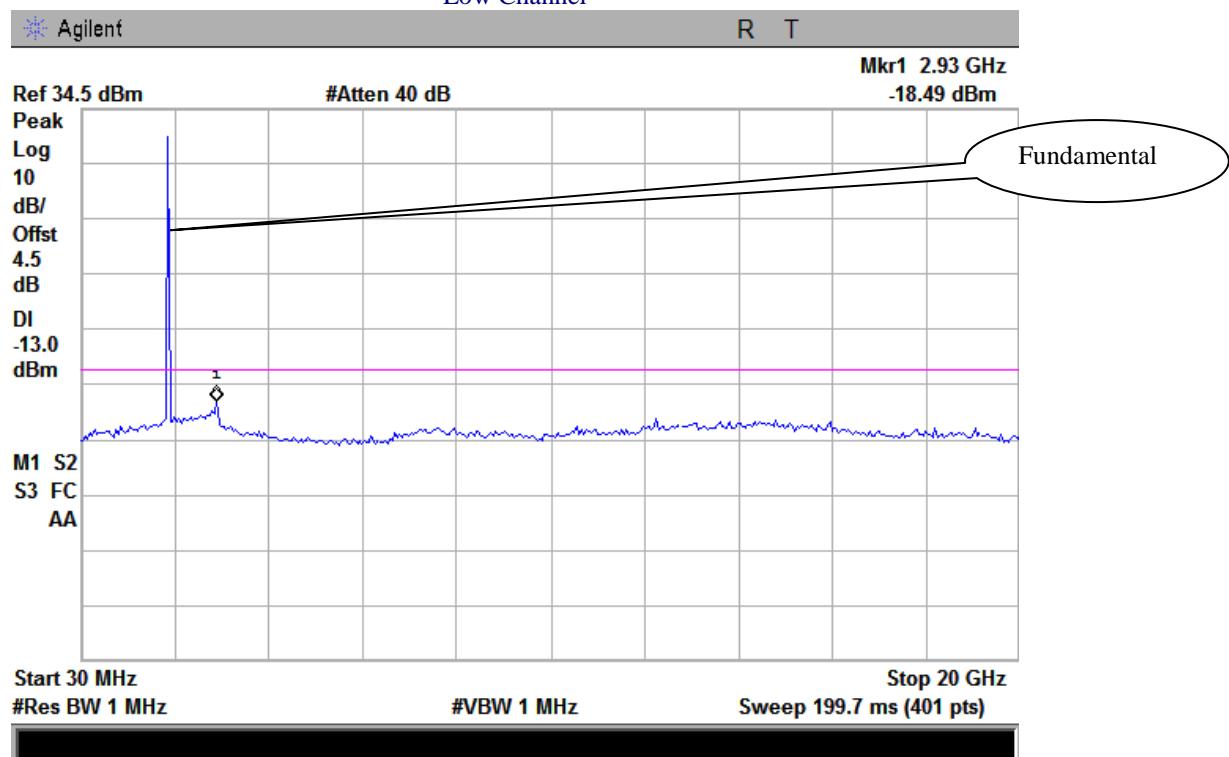

## Middle Channel

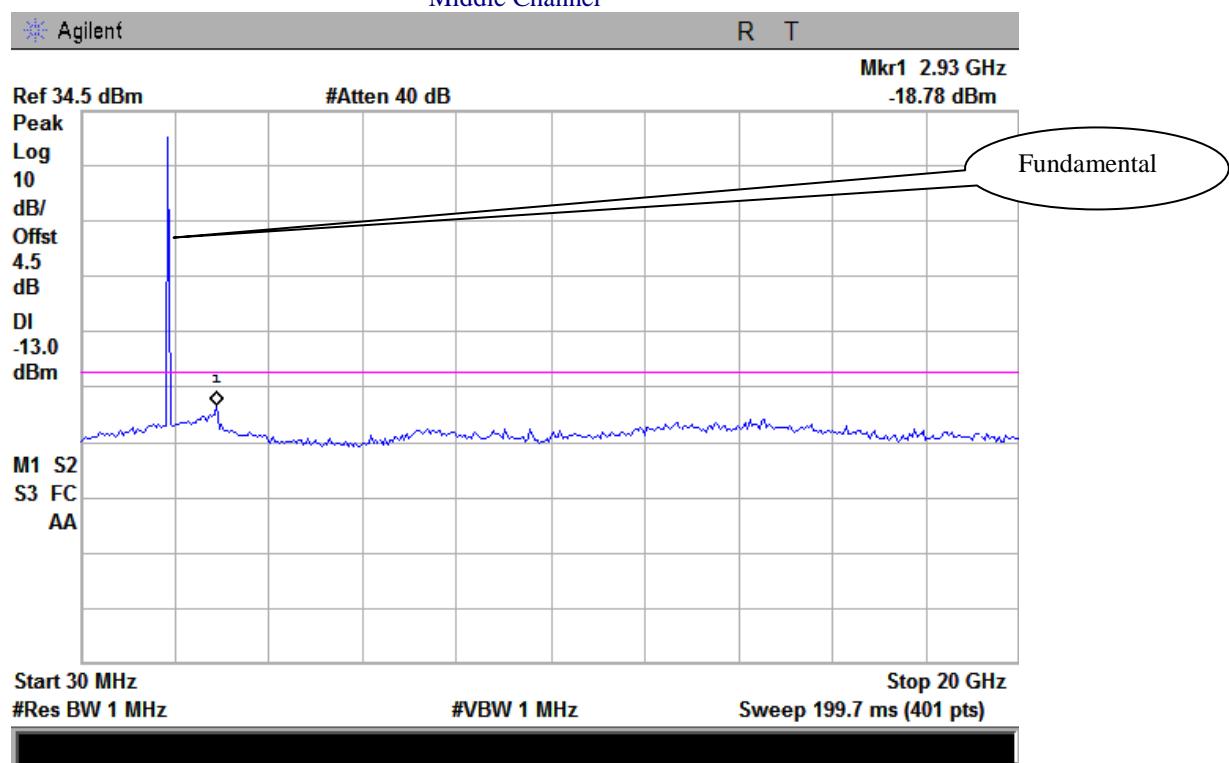

## High Channel

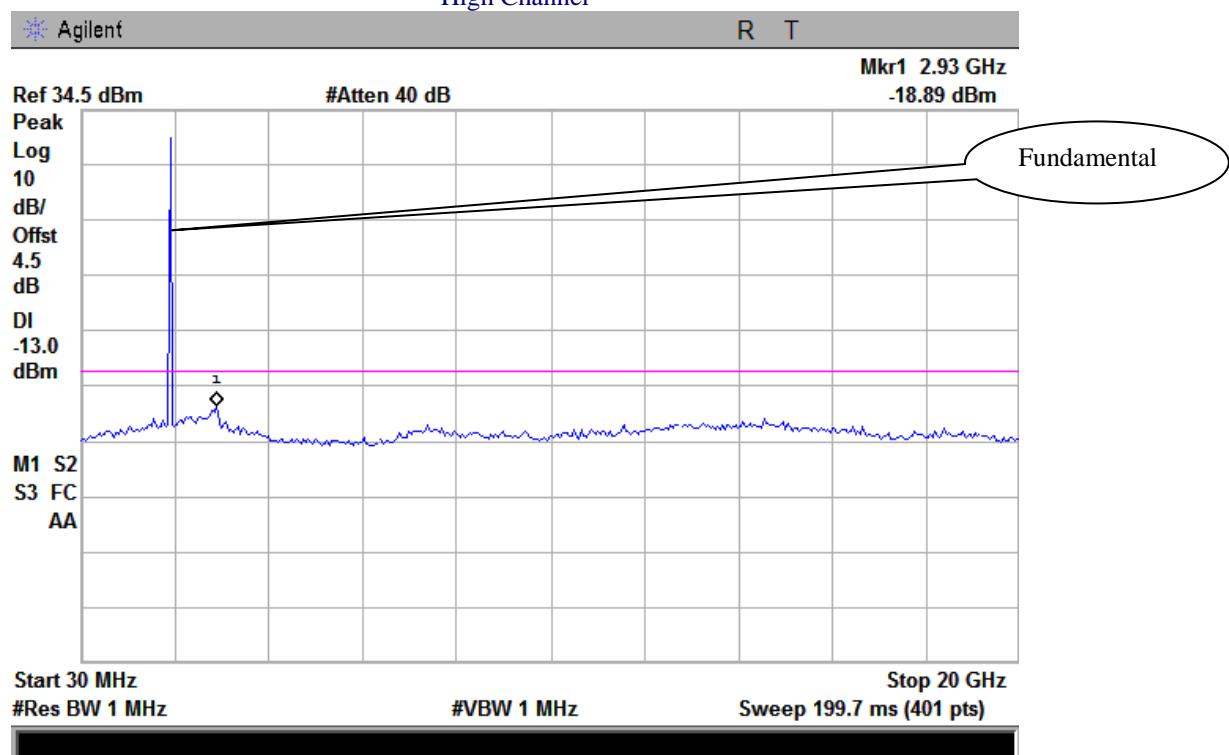

## **5.6 §2.1053, §22.917 & §24.238 - Spurious Radiated Emissions**

1. All possible modes of operation were investigated. Only the 6 worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
2. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
3. Radiated Emissions Measurement Uncertainty  
 All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 1GHz – 40GH is  $\pm 6.0$ dB (for EUTs  $< 0.5$ m X 0.5m X 0.5m).
4. Environmental Conditions
 

Temperature	25°C
Relative Humidity	50%
Atmospheric Pressure	1018mbar
5. Test date : 11th July , 2012  
 Tested By : Back Huang

### **Standard Requirement:**

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.

### **Procedures:**

Equipment was setup in a semi-anechoic chamber. For measurements above 1 GHz an average measurement was taken with a 10Hz video bandwidth. The EUT was tested at low, mid and high with the highest output power. An emission was scan up to 10<sup>th</sup> harmonic of the operating frequency.

#### Sample Calculation:

EUT Field Strength = Raw Amplitude (dB  $\mu$ V/m) – Amplifier Gain (dB) + Antenna Factor (dB) + Cable Loss (dB) + Filter Attenuation (dB, if used)

### **Test Result: Pass**

## Cellular Band (Part 22H)

### Low channel

Frequency (MHz)	Substituted level (dBm)	Direction (degree)	Height (cm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Amplifier (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
594.6	-37.16	152	132	V	6.4	1.0	0	-31.76	-13	-18.76
986.1	-35.26	261	110	H	6.6	1.8	0	-30.46	-13	-17.46
2472.5	-33.17	79	124	V	9.3	3.2	0	-27.07	-13	-14.07
3296.8	-34.26	154	123	H	9.6	4.1	0	-28.76	-13	-15.76

### Middle channel

Frequency (MHz)	Substituted level (dBm)	Direction (degree)	Height (cm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Amplifier (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
349.8	-37.16	152	120	V	5.9	0.6	0	-31.86	-13	-18.86
880.6	-36.16	39	154	H	6.6	1.6	0	-31.16	-13	-18.16
1673.2	-34.02	98	124	V	8.3	2.6	0	-28.32	-13	-15.32
2509.8	-35.49	187	120	H	9.4	3.2	0	-29.29	-13	-16.29

### High channel

Frequency (MHz)	Substituted level (dBm)	Direction (degree)	Height (cm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Amplifier (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
351.2	-38.13	264	120	H	5.9	0.6	0	-32.83	-13	-19.83
880.6	-37.67	187	115	V	6.6	1.6	0	-32.67	-13	-19.67
3395.2	-35.61	116	142	V	9.6	4.1	0	-30.11	-13	-17.11
2153.1	-34.76	90	230	H	8.9	3.0	0	-28.86	-13	-15.86

**SIEMIC, INC.**

Accessing global markets

**Title:** RF Test Report for GSM Mobile Phone  
**Main Model:** F6 Pro  
**Serial Model:** F6  
**To:** FCC Part 22(H) & FCC Part 24(E): 2011

**Report No:** 12070143-FCC-R1  
**Issue Date:** 17th July, 2012  
**Page:** 23 of 37  
**www.siemic.com.cn**

**PCS Band (Part 24E)****Low channel**

Frequency (MHz)	Substituted level (dBm)	Direction (degree)	Height (cm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Amplifier (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
583.6	-37.23	153	125	V	6.1	1.0	0	-32.13	-13	-19.13
912.5	-36.24	28	112	H	6.5	1.7	0	-31.44	-13	-18.44
3700.4	-36.86	99	100	V	9.9	4.3	0	-31.26	-13	-18.26
3700.4	-36.79	152	154	H	9.9	4.3	0	-31.19	-13	-18.19

**Middle channel**

Frequency (MHz)	Substituted level (dBm)	Direction (degree)	Height (cm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Amplifier (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
480.6	-37.25	314	231	V	5.8	0.7	0	-32.15	-13	-19.15
903.6	-36.26	254	112	H	6.4	1.3	0	-31.16	-13	-18.16
5640	-36.03	112	133	V	11.6	5.2	0	-29.63	-13	-16.63
3760	-36.22	31	121	H	9.9	4.3	0	-30.62	-13	-17.62

**High channel**

Frequency (MHz)	Substituted level (dBm)	Direction (degree)	Height (cm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Amplifier (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
490.6	-36.88	264	241	V	5.8	0.7	0	-31.78	-13	-18.78
832.7	-38.63	241	132	H	6.5	1.5	0	-33.63	-13	-20.63
2721.4	-35.19	21	135	V	9.5	3.5	0	-29.19	-13	-16.19
3819.5	-37.02	153	164	H	9.9	4.4	0	-31.52	-13	-18.52

**SIEMIC, INC.**

Title: RF Test Report for GSM Mobile Phone  
Main Model: F6 Pro  
Serial Model: F6  
To: FCC Part 22(H) & FCC Part 24(E): 2011

Report No: 12070143-FCC-R1  
Issue Date: 17th July, 2012  
Page: 24 of 37  
www.siemic.com.cn

## **5.7 §22.917(a) & §24.238(a) - Band Edge**

1. Conducted Measurement  
EUT was set for low, mid, high channel with modulated mode and highest RF output power.  
The spectrum analyzer was connected to the antenna terminal.
2. Conducted Emissions Measurement Uncertainty  
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is  $\pm 1.5$ dB.
3. Environmental Conditions  
Temperature 23°C  
Relative Humidity 50%  
Atmospheric Pressure 1019mbar
4. Test date : 10th July , 2012  
Tested By : Back Huang

### **Standard Requirement:**

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

### **Procedures:**

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The Band Edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly BW/100.

### **Test Result: Pass**

Refer to the attached plots.


#### **Cellular Band (Part 22H)**

Frequency (MHz)	Emission (dBm)	Limit (dBm)
823.9975	-14.73	-13
849.0175	-14.18	-13

#### **PCS Band (Part 24E)**


Frequency (MHz)	Emission (dBm)	Limit (dBm)
1849.9800	-15.46	-13
1910.0200	-16.66	-13

## Cellular Band, Lowest Channel

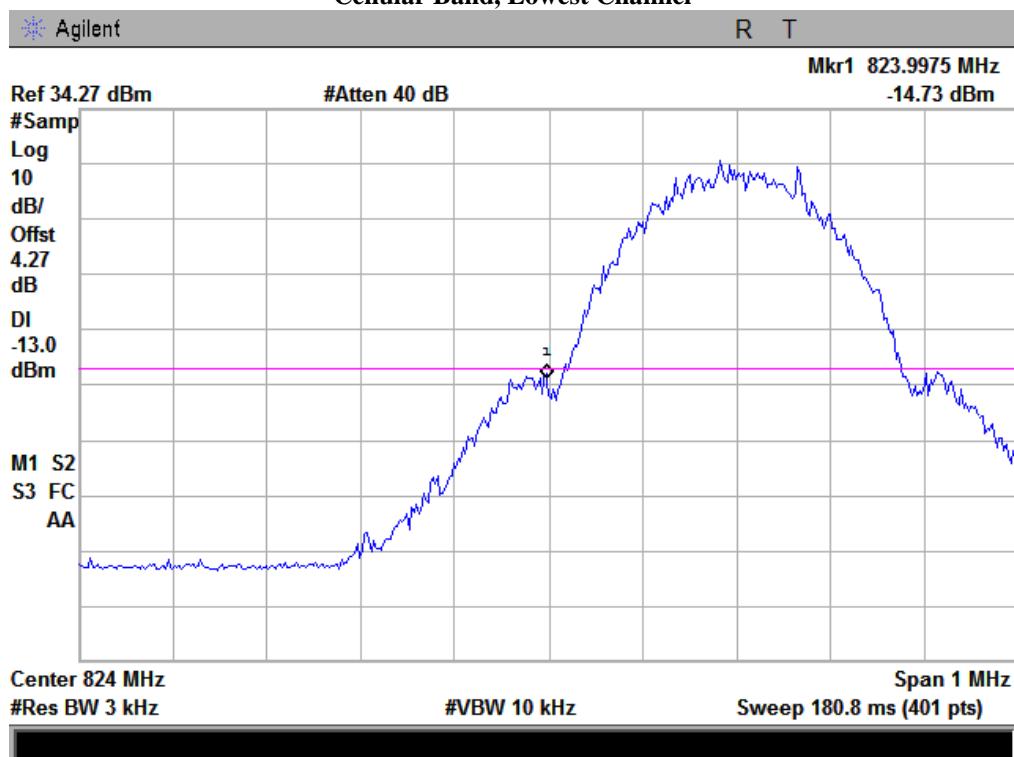


Note: Offset=Cable loss (4.0) + 10log (3.19/3)=4.0+0.27=4.27 dB

## Cellular Band, Highest Channel

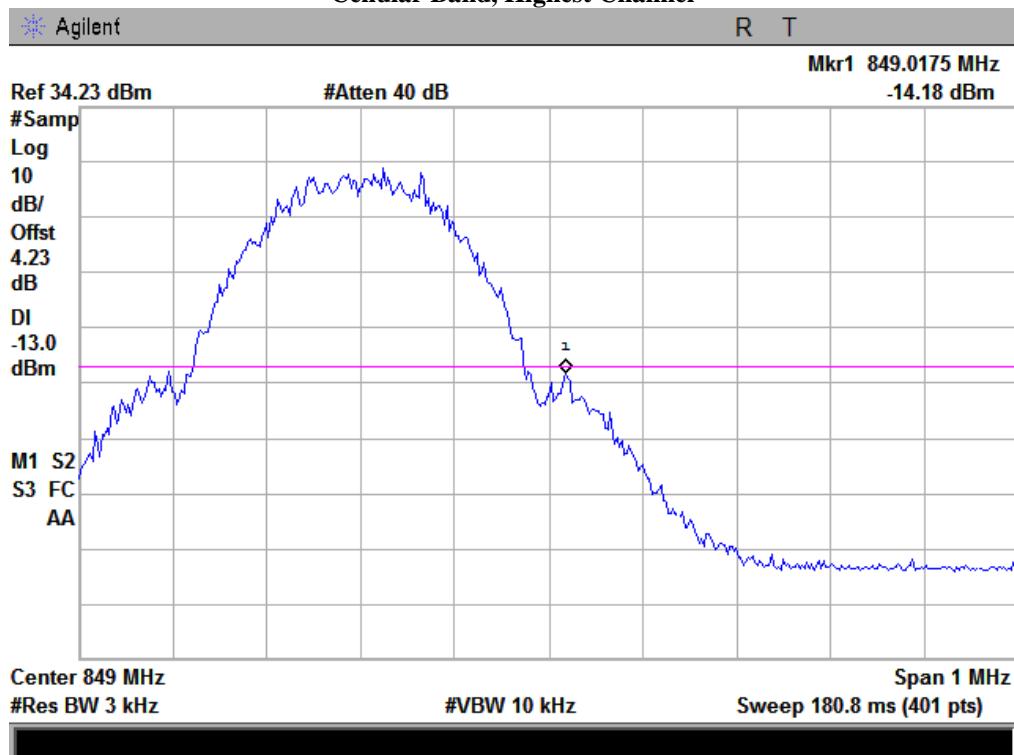


Note: Offset=Cable loss (4.0) + 10log (3.16/3)=4.0+0.23=4.23 dB

## PCS Band, Lowest Channel

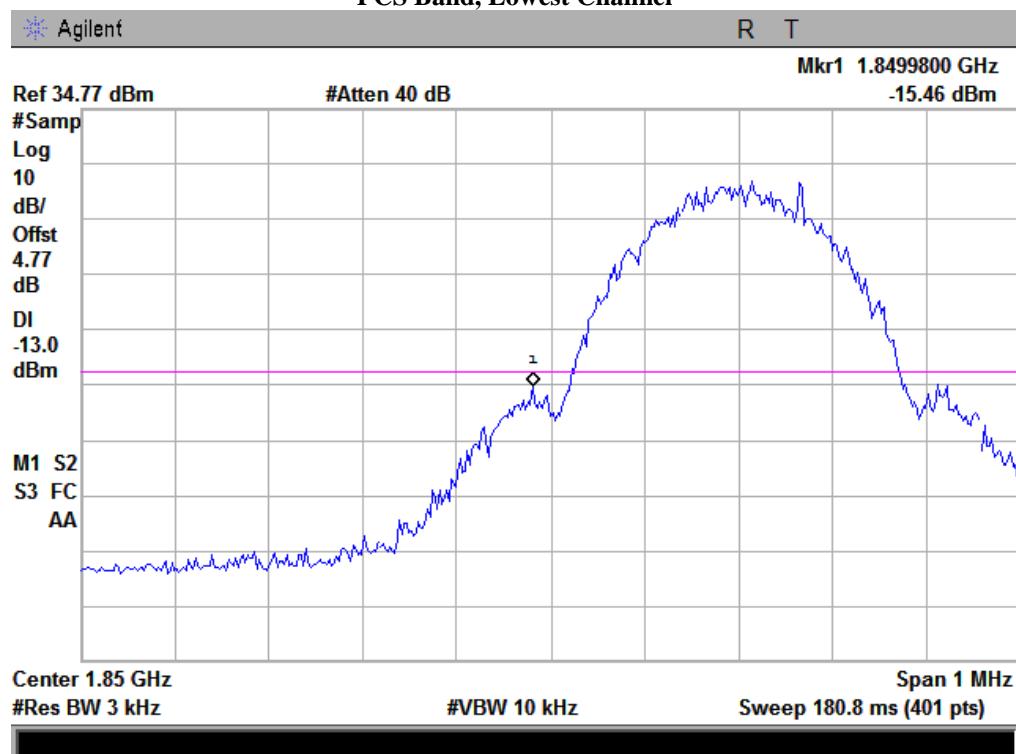

Note: Offset=Cable loss (4.5) + 10log (3.19/3)=4.5+0.27=4.77 dB

## PCS Band, Highest Channel

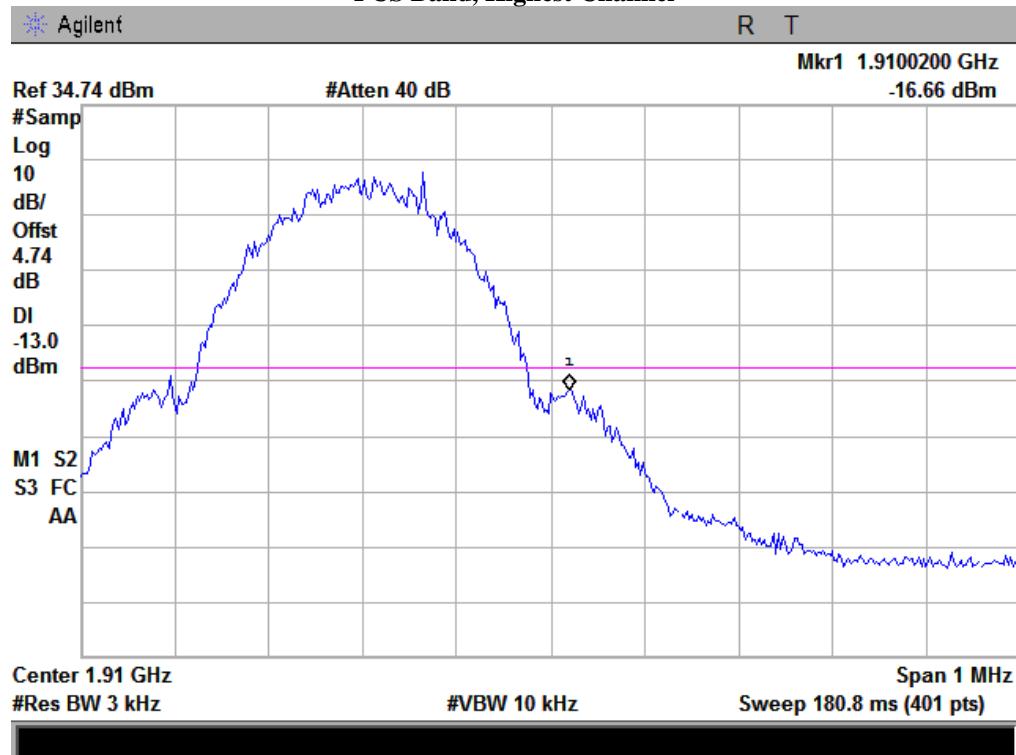

Note: Offset=Cable loss (4.5) + 10log (3.17/3)=4.5+0.24=4.74 dB

**SIEMIC, INC.**

Title: RF Test Report for GSM Mobile Phone  
Main Model: F6 Pro  
Serial Model: F6  
To: FCC Part 22(H) & FCC Part 24(E): 2011

Report No: 12070143-FCC-R1  
Issue Date: 17th July, 2012  
Page: 27 of 37  
www.siemic.com.cn

## **5.8 §2.1055, §22.355 & §24.235 - Frequency Stability**

1.	Environmental Conditions	Temperature Relative Humidity Atmospheric Pressure	23°C 50% 1019mbar
2.	Test date : 9th July , 2012 Tested By : Back Huang		

### **Standard Requirement:**

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile $\leq$ 3 watts (ppm)	Mobile $\leq$ 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A

According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized frequency block.

### **Procedures:**

A communication link was established between EUT and base station. The frequency error was monitored and measured by base station under variation of ambient temperature and variation of primary supply voltage.

Limit: The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

### **Test Results: Pass**

**Frequency Stability versus Temperature:** The Frequency tolerance of the carrier signal shall be maintained within 2.5ppm of the operating frequency over a temperature variation of -10 °C to +55 °C at normal supply voltage.

### Cellular Band (Part 22H)

Middle Channel, $f_o = 836.6$ MHz				
Temperature (°C)	Power Supplied (V <sub>DC</sub> )	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	4	0.0048	2.5
0		-1	-0.0012	2.5
10		3	0.0036	2.5
20		2	0.0024	2.5
30		3	0.0036	2.5
40		0	0.0000	2.5
50		4	0.0048	2.5
55		0	0.0000	2.5
25	4.2	5	0.0060	2.5
	3.5	2	0.0024	2.5

### PCS Band (Part 24E)

Middle Channel, $f_o = 1880$ MHz				
Temperature (°C)	Power Supplied (V <sub>DC</sub> )	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	2	0.0011	2.5
0		0	0.0000	2.5
10		4	0.0021	2.5
20		3	0.0016	2.5
30		2	0.0011	2.5
40		3	0.0016	2.5
50		6	0.0032	2.5
55		5	0.0027	2.5
25	4.2	3	0.0016	2.5
	3.5	2	0.0011	2.5

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for GSM Mobile Phone  
Main Model: F6 Pro  
Serial Model: F6  
To: FCC Part 22(H) & FCC Part 24(E): 2011

Report No: 12070143-FCC-R1  
Issue Date: 17th July, 2012  
Page: 29 of 37  
www.siemic.com.cn

## **Annex A. TEST INSTRUMENT & METHOD**

### **Annex A.i. TEST INSTRUMENTATION & GENERAL PROCEDURES**

Instrument	Model	Calibration Date	Calibration Due Date
<b>RF conducted test</b>			
Agilent ESA-E SERIES SPECTRUM ANALYZER	E4407B	10/25/2011	10/25/2012
Power Splitter	1#	02/02/2012	02/02/2013
Universal Radio Communication Tester	CMU200	02/22/2012	02/22/2013
Temperature/Humidity Chamber	1007H	01/08/2012	01/08/2013
DC Power Supply	PS-305D	02/22/2012	02/22/2013
<b>Radiated Emissions</b>			
Hp Spectrum Analyzer	8563E	01/10/2012	01/09/2013
Agilent ESA-E SERIES SPECTRUM ANALYZER	E4407B	10/25/2011	10/25/2012
R&S EMI Receiver	ESPI3	08/26/2011	08/25/2012
Antenna (30MHz~2GHz)	JB1	10/04/2011	10/03/2012
ETS-Lindgren Antenna(1 ~18GHz)	3115	10/04/2011	10/03/2012
A-INFOMW Antenna(1 ~18GHz)	JXTXLB-10180	06/25/2012	06/24/2013
Horn Antenna (18~40GHz)	AH-840	07/23/2011	07/22/2012
Microwave Pre-Amp (18~40GHz)	PA-840	Every 2000 Hours	
Hp Agilent Pre-Amplifier	8447F	05/26/2012	05/25/2013
MITEQ Pre-Amplifier(1 ~ 18GHz)	AMF-7D-00101800-30-10P	05/26/2012	05/25/2013
Universal Radio Communication Tester	CMU200	02/29/2012	02/28/2013
Chamber	3m	04/13/2012	04/13/2013

**SIEMIC, INC.**

Title: RF Test Report for GSM Mobile Phone  
Main Model: F6 Pro  
Serial Model: F6  
To: FCC Part 22(H) & FCC Part 24(E): 2011

Report No: 12070143-FCC-R1  
Issue Date: 17th July, 2012  
Page: 30 of 37  
www.siemic.com.cn

## Annex A. ii. RADIATED EMISSIONS TEST DESCRIPTION


### EUT Characterisation

EUT characterisation, over the frequency range from 30MHz to 1GHz (for FCC tests, until the 10<sup>th</sup> harmonic for operating frequencies  $\geq$  108MHz),, was done in order to minimise radiated emissions testing time while still maintaining high confidence in the test results.

The EUT was placed in the chamber, at a height of about 0.8m on a turntable. Its radiated emissions frequency profile was observed, using a spectrum analyzer / receiver with the appropriate broadband antenna placed 3m or 10m away from the EUT. Radiated emissions from the EUT were maximised by rotating the turntable manually, changing the antenna polarisation and manipulating the EUT cables while observing the frequency profile on the spectrum analyzer / receiver. Frequency points at which maximum emissions occurred, clock frequencies and operating frequencies were then noted for the formal radiated emissions test at the Open Area Test Site (OATS) or EMC 3m chamber.

### Test Set-up

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m X 1.0m X 0.8m high, non-metallic table.
2. The filtered power supply for the EUT and supporting equipment were tapped from the appropriate power sockets located on the turntable.
3. The relevant broadband antenna was set at the required test distance away from the EUT and supporting equipment boundary.

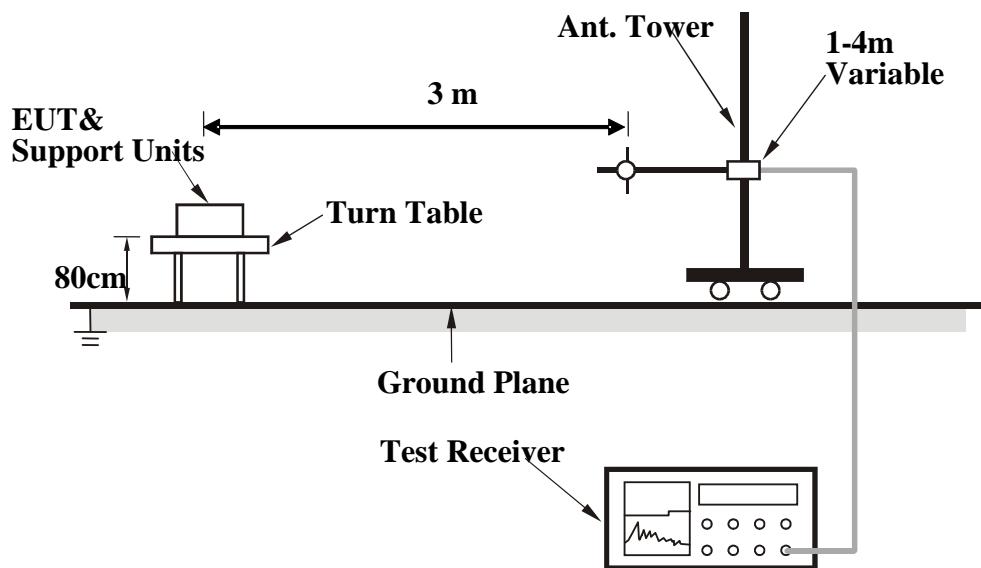



## Test Method

The following procedure was performed to determine the maximum emission axis of EUT:

1. With the receiving antenna is H polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
2. With the receiving antenna is V polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
3. Compare the results derived from above two steps. So, the axis of maximum emission from EUT was determined and the configuration was used to perform the final measurement.

### Final Radiated Emission Measurement

1. Setup the configuration according to figure 1. Turn on EUT and make sure that it is in normal function.
2. For emission frequencies measured below 1 GHz, a pre-scan is performed in a shielded chamber to determine the accurate frequencies of higher emissions will be checked on a open test site or EMC 10m chamber. As the same purpose, for emission frequencies measured above 1 GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
3. For emission frequencies measured below and above 1 GHz, set the spectrum analyzer on a 100 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0 ° to 360 ° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading.
5. Repeat step 4 until all frequencies need to be measured were complete.
6. Repeat step 5 with search antenna in vertical polarized orientations.

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	Peak	100 kHz	100 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

## Description of Radiated Emission Program

This EMC Measurement software run LabView automation software and offers a common user interface for electromagnetic interference (EMI) measurements. This software is a modern and powerful tool for controlling and monitoring EMI test receivers and EMC test systems. It guarantees reliable collection, evaluation, and documentation of measurement results. Basically, this program will run a pre-scan measurement before it proceeds with the final measurement. The pre-scan routine will run the scan on four different antenna heights, 2 antenna polarity, and 360 degrees table rotation. For example, the program was set to run 30 MHz to 1 GHz scan; the program will first start from a meter antenna height and divide the 30 MHz to 1 GHz into 10 separate parts of maximum hold sweeps. Each parts of maximum hold sweep, the program will collect the data from 0 degree to 360 degrees table rotation. After the program complete the 1m scan, the antenna continues to rise to 2m and continue the scan. The step will repeated for all specified antenna height and polarity. This program will perform the Quasi Peak measurement after the signal maximization process and pre-scan routine. The final measurement will be base on the pre-scan data reduction result.

## Sample Calculation Example

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. For the limit is employed average value, therefore the peak value can be transferred to average value by subtracting the duty factor. The basic equation with a sample calculation is as follows:

$$\text{Peak} = \text{Reading} + \text{Corrected Factor}$$

where

$$\text{Corr. Factor} = \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain (if any)}$$

And the average value is

$$\text{Average} = \text{Peak Value} + \text{Duty Factor} \text{ or}$$
$$\text{Set RBW} = 1\text{MHz}, \text{VBW} = 10\text{Hz}.$$

Note:

If the measured frequencies are fall in the restricted frequency band, the limit employed must be quasi peak value when frequencies are below or equal to 1 GHz. And the measuring instrument is set to quasi peak detector function.



**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for GSM Mobile Phone  
Main Model: F6 Pro  
Serial Model: F6  
To: FCC Part 22(H) & FCC Part 24(E): 2011

Report No: 12070143-FCC-R1  
Issue Date: 17th July, 2012  
Page: 32 of 37  
[www.siemic.com.cn](http://www.siemic.com.cn)

## **Annex B. EUT AND TEST SETUP PHOTOGRAPHS**

**Please see the attachment**


## **Annex C. TEST SETUP AND SUPPORTING EQUIPMENT**

### **EUT TEST CONDITIONS**

#### **Annex C. i. SUPPORTING EQUIPMENT DESCRIPTION**

The following is a description of supporting equipment and details of cables used with the EUT.

## Block Configuration Diagram for Radiated Emissions

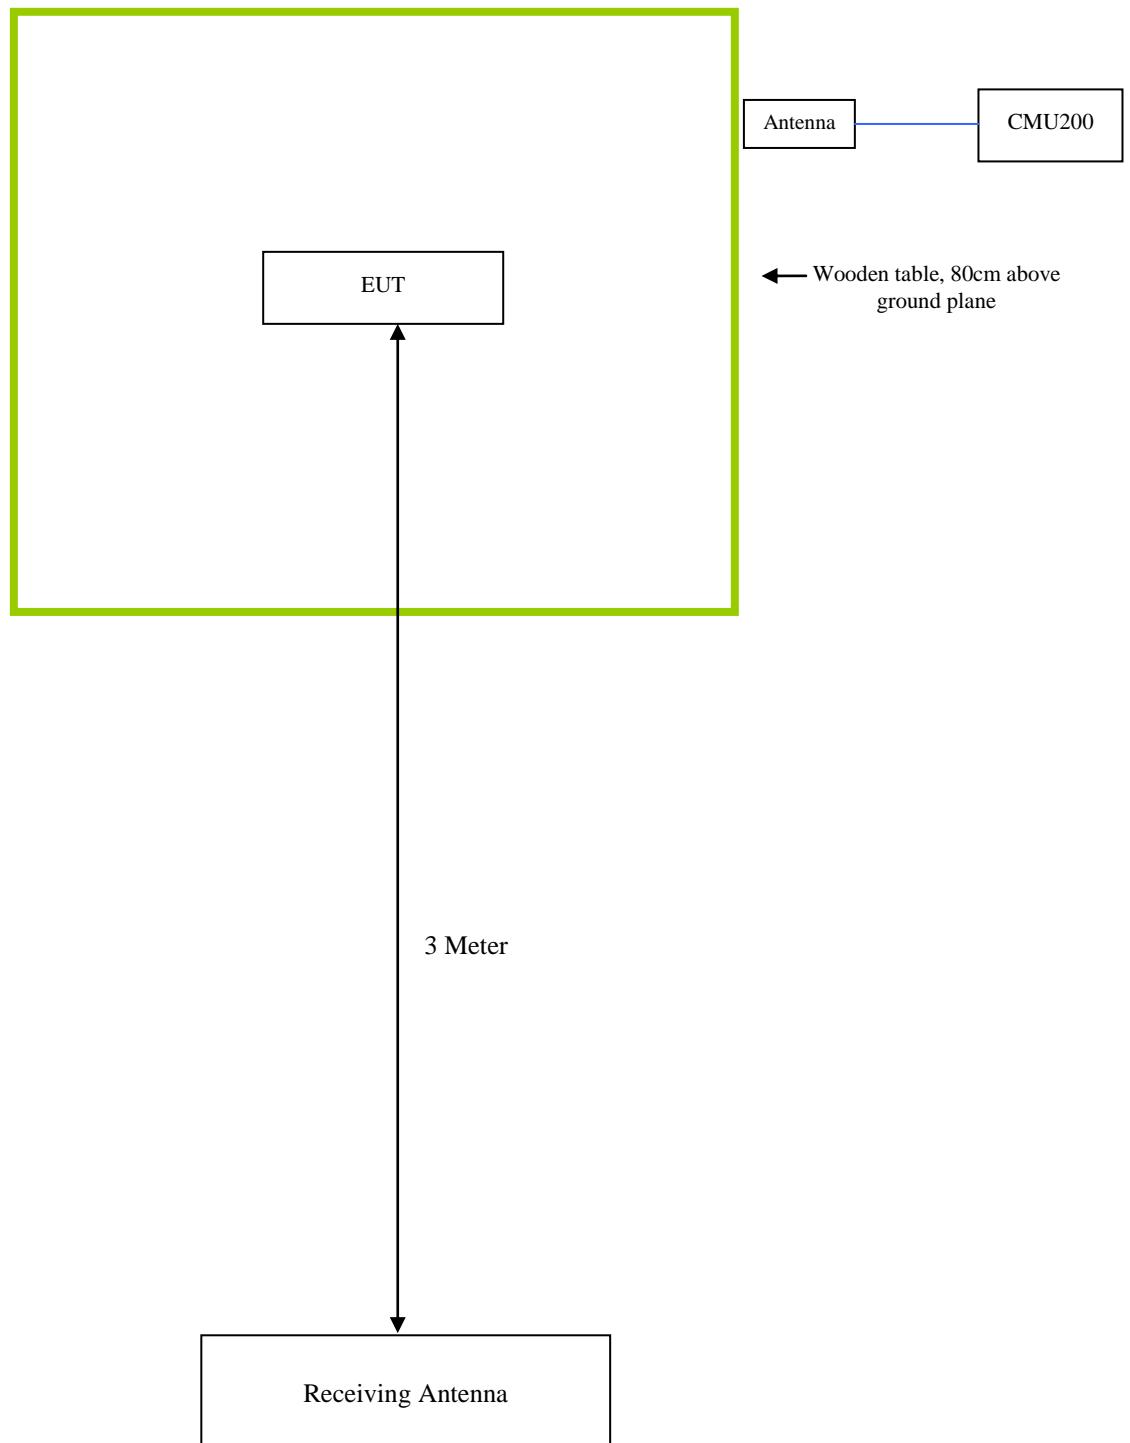

### **Annex C.ii. EUT OPERATING CONDITIONS**

The following is the description of how the EUT is exercised during testing.

Test	Description Of Operation
<b>Emissions Testing</b>	The EUT was communicating with base station and set to work at maximum output power.
<b>Others Testing</b>	The EUT was communicating with base station and set to work at maximum output power.



**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for GSM Mobile Phone  
Main Model: F6 Pro  
Serial Model: F6  
To: FCC Part 22(H) & FCC Part 24(E): 2011

Report No: 12070143-FCC-R1  
Issue Date: 17th July, 2012  
Page: 36 of 37  
[www.siemic.com.cn](http://www.siemic.com.cn)

## **Annex D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PART LIST**

**Please see attachment**

## Annex E. DECLARATION OF SIMILARITY



To: SIEMIC ,2206 Ringwood Avenue, San Jose, C, USA

### Declaration letter

Dear Sir,


For our business issue and marketing requirement, we would like to list 2 model numbers on the FCC certificates and reports, as following:

Model No.: F6 Pro , F6

We declare that there is no electrical change has been made to the equipment that alters the compliance characteristics. The difference of these two models is for different logo and color. Please kindly handle on the project.

Thank you!

Signature:



Printed name/title: sissy / Manager

Tel: 0755-83496450

Fax: 0755-83496050

Address: 1805, Tower A , Phase I, Tianan High-Tech Plaza, Futian District, Shenzhen China