

NOTES: UNLESS OTHERWISE SPECIFIED,

1. FOR TOP ASSEMBLY DRAWING, SEE 940-0400-001.

2 WEIGHT: 13.0 LBS MAX.

3 FOR POWER CONSUMPTION AND AVAILABLE OPTIONS, SEE TABLE 1.

4 BOTTOM SURFACE OF CONNECTOR LOCATOR TAB TO BE FLUSH TO .010 INCHES (0,3MM) BELOW DATUM -B-.

5. ARINC 600 REQUIRES MINIMUM 13.2 KG/HR AT 50 DEGREES CELSIUS. FORCED AIR COOLING IS OPTIONAL.

6 DATUM -A- IS ARINC CONNECTOR TAB FACE.

7. CAUTION: THIS ASSEMBLY EITHER CONTAINS OR IS ASSOCIATED WITH ELECTROSTATIC DISCHARGE SENSITIVE (ESDS) DEVICES. HANDLE WITH CARE IN ACCORDANCE WITH THE PROCEDURES OUTLINED IN THE SERVICE MANUAL.

8. THE SYMBOL  INDICATES CENTER OF GRAVITY.

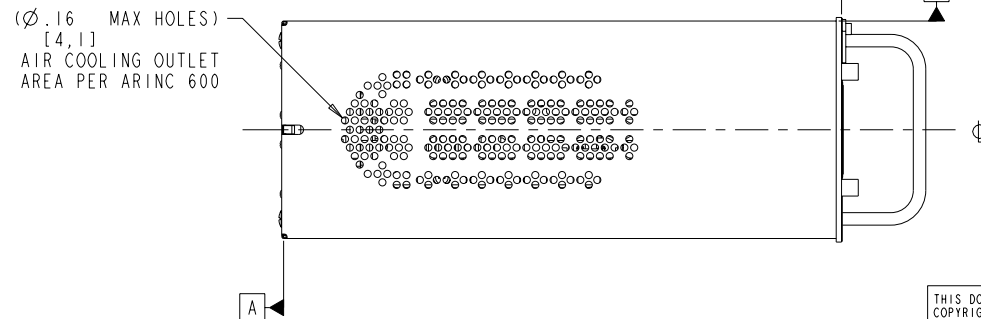
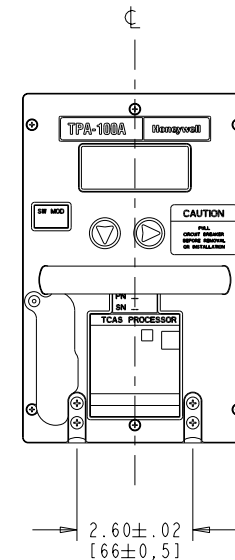
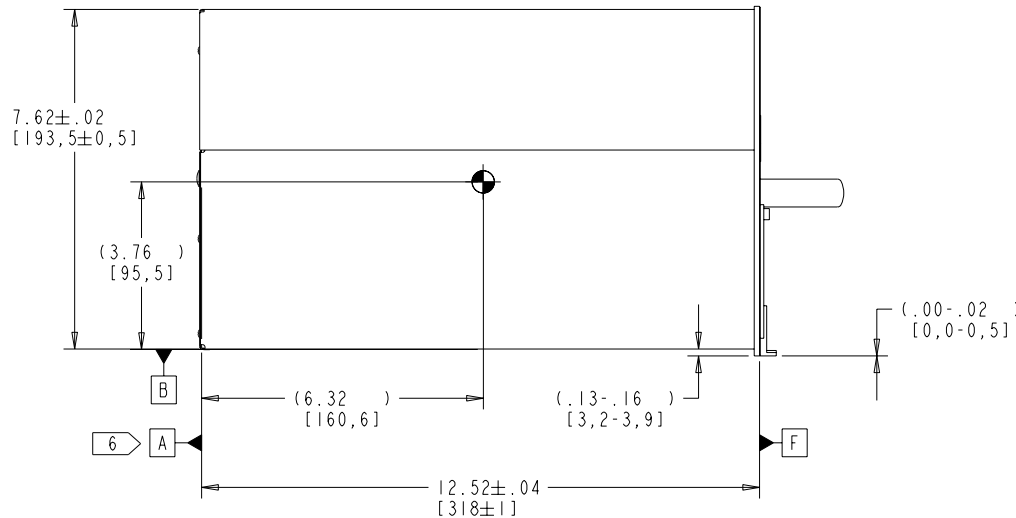
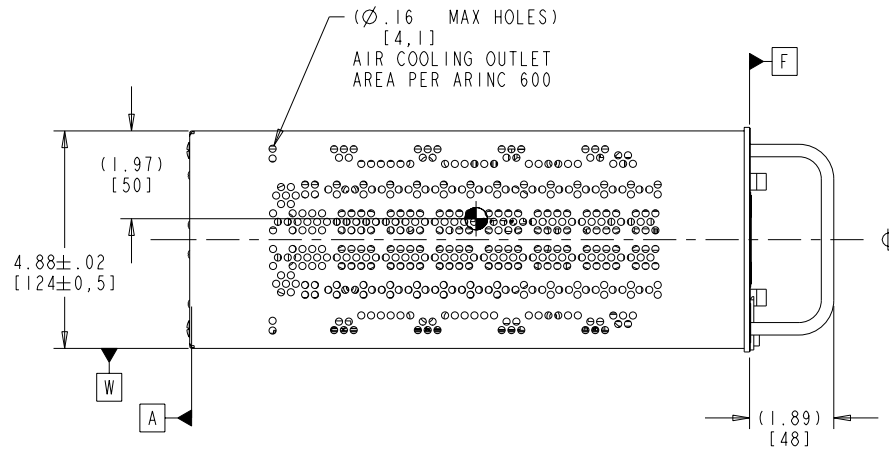
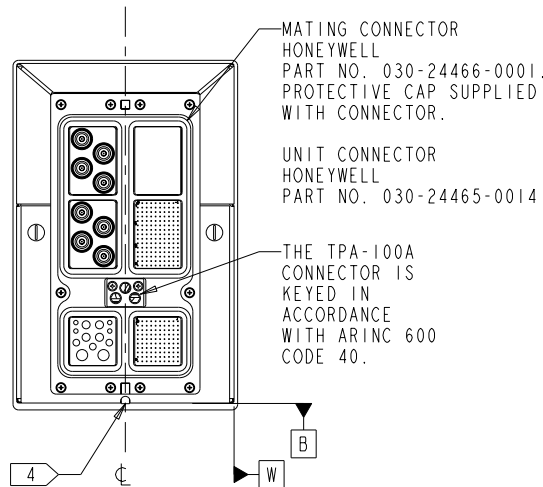


TABLE 1 3			
POWER CONSUMPTION TABLE			
PART NUMBER	115 VAC 400 Hz	28Vdc	
940-0400-001	60W	60W	

THIS DOCUMENT IS AN UNPUBLISHED WORK.
COPYRIGHT 2002, 2003 HONEYWELL
INTERNATIONAL INC. ALL RIGHTS RESERVED.

HONEYWELL PROPRIETARY
THIS DOCUMENT AND ALL INFORMATION AND EX-
PRESSION CONTAINED HEREIN ARE THE PROPERTY
OF HONEYWELL INTERNATIONAL INC., ARE LOANED
IN CONFIDENCE, AND MAY NOT, IN WHOLE, OR IN
PART, BE USED, DUPLICATED OR DISCLOSED FOR
ANY PURPOSE WITHOUT PRIOR WRITTEN PERMISSION
OF HONEYWELL INTERNATIONAL INC.

CAD PREPARED DRAWING USING PRO/ENGINEER
SOFTWARE. NOT TO BE MANUALLY ALTERED.

UNLESS OTHERWISE SPECIFIED
ALL DIMS
ARE IN
INCHES
±.XX 0.03
±.XXX 0.010
ANGLE 0.5°

INTERPRET DRAWING PER
ASME Y14.100-2000
ANGLE PROJECTION


PRECIOUS METAL INDICATOR CODE
NA

CONTRACT NO.

TYPED SIGNATURES CONSTITUTE
APPROVAL. ACTUAL SIGNATURES
ARE ON FILE AT HONEYWELL IN
REDMOND, WA.

DWN	KSHAYATSU	10/27/02
CHECK	J CHUNGBIN	10-3-02
ENGR	L KING	10-7-02
MFG	D CHACE	10-11-02
QA	G CHILDS	10/8/02
APPD		

HONEYWELL INTERNATIONAL INC.
REDMOND, WASHINGTON 98073-9701

Honeywell

TITLE

OUTLINE,
TPA-100A, 4MCU

SIZE

CAGE CODE

D

97896

DRAWING NO.

940-0400-201

REV

B

SCALE: 1/2

WT: —

SHEET: 1 OF 1

INTERFACE CONTROL DRAWING

TPA-100A