

TABLE OF CONTENTS	PAGE
1. VERIFICATION OF COMPLIANCE.....	1
2. PRODUCT DESCRIPTION	2
3. TEST FACILITY	2
4. MEASUREMENT STANDARDS.....	2
5. TEST METHODOLOGY.....	2
6. MEASUREMENT EQUIPMENT USED.....	3
7. POWERLINE RFI LIMIT	3
8. RADIATED EMISSION LIMITS	3
9. SYSTEM TEST CONFIGURATION.....	4
10. EQUIPMENT MODIFICATIONS.....	5
11. TEST PROCEDURE AND RESULT.....	5
11.1 RADIATED EMISSION TEST PROCEDURE AND RESULT	5

EXHIBIT

1. Proposed FCC ID Label Format
2. Agent Authorization Letter

Attachment

- EUT Photographs
- Schematic Diagram

1. VERIFICATION OF COMPLIANCE

COMPANY NAME : MATTEL TOYS, INC.
333 CONTINENTAL BLVD.
EL SEGUNDO, CA 90245, USA

CONTACT PERSON : VLADIMIR SOSNOVSKY / SENIOR ELECTRONIC
ENGINEER, CES

TELEPHONE NO. : (310) 252-2000

EUT DESCRIPTION : RC CAR TRANSMITTER

MODEL NAME/NUMBER : 37514 SERIAL NUMBER : 3a

BRAND NAME : BIG BAD KONG


FCC ID : APB37514-99A2T

DATE TESTED : MAY 26, 1999

REPORT NUMBER : 99U0276-1

TYPE OF EQUIPMENT	REMOTE CONTROL
EQUIPMENT TYPE	27 MHz TRANSMITTER
MEASUREMENT PROCEDURE	ANSI 63.4 / 1992
LIMIT TYPE	CERTIFICATION
FCC RULE	CFR 47, PART 15.227

The above equipment was tested by Compliance Engineering Services, Inc. for compliance with the requirements set forth in CFR 47, PART 15. This said equipment in the configuration described in this report shows that maximum emission levels emanating from equipment are within the compliance requirements.


MIKE C.I. KUO / VICE PRESIDENT
COMPLIANCE ENGINEERING SERVICES, INC.

2. Product Description

CHASSIS TYPE	PLASTIC
Fundamental Frequency	27.145 MHz
Power Source	9V Battery
Transmitting Time	CONTINUOUS
NO. OF LAYER	1
Local Osc.	27.145 MHz

3. Test Facility

The 3/10/30 meter open area test site and conducted measurement facility used to collect the radiated data is located at 561F Monterey Road, Morgan Hill, California, U.S.A. A detailed description of the test facility was submitted to the Commission on May 27, 1994.

4. Measurement Standards

The site is constructed and calibrated in conformance with the requirements of ANSI C63.4/1992.

5. Test Methodology

For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 KHz, up to at least the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower. (CFR 47 Section 15.33)

6. Measurement Equipment Used

Manufacturer	Model Number	Description	Cal Due Date
H.P.	8568A	Spectrum Analyzer (100Hz - 1.5GHz)	02/2000
EATON	94455-1	Antenna (25 - 200MHz)	10/1999
EMCO	3146	Antenna (200-1000 MHz)	10/1999
H.P.	8447D	Preamplifier (0.1 - 1300 MHz)	09/1999

7. POWERLINE RFI LIMIT

CONNECTED TO AC POWER LINE	SECTION 15.207
CARRIER CURRENT SYSTEM IN THE FREQUENCY RANGE OF 450 KHZ TO 30 MHz	SECTION 15.205 AND SECTION 15.209, 15.221, 15.223, 15.225 OR 15.227, AS APPROPRIATE.
BATTERY POWER	NO REQUIRED.

8. RADIATED EMISSION LIMITS

GENERAL REQUIREMENTS	SECTION 15.209.
RESTRICTED BANDS OF OPERATION	SECTION 15.205
OPERATION WITHIN THE BAND 26.96 - 27.28 MHZ	SECTION 15.227

10. Equipment Modifications

To achieve compliance to FCC Section 15.227 technical limits, the following change(s) were made during compliance testing:

NOT APPLICABLE

11. TEST PROCEDURE AND RESULT

Powerline RFI Limits	Eut	Radiated Emission Limits	Eut
SECTION 15.207		SECTION 15.209	x
SECTION 15.205, 15.209, 15.221, 15.223, x 15.225 OR 15.227		SECTION 15.205	x
BATTERY POWER	X	SECTION 15.227	X

11.1 Radiated Emission Test Procedure and Result

1. The EUT was placed on a wooden table on the outdoor ground plane. The search antenna was placed 3 meter from the EUT. The EUT antenna was mounted vertically as per normal installation.
2. The turntable was slowly rotated to locate the direction of maximum emission at each emission falling in the restricted bands of 15.205. The EUT was moved throughout the XY, XZ, and YZ planes to maximize emissions received by the search antenna.
3. Once maximum direction was determined, the search antenna was raised and lowered in both vertical and horizontal polarizations. The six maximum readings so obtained are recorded in the data listed below.

Data No:	99U0276-1							
Date:	05/24/1999							
Test Engineer:	Jesse Saldivar							
Company:	Mattel Toys, Inc.							
EUT:	RC CAR TRANSMITTER							
Technical Limit:	FCC 15.227							
Mode of Operation:	TX							
Freq (MHz)	Reading (dBuV/m)	Setting (P/Q/A)	C.F. (dB)	Adjusted Reading (dBuV/m)	Limits (dB)	Margin (dB)	Antenna (H/V)	Remark
298.6	52.84	P	-9.91	42.93	46	-3.07	V	EUT-X
434.31	49.52	P	-9.23	40.29	46	-5.71	V	EUT-X
461.47	51.4	P	-8.67	42.78	46	-3.22	V	EUT-X
515.77	51.12	P	-7.55	43.57	46	-2.43	V	EUT-X
298.6	53.68	P	-10.04	43.64	46	-2.36	H	EUT-X
380.04	48.41	P	-5.27	40.15	46	-5.85	H	EUT-X
Total Number of Data= 6								
Measuring Instrument:								
Spectrum Analyzer : H.P. 8568A (100 Hz - 1.5GHz)					Analyzer Setting :			
Antenna : Eaton 94455-1 (25 - 200 MHz)					Resolution Bandwidth: 100KHz			
Antenna : EMCO 3146 (200 - 1000 MHz)					Video Bandwidth : 100KHz			
Preamplifier: H.P. 8447D (0.1 - 1300 MHz)					Frequency Range Investigated : 30 - 1000 M			

Compliance Engineering Services Inc.

Project No. : 99U0276

Report No. : 990526F1

Date : 05/26/1999

Time : 11:15

>> 3 M RADIATED EMISSION DATA <<

Test Engr : JESSE SALDIVAR

98

Company : MATTEL TOYS, INC.
Equipment Under Test : 27MHz TRANSMITTER
Test Configuration : EUT
Type of Test : FCC 15.209/FCC 15.227
Mode of Operation : TX

Freq.	dBuV	PreAmp	Ant	Cable	dBuV/m	Limit	Margin	Pol	Hgt(m)	Az
V/X POSTITION OF EUT:										
Biconical 8909-1079 ; Pre-pamp = 8447D-P2 2944A07781:										
27.18	80.60	-31.40	13.20	1.14	63.54	80.00	-16.46	V	1.0	90
54.26	45.50	-31.35	8.57	1.57	24.30	40.00	-15.70	V	1.0	180
81.45	44.00	-31.18	8.15	1.96	22.93	40.00	-17.07	V	1.0	180
108.56	47.50	-31.04	10.78	2.27	29.51	43.50	-13.99	V	1.0	90
135.73	39.56	-31.00	12.20	2.54	23.30	43.50	-20.20	V	1.0	180
LP NSN=X100 ; Pre-pamp = 8447D-P2 2944A07781:										
217.10	40.26	-30.47	11.20	3.25	24.24	46.00	-21.76	V	1.0	180
244.23	43.72	-30.35	11.94	3.49	28.80	46.00	-17.20	V	1.0	180
298.60	52.84	-30.10	16.36	3.83	42.93	46.00	-3.07	V	2.0	180
380.04	46.27	-30.41	16.07	4.38	36.32	46.00	-9.68	V	1.0	180
407.17	47.89	-30.52	16.12	4.56	38.05	46.00	-7.95	V	1.5	180
434.31	49.52	-30.64	16.69	4.72	40.29	46.00	-5.71	V	1.0	180
461.47	51.40	-30.75	17.26	4.88	42.78	46.00	-3.22	V	1.0	180
515.77	51.12	-30.90	18.17	5.18	43.57	46.00	-2.43	V	1.0	180
H/X POSITION OF EUT:										
27.18	57.50	-31.40	13.26	1.14	40.50	80.00	-39.50	H	3.5	0
54.34	42.30	-31.35	9.58	1.57	22.10	40.00	-17.90	H	1.0	180
81.44	43.60	-31.18	9.42	1.96	23.80	40.00	-16.20	H	4.0	180
108.61	40.00	-31.04	10.40	2.27	21.63	43.50	-21.87	H	4.0	0
135.70	39.20	-31.00	11.44	2.54	22.17	43.50	-21.33	H	4.0	180
298.60	53.68	-30.10	16.22	3.83	43.64	46.00	-2.36	H	1.0	0
325.75	48.65	-30.19	16.79	4.02	39.26	46.00	-6.74	H	1.0	180
380.04	48.41	-30.41	17.77	4.38	40.15	46.00	-5.85	H	1.0	180
V/Y POSITION OF EUT:										
Biconical 8908-1079 ; Pre-pamp = 8447D-P2 2944A07781:										
27.18	86.62	-31.40	13.20	1.14	69.56	80.00	-10.44	V	1.0	180
54.28	47.61	-31.35	8.57	1.57	26.40	40.00	-13.60	V	1.0	180
81.41	46.28	-31.18	8.15	1.96	25.21	40.00	-14.79	V	1.0	0
108.58	47.54	-31.04	10.78	2.27	29.56	43.50	-13.94	V	1.0	180
135.70	44.00	-31.00	12.20	2.54	27.73	43.50	-15.77	V	1.0	180
LP NSN=X100 ; Pre-pamp = 8447D-P2 2944A07781:										
217.11	35.40	-30.47	11.20	3.25	19.38	46.00	-26.62	V	1.0	180
298.59	38.35	-30.10	16.36	3.83	28.44	46.00	-17.56	V	1.5	0

515.77	34.10	-30.90	18.17	5.18	26.55	46.00	-19.45	V	1.0	180
--------	-------	--------	-------	------	-------	-------	--------	---	-----	-----

H/Y POSITION OF EUT:

27.18	78.15	-31.40	13.26	1.14	61.15	80.00	-18.85	H	3.5	0
54.28	47.39	-31.35	9.58	1.57	27.19	40.00	-12.81	H	3.5	0
81.43	52.00	-31.18	9.42	1.96	32.20	40.00	-7.80	H	3.5	0
108.56	53.18	-31.04	10.39	2.27	34.81	43.50	-8.69	H	3.5	180
135.72	44.89	-31.00	11.44	2.54	27.87	43.50	-15.63	H	3.0	180

298.60	47.51	-30.10	16.22	3.83	37.47	46.00	-8.53	H	1.0	180
325.75	42.14	-30.19	16.79	4.02	32.75	46.00	-13.25	H	1.0	180
352.89	40.25	-30.30	17.28	4.20	31.43	46.00	-14.57	H	1.0	180
461.47	44.07	-30.75	18.11	4.88	36.30	46.00	-9.70	H	1.0	180
570.06	33.52	-30.83	19.08	5.45	27.23	46.00	-18.77	H	1.0	180

V/Z POSITION OF EUT:

Biconical 8908-1079 ; Pre-pamp = 8447D-P2 2944A07781:

27.18	80.36	-31.40	13.20	1.14	63.30	80.00	-16.70	V	1.0	180
54.29	48.85	-31.35	8.57	1.57	27.64	40.00	-12.36	V	1.0	180
81.42	48.91	-31.18	8.15	1.96	27.84	40.00	-12.16	V	1.0	180
108.55	45.80	-31.04	10.78	2.27	27.81	43.50	-15.69	V	1.0	180

LP NSN=X100 ; Pre-pamp = 8447D-P2 2944A07781:

217.07	39.40	-30.47	11.20	3.25	23.38	46.00	-22.62	V	1.0	180
298.59	39.17	-30.10	16.36	3.83	29.26	46.00	-16.74	V	1.0	180
434.32	36.49	-30.64	16.69	4.72	27.26	46.00	-18.74	V	1.0	180

H/Z POSITION OF EUT:

27.18	75.85	-31.40	13.26	1.14	58.85	80.00	-21.15	H	4.0	0
54.29	47.68	-31.35	9.58	1.57	27.48	40.00	-12.52	H	3.5	0
81.42	52.50	-31.18	9.42	1.96	32.70	40.00	-7.30	H	4.0	180

298.60	49.29	-30.10	16.22	3.83	39.25	46.00	-6.75	H	1.0	180
325.75	40.71	-30.19	16.79	4.02	31.32	46.00	-14.68	H	1.0	180
352.89	38.33	-30.30	17.28	4.20	29.51	46.00	-16.49	H	1.0	180
380.03	39.34	-30.41	17.77	4.38	31.08	46.00	-14.92	H	1.0	180
434.33	38.98	-30.64	18.12	4.72	31.18	46.00	-14.82	H	1.0	180


COMPLETED SCAN FROM 30MHz TO 1GHz IN VERTICAL AND HORIZONTAL POLARIZATIONS.
TESTED X, Y, Z POSITIONS

Total # of data 55

V. f2.2

09:32:05 MAY 26, 1999 *GS*

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKRA 12.050 msec
-8.28 dB

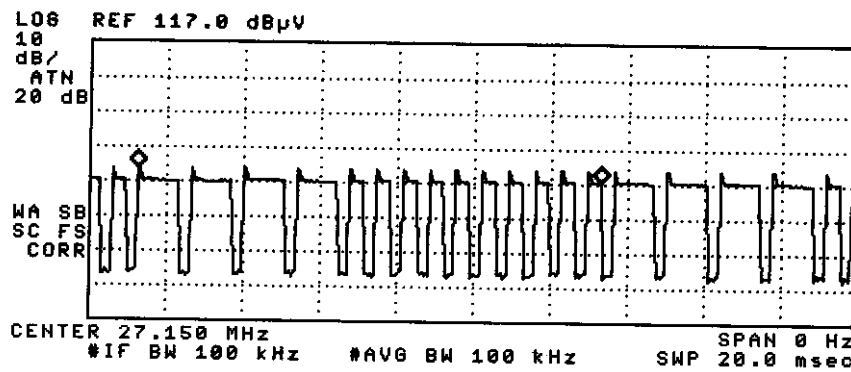


MATTEL TOYS, INC

FCC ID: APB37514-99A2T

09:56:16 MAY 26, 1999

95

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 27.130 MHz
76.43 dBμV

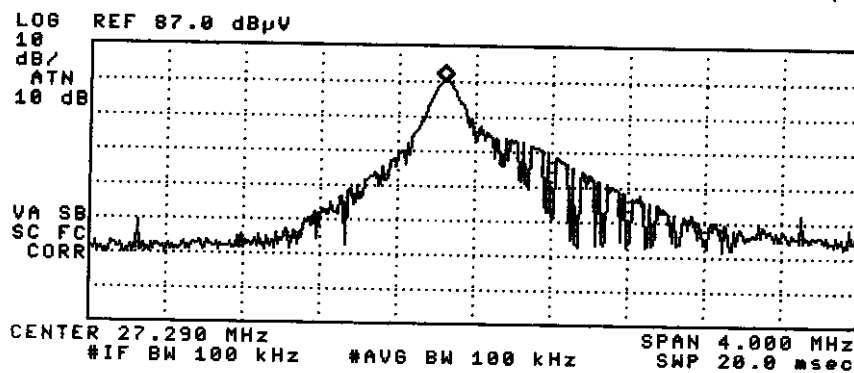

MATTEL TOYS, INC.

FCC ID: APB37514-99A2T