

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT
CERTIFICATION TO FCC PART 15 REQUIREMENTS**

for

UNINTENTIONAL RADIATOR

49 MHz RADIO CONTROL CAR RECEIVER

MODEL NO: 95086-49R

BRAND NAME: TYCO R/C-6V CORVETTE

FCC ID NO: APB95086-00A4R

REPORT NO: 01U0710-1

DATE: MARCH 13, 2001

Prepared for
MATTEL MT. LAUREL
6000 MIDATLANTIC DRIVE
MOUNT LAUREL, NJ 08054
USA

Prepared by
COMPLIANCE ENGINEERING SERVICES, INC.
561 F MONTEREY ROAD
MORGAN HILL, CA 95037, USA
TEL: (408) 463-0885
FAX: (408) 463-0888

TABLE OF CONTENTS

1. VERIFICATION OF COMPLIANCE.....	1
2. PRODUCT DESCRIPTION.....	2
3. TEST FACILITY	2
4. MEASUREMENT EQUIPMENT USED	3
5. TEST CONFIGURATION.....	3
6. TESTS CONDUCTED	3
7. RADIATED EMISSION TEST PROCEDURE	4
8. COHERENT TESTS.....	4
9. EQUIPMENT MODIFICATIONS.....	5
10. TEST CONFIGURATION PHOTOS (RADIATED EMISSION TEST)	6
• TEST DATA	
○ Cohered Emission Plot	
○ Radiated Emission Data	
• PROPOSED FCC ID LABEL FORMAT	
• AUTHORIZATION LETTER	
• SCHEMATIC DIAGRAM	
• USER MANUAL	
• EUT PHOTOGRAPHS	

1. VERIFICATION OF COMPLIANCE

COMPANY NAME : MATTEL MT. LAUREL
 6000 MIDATLANTIC DRIVE
 MOUNT LAUREL, NJ 08054
 USA

CONTACT PERSON : FRANK WINKLER, SENIOR PROJECT ENGINEER

TELEPHONE NO. : (856) 840-1259

EUT DESCRIPTION : 49MHz RADIO CONTROL CAR RECEIVER

MODEL NAME/NUMBER : 95086-49R

BRAND NAME : TYCO R/C-6V CORVETTE

SERIAL NUMBER : N/A

FCC ID : APB95086-00A4R

DATE TESTED : MARCH 06, 2001

REPORT NUMBER : 01U0710-1

TYPE OF EQUIPMENT	SECURITY EQUIPMENT (UNINTENTIONAL RADIATOR)
EQUIPMENT TYPE	49 MHz SUPERREGENERATE RECEIVER
MEASUREMENT PROCEDURE	ANSI 63.4 / 1992
LIMIT TYPE	CERTIFICATION
FCC RULE	CFR 47, PART 15.109

The above equipment was tested by Compliance Engineering Services, Inc. for compliance with the requirements set forth in CFR 47, PART 15. This said equipment in the configuration described in this report shows that maximum emission levels emanating from equipment are within the compliance requirements. **Warning:** This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification will constitute fraud and shall nullify the document.

Tested and/or Reviewed By:

Released For CCS By:

MIKE ZHU
 SENIOR EMC ENGINEER
 COMPLIANCE CERTIFICATION SERVICES

THU CHAN
 SENIOR EMC ENGINEERING
 COMPLIANCE CERTIFICATION SERVICES

PAGE NO: 1

2. PRODUCT DESCRIPTION

MATTEL MT. LAUREL, Model TYCO R/C-6V CORVETTE is the receiving portion of a remote control toy. The associated Transmitter is manufactured by MATTEL MT. LAUREL, Model No 95086-49T: FCC ID APB95086-00A4T.

3. TEST FACILITY

The 3 meter open area test site and conducted measurement facility used to collect the radiated data is located at 561F Monterey Road, Morgan Hill, California, U.S.A. A detailed description of the test facilities was submitted to the Commission on May 27, 1994.

The measuring instrument, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4. MEASUREMENT EQUIPMENT USED

Manufacturer	Model Number	Description	Cal Due Date
H.P.	8568B	Spectrum Analyzer (100Hz - 1.5GHz)	07/14/01
EATON	94455-1	Antenna, Biconical	09/12/01
H.P.	8640B	Signal Generator (0.5 - 1024 MHz)	11/09/00
BATTERY	N/A	6 Volt Nicad or 6V Alkaline (4 x AA)	N/A

5. TEST CONFIGURATION

Set signal generator to transmit at 49 MHz. Adjusted generator level and frequency to get the maximum coherent and emission of the Eut. The receiver receives the signal. All the wires are placed on the turntable to their maximum length to simulate the worse emission condition.

6. TESTS CONDUCTED

CFR 47, 15.109 RADIATED EMISSION TESTS	CONDUCTED AT 3 METERS
---	-----------------------

7. RADIATED EMISSION TEST PROCEDURE

The EUT and all other support equipment are placed on a wooden table 80 cm above the ground screen. Antenna to EUT distance is 3 meters. During the test, the table is rotated 360 degrees to maximize emissions and the antenna is positioned from 1 to 4 meters above the ground screen to further maximize emissions. The antenna is polarized in both vertical and horizontal positions.

Monitor the frequency range of interest at a fixed antenna height and EUT azimuth. Frequency span should be small enough to easily differentiate between broadcast stations and intermittent ambients. Rotate EUT 360 degrees to maximize emissions received from EUT. If emission increases by more than 1 dB, or if another emission appears that is greater by 1 dB, return to azimuth where maximum occurred and perform additional cable manipulation to further maximize received emission.

Move antenna up and down to further maximize suspected highest amplitude signal. If emission increased by 1 dB or more, or if another emission appears that is greater by 1dB or more, return to antenna height where maximum signal was observed and manipulate cables to produce highest emissions, noting frequency and amplitude.

8. COHERENT TESTS

During Radiated Emission Tests, H.P. Signal Generator Model No: 8640B (0.5 - 1024 MHz) was used to radiate unmodulated CW signal to EUT at 49 MHz. Please refer to radiated emission data for six highest readings.

9. EQUIPMENT MODIFICATIONS

To achieve compliance to FCC Section 15.109, the following change(s) were made during compliance testing:

No changes were required in order to achieve compliance to FCC Section 15.109.


10. TEST CONFIGURATION PHOTOS (Radiated Emission Test)

MATTEL, FCC15.109, FCCID APB95086-00A4R
REF 80.9 dB μ V ATTN 10 dB

MR 49.700 MHz
48.40 dB μ V

10 dB/
dB

OFFSET
-16.4

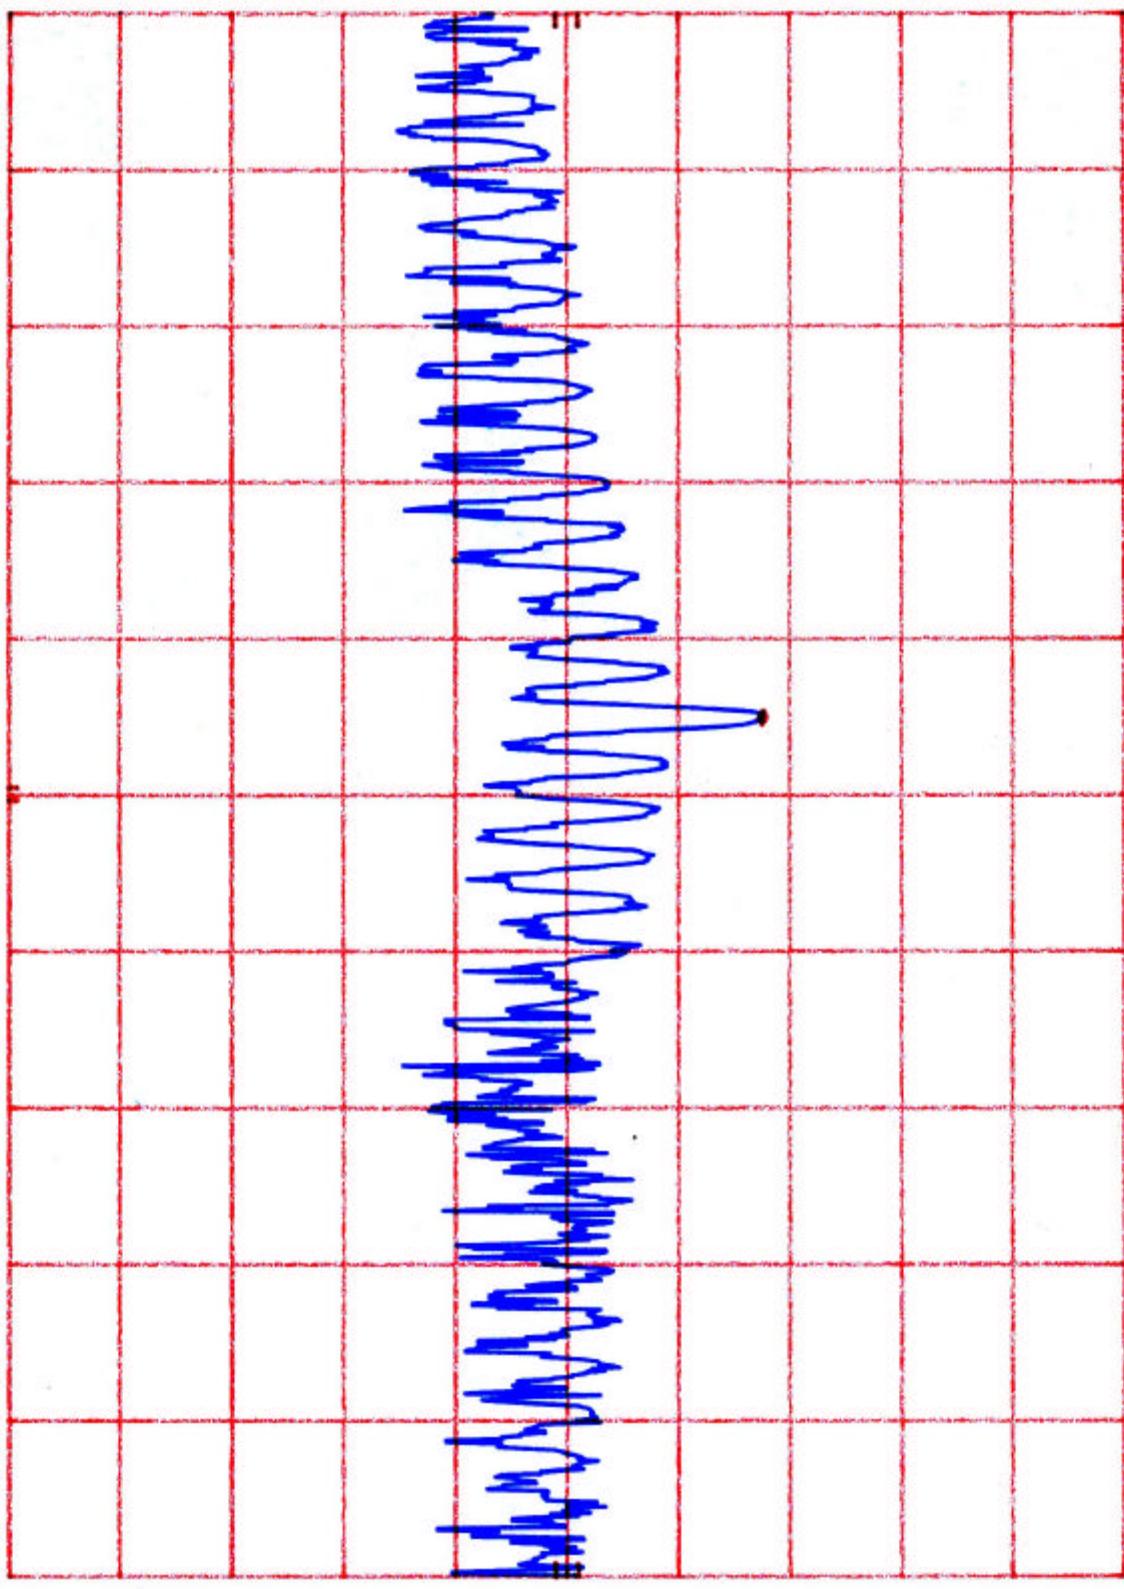

10 dB/
dB

OFFSET
-16.4

10 dB/
dB

MATTEL, FCC15-109, FCCID APB95086-00A4R


MKR 49.940 MHz
39.80 dB μ V

$h\mu$
10 dB/ μ V

OFFSET
-16.4
dB

DL
40.0
dB μ V

CENTER 50.100 MHz
RES BW 100 kHz
VBW 100 kHz
SPAN 8.000 MHz
SWP 20 msec

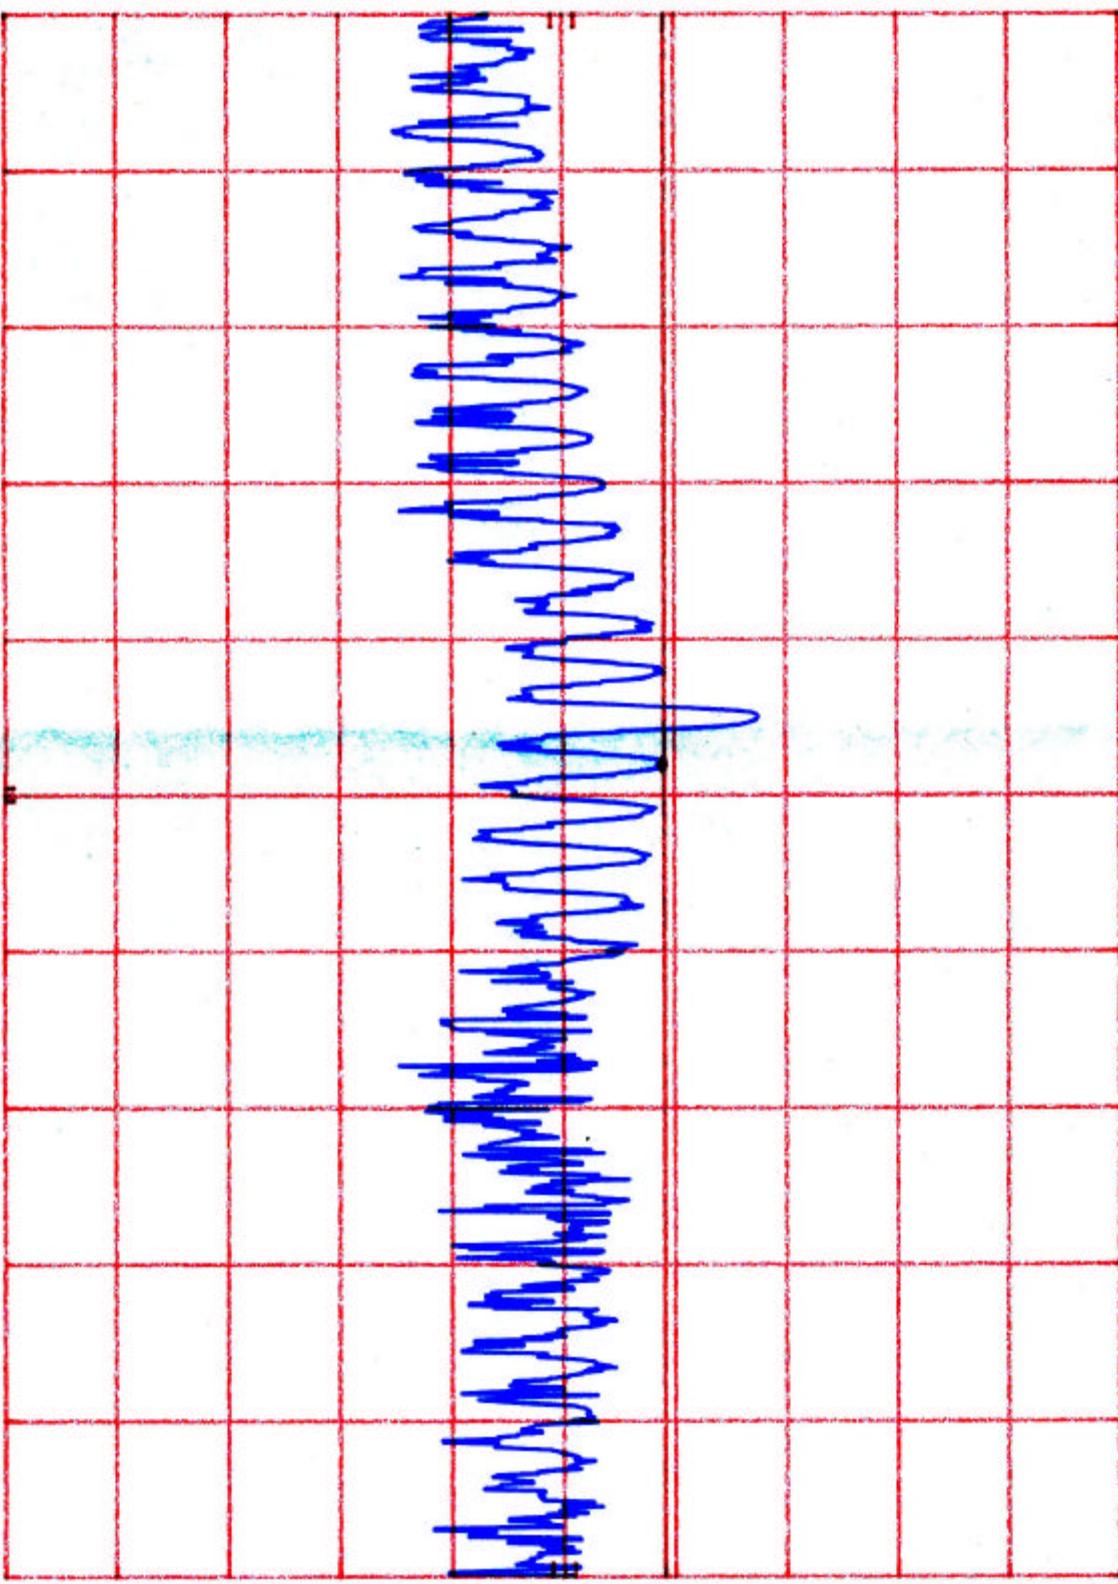



FCC, VCCI, CISPR, CE, AUSTEL, NZ
UL, CSA, TUV, BSMI, DHHS, NVLAP

561F MONTEREY ROAD, SAN JOSE, CA 95037-9001
PHONE: (408) 463-0885 FAX: (408) 463-0888

Project #: 01U0710-1
Report #: 010306C2
Date & Time: 03/06/01 2:30 PM
Test Engr: MIKE ZHU

MZ

Company: MATTEL MOUNT LAUREL FW
EUT Description: 49MHZ RADIO CONTROL CAR,M/N: 95086-49R
Test Configuration: EUT/SIGNAL GENERATOR
Type of Test: FCC CLASS B
Mode of Operation: NORMAL

Data Entry

C-Site
Preamp

FCC_A FCC_B EN_A EN_B EN11B_G2

Freq. (MHz)	Reading (dBuV)	AF (dB)	Closs (dB)	Pre-amp (dB)	Level (dBuV/m)	Limit FCC_B	Margin (dB)	Pol (H/V)	Az (Deg)	Height (Meter)	Mark (P/Q/A)
49.94	55.90	10.18	0.98	27.26	39.80	40.00	-0.20	3mV	180.00	1.00	P
50.15	55.30	10.12	0.98	27.26	39.14	40.00	-0.86	3mV	180.00	1.00	P
50.37	54.60	10.05	0.98	27.26	38.38	40.00	-1.62	3mV	180.00	1.00	P
49.68	55.10	10.25	0.98	27.26	39.07	40.00	-0.93	3mV	180.00	1.00	P
49.22	54.90	10.38	0.97	27.26	38.99	40.00	-1.01	3mV	180.00	1.00	P
49.01	53.20	10.44	0.97	27.27	37.35	40.00	-2.65	3mV	180.00	1.00	P

Above data was taken using a coherent frequency 49.7Mhz

*Completed full scan in the range of 30-1000Mhz in vertical and horizontal pol.