# ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT CERTIFICATION TO FCC PART 15 REQUIREMENTS

for

#### INTENTIONAL RADIATOR

# 27 MHz RADIO CONTROL CAR TRANSMITTER

**MODEL NO: 95087-27T** 

**BRAND NAME: TYCO R/C-6V THUNDERBIRD** 

FCC ID NO: APB95087-00A2T

**REPORT NO: 01U0707-1** 

**ISSUE DATE: MARCH 12, 2001** 

Prepared for
MATTEL MT. LAUREL
6000 MIDATLANTIC DRIVE

MOUNT LAUREL, NJ 08054

**USA** 

*Prepared by* 

COMPLIANCE ENGINEERING SERVICES, INC.

d.b.a.

COMPLIANCE CERTIFICATION SERVICES 561 F MONTEREY ROAD

**MORGAN HILL, CA 95037, USA** 

TEL: (408) 463-0885 FAX: (408) 463-0888

# TABLE OF CONTENTS **PAGE** 1. 2. 3. 4. 5. 6. PPOWERLINE RFI LIMITS .......4 7. 8. TEST SETUP AND CONFIGURATION ...... 5 9. 10. 11. **EXHIBIT** 1. Proposed FCC ID Label Format 2. Agent Authorization Letter

# Attachment

- EUT Photographs
- Schematic Diagram

#### 1. VERIFICATION OF COMPLIANCE

COMPANY NAME : MATTEL MOUNT LAUREL

6000 MIDATLANTIC DRIVE MOUNT LAUREL, NJ 08054

USA

CONTACT PERSON : FRANK WINKLER/ SENIOR ELECTRONIC ENGINEER

TELEPHONE NO. : 856-840-1259

EUT DESCRIPTION : 27 MHz RADIO CONTROL CAR TRANSMITTER

MODEL NAME/NUMBER : 95087-27T

BRAND NAME : TYCO R/C-6V THUNDERBIRD

SERIAL NUMBER : N/A

FCC ID : APB95087-00A2T

DATE TESTED : MARCH 08, 2001

REPORT NUMBER : 01U0707-1

TYPE OF EQUIPMENT	REMOTE CONTROL
EQUIPMENT TYPE	27 MHZ TRANSMITTER
MEASUREMENT PROCEDURE	ANSI 63.4 / 1992
EQUIPMENT AUTHORIZATION TYPE	CERTIFICATION
FCC RULE	CFR 47, PART 15.227

The above equipment was tested by Compliance Engineering Services, Inc. for compliance with the requirements set forth in CFR 47, PART 15. This said equipment in the configuration described in this report shows that maximum emission levels emanating from equipment are within the compliance requirements.

**Warning**: This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification will constitute fraud and shall nullify the document.

Tested and/or Reviewed By:	Released For CCS By:
PETE KREBILL	THU CHAN
ASSOCIATE EMC ENGINEER	SENIOR EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES	COMPLIANCE CERTIFICATION SERVICES

Page 1 of 6

#### 2. PRODUCT DESCRIPTION

CHASSIS TYPE	PLASTIC
Fundamental Frequency	27.145 MHz
Power Source	ONE 9 VOLT BATTERY
CHIPSET BRAND AND PART NO	MATTEL. 95087-27T/TX
Transmitting Time	CONTINUOUS
Type of antenna	PERMANENTLY ATTACHED
NO. OF LAYER	1
Local Osc.	27.145MHz

#### 3. TEST FACILITY

The 3/10/30 meter open area test site and conducted measurement facility used to collect the radiated data is located at 561F Monterey Road, Morgan Hill, California, U.S.A. A detailed description of the test facility was submitted to the Commission on May 27,1994.

### 4. MEASUREMENT STANDARDS

The site is constructed and calibrated in conformance with the requirements of ANSI C63.4/1992.

# 5. TEST METHODOLOGY

For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 KHz, up to at least the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower. (CFR 47 Section 15.33)

# 6. MEASUREMENT EQUIPMENT USED

Manufacturer	Model Number	Description	Cal Due Date	
H.P.	8568B	Spectrum Analyzer	07/14/01	
		(100 Hz-1.5 GHz)		
EMCO	6502	Active Loop Antenna	02/23/01	
		(10 K-30 MHz)		
EMCO	3146	Antenna, Log Periodic	10/2001	
		(200-2000 MHz)		
EATON	94455-1	Antenna, Biconical	09/12/01	

# 7. POWER LINE RFI LIMIT

CONNECTED TO AC POWER LINE	SECTION 15.207
CARRIER CURRENT SYSTEM IN THE FREQUENCY RANGE OF 450 KHz TO 30MHz	SECTION 15.205 AND SECTION 15.209, 15.221, 15.223, 15.225 OR 15.227, AS APPROPRIATE.
BATTERY POWER	NOT REQUIRED.

# 8. RADIATED EMISSION LIMITS

GENERAL REQUIREMENTS	SECTION 15.209
RESTRICTED BANDS OF OPERATION	SECTION 15.205
OPERATION WITHIN THE BAND 26.96 - 27.28 MHZ	SECTION 15.227

# 9. SYSTEM TEST CONFIGURATION

The EUT was configured for testing in a typical fashion (as a customer would normally use it). Push-to-Transmit switch is held in transmit position using electrician's (PVC) tape for transmit mode. The tape is removed for receive mode. Please refer to the following photograph for actual setup.







Radiated Open Site Test Set-up

# 10. EQUIPMENT MODIFICATIONS

To achieve compliance to FCC Section 15.227 technical limits, the following change(s) were made during compliance testing:


No changes were required in order to achieve compliance to FCC Section 15.227.


#### 11. TEST PROCEDURE AND RESULT

Powerline RFI Limits	Eut	Radiated Emission Limits	Eut
SECTION 15.207		SECTION 15.209	X
SECTION 15.205, 15.209, 15.221, 15.223, x 15.225 OR 15.227	X	SECTION 15.205	Х
BATTERY POWER	X	SECTION 15.227	X

#### 11.1 RADIATION EMISSION TEST PROCEDURE AND RESULT

- 1. The EUT was placed on a wooden table on the outdoor ground plane. The search antenna was placed 3 meter from the EUT. The EUT antenna was mounted vertically as per normal installation.
- 2. The turntable was slowly rotated to locate the direction of maximum emission at each emission falling in the restricted bands of 15.205. The EUT was moved throughout the XY, XZ, and YZ planes to maximize emissions received by the search antenna.
- 3. Once maximum direction was determined, the search antenna was raised and lowered in both vertical and horizontal polarizations. The six maximum readings so obtained are recorded in the data listed below.

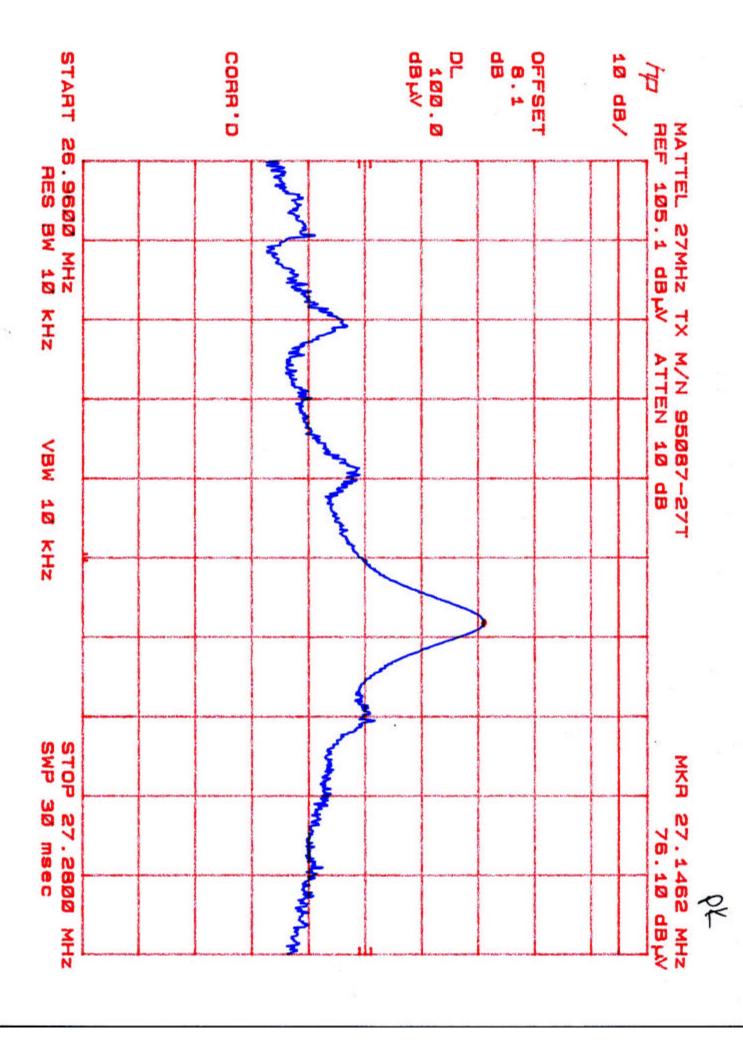

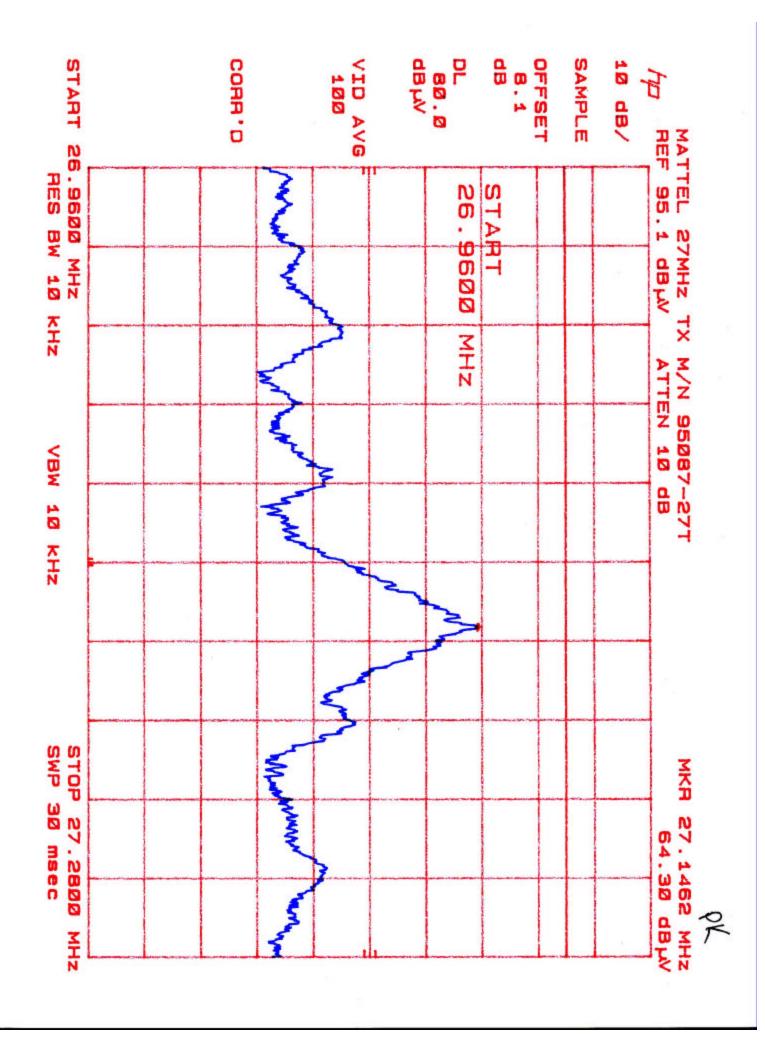

Project #: Report #:

01U0707

010308C2

Date& Time: 03/08/01 10:17 AM

Test Engr: Pete Krebill

FCC, VCCI, CISPR, CE, AUSTEL, NZ UL, CSA, TUV, BSMI, DHHS, NVLAP

561F MONTEREY ROAD, SAN JOSE, CA 95037-9001 PHONE: (408) 463-0885 FAX: (408) 463-0888

Company:

Mattel Mount Laurel FW

EUT Description:

27MHz Radio Control TX M/N:95087-27T

Test Configuration:

**EUT only** 

Type of Test: FCC 15.227/15.209

Mode of Operation:

TX

C A-Site

C B-Site

C C-Site

C F-Site

6 Worst Data

Descending

PK

Freq.	Reading	AF	Closs	Pre-amp	Level	Limit	Margin	Pol	Az	Height	Mark
(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	FCC_B	(dB)	(H/V)	(Deg)	(Meter)	(P/Q/A)
54.29	48.40	8.92	1.02	27.26	31.08	40.00	-8.92	3mV	0.00	1.00	Р
Above Y	-Axis										
X-Axis											1 40.00
54.29	33.80	10.09	1.02	27.26	17.65	40.00	-22.35	3mH	270.00	1.50	Р
81.43	31.40	8.79	1.22	27.22	14.18	40.00	-25.82	3mH	0.00	1.50	Р
Z-Axis											
54.29	31.30	10.09	1.02	27.26	15.15	40.00	-24.85	3mH	0.00	2.00	P
81.43	30.10	8.79	1.22	27.22	12.88	40.00	-27.12	3mH	180.00	1.50	P
Below ar	re noise fl	oor read	ings of f		s to the 10	th harmo	nic of the	EUT wi	thin restric	ted bands.	
108.58	41.00		1.47	27.12		43.50	-17.40	THE CONTRACTOR OF THE CONTRACT	0.00	1.00	Р
135.73	36.60	14.14	1.66	27.02	25.38	43.50	-18.12	3mV	0.00	1.00	P
162.87	38.30	17.21	1.77	26.89	30.39	43.50	-13.11	3mV	0.00	1.00	Р
244.31	37.80	12.74	2.24	26.55	26.23	46.00	-19.77	3mV	0.00	1.00	Р
271.45	37.50	13.99	2.36	26.47	27.38	46.00	-18.62	3mV	0.00	1.00	P
Total da					1200000	110000	500000				
V.2c		1	i i								
				1	f l		1				
						-					
							-				
			Ü	1							
		3									je.
	100										
	3										
200000-77		Section 1				Services come				William Committee	