



Valued Quality. Delivered.

TEST REPORT

Report Number: 16041977HKG-001

Application
for
Original Grant of 47 CFR Part 15 Certification
RSS-247 Issue 1 Equipment Certification

Remote Control Digital Mixer

FCC ID: API-UI12MIXER

IC: 6132A-UI12MIXER

This report contains the data of WLAN (WiFi) portion only.

Prepared and Checked by:

Approved by:

Signed On File

Wong Cheuk Ho, Herbert
Lead Engineer

Koo Wai Ip
Assistant Supervisor
July 28, 2016

- Intertek's standard Terms and Conditions can be obtained at our website: <http://www.intertek.com/terms/>.
- The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Intertek Testing Services Hong Kong Ltd.

2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.
Tel: (852) 2173 8888 Fax: (852) 2785 5487 Website: www.hk.intertek-etlsemko.com

INTERTEK TESTING SERVICES

GENERAL INFORMATION

Applicant Name:	Harman International Industries, Inc
Applicant Address:	8500 Balboa Boulevard, Northridge, California, 91329, United States.
Contact Person:	Tim Song
Tel:	(818) 898 8173
Fax:	(818) 892 0325
Manufacturer:	Harman International Industries, Inc
Manufacturer Address:	8500 Balboa Boulevard, Northridge, California, 91329, United States.
FCC Specification Standard:	FCC Part 15, 2014 Edition
IC Specification Standard:	RSS-247 Issue 1, May 2015 RSS-Gen Issue 4, November 2014
FCC ID:	API-UI12MIXER
IC:	6132A-UI12MIXER
Brand Name:	Soundcraft
FCC Model(s):	Ui12
For IC HVIN:	Ui12
For IC PMN:	Ui12
Type of EUT:	Digital Transmission System Transmitter
Description of EUT:	Remote Control Digital Mixer
Serial Number:	N/A
Sample Receipt Date:	April 29, 2016
Date of Test:	April 29, 2016 to July 28, 2016
Report Date:	July 28, 2016
Environmental Conditions:	Temperature: +10 to 40°C Humidity: 10 to 90%

INTERTEK TESTING SERVICES

Table of Contents

1.0 Test Results Summary & Statement of Compliance	5
1.1 Summary of Test Results	5
1.2 Statement of Compliance.....	5
2.0 General Description	7
2.1 Product Description	7
2.2 Test Methodology	8
2.3 Test Facility	8
2.4 Related Submittal(s) Grants.....	8
3.0 System Test Configuration	10
3.1 Justification.....	10
3.2 EUT Exercising Software	12
3.3 Details of EUT and Description of Accessories	12
3.4 Measurement Uncertainty	12
4.0 Test Results	14
4.1 Maximum Conducted (peak) Output Power at Antenna Terminals	14
4.2 Minimum 6dB RF Bandwidth	16
4.3 Maximum Power Spectral Density	19
4.4 Out of Band Conducted Emissions	22
4.5 Field Strength Calculation	27
4.6 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions	28
4.6.1 Radiated Emission Configuration Photograph.....	28
4.6.2 Radiated Emission Data	28
4.6.3 Transmitter Duty Cycle Calculation	34
4.7 AC Power Line Conducted Emission	34
4.7.1 AC Power Line Conducted Emission Configuration Photograph	34
4.7.2 AC Power Line Conducted Emission Data.....	34
5.0 Equipment List	38

INTERTEK TESTING SERVICES

EXHIBIT 1 TEST RESULTS SUMMARY & STATEMENT OF COMPLIANCE

INTERTEK TESTING SERVICES

1.0 Test Results Summary & Statement of Compliance

1.1 Summary of Test Results

Test Items	FCC Part 15 Section	RSS-210/ RSS- Gen# Section	Results	Details see section
Antenna Requirement	15.203	7.1.2#	Pass	2.1
Max. Conducted Output Power (peak)	15.247(b)(3)&(4)	5.4(4)	Pass	4.1
Min. 6dB RF Bandwidth	15.247(a)(2)	5.2(1)	Pass	4.2
Max. Power Density	15.247(e)	5.2(2)	Pass	4.3
Out of Band Antenna Conducted Emission	15.247(d)	5.5	Pass	4.4
Radiated Emission in Restricted Bands and Spurious Emissions	15.247(d), 15.209 & 15.109	5.5	Pass	4.6
AC Power Line Conducted Emission	15.207 & 15.107	7.2.4#	Pass	4.7

Note: Pursuant to FCC Part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.

1.2 Statement of Compliance

The equipment under test is found to be complying with the following standard:

FCC Part 15, 2014 Edition
RSS-247 Issue 1, May 2015
RSS-Gen Issue 4, November 2014

INTERTEK TESTING SERVICES

EXHIBIT 2 GENERAL DESCRIPTION

2.0 **General Description**

2.1 Product Description

The Equipment Under Test (EUT) is a Remote Control Digital Mixer, equipped with multi-channel XLR/line input/output, headphone output, WiFi, LAN and USB Interface. Its operation can be controlled by a Smartphone/Notebook over WiFi link. The EUT has only 802.11b mode that occupies a frequency range from 2412MHz to 2462MHz (11 channels with channel spacing of 5MHz). The EUT is powered by an external AC/DC adaptor (18VDC output). The adaptor accepts 100-240VAC. HDMI function is not implemented for this product.

The antenna(s) used in the EUT is external, detachable, with reverse-SMA connector.

The circuit description is saved with filename: descri.pdf.

INTERTEK TESTING SERVICES

2.2 Test Methodology

Radiated emission measurements was performed according to the procedures in ANSI C63.10 (2013). Preliminary radiated scans and all radiated measurements were performed in a 3m Chamber. All Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application. Antenna port conducted measurements were performed according to ANSI C63.10 (2013) and KDB Publication No. 558074 D01 v03r05 (08-April-2016). All other measurements were made in accordance with the procedures in RSS-Gen Issue 4 (2014).

2.3 Test Facility

The radiated emission test site and antenna port conducted measurement facility used to collect the radiated data and conductive data are at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong. This test facility and site measurement data have been fully placed on file with the FCC and the Industry Canada.

2.4 Related Submittal(s) Grants

This is a single application for certification of a transceiver.

INTERTEK TESTING SERVICES

EXHIBIT 3 SYSTEM TEST CONFIGURATION

INTERTEK TESTING SERVICES

3.0 **System Test Configuration**

3.1 Justification

For radiated emissions testing, the equipment under test (EUT) was setup to transmit / receive continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables (if any) were manipulated to produce worst case emissions.

The EUT was powered by 120VAC.

For the measurements, the EUT was attached to a plastic stand if necessary and placed on the wooden turntable which is four feet in diameter and approximately 0.8m in height above the ground plane for emission measurement at or below 1GHz and 1.5m in height above the ground plane for emission measurement above 1GHz. If the base unit attached to peripherals, they were connected and operational (as typical as possible).

The signal was maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization were varied during the search for maximum signal level. The antenna height was varied from 1 to 4 meters. Radiated emissions were taken at three meters unless the signal level was too low for measurement at that distance. If necessary, a pre-amplifier was used and/or the test was conducted at a closer distance.

For any intentional radiator powered by AC power line, measurements of the radiated signal level of the fundamental frequency component of the emission was performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

Radiated emission measurement for transmitter were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

INTERTEK TESTING SERVICES

Justification – Cont'd

Emission that are directly caused by digital circuits in the transmit path and transmitter portion were measured, and the limit are according to FCC Part 15 Section 15.209/ RSS-247 2.5. Digital circuitries used to control additional functions other than the operation of the transmitter are subject to FCC Part 15 Section 15.109/ RSS-247 Section 5.5 Limits.

Detector function for radiated emissions was in peak mode. Average readings, when required, were taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in section 4.2.3.

Determination of pulse desensitization was made according to *Hewlett Packard Application Note 150-2, Spectrum Analysis... Pulsed RF*. The effective period (Teff) was referred to Exhibit 4.6.3. With the resolution bandwidth 1MHz and spectrum analyzer IF bandwidth 3dB, the pulse desensitization factor was 0dB.

The EUT along with its peripherals were placed on a 1.0m(W)x1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT power cord connected to one LISN (Line impedance stabilization network), which provided 50ohm coupling impedance for measuring instrument. Meanwhile, the peripheral or support equipment power cords connected to a separate LISN. The ac powers for all LISNs were obtained from the same power source. The LISN housing, measuring instrument case, reference ground plane, and vertical ground plane were bounded together. The excess power cable between the EUT and the LISN was bundled. Power cords of non-EUT equipment (peripherals) were not bundled. AC power cords of peripheral equipments draped over the rear edge of the table, and routed them down onto the floor of the ac power line conducted emission test site to the second LISN.

All connecting cables of EUT and peripherals were manipulated to find the maximum emission.

All setting of data rate for 802.11b of WiFi mode had been considered, and worst case test data are shown on this test report.

INTERTEK TESTING SERVICES

3.2 EUT Exercising Software

The EUT exercise program (if any) used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use.

3.3 Details of EUT and Description of Accessories

Details of EUT:

- 1 The EUT is powered by 120VAC

Description of Accessories:

1. Headphone cable of 1.2m long (with termination)
2. 4GB USB Flash (Play)
3. 5X Audio cable of 2m long (with termination)
4. LAN cable of 2m long (with termination)
(Provided by Intertek)
5. AC/DC Adaptor
Model: GPE024D-180130-D
(Input: 100-240VAC 50/60Hz 0.75A; Output: 18VDC 1.3A)
(Provided by Applicant)

3.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test at a level of confidence of 95% has been considered. The values of the Measurement uncertainty for radiated emission test and RF conducted measurement test are $\pm 5.3\text{dB}$ and $\pm 0.99\text{dB}$ respectively. The value of the Measurement uncertainty for conducted emission test is $\pm 4.2\text{dB}$.


Uncertainty and Compliance - Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.

INTERTEK TESTING SERVICES

EXHIBIT 4 TEST RESULTS

INTERTEK TESTING SERVICES

4.0 Test Results



4.1 Maximum Conducted (peak) Output Power at Antenna Terminals

The antenna port of the EUT was connected to the input of a power meter.

- ☒ The antenna power of the EUT was connected to the input of a power meter. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals. The measurement procedure 9.1.2 was used.
- ☐ The EUT should be configured to transmit continuously (at a minimum duty cycle of 98%) at full power over the measurement duration. The measurement procedure AVG1 was used.

IEEE 802.11b (DSSS, 1 Mbps) Antenna Gain = 2 dBi		
Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2412	10.34	10.81
Middle Channel: 2437	10.32	10.76
High Channel: 2462	10.06	10.14

INTERTEK TESTING SERVICES

4.1 Maximum Conducted (peak) Output Power at Antenna Terminals – Cont'd

Cable loss: 0.5 dB External Attenuation: 0 dB

IEEE 802.11b (DSSS, 1 Mbps)
max. conducted (peak) output level = 10.34dBm

Limits:


☒ 1W (30dBm) for antennas with gains of 6dBi or less

☐ ___W (___dBm) for antennas with gains more than 6dBi

INTERTEK TESTING SERVICES

RF Conduct measurement Test Setup

The figure below shows the test setup, which is utilized to make these measurements.



4.2 Minimum 6dB RF Bandwidth

The antenna port of the EUT was connected to the input of a spectrum analyzer. The EBW measurement procedure was used. A PEAK output reading was taken, a DISPLAY line was drawn 6dB lower than PEAK level. The 6dB bandwidth was determined from where the channel output spectrum intersected the display line.

IEEE 802.11b (DSSS, 1 Mbps)	
Frequency (MHz)	6dB Bandwidth (kHz)
Low Channel: 2412	10240
Middle Channel: 2437	10200
High Channel: 2462	10240


Limits:

6 dB bandwidth shall be at least 500kHz

INTERTEK TESTING SERVICES


Plots of 6dB RF bandwidth

802.11b, Lowest Channel

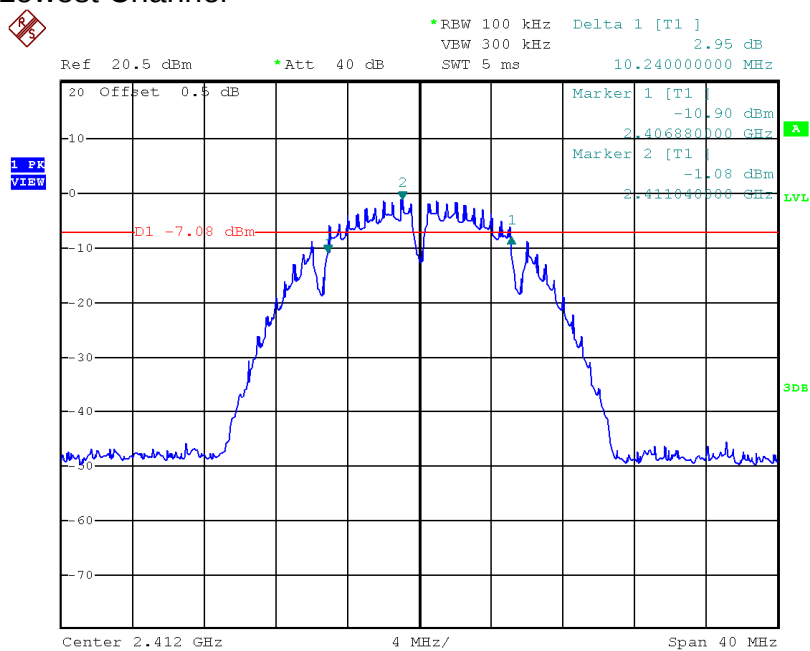

Date: 17.JUN.2016 17:39:56


802.11b, Middle Channel

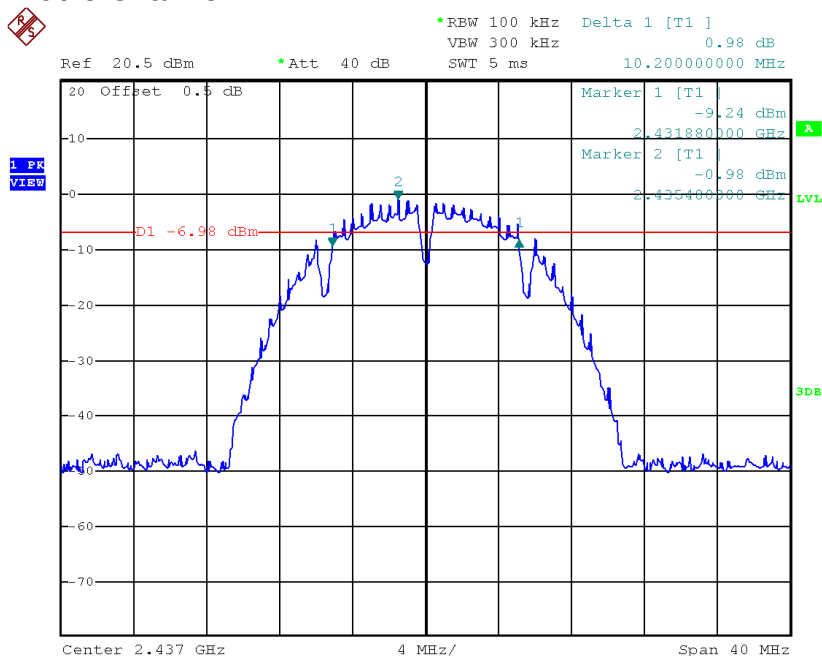

Date: 17.JUN.2016 17:43:53

INTERTEK TESTING SERVICES

Plots of 6dB RF bandwidth
802.11b, Highest Channel

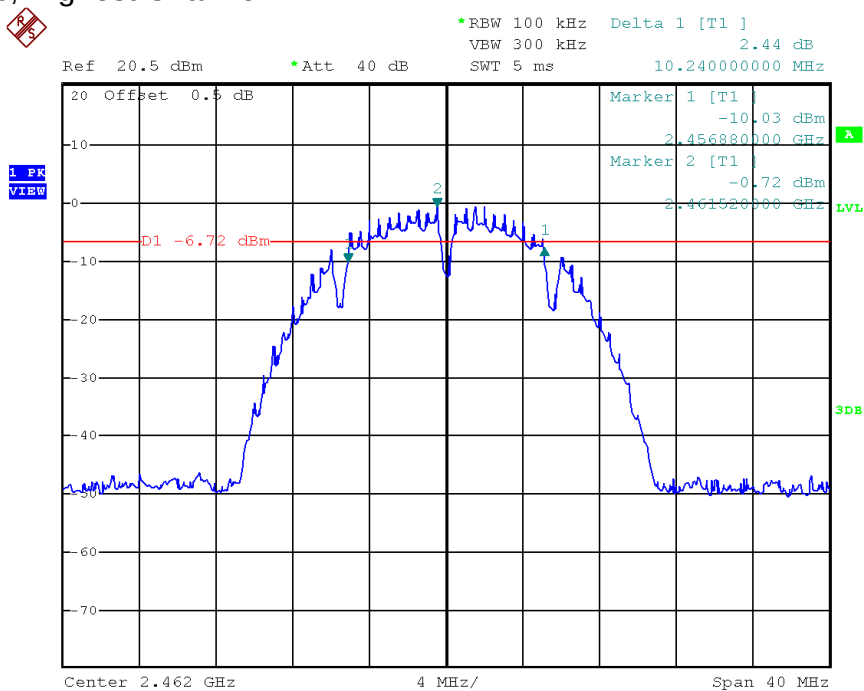

Date: 17.JUN.2016 17:47:11

INTERTEK TESTING SERVICES

4.3 Maximum Power Spectral Density

Antenna output of the EUT was coupled directly to spectrum analyzer. The measurement procedure 10.2 PKPSD-1 was used. If an external attenuator and/or cable was used, these losses are compensated for using the OFFSET function of the analyser.

IEEE 802.11b (DSSS, 1 Mbps)	
Frequency (MHz)	PSD in 100kHz (dBm)
Low Channel: 2412	-1.32
Middle Channel: 2437	-1.28
High Channel: 2462	-0.38


Cable Loss: 0.5 dB

Limit:
8dBm

INTERTEK TESTING SERVICES


Plots of power spectral density

802.11b, Lowest channel

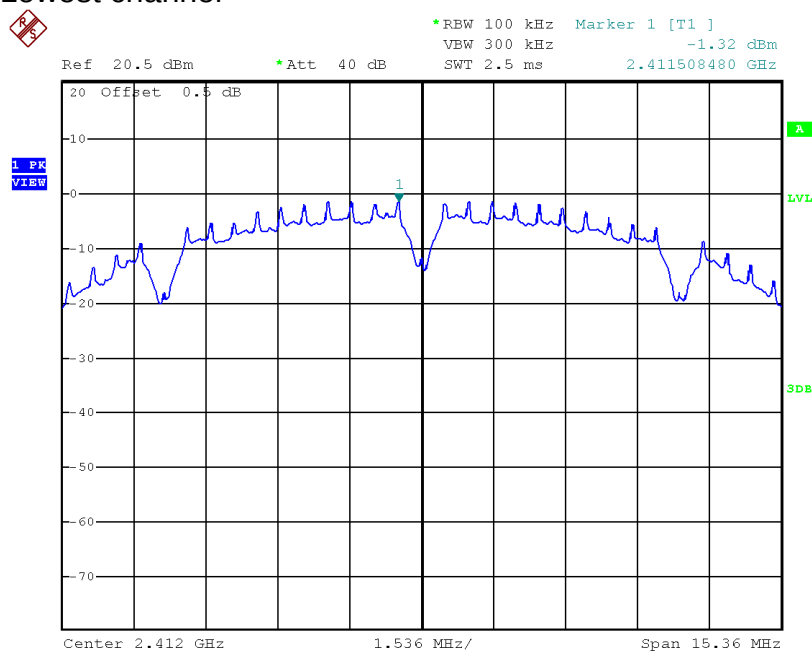

Date: 17.JUN.2016 17:51:35

802.11b, Middle channel

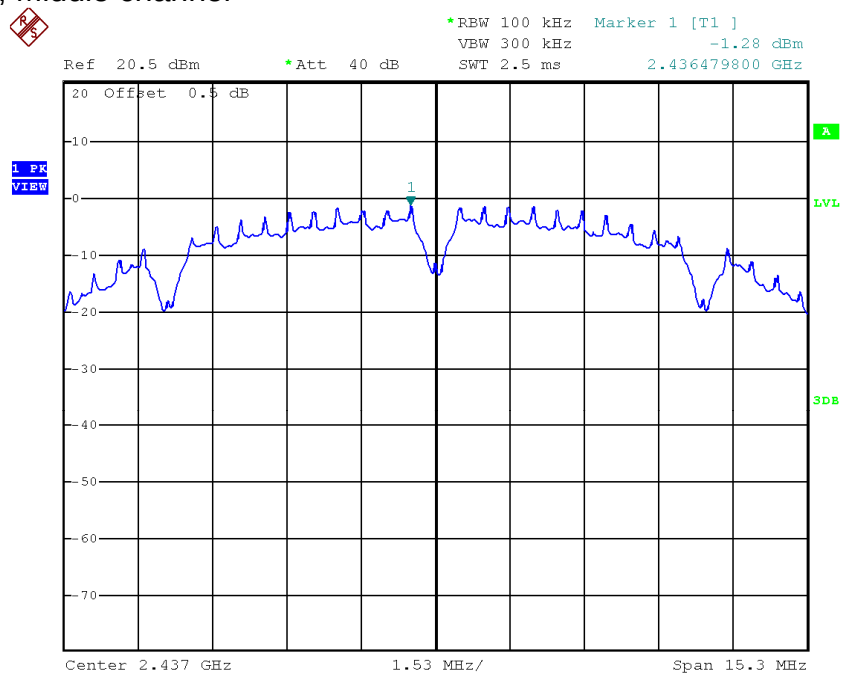


Date: 17.JUN.2016 17:56:24

INTERTEK TESTING SERVICES

Plots of power spectral density

802.11b, Highest channel

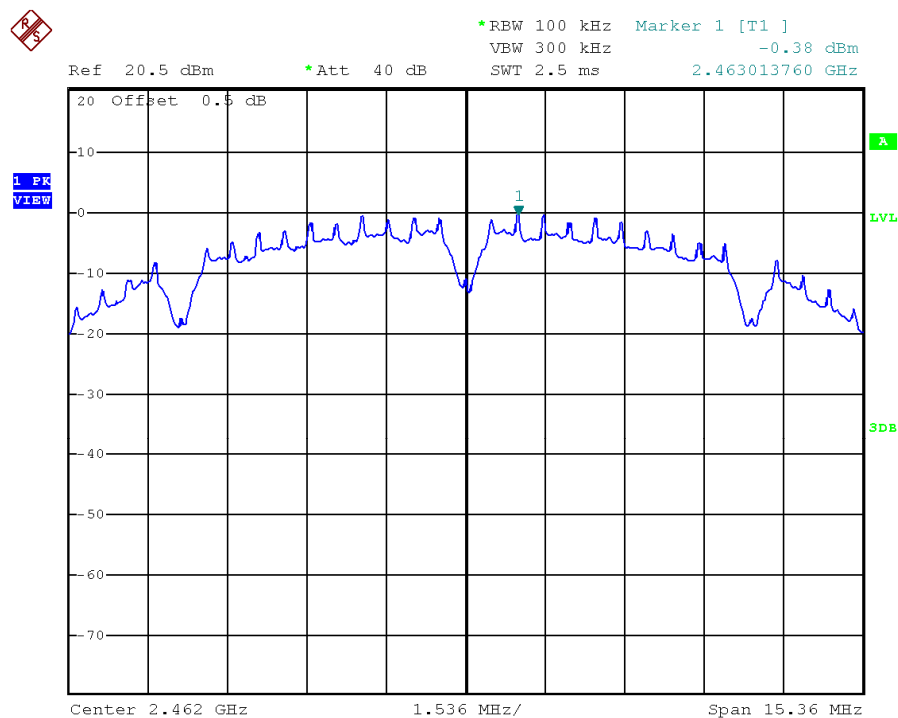

Date: 17.JUN.2016 17:52:25

INTERTEK TESTING SERVICES

4.4 Out of Band Conducted Emissions

For 802.11b:

The maximum conducted (peak) output power was used to demonstrate compliance as described in 9.1. Then the display line (in red) shown in the following plots denotes the limit at 20dB below maximum measured in-band peak PSD level in 100 KHz bandwidth.

The measurement procedures under sections 11 of KDB558074 D01 v03r05 (08-April-2016) were used.

Furthermore, delta measurement technique for measuring bandedge emissions was incorporated in the test of the edge at 2483.5MHz.

Limits:

For 802.11 b


All spurious emission and up to the tenth harmonic was measured and they were found to be at least 20 dB below the maximum measured in-band peak PSD level.

The plots of out of band conducted emissions are as below.

INTERTEK TESTING SERVICES


Plots of out of band conducted emissions

802.11b, Lowest Channel, Plot A

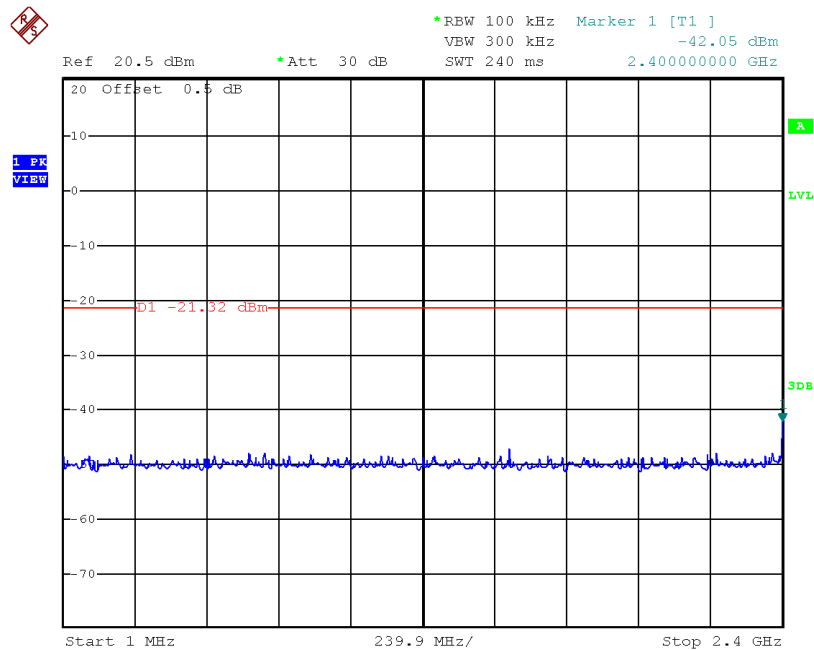

Date: 17.JUN.2016 18:01:20

802.11b, Lowest Channel, Plot B

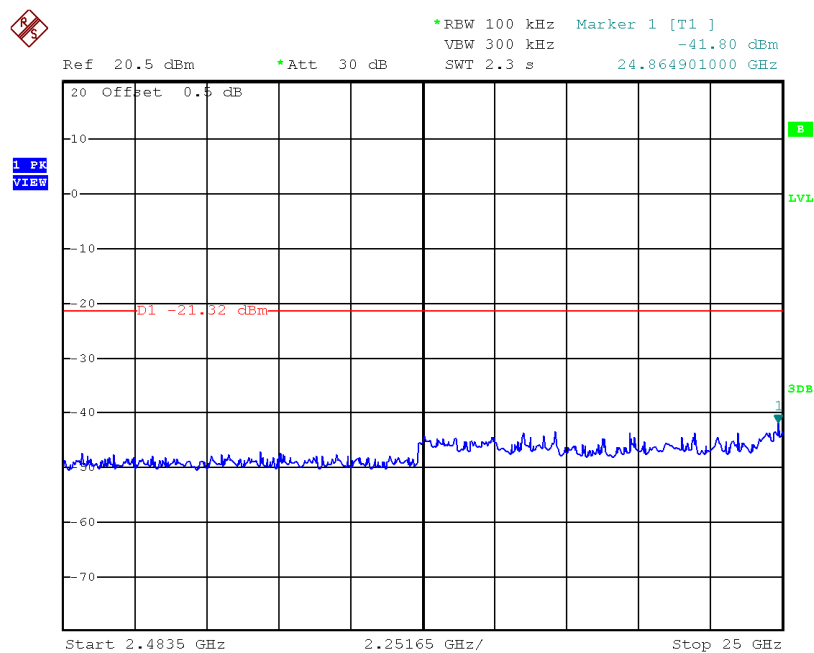


Date: 17.JUN.2016 18:02:07

INTERTEK TESTING SERVICES


Plots of out of band conducted emissions

802.11b, Middle Channel, Plot A

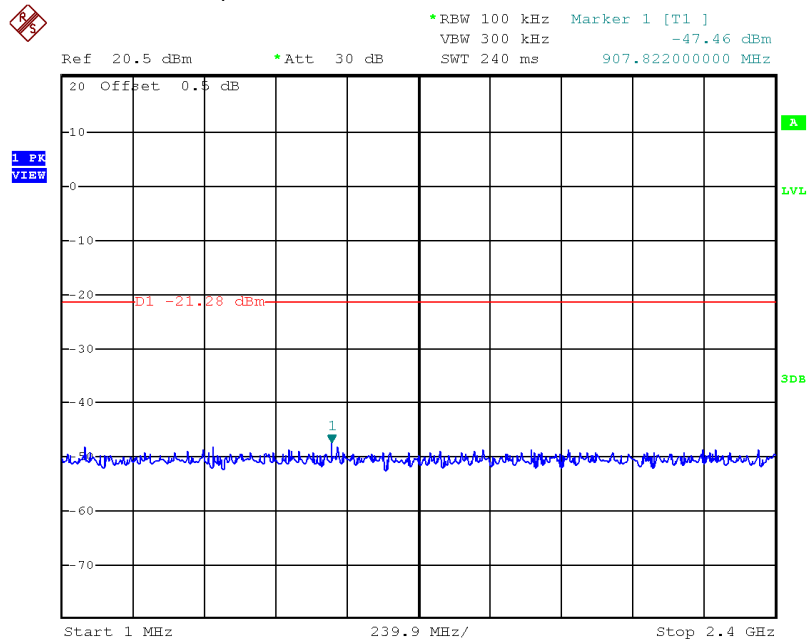

Date: 17.JUN.2016 18:05:56

802.11b, Middle Channel, Plot B

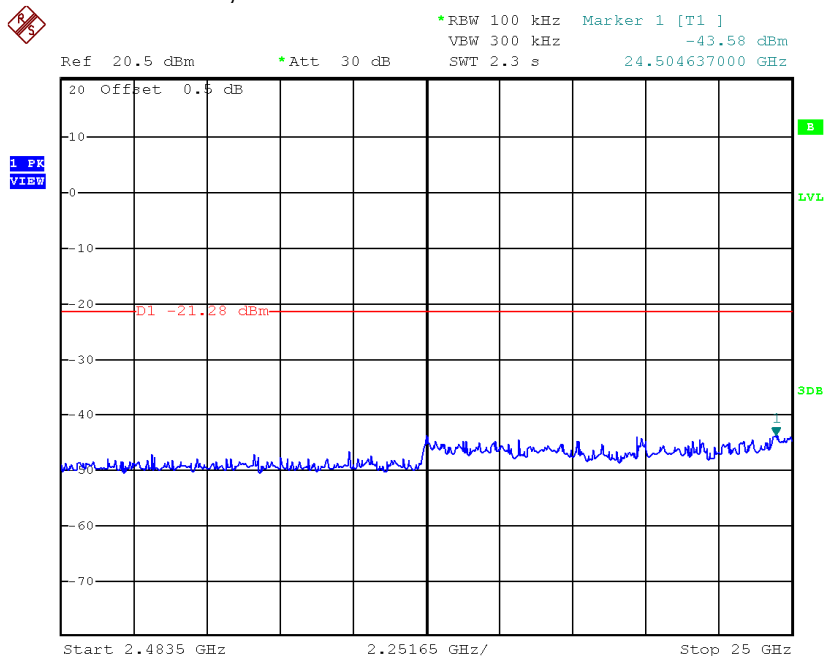


Date: 17.JUN.2016 18:06:28

INTERTEK TESTING SERVICES


Plots of out of band conducted emissions

802.11b, Highest Channel, Plot A

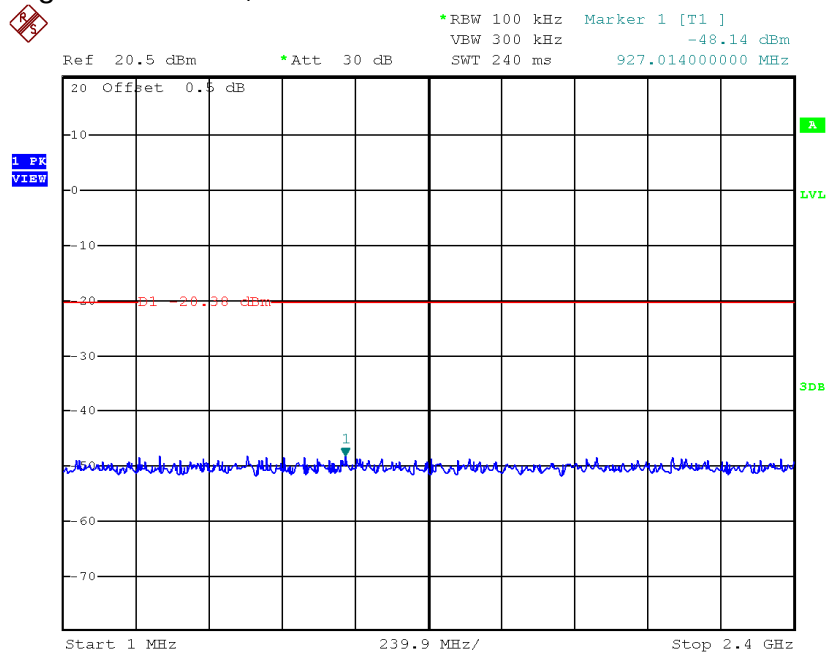

Date: 17.JUN.2016 18:10:28


802.11b, Highest Channel, Plot B

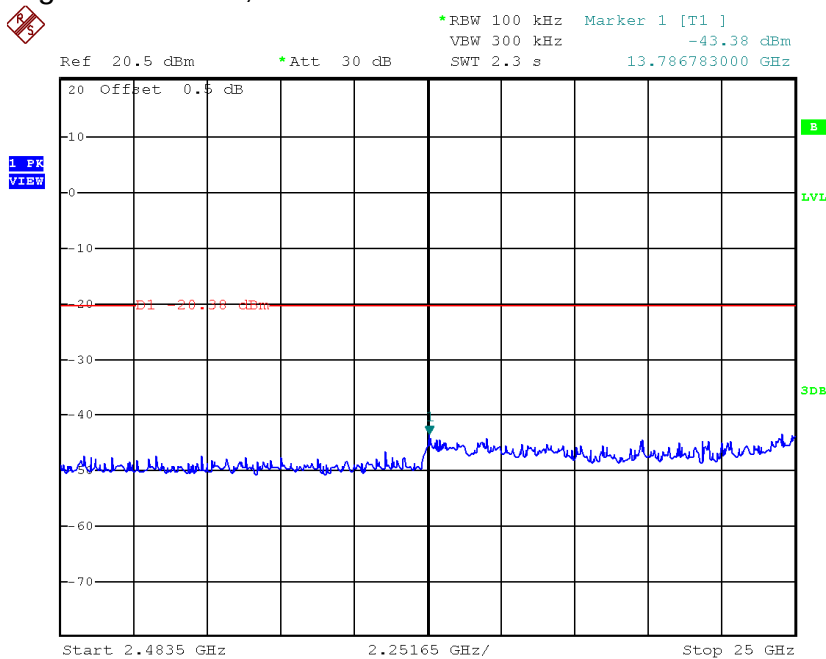

Date: 17.JUN.2016 18:10:02


INTERTEK TESTING SERVICES

Plots of Bandedge 802.11b, Lowest Channel

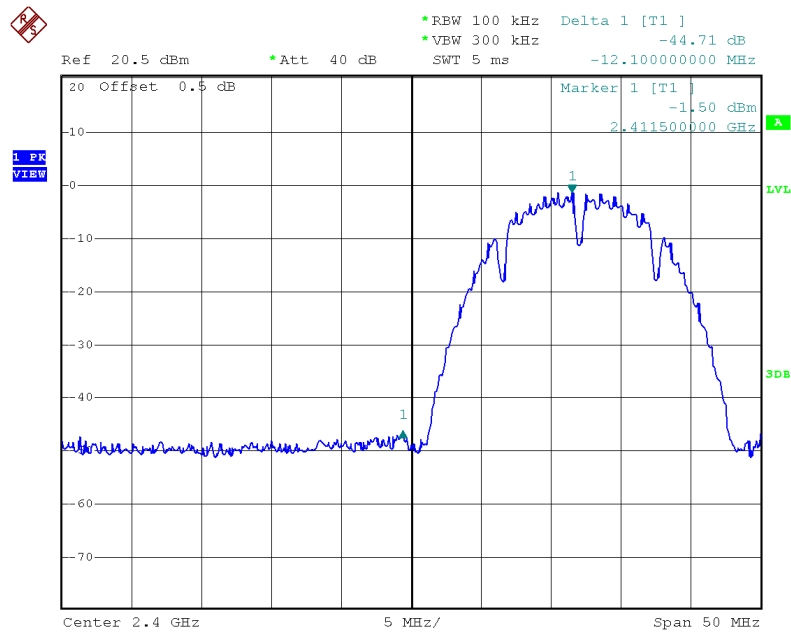

Date: 27.JUL.2016 13:52:01

802.11b, Highest Channel

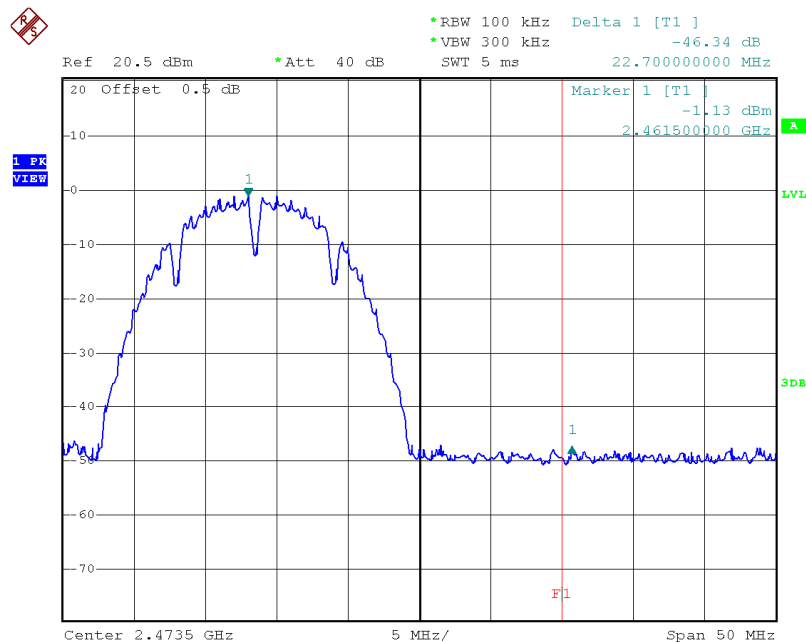

Date: 27.JUL.2016 13:55:21

INTERTEK TESTING SERVICES

4.5 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

Where FS = Field Strength in dB μ V/m
 RA = Receiver Amplitude (including preamplifier) in dB μ V
 CF = Cable Attenuation Factor in dB
 AF = Antenna Factor in dB
 AG = Amplifier Gain in dB
 PD = Pulse Desensitization in dB
 AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Example

Assume a receiver reading of 62.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29.0 dB is subtracted. The pulse desensitization factor of the spectrum analyzer is 0.0 dB, and the resultant average factor is -10.0 dB. The net field strength for comparison to the appropriate emission limit is 32.0 dB μ V/m. This value in dB μ V/m is converted to its corresponding level in μ V/m.

RA = 62.0 dB μ V
AF = 7.4 dB
CF = 1.6 dB
AG = 29.0 dB
PD = 0.0 dB
AV = -10 dB

$$FS = 62.0 + 7.4 + 1.6 - 29.0 + 0.0 + (-10.0) = 32.0 \text{ dB}\mu\text{V/m}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32.0 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}$$

INTERTEK TESTING SERVICES

4.6 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

4.6.1 Radiated Emission Configuration Photograph

Worst Case Restricted Band Radiated Emission
at

233.457 MHz

The worst case radiated emission configuration photographs are saved with filename:
config photos.pdf

4.6.2 Radiated Emission Data

The data in tables 1-4 list the significant emission frequencies, the limit and the margin of compliance.

Judgement -

Passed by 0.4 dB margin

INTERTEK TESTING SERVICES

Mode: TX-Channel 01

Date of Test: July 19, 2016

Table 1
IEEE 802.11b (DSSS, 1 Mbps)

Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBuV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBuV/m)	Average Limit at 3m (dBuV/m)	Margin (dB)
V	2390.000	55.7	33	29.4	52.1	54.0	-1.9
V	4824.000	48.3	33	34.9	50.2	54.0	-3.8
V	12060.000	42.8	33	40.5	50.3	54.0	-3.7

Polarization	Frequency (MHz)	Reading (dBuV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBuV/m)	Peak Limit at 3m (dBuV/m)	Margin (dB)
V	2390.000	55.7	33	29.4	52.1	74.0	-21.9
V	4824.000	48.3	33	34.9	50.2	74.0	-23.8
V	12060.000	42.8	33	40.5	50.3	74.0	-23.7

- NOTES:
1. Peak detector is used for the emission measurement.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.
 5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-247 Section 3.3.
 6. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
 7. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

INTERTEK TESTING SERVICES

Mode: TX-Channel 06

Date of Test: July 19, 2016

Table 2
IEEE 802.11b (DSSS, 1 Mbps)

Radiated Emission Data

Polarization	Frequency	Reading (dBuV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBuV/m)	Average Limit at 3m (dBuV/m)	Margin (dB)
V	4874.000	48.3	33	34.9	50.2	54.0	-3.8
V	7311.000	45.3	33	37.9	50.2	54.0	-3.8
V	12185.000	43.3	33	40.5	50.8	54.0	-3.2

Polarization	Frequency	Reading (dBuV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBuV/m)	Peak Limit at 3m (dBuV/m)	Margin (dB)
V	4874.000	48.3	33	34.9	50.2	74.0	-23.8
V	7311.000	45.3	33	37.9	50.2	74.0	-23.8
V	12185.000	43.3	33	40.5	50.8	74.0	-23.2

- NOTES:
1. Peak detector is used for the emission measurement.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.
 5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-247 Section 3.3.
 6. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
 7. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

INTERTEK TESTING SERVICES

Mode: TX-Channel 11

Date of Test: July 19, 2016

Table 3
IEEE 802.11b (DSSS, 1 Mbps)

Radiated Emission Data

Polarization	Frequency	Reading (dBuV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBuV/m)	Average Limit at 3m (dBuV/m)	Margin (dB)
V	2483.500	55.7	33	29.4	52.1	54.0	-1.9
V	4924.000	48.4	33	34.9	50.3	54.0	-3.7
V	7386.000	45.5	33	37.9	50.4	54.0	-3.6
V	12310.000	43.0	33	40.5	50.5	54.0	-3.5

Polarization	Frequency	Reading (dBuV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBuV/m)	Peak Limit at 3m (dBuV/m)	Margin (dB)
V	2483.500	55.7	33	29.4	52.1	74.0	-21.9
V	4924.000	48.4	33	34.9	50.3	74.0	-23.7
V	7386.000	45.5	33	37.9	50.4	74.0	-23.6
V	12310.000	43.0	33	40.5	50.5	74.0	-23.5

- NOTES:
1. Peak detector is used for the emission measurement.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.
 5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-247 Section 3.3.
 6. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
 7. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

INTERTEK TESTING SERVICES

Worst Case: EUT Transmitting

Date of Test: July 19, 2016

Table 4

Radiated Emission Data


Polarization	Frequency (MHz)	Reading (dBμV)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
V	41.033	22.6	16	10.0	16.6	40.0	-23.4
V	64.435	28.4	16	9.0	21.4	40.0	-18.6
V	159.616	30.4	16	16.0	30.4	43.5	-13.1
V	208.843	33.2	16	17.0	34.2	43.5	-9.3
V	233.457	42.6	16	19.0	45.6	46.0	-0.4
V	257.950	33.4	16	21.0	38.4	46.0	-7.6
V	282.563	27.4	16	22.0	33.4	46.0	-12.6
V	430.003	19.4	16	25.0	28.4	46.0	-17.6
V	524.942	17.4	16	27.0	28.4	46.0	-17.6
V	712.758	18.2	16	30.0	32.2	46.0	-13.8
V	960.108	19.4	16	33.0	36.4	54.0	-17.6

- NOTES: 1. Peak detector is used for the emission measurement.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-247 Section 3.3.


INTERTEK TESTING SERVICES

Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

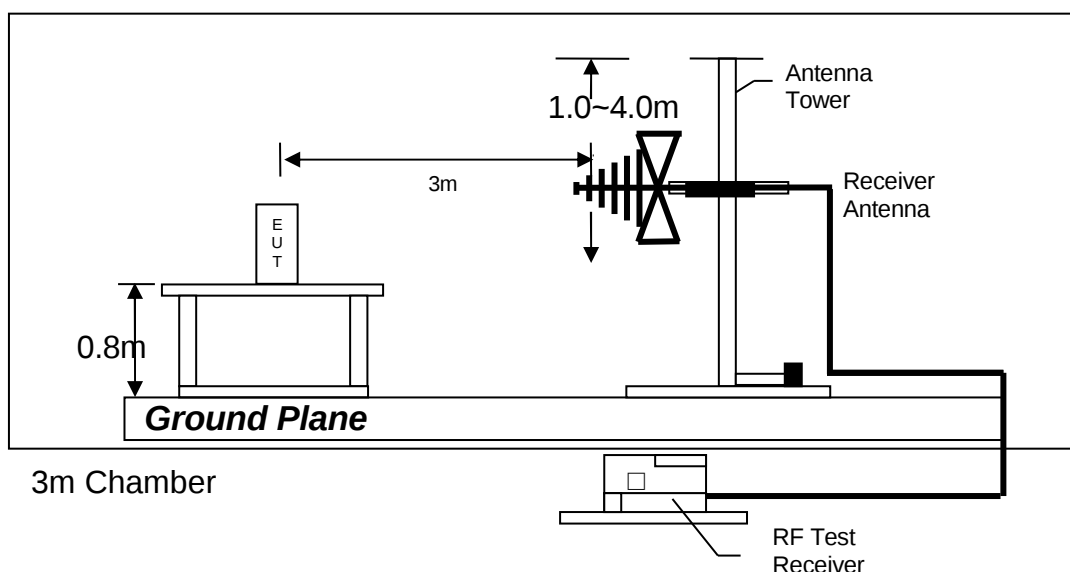

Test setup of radiated emissions up to 1GHz

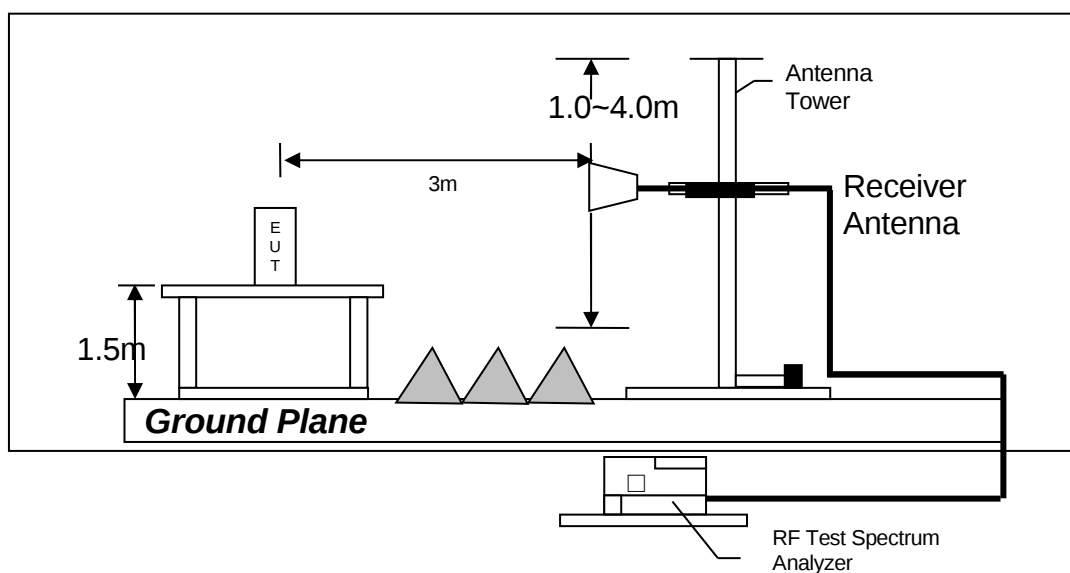

Test setup of radiated emissions above 1GHz

INTERTEK TESTING SERVICES

4.6.3 Transmitter Duty Cycle Calculation

Not applicable – No average factor is required.

4.7 AC Power Line Conducted Emission

- ☐ Not applicable – EUT is only powered by battery for operation.
- ☒ EUT connects to AC power line. Emission Data is listed in following pages.
- ☐ Base Unit connects to AC power line and has transmission. Handset connects to AC power line but has no transmission. Emission Data of Base Unit is listed in following pages.

4.7.1 AC Power Line Conducted Emission Configuration Photograph

Worst Case Line-Conducted Configuration
at

0.416 MHz

The worst case line conducted configuration photographs are attached in the Appendix and saved with filename: config photos.pdf

4.7.2 AC Power Line Conducted Emission Data

The plot(s) and data in the following pages list the significant emission frequencies, the limit and the margin of compliance

Passed by 7.2 dB margin

INTERTEK TESTING SERVICES


Worst Case: EUT Transmitting

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	CF15MQP			
Trace2:	CF15MAV			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dBµV		DELTA LIMIT dB
2 CISPR Average	370.5 kHz	35.38	N	-13.10
1 Quasi Peak	415.5 kHz	40.74	N	-16.79
2 CISPR Average	415.5 kHz	40.31	N	-7.22
2 CISPR Average	951 kHz	18.53	L1	-27.46
2 CISPR Average	1.455 MHz	25.92	N	-20.07

Date: 23.JUN.2016 20:19:46


INTERTEK TESTING SERVICES

Worst Case: EUT Transmitting

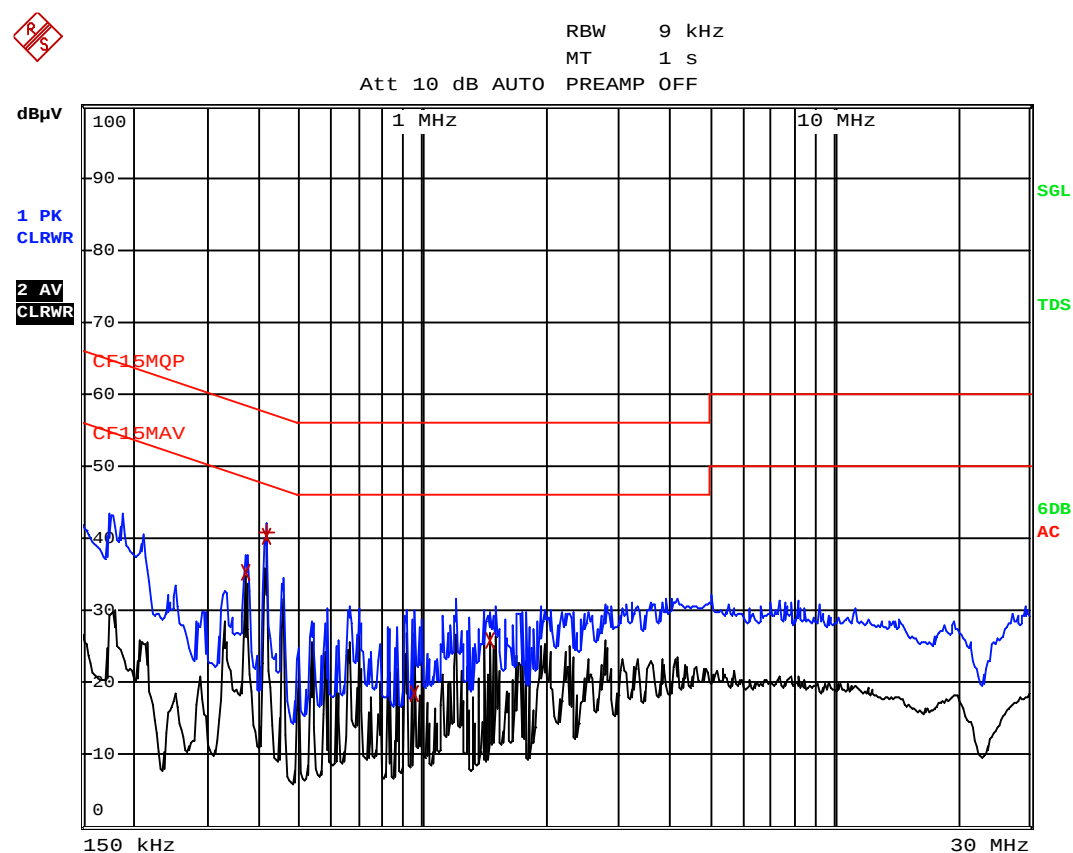

Date: 23.JUN.2016 20:20:04

Conducted Emission Test Setup

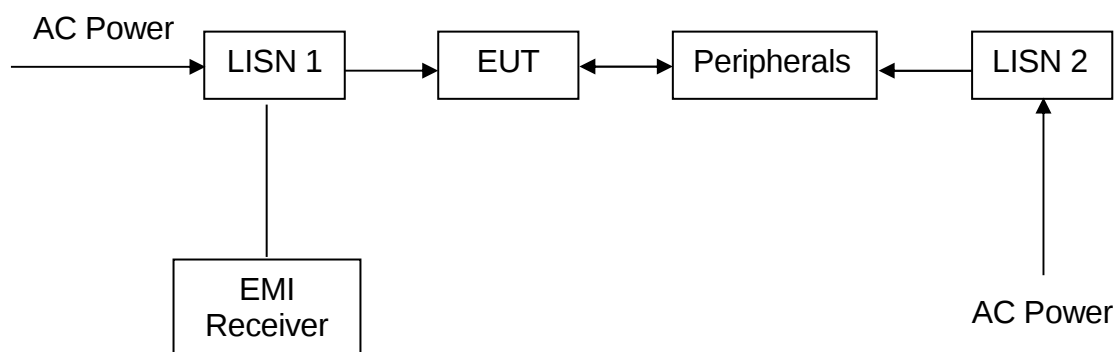

INTERTEK TESTING SERVICES

EXHIBIT 5 EQUIPMENT LIST

INTERTEK TESTING SERVICES

5.0 Equipment List

1) Radiated Emissions Test

Equipment	EMI Test Receiver	Spectrum Analyzer	Biconical Antenna
Registration No.	EW-3156	EW-2188	EW-0571
Manufacturer	R&S	AGILENTTECH	EMCO
Model No.	ESR26	E4407B	3104C
Calibration Date	Nov. 03, 2015	Apr. 25, 2016	Jun 23, 2015
Calibration Due Date	Nov. 03, 2016	Apr. 25, 2017	Dec 23, 2016

Equipment	Log Periodic Antenna	Pyramidal Horn Antenna	Double Ridged Guide Antenna
Registration No.	EW-1042	EW-0905	EW-1133
Manufacturer	EMCO	EMCO	EMCO
Model No.	3148	3160-09	3115
Calibration Date	May 21, 2015	Feb. 12, 2016	Nov. 05, 2015
Calibration Due Date	Nov 21, 2016	Aug. 12, 2017	May 05, 2017

2) Conductive Measurement Test

Equipment	RF Power Meter with Power Sensor (N1921A)	Spectrum Analyzer
Registration No.	EW-2270	EW-2249
Manufacturer	AGILENTTECH	R&S
Model No.	N1911A	FSP30
Calibration Date	Jan. 19, 2016	Nov. 27, 2015
Calibration Due Date	Jan. 19, 2017	Nov. 27, 2016

3) Conducted Emissions Test

Equipment	EMI Test Receiver	LISN
Registration No.	EW-2500	EW-2501
Manufacturer	R&S	R&S
Model No.	ESCI	ENV-216
Calibration Date	Jan. 28, 2016	Jan. 28, 2016
Calibration Due Date	Jan. 28, 2017	Jan. 28, 2017

END OF TEST REPORT