

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan

District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594 Report No.: SZEM150900590201

Email: ee.shenzhen@sgs.com Page: 1 of 97

FCC REPORT

Application No: SZEM1509005902CR

Applicant: Harman International Industries, Incorporated **Manufacturer:** Harman International Industries, Incorporated

Factory: COSONIC ELECTROACOUSTIC TECHNOLOGY CO.,LTD

Product Name: Bluetooth headset

Model No.(EUT): UA HEADPHONES WIRELESS

Trade Mark: JBL

FCC ID: APIJBLUAWL

Standards: 47 CFR Part 15, Subpart C (2014)

 Date of Receipt:
 2015-09-23

 Date of Test:
 2015-09-24

 Date of Issue:
 2015-10-12

Test Result: PASS *

Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

^{*} In the configuration tested, the EUT complied with the standards specified above.



Report No.: SZEM150900590201

Page: 2 of 97

2 Version

Revision Record							
Version	Chapter	Date	Modifier	Remark			
00		2015-10-12		Original			

Authorized for issue by:		
	Eric Fu	2015-09-24
Tested By	(Eric Fu) /Project Engineer	Date
	Jorde Chen	2015-10-12
Prepared By	(Jade Chen) /Clerk	Date
	Benson Wang	2015-10-12
Checked By	(Benson Wang) /Reviewer	Date



Report No.: SZEM150900590201

Page: 3 of 97

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 (2009)	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 (2009)	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(1)	ANSI C63.10 (2009)	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Carrier Frequencies Separation	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Hopping Channel Number	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Dwell Time	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15, Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10 (2009)	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2009)	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2009)	PASS
Radiated Spurious emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2009)	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2009)	PASS



Report No.: SZEM150900590201

Page: 4 of 97

4 Contents

			Page
1	CC	OVER PAGE	1
2	VE	RSION	2
3	TE	ST SUMMARY	3
4		ONTENTS	_
-			
5	GE	ENERAL INFORMATION	_
	5.1	CLIENT INFORMATION	
	5.2	GENERAL DESCRIPTION OF EUT	
	5.3 5.4	TEST ENVIRONMENT DESCRIPTION OF SUPPORT UNITS	
	5.5	TEST LOCATION	
	5.6	Test Facility	
	5.7	DEVIATION FROM STANDARDS	
	5.8	ABNORMALITIES FROM STANDARD CONDITIONS	
	5.9 5.10	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
6	TE	ST RESULTS AND MEASUREMENT DATA	
	6.1	Antenna Requirement	
	6.2	CONDUCTED EMISSIONS	
	6.3 6.4	CONDUCTED PEAK OUTPUT POWER	
	6.5	CARRIER FREQUENCIES SEPARATION	
	6.6	HOPPING CHANNEL NUMBER	
	6.7	DWELL TIME	
	6.8	BAND-EDGE FOR RF CONDUCTED EMISSIONS	
	6.9 6.10	SPURIOUS RF CONDUCTED EMISSIONS	
	6.11	RADIATED SPURIOUS EMISSION	
	•	11.1 Radiated Emission below 1GHz	
		11.2 Transmitter Emission above 1GHz	
	6.12	RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	86
7	PH	IOTOGRAPHS - EUT TEST SETUP	96
	7.1	CONDUCTED EMISSION	96
	7.2	RADIATED EMISSION	
	7.3	RADIATED SPURIOUS EMISSION	97
8	PH	IOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	97



Report No.: SZEM150900590201

Page: 5 of 97

5 General Information

5.1 Client Information

Applicant:	Harman International Industries, Incorporated		
Address of Applicant:	8500 Balboa Blvd, Northridge, CA 91329, UNITED STATES		
Manufacturer:	Harman International Industries, Incorporated		
Address of Manufacturer:	8500 Balboa Blvd, Northridge, CA 91329, UNITED STATES		
Factory:	COSONIC ELECTROACOUSTIC TECHNOLOGY CO.,LTD		
Address of Factory:	Cosonic Industric Park, Shajin Vilage, Shipai Town ,Dongguan, Guangdong, P.R. China		
Supplier:	Cosonic Acoustic technology Co.,LTD		
Country of Origin:	China		

5.2 General Description of EUT

Product Name:	Bluetooth headset		
Model No.:	UA HEADPHONES WIRELESS		
Trade Mark:	JBL		
Operation Frequency:	2402MHz~2480M	lHz	
Bluetooth Version:	BT 4.0 Dual mode		
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)		
Modulation Type:	GFSK, π/4DQPSK, 8DPSK		
Number of Channel:	79		
Hopping Channel Type:	Adaptive Frequen	cy Hopping systems	
Sample Type:	Portable production	on	
Antenna Type:	Integral		
Antenna Gain:	1.6dBi		
Power Supply:	Battery Lithium-ion battery:3.7V(charge by USB)		



Report No.: SZEM150900590201

Page: 6 of 97

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
2	2404MHz	22	2424MHz	42	2444MHz	62	2464MHz
3	2405MHz	23	2425MHz	43	2445MHz	63	2465MHz
4	2406MHz	24	2426MHz	44	2446MHz	64	2466MHz
5	2407MHz	25	2427MHz	45	2447MHz	65	2467MHz
6	2408MHz	26	2428MHz	46	2448MHz	66	2468MHz
7	2409MHz	27	2429MHz	47	2449MHz	67	2469MHz
8	2410MHz	28	2430MHz	48	2450MHz	68	2470MHz
9	2411MHz	29	2431MHz	49	2451MHz	69	2471MHz
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
12	2414MHz	32	2434MHz	52	2454MHz	72	2474MHz
13	2415MHz	33	2435MHz	53	2455MHz	73	2475MHz
14	2416MHz	34	2436MHz	54	2456MHz	74	2476MHz
15	2417MHz	35	2437MHz	55	2457MHz	75	2477MHz
16	2418MHz	36	2438MHz	56	2458MHz	76	2478MHz
17	2419MHz	37	2439MHz	57	2459MHz	77	2479MHz
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz		

Note

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2441MHz
The Highest channel	2480MHz



Report No.: SZEM150900590201

Page: 7 of 97

5.3 Test Environment

Operating Environment:				
Temperature:	25.0 °C			
Humidity:	53 % RH			
Atmospheric Pressure:	995mbar			

5.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Description Manufacturer		Serial No.
iPhone 4	Apple	A1349	C37HL4GXDP0N
Adapter	Apple	A1357 W010A051	REF. No.SEA0500
Micro USB Cable	PHILIPS	SWR2101	REF. No.SEA0700

5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.



Report No.: SZEM150900590201

Page: 8 of 97

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

· VCC

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

• FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

Industry Canada (IC)

The 3m Semi-anechoic chambers and the 10m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-2, 4620C-3.

5.7 Deviation from Standards

None.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.



Report No.: SZEM150900590201

Page: 9 of 97

5.10 Equipment List

	Conducted Emission							
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)		
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2015-05-13	2016-05-13		
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2015-10-09	2016-10-09		
3	LISN	ETS-LINDGREN	3816/2	SEL0021	2015-05-13	2016-05-13		
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLIS N-T8-02	SEL0162	2015-08-30	2016-08-30		
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLIS N-T4-02	SEL0163	2015-08-30	2016-08-30		
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLIS N-T2-02	SEL0164	2015-08-30	2016-08-30		
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2015-05-13	2016-05-13		
8	Coaxial Cable	SGS	N/A	SEL0025	2015-05-13	2016-05-13		
9	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-09	2016-10-09		
10	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2015-10-24	2016-10-24		
11	Barometer	Chang Chun	DYM3	SEL0088	2015-05-13	2016-05-13		



Report No.: SZEM150900590201

Page: 10 of 97

	RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2015-05-13	2016-05-13
2	EMI Test Receiver	Agilent Technologies	N9038A	SEL0312	2015-09-16	2016-09-16
3	EMI Test software	AUDIX	E3	SEL0050	N/A	N/A
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2014-11-15	2017-11-15
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2015-10-17	2016-10-17
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2014-11-24	2017-11-24
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2015-05-13	2016-05-13
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2015-10-17	2016-10-17
9	Coaxial cable	SGS	N/A	SEL0027	2015-05-13	2016-05-13
10	Coaxial cable	SGS	N/A	SEL0189	2015-05-13	2016-05-13
11	Coaxial cable	SGS	N/A	SEL0121	2015-05-13	2016-05-13
12	Coaxial cable	SGS	N/A	SEL0178	2015-05-13	2016-05-13
13	Band filter	Amindeon	82346	SEL0094	2015-05-13	2016-05-13
14	Barometer	Chang Chun	DYM3	SEL0088	2015-05-13	2016-05-13
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-09	2016-10-09
16	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2015-10-24	2016-10-24 CSTC F
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2015-05-13	2016-05-13
18	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2015-05-13	2016-05-13



Report No.: SZEM150900590201

Page: 11 of 97

	RF connected test						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)	
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-09	2016-10-09	
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2015-10-24	2016-10-24	
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2015-10-17	2016-10-17	
4	Coaxial cable	SGS	N/A	SEL0178	2015-05-13	2016-05-13	
5	Coaxial cable	SGS	N/A	SEL0179	2015-05-13	2016-05-13	
6	Barometer	ChangChun	DYM3	SEL0088	2015-05-13	2016-05-13	
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2015-04-25	2016-04-25	
8	POWER METER	R&S	NRVS	SEL0144	2015-10-09	2016-10-09	
9	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2015-04-25	2016-04-25	



Report No.: SZEM150900590201

Page: 12 of 97

6 Test results and Measurement Data

6.1 Antenna Requirement

Standard requirement: 47 CFR Part 15C Section 15.203 /247(c)


15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

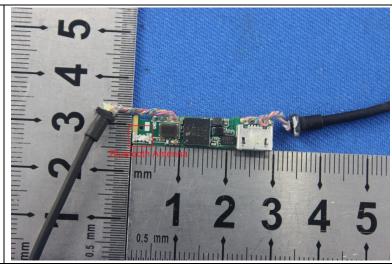

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 1.6dBi.



Report No.: SZEM150900590201

Page: 13 of 97


6.2 Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.207				
Test Method:	ANSI C63.10: 2009				
Test Frequency Range:	150kHz to 30MHz				
Limit:	Francisco (MIII-)	Limit (d	Limit (dBuV)		
	Frequency range (MHz)	Quasi-peak	Average		
	0.15-0.5	66 to 56*	56 to 46*		
	0.5-5	56	46		
	5-30	60	50		
	* Decreases with the logarithm	n of the frequency.		-	
Test Procedure:	 The mains terminal disturt room. 	bance voltage test was	s conducted in a shi	elded	
	,				



Report No.: SZEM150900590201

Page: 14 of 97

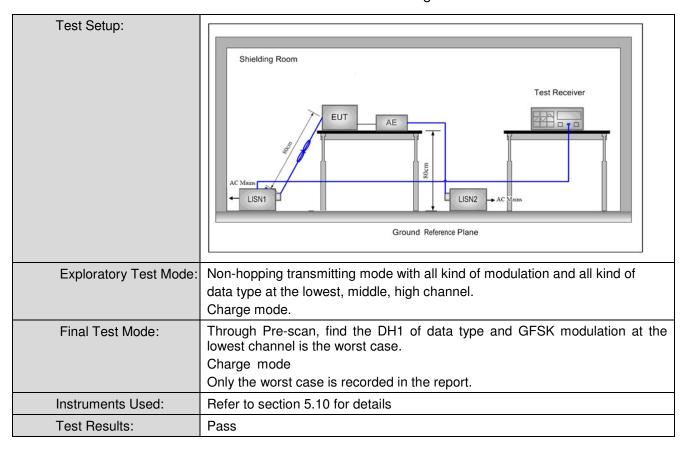



Report No.: SZEM150900590201


Page: 15 of 97

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

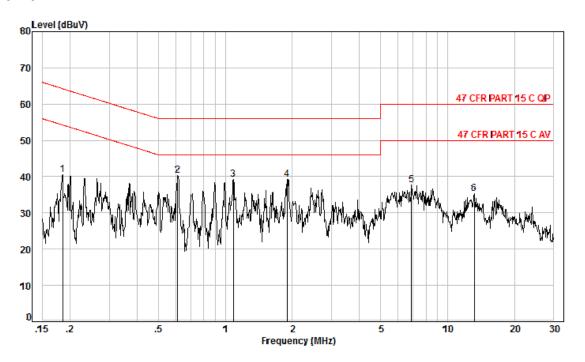

Site : Shielding Room

Condition: 47 CFR PART 15 C AV CE Line

Job No. : 5902CR Test Mode: Charge mode


	Freq		LISN Factor					Remark
-	MHz	dB	dB	dBu₩	dBu₩	dBu₩	dB	
1	0.19	0.07	9.83	30.67	40.57	54.24	-13.67	Peak
2	0.61	0.04	9.87	30.39	40.30	46.00	-5.70	Peak
3	1.09	0.03	9.90	29.22	39.15	46.00	-6.85	Peak
4	1.90	0.04	9.95	29.34	39.33	46.00	-6.67	Peak
5	6.88	0.22	10.15	27.38	37.75	50.00	-12.25	Peak
6	13.20	0.79	10.16	24.37	35.32	50.00	-14.68	Peak



Report No.: SZEM150900590201

Page: 16 of 97

Neutral line:

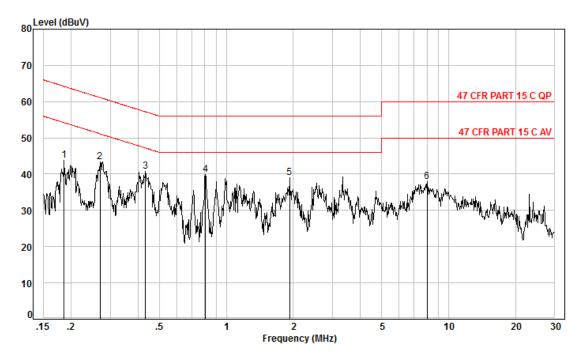

Site : Shielding Room

Condition: 47 CFR PART 15 C AV CE Neutral

Job No. : 5902CR Test Mode: Charge mode

		Cable	LISN	Read		Limit	0ver	
	Freq	Loss	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.19	0.06	9.83	33.91	43.80	54.20	-10.40	Peak
2	0.27	0.06	9.86	33.54	43.46	51.12	-7.66	Peak
3	0.43	0.05	9.88	30.91	40.84	47.20	-6.36	Peak
4	0.80	0.04	9.98	29.87	39.89	46.00	-6.11	Peak
5	1.93	0.04	10.12	28.81	38.97	46.00	-7.03	Peak
6	8.02	0.34	10.13	27.44	37.91	50.00	-12.09	Peak

Notes:


- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM150900590201

Page: 17 of 97

6.3 Conducted Peak Output Power

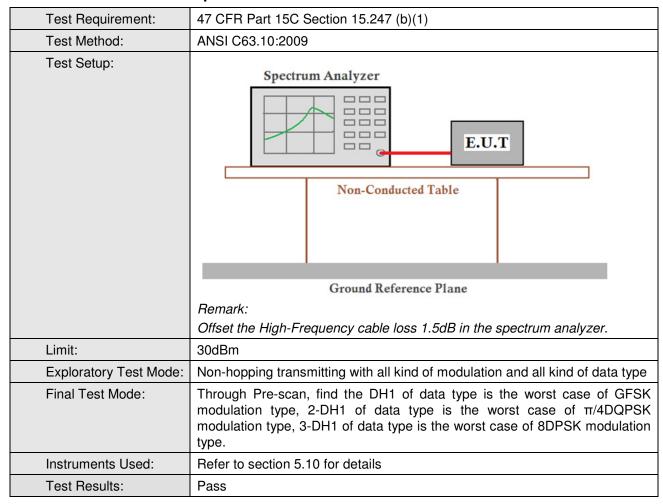



Report No.: SZEM150900590201

Page: 18 of 97

Measurement Data

	GFSK mode					
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result			
Lowest	1.43	30.00	Pass			
Middle	2.76	30.00	Pass			
Highest	2.89	30.00	Pass			
	π/4DQPSK m	node				
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result			
Lowest	-1.41	30.00	Pass			
Middle	-0.07	30.00	Pass			
Highest	0.06	30.00	Pass			
	8DPSK mo	de				
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result			
Lowest	Lowest -0.74		Pass			
Middle	0.70	30.00	Pass			
Highest	0.81	30.00	Pass			




Report No.: SZEM150900590201


Page: 19 of 97

Test plot as follows:

Test mode: GFSK Test channel: Lowest

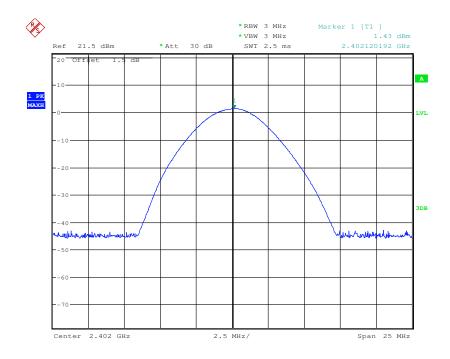



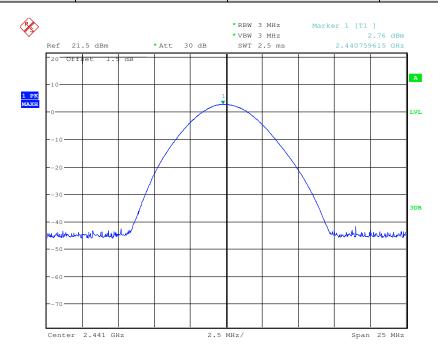





Report No.: SZEM150900590201

Page: 20 of 97

Test mode: GFSK Test channel: Highest

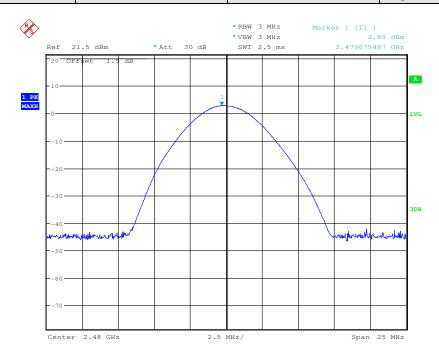



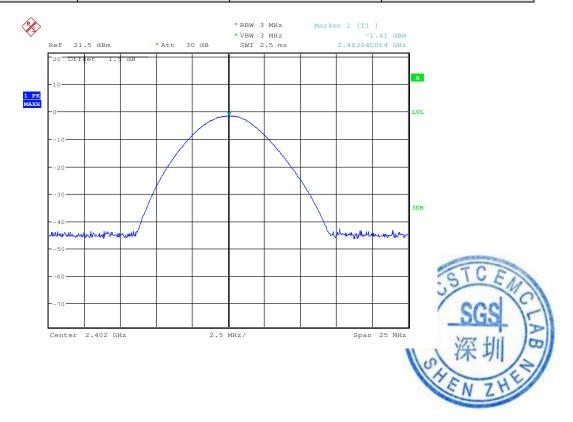






Report No.: SZEM150900590201

Page: 21 of 97

Test mode: $\pi/4DQPSK$ Test channel: Middle

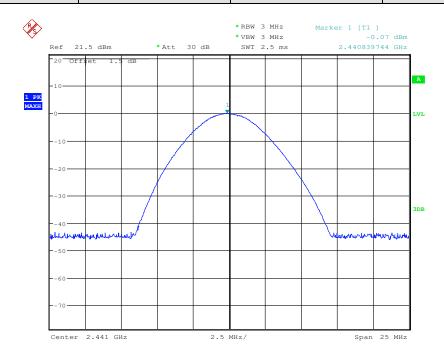



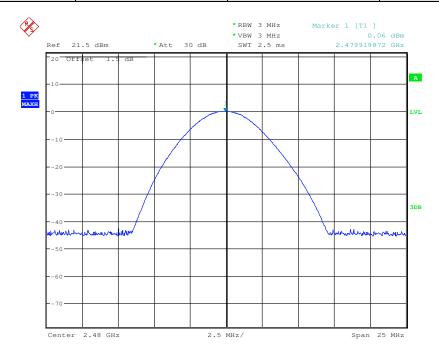





Report No.: SZEM150900590201

Page: 22 of 97

Test mode: 8DPSK Test channel: Lowest

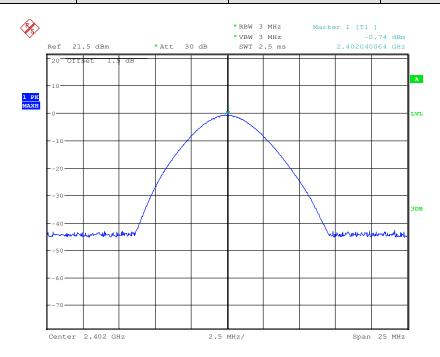



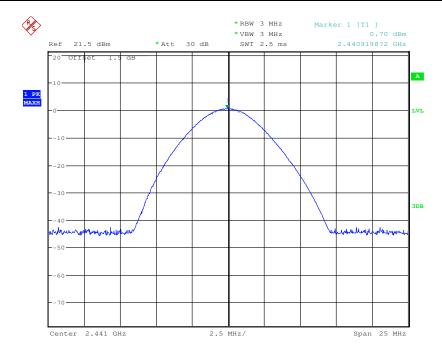




Report No.: SZEM150900590201

Page: 23 of 97

Test mode: 8DPSK Test channel: Highest

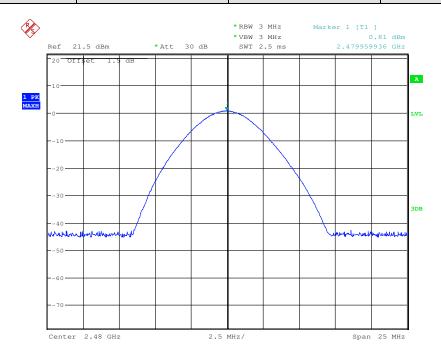




Report No.: SZEM150900590201

Page: 24 of 97

6.4 20dB Occupy Bandwidth

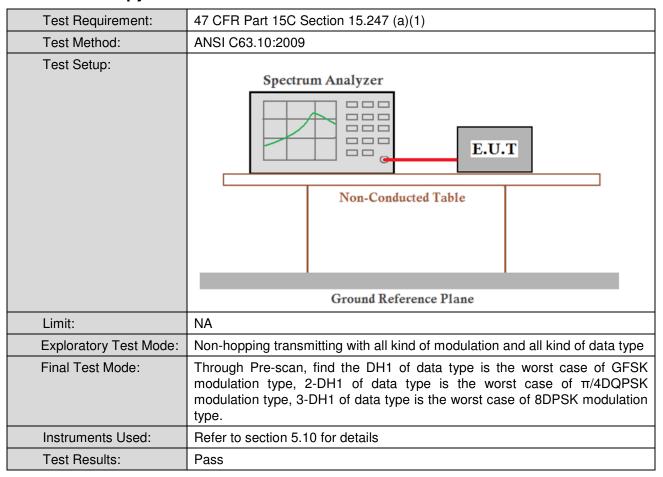

Measurement Data

	2	20dB Occupy Bandwidth (kHz)		
Test channel	GFSK	π/4DQPSK	8DPSK	
Lowest	928	1221	1216	
Middle	904	1226	1221	
Highest	904	1226	1226	




Report No.: SZEM150900590201


Page: 25 of 97

Test plot as follows:

Test mode: GFSK Test channel: Lowest

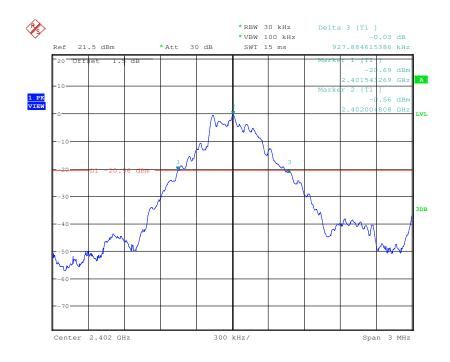



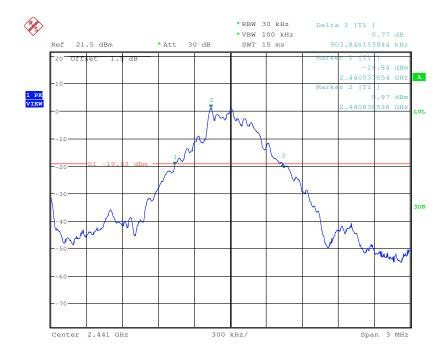





Report No.: SZEM150900590201

Page: 26 of 97

Test mode: GFSK Test channel: Highest

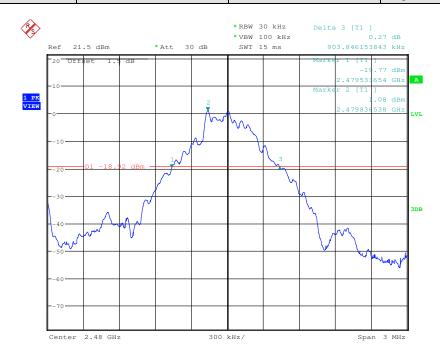



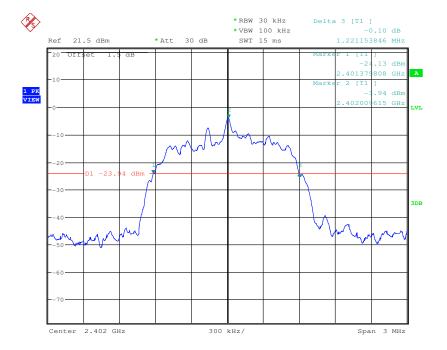





Report No.: SZEM150900590201

Page: 27 of 97

Test mode: π/4DQPSK Test channel: Middle

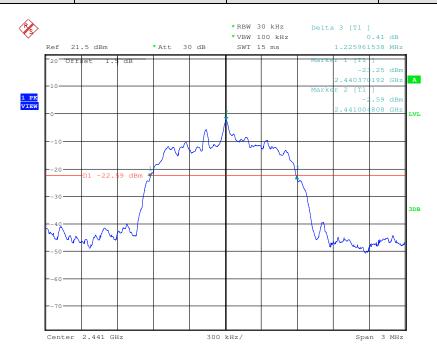



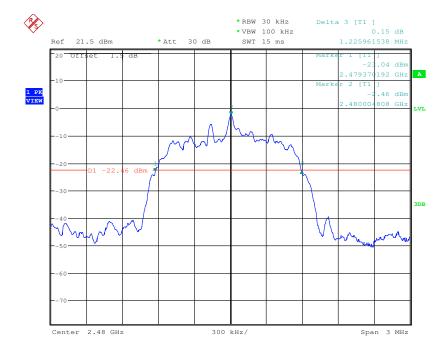





Report No.: SZEM150900590201

Page: 28 of 97

Test mode: 8DPSK Test channel: Lowest

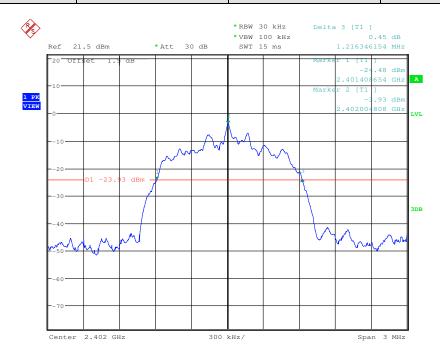



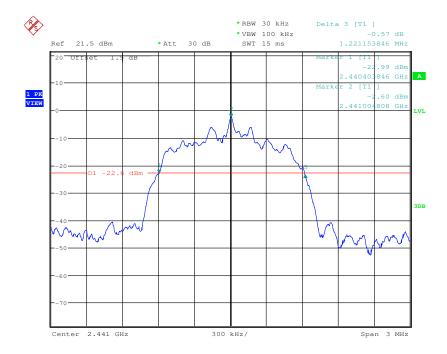




Report No.: SZEM150900590201

Page: 29 of 97

Test mode: 8DPSK Test channel: Highest

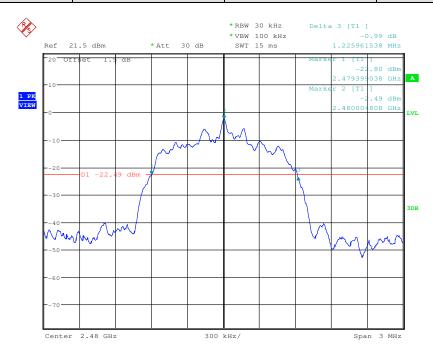



Report No.: SZEM150900590201

Page: 30 of 97

6.5 Carrier Frequencies Separation

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)		
Test Method:	ANSI C63.10:2009		
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane		
Limit:	2/3 of the 20dB bandwidth		
	Remark: the transmission power is less than 0.125W.		
Exploratory Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type		
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of $\pi/4DQPSK$ modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type.		
Instruments Used:	Refer to section 5.10 for details		
Test Results:	Pass		





Report No.: SZEM150900590201

Page: 31 of 97

	GFSK mode						
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result				
Lowest	1002	≥619	Pass				
Middle	1002	≥619	Pass				
Highest	1002	≥619	Pass				
	π/4DQPSK m	iode					
Test channel	Test channel Carrier Frequencies Separation (kHz)		Result				
Lowest	1002	≥817	Pass				
Middle	1002	≥817	Pass				
Highest	1002	≥817	Pass				
	8DPSK mode						
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result				
Lowest	1006	≥817	Pass				
Middle	1006	≥817	Pass				
Highest	Highest 1002		Pass				

Note: According to section 6.4,

Mode	20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)		
GFSK	928	619		
π/4DQPSK	1226	817		
8DPSK	1226	817		




Report No.: SZEM150900590201


Page: 32 of 97

Test plot as follows:



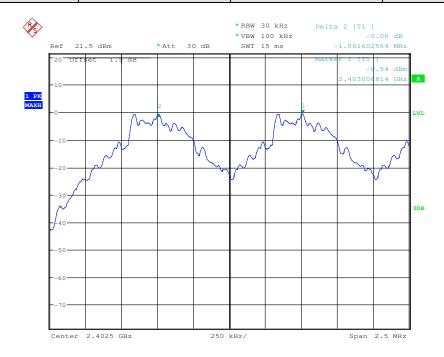



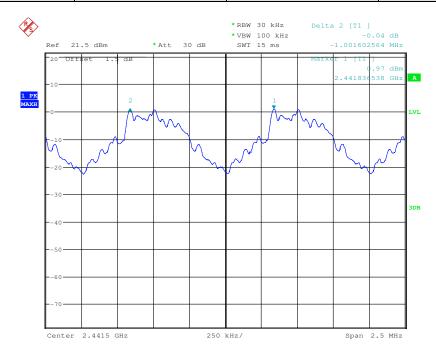





Report No.: SZEM150900590201

Page: 33 of 97



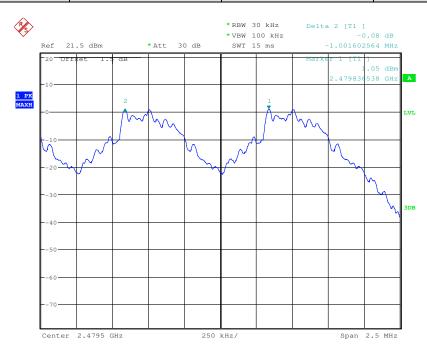



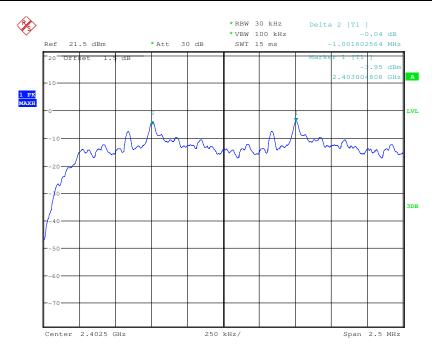





Report No.: SZEM150900590201

Page: 34 of 97

Test mode: π/4DQPSK Test channel: Middle

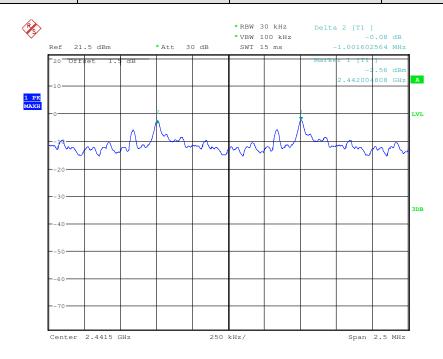



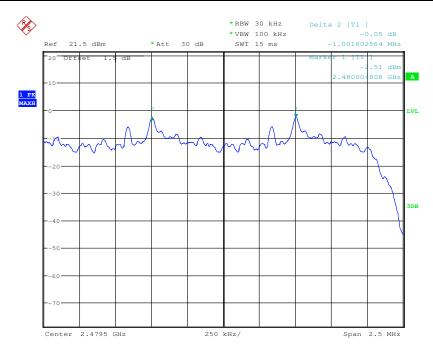





Report No.: SZEM150900590201

Page: 35 of 97

Test mode: 8DPSK Test channel: Lowest

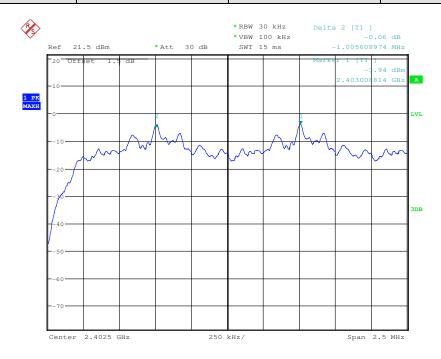



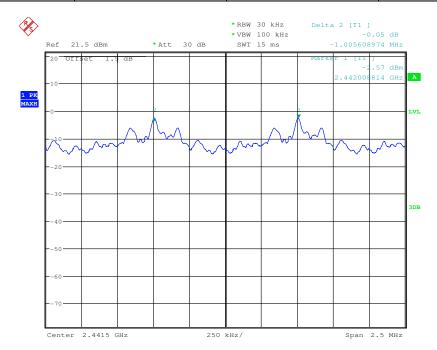




Report No.: SZEM150900590201

Page: 36 of 97

Test mode: 8DPSK Test channel: Highest

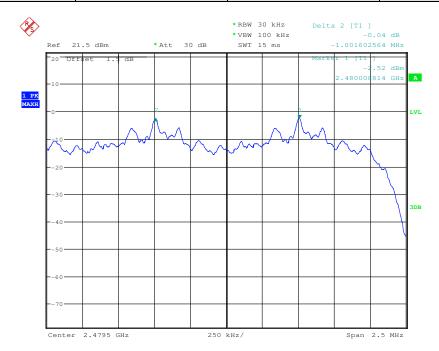




Report No.: SZEM150900590201

Page: 37 of 97

6.6 Hopping Channel Number

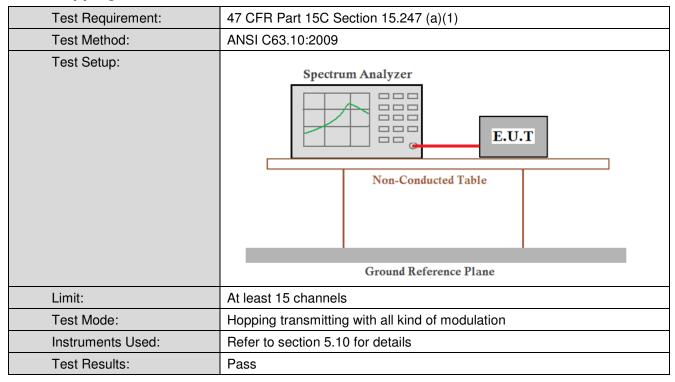

Measurement Data

Test mode	Hopping channel numbers	Limit	Results
GFSK	79	15	Pass
π/4DQPSK	79	15	Pass
8DPSK	79	15	Pass




Report No.: SZEM150900590201


Page: 38 of 97

Test plot as follows:



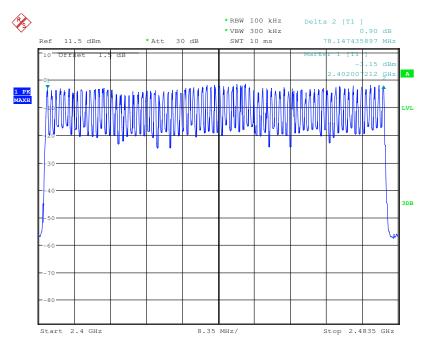




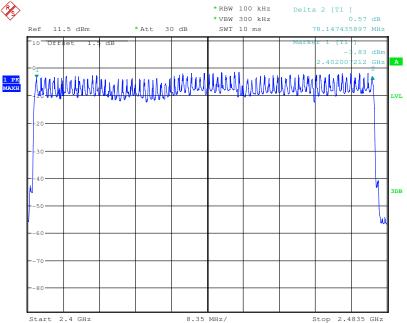




Report No.: SZEM150900590201

Page: 39 of 97



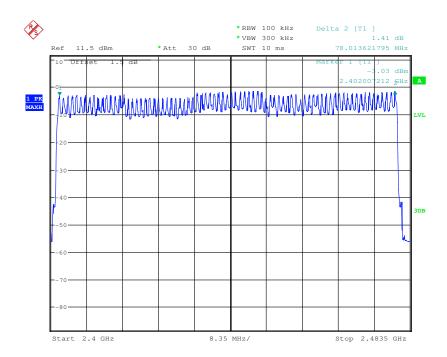




Report No.: SZEM150900590201

Page: 40 of 97

6.7 Dwell Time

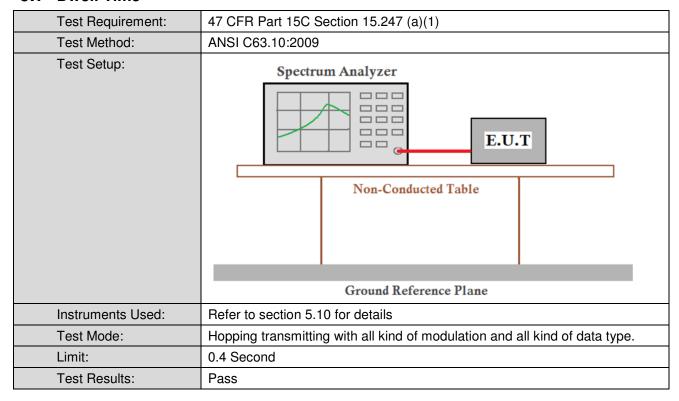

Measurement Data

Mode	Packet	Dwell time (second)	Limit (second)
10000		, ,	, ,
GFSK	DH1	0.116	≤0.4
	DH3	0.230	≤0.4
	DH5	0.289	≤0.4
π/4DQPSK	2-DH1	0.120	≤0.4
	2-DH3	0.231	≤0.4
	2-DH5	0.290	≤0.4
8DPSK	3-DH1	0.120	≤0.4
	3-DH3	0.231	≤0.4
	3-DH5	0.290	≤0.4



Report No.: SZEM150900590201

Page: 41 of 97

Remark:

The test period: T= 0.4 Second/Channel x 79 Channel = 31.6 s

On (ms)*total number=dwell time (ms)

The Middle channel (2441MHz), as below:

DH1 time slot=0.385 (ms)*total number=115.5 (ms)

DH3 time slot= 1.643 (ms)^* total number = 230.02 (ms)

DH5 time slot=2.885 (ms)* total number = 288.5(ms)

2-DH1 time slot=0.401 (ms)*total number=120.3 (ms)

2-DH3 time slot=1.651 (ms)* total number = 231.14 (ms)

2-DH5 time slot=2.897 (ms)* total number =289.7 (ms)

3-DH1 time slot=0.401 (ms)*total number=120.3 (ms)

3-DH3 time slot=1.651 (ms)* total number = 231.14 (ms)

3-DH5 time slot=2.897 (ms)* total number = 289.7 (ms)





Report No.: SZEM150900590201

Page: 42 of 97

Test plot as follows:

Test Packet:	DH1

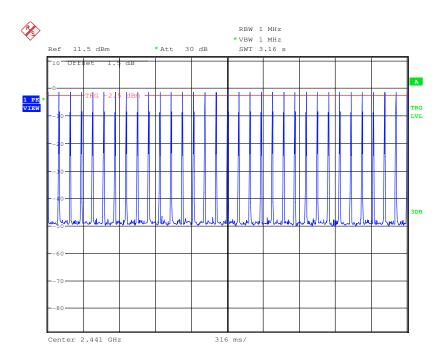

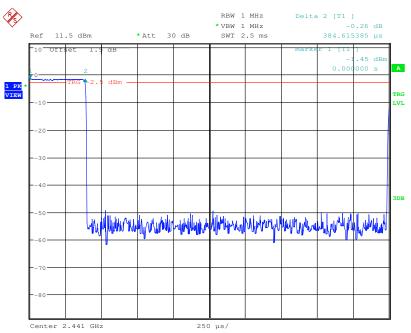





Report No.: SZEM150900590201

Page: 43 of 97



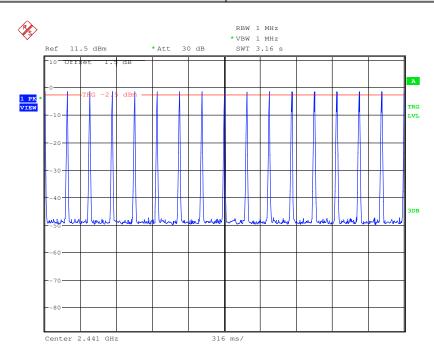

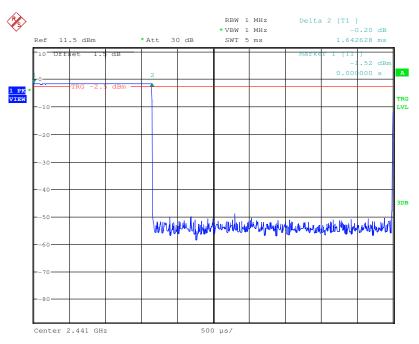





Report No.: SZEM150900590201

Page: 44 of 97



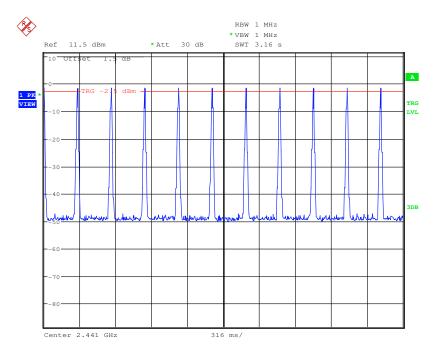


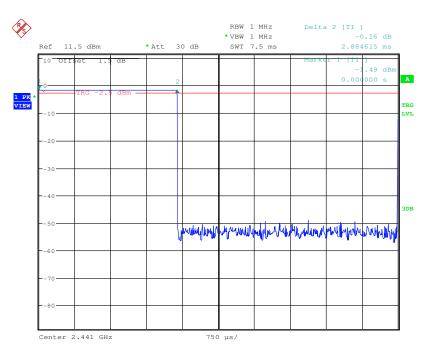





Report No.: SZEM150900590201

Page: 45 of 97



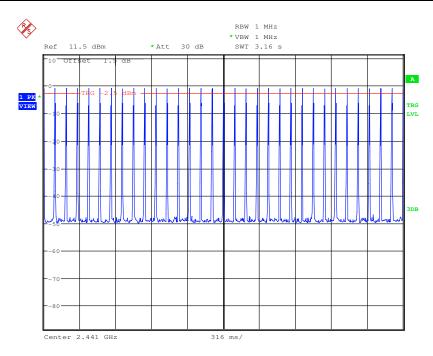


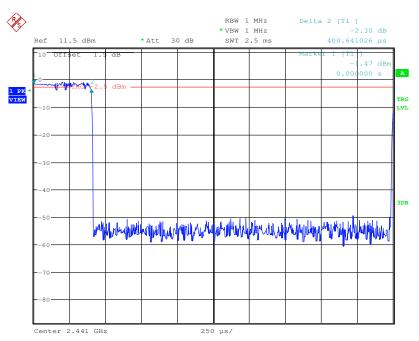





Report No.: SZEM150900590201

Page: 46 of 97



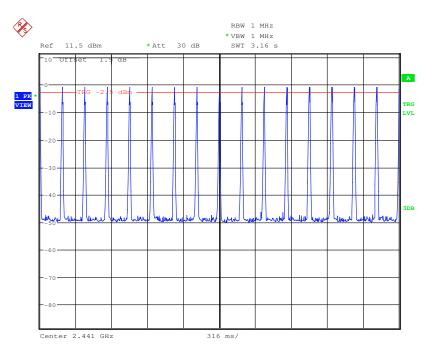


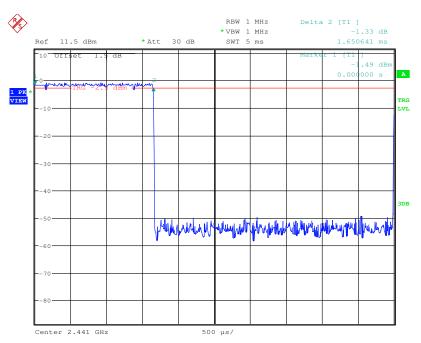





Report No.: SZEM150900590201

Page: 47 of 97



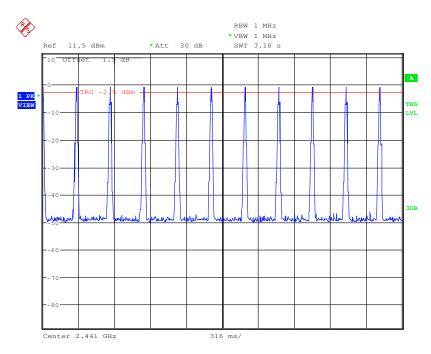

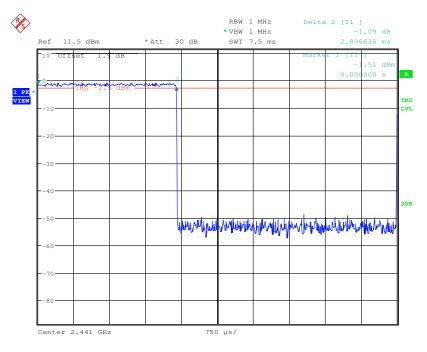





Report No.: SZEM150900590201

Page: 48 of 97



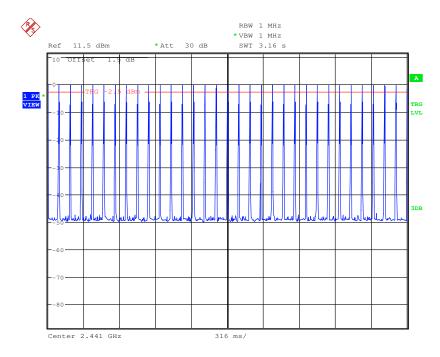


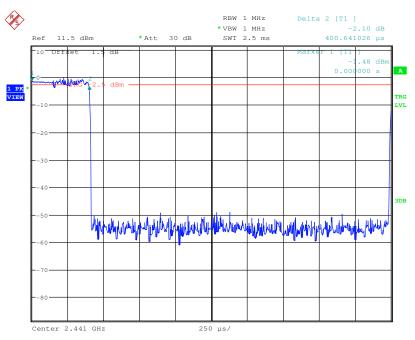





Report No.: SZEM150900590201

Page: 49 of 97



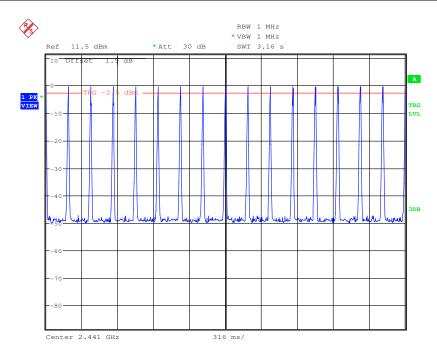

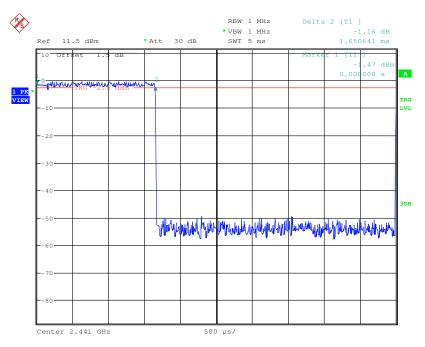





Report No.: SZEM150900590201

Page: 50 of 97



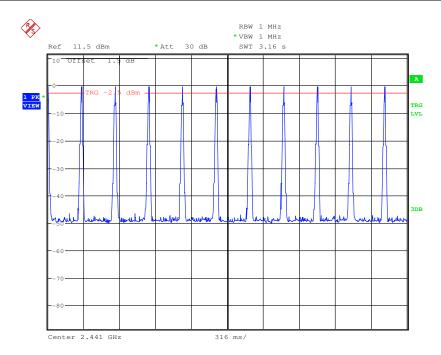

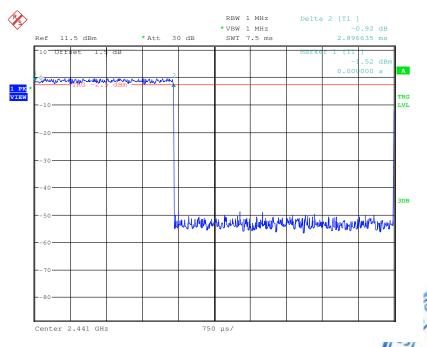



Report No.: SZEM150900590201

Page: 51 of 97

6.8 Band-edge for RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)	
Test Method:	ANSI C63.10:2009	
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane	
	Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.	
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.	
Exploratory Test Mode:	Hopping and Non-hopping transmitting with all kind of modulation and all kind of data type	
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of $\pi/4DQPSK$ modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type.	
Instruments Used:	Refer to section 5.10 for details	
Test Results:	Pass	





Report No.: SZEM150900590201

Page: 52 of 97

Test plot as follows:

Test mode: GFSK Test channel: Lowest

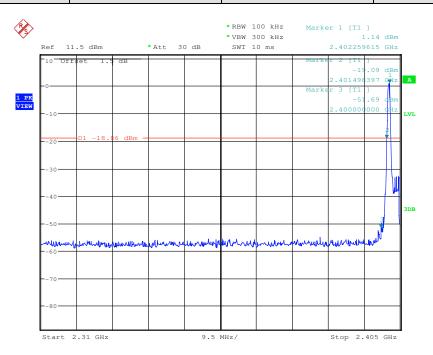


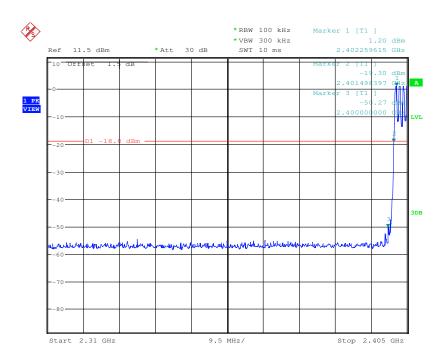





Report No.: SZEM150900590201

Page: 53 of 97



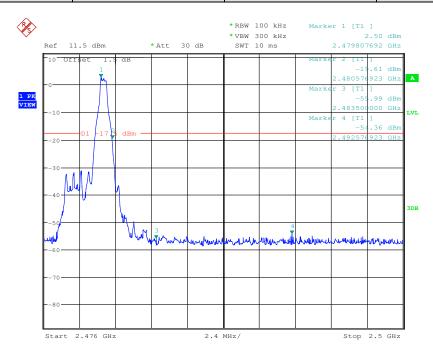

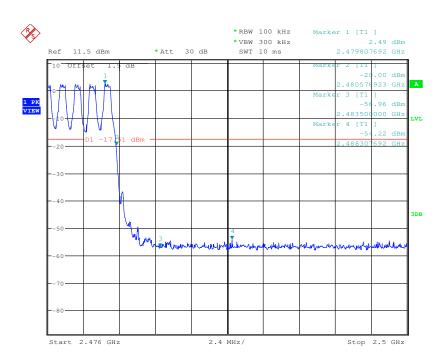





Report No.: SZEM150900590201

Page: 54 of 97

Test mode: π/4DQPSK Test channel: Lowest

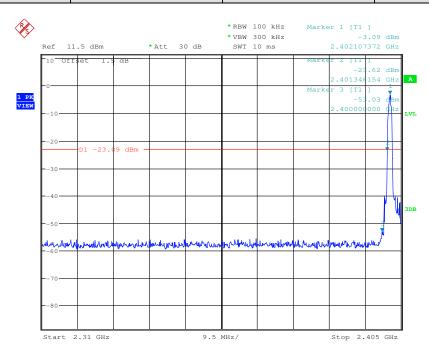

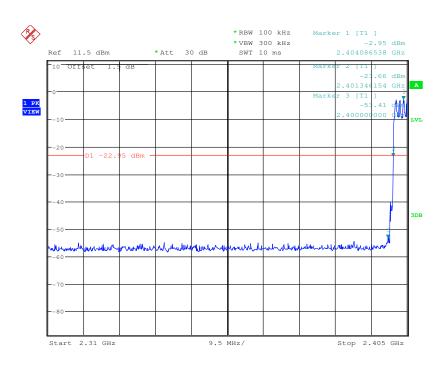





Report No.: SZEM150900590201

Page: 55 of 97

Test mode: π/4DQPSK Test channel: Highest

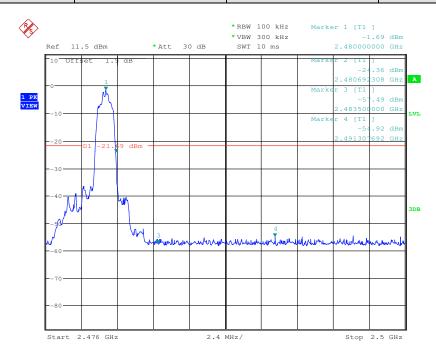

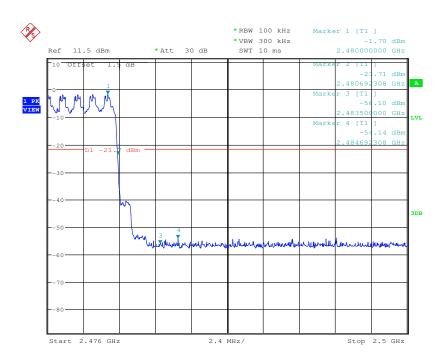





Report No.: SZEM150900590201

Page: 56 of 97



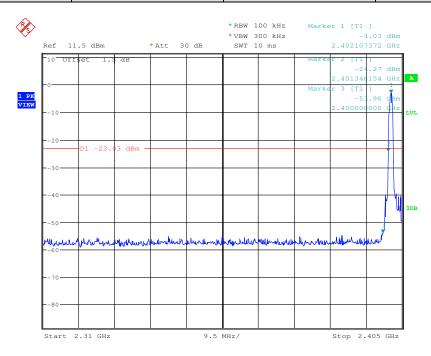

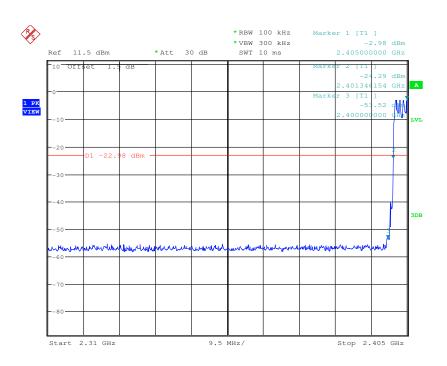





Report No.: SZEM150900590201

Page: 57 of 97

Test mode: 8DPSK Test channel: Highest

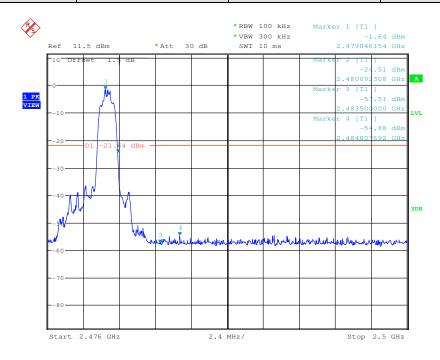

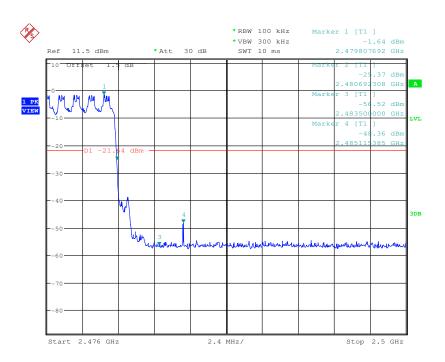



Report No.: SZEM150900590201

Page: 58 of 97

6.9 Spurious RF Conducted Emissions


Test Requirement:	47 CFR Part 15C Section 15.247 (d)	
Test Method:	ANSI C63.10:2009	
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane	
	Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.	
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.	
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type	
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of $\pi/4DQPSK$ modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type.	
Instruments Used:	Refer to section 5.10 for details	
Test Results:	Pass	




Report No.: SZEM150900590201

Page: 59 of 97

Test mode: GFSK Test channel: Lowest

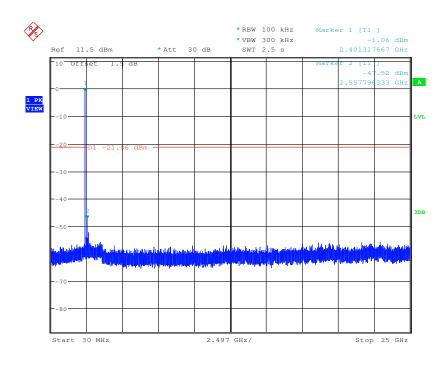


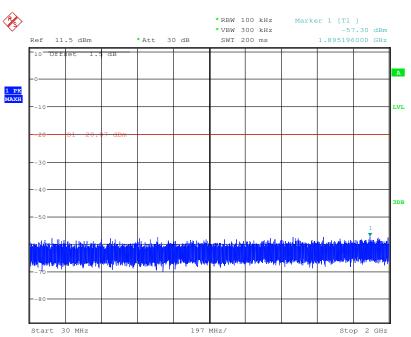




Report No.: SZEM150900590201

Page: 60 of 97

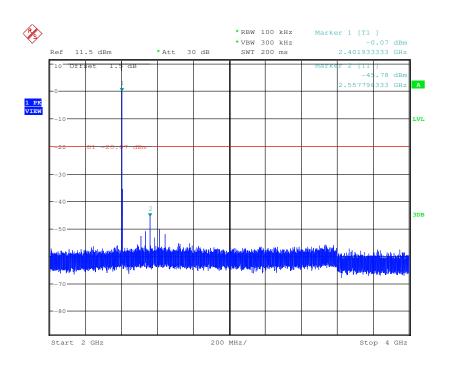

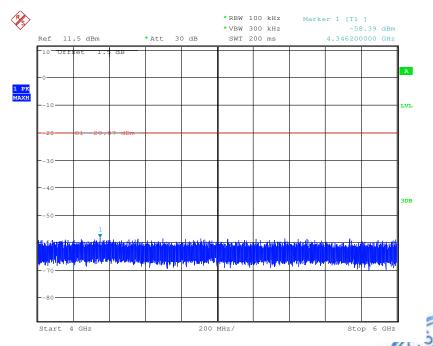





Report No.: SZEM150900590201

Page: 61 of 97

Test mode: GFSK Test channel: Middle

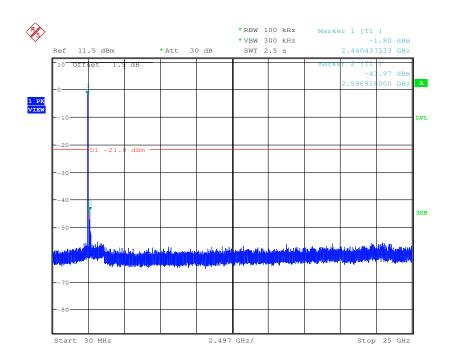


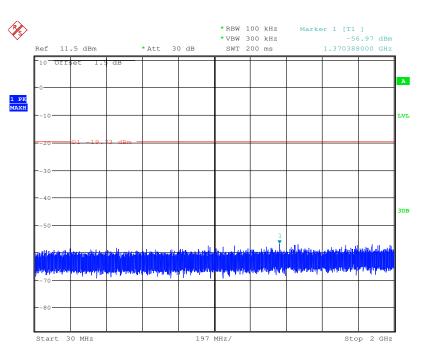




Report No.: SZEM150900590201

Page: 62 of 97

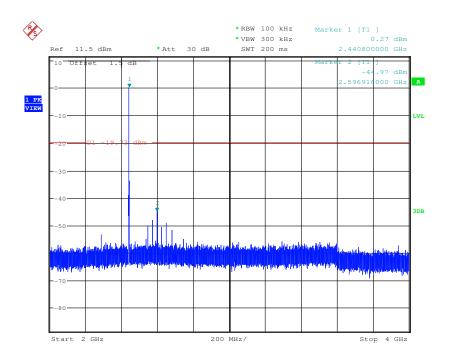

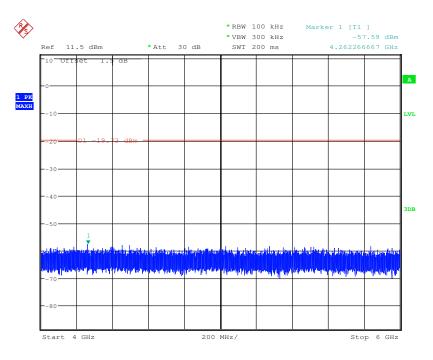





Report No.: SZEM150900590201

Page: 63 of 97

Test mode: GFSK Test channel: Highest

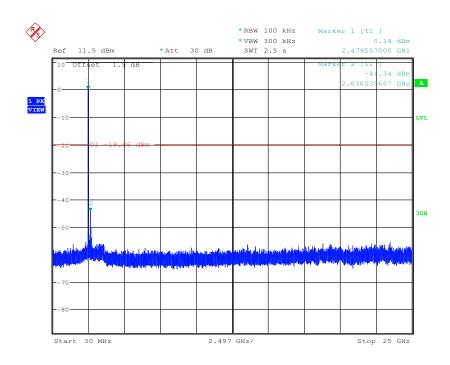


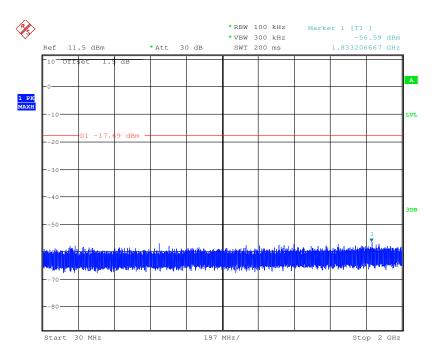




Report No.: SZEM150900590201

Page: 64 of 97

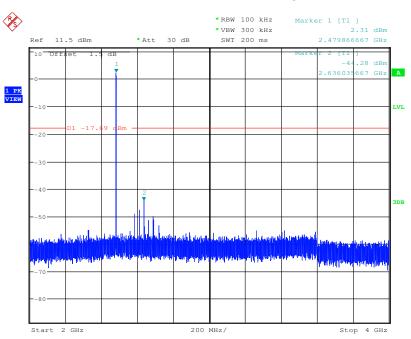

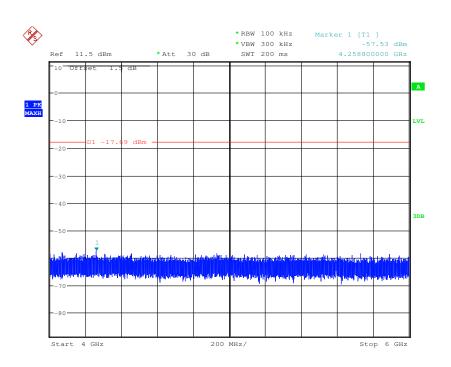





Report No.: SZEM150900590201

Page: 65 of 97

Test mode: π/4DQPSK Test channel: Lowest

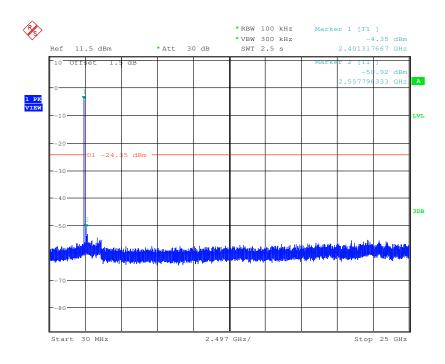


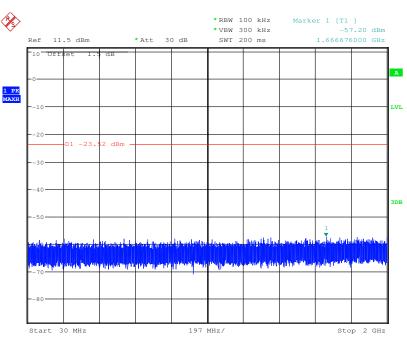




Report No.: SZEM150900590201

Page: 66 of 97

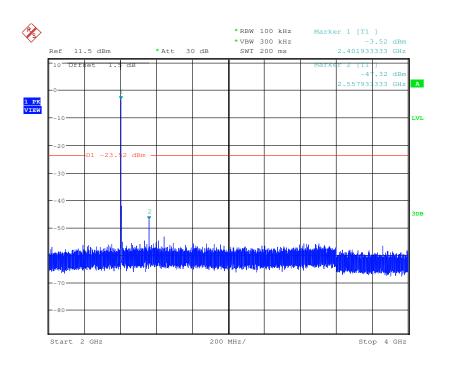

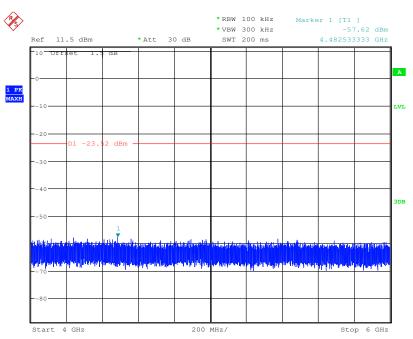





Report No.: SZEM150900590201

Page: 67 of 97

Test mode: π/4DQPSK Test channel: Middle

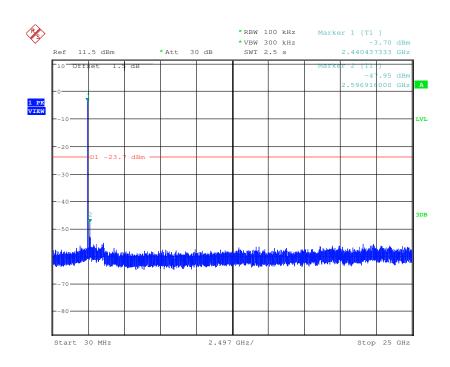


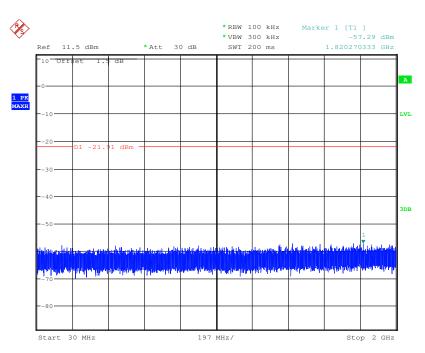




Report No.: SZEM150900590201

Page: 68 of 97

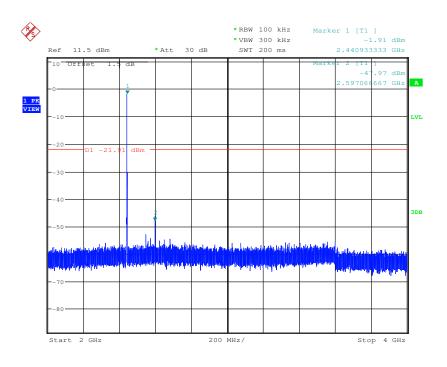

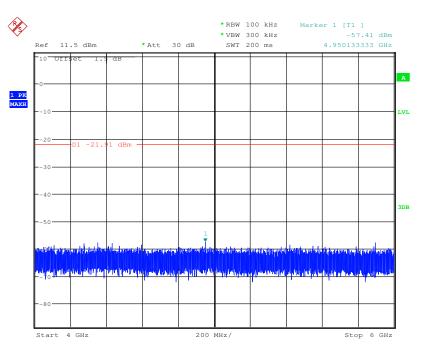





Report No.: SZEM150900590201

Page: 69 of 97

Test mode: π/4DQPSK Test channel: Highest

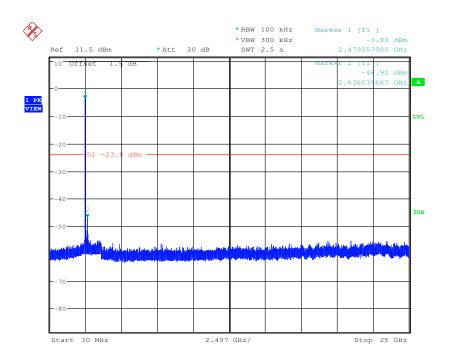


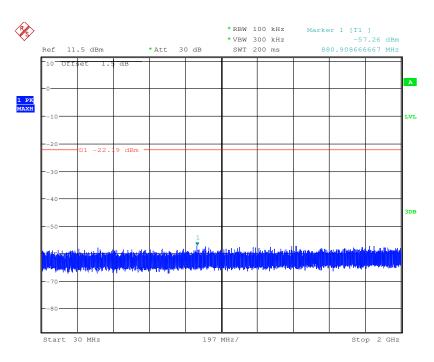




Report No.: SZEM150900590201

Page: 70 of 97

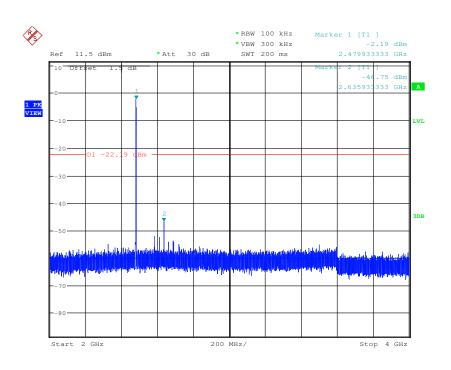

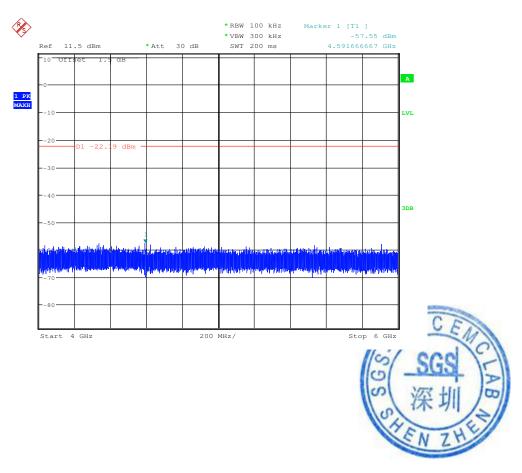





Report No.: SZEM150900590201

Page: 71 of 97

Test mode: 8DPSK Test channel: Lowest

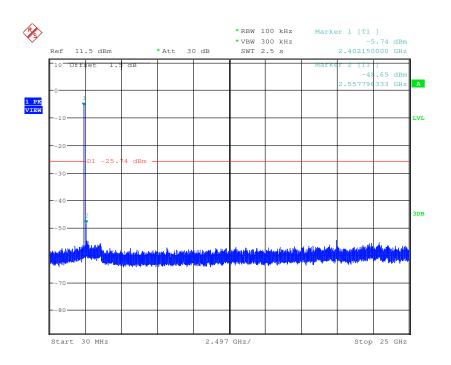


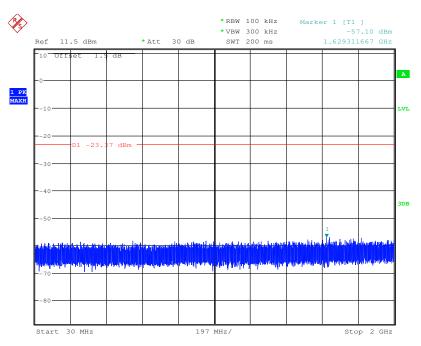




Report No.: SZEM150900590201

Page: 72 of 97

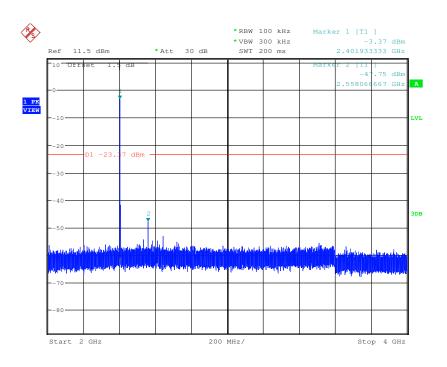

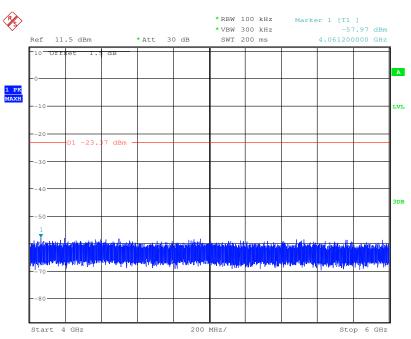





Report No.: SZEM150900590201

Page: 73 of 97

Test mode: 8DPSK Test channel: Middle

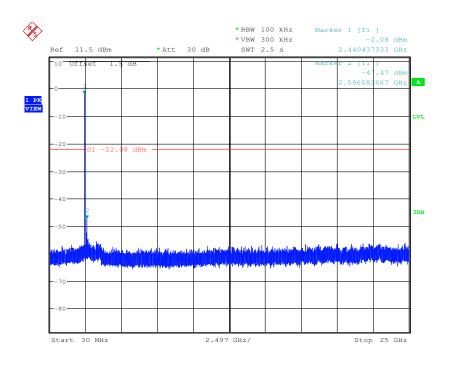


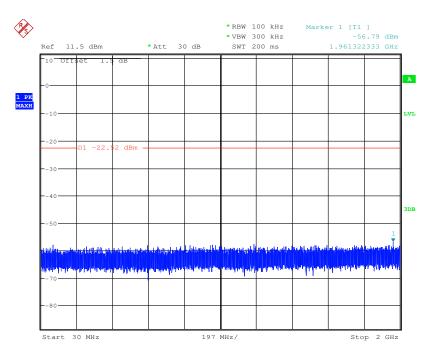




Report No.: SZEM150900590201

Page: 74 of 97

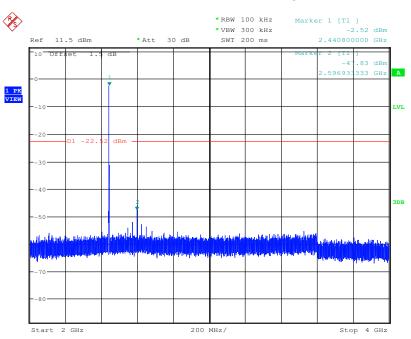

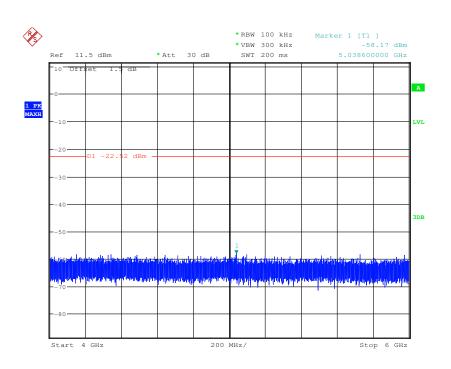





Report No.: SZEM150900590201

Page: 75 of 97

Test mode: 8DPSK Test channel: Highest

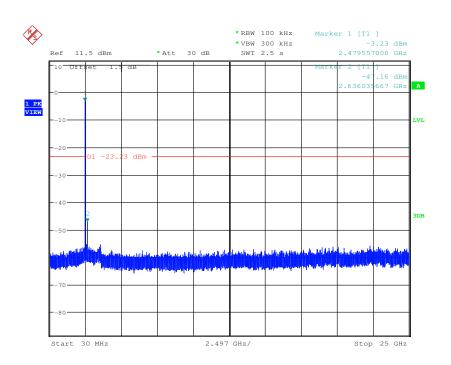


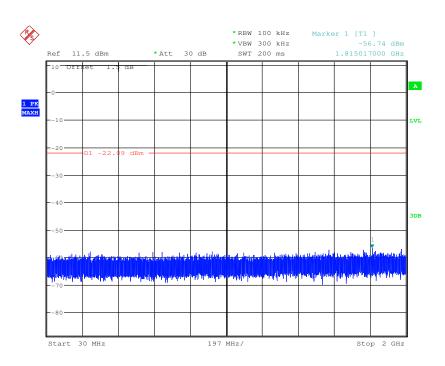




Report No.: SZEM150900590201

Page: 76 of 97

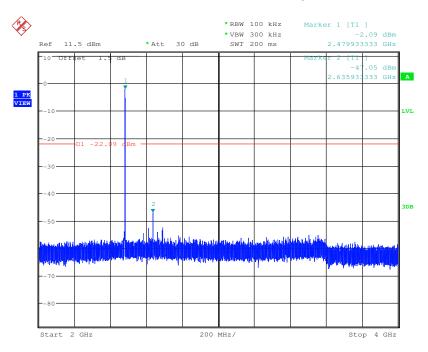

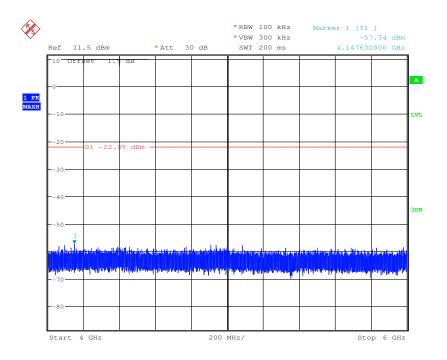

Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.



Report No.: SZEM150900590201

Page: 77 of 97

6.10 Other requirements Frequency Hopping Spread Spectrum System

Test Requirement: 47 CFR Part 15C Section 15.247 (a)(1), (h) requirement:

The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.


The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

Compliance for section 15.247(a)(1)

According to Bluetooth Core Specification, the pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage

outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:



Each frequency used equally on the average by each transmitter.

According to Bluetooth Core Specification, Bluetooth receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any Bluetooth transmitters and shift frequencies in synchronization with the transmitted signals.



Report No.: SZEM150900590201

Page: 78 of 97

Compliance for section 15.247(g)

According to Bluetooth Core Specification, the Bluetooth system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

Compliance for section 15.247(h)

According to Bluetooth Core specification, the Bluetooth system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

According to the Bluetooth Core specification, the Bluetooth system is designed not have the ability to coordinated with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.



Report No.: SZEM150900590201

Page: 79 of 97

6.11 Radiated Spurious Emission


Test Requirement:	47 CFR Part 15C Section	on 1	5.209 and 15.	205				
Test Method:	ANSI C63.10: 2009							
Test Site:	Measurement Distance	: 3m	n (Semi-Anech	oic Cham	ber)			
Receiver Setup:	Frequency		Detector	RBW	VBW	Remark		
	0.009MHz-0.090MH	z	Peak	10kHz	z 30kHz	Peak		
	0.009MHz-0.090MH	Z	Average	10kHz	z 30kHz	Average		
	0.090MHz-0.110MH	Z	Quasi-peak	10kHz	z 30kHz	Quasi-peak		
	0.110MHz-0.490MH	Z	Peak	10kHz	z 30kHz	Peak		
	0.110MHz-0.490MH	Z	Average	10kHz	z 30kHz	Average		
	0.490MHz -30MHz		Quasi-peak	10kHz	z 30kHz	Quasi-peak		
	30MHz-1GHz		Quasi-peak	100 kH	Iz 300kHz	Quasi-peak		
	Above 1GHz		Peak	1MHz	: 3MHz	Peak		
	Above Tariz		Peak	1MHz	10Hz	Average		
Limit:	Frequency		eld strength crovolt/meter)	Limit (dBuV/m)	Remark	Measureme distance (n		
	0.009MHz-0.490MHz	2	400/F(kHz)	-	-	300		
	0.490MHz-1.705MHz	24	1000/F(kHz)	-	-	30		
	1.705MHz-30MHz		30	-	ı	30		
	30MHz-88MHz		100	40.0	Quasi-peak	3		
	88MHz-216MHz		150	43.5	Quasi-peak	3		
	216MHz-960MHz		200	46.0	Quasi-peak	3		
	960MHz-1GHz		500	54.0	Quasi-peak	3		
	Above 1GHz	3						
	Above 1GHz 500 54.0 Average 3 Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.							



Report No.: SZEM150900590201

Page: 80 of 97

Test Setup:






Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz




Figure 3. Above 1 GHz

Test Procedure:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB



Report No.: SZEM150900590201

Page: 81 of 97

	margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel (2402MHz),the middle channel (2441MHz),the Highest channel (2480MHz) h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.					
	i. Repeat above procedures until all frequencies measured was com					
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of					
	data type					
	Transmitting mode					
Final Test Mode:	Through Pre-scan, find the DH1 of data type and GFSK modulation is the worst case.					
	Only the worst case is recorded in the report.					
Instruments Used:	Refer to section 5.10 for details					
Test Results:	Pass					




Report No.: SZEM150900590201

Page: 82 of 97

6.11.1 Radiated Emission below 1GHz

30MHz~1GHz (QP)		
Test mode:	Transmitting	Vertical

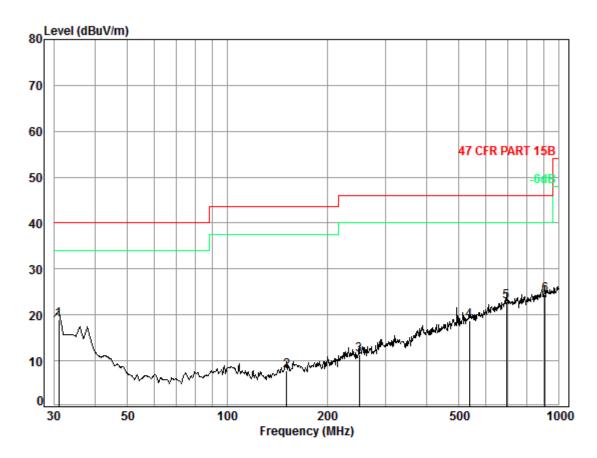

Condition: 47 CFR PART 15B 3m 3142C Vertical

Job No. : 5902CR


Test Mode: a


-5-	Freq			Preamp Factor				Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	30.96	0.60	18.16	27.35	27.52	18.93	40.00	-21.07
2	151.07	1.32	9.06	26.90	24.41	7.89	43.50	-35.61
3	250.30	1.68	12.31	26.54	23.79	11.24	46.00	-34.76
4	537.59	2.64	18.70	27.63	25.00	18.71	46.00	-27.29
5	694.42	2.89	21.56	27.42	25.79	22.82	46.00	-23.18
6	909.67	3.61	23.24	26.71	24.34	24.48	46.00	-21.52



Report No.: SZEM150900590201

Page: 83 of 97



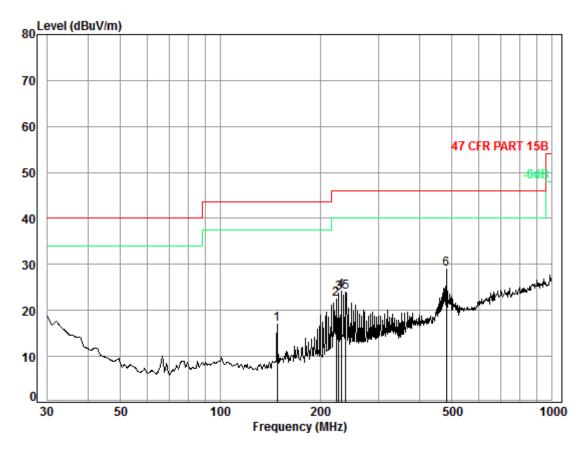

Condition: 47 CFR PART 15B 3m 3142C Horizontal

Job No. : 5902CR

Test Mode: a

	Freq			Preamp Factor				Over Limit
	MHz	dB	dB/m				dBuV/m	——dB
1	148.44	1.31	8.86	26.91	33.84	17.10	43.50	-26.40
2	223.73			26.62				
3	227.69	1.56	11.59	26.61	37.12	23.66	46.00	-22.34
4	231.72	1.58	11.71	26.59	37.40	24.10	46.00	-21.90
5	239.15	1.62	11.95	26.57	36.92	23.92	46.00	-22.08
6	480.53	2.53	17.80	27.60	36.18	28.91	46.00	-17.09



Report No.: SZEM150900590201

Page: 84 of 97

6.11.2 Transmitter Emission above 1GHz

Test mode:		GFSK(DH1)	Test channel:		Lowest	Rema	rk:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3447.042	7.07	32.83	38.72	48.81	49.99	74	-24.01	Vertical
4804.000	6.42	34.70	39.24	48.71	50.59	74	-23.41	Vertical
5999.562	8.08	36.30	39.18	48.37	53.57	74	-20.43	Vertical
7206.000	8.92	35.63	39.07	48.36	53.84	74	-20.16	Vertical
9608.000	9.99	37.33	37.93	43.76	53.15	74	-20.85	Vertical
11588.750	10.43	38.29	38.51	43.12	53.33	74	-20.67	Vertical
3417.246	7.13	32.80	38.70	49.19	50.42	74	-23.58	Horizontal
4804.000	6.42	34.70	39.24	50.15	52.03	74	-21.97	Horizontal
5964.939	8.03	36.23	39.19	47.98	53.05	74	-20.95	Horizontal
7206.000	8.92	35.63	39.07	47.61	53.09	74	-20.91	Horizontal
9608.000	9.99	37.33	37.93	44.01	53.40	74	-20.60	Horizontal
11389.270	10.37	38.15	38.41	43.81	53.92	74	-20.08	Horizontal

Test mode:		GFSK(DH1)	Test	channel:	Middle	Rema	rk:	Peak
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Over limit (dB)	Polarization
3215.762	7.52	32.29	38.61	48.64	49.84	74	-24.16	Vertical
4882.000	6.59	34.78	39.26	49.44	51.55	74	-22.45	Vertical
5982.226	8.05	36.27	39.19	48.50	53.63	74	-20.37	Vertical
7323.000	9.08	35.50	39.06	47.52	53.04	74	-20.96	Vertical
9764.000	9.90	37.81	37.84	43.50	53.37	74	-20.63	Vertical
11622.330	10.44	38.32	38.52	43.48	53.72	74	-20.28	Vertical
3748.808	6.83	33.11	38.85	52.04	53.13	74	-20.87	Horizontal
4882.000	6.59	34.78	39.26	49.44	51.55	74	-22.45	Horizontal
5999.562	8.08	36.30	39.18	48.69	53.89	74	-20.11	Horizontal
7323.000	9.08	35.50	39.06	47.66	53.18	74	-20.82	Horizontal
9764.000	9.90	37.81	37.84	43.19	53.06	74	-20.94	Horizontal
11622.330	10.44	38.32	38.52	43.48	53.72	74	-20.28	Horizontal



Report No.: SZEM150900590201

Page: 85 of 97

Test mode:		GFSK(DH1)	Test	channel:	Highest	Rema	rk:	Peak
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Over limit (dB)	Polarization
3407.371	7.15	32.79	38.70	49.34	50.58	74	-23.42	Vertical
4960.000	6.76	34.86	39.29	48.60	50.93	74	-23.07	Vertical
6016.949	8.08	36.28	39.18	48.58	53.76	74	-20.24	Vertical
7440.000	9.23	35.43	39.05	48.23	53.84	74	-20.16	Vertical
9920.000	9.81	38.27	37.75	43.52	53.85	74	-20.15	Vertical
11521.870	10.40	38.24	38.48	43.21	53.37	74	-20.63	Vertical
3447.042	7.07	32.83	38.72	48.81	49.99	74	-24.01	Horizontal
4960.000	6.76	34.86	39.29	49.99	52.32	74	-21.68	Horizontal
6016.949	8.08	36.28	39.18	48.58	53.76	74	-20.24	Horizontal
7440.000	9.23	35.43	39.05	47.23	52.84	74	-21.16	Horizontal
9920.000	9.81	38.27	37.75	42.82	53.15	74	-20.85	Horizontal
11689.790	10.47	38.39	38.56	43.66	53.96	74	-20.04	Horizontal

Remark:

- The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
 Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) Shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.




Report No.: SZEM150900590201

Page: 86 of 97

6.12Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15	47 CFR Part 15C Section 15.209 and 15.205								
Test Method:	ANSI C63.10: 2009									
Test Site:	Measurement Distance: 3m	Measurement Distance: 3m (Semi-Anechoic Chamber)								
Limit:	Frequency	Limit (dBuV/m @3m)	Remark							
	30MHz-88MHz	40.0	Quasi-peak Value							
	88MHz-216MHz	43.5	Quasi-peak Value							
	216MHz-960MHz	46.0	Quasi-peak Value							
	960MHz-1GHz	54.0	Quasi-peak Value							
	Above 1GHz	54.0	Average Value							
	Above IGHZ	74.0	Peak Value							
Test Setup:										






Figure 1. 30MHz to 1GHz

Figure 2. Above 1 GHz



Report No.: SZEM150900590201

Page: 87 of 97

Test Procedure:	 a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel g. Test the EUT in the lowest channel, the Highest channel h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type Transmitting mode, Charge + Transmitting mode.
Final Test Mode:	Through Pre-scan, find the DH5 of data type and GFSK modulation is the worst case. Pretest the EUT at Transmitting mode and Charge + Transmitting mode, found the Charge + Transmitting mode which it is worse case Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass




Report No.: SZEM150900590201

Page: 88 of 97

Test plot as follows:

Worse case mode: GFSK (DH5) Test channel: Lowest Remark: Peak Vertical

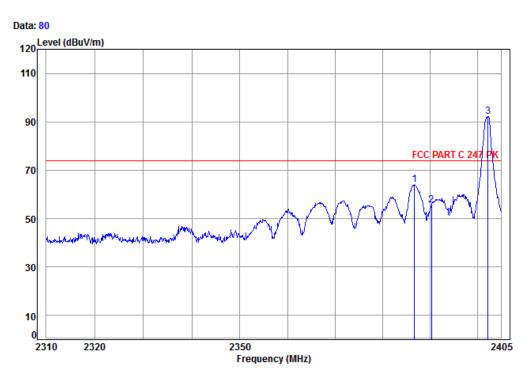

Site : chamber

Condition: FCC PART C 247 PK 3m Vertical

Job No: : 5902CR

Mode: : 2402 BT Band edge


		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2386.65	4.90	32.32	38.46	65.17	63.93	74.00	-10.07
2	2390.22	4.90	32.35	38.46	56.87	55.66	74.00	-18.34
3 pp	2402.29	4.92	32.41	38.46	93.37	92.24	74.00	18.24



Report No.: SZEM150900590201

Page: 89 of 97

Worse case mode: GFSK (DH5) Test channel: Lowest Remark: Peak Horizontal

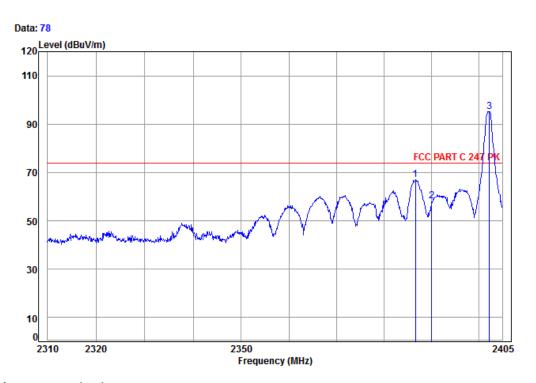

Site : chamber

Condition: FCC PART C 247 PK 3m Horizontal

report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

Job No: : 5902CR

Mode: : 2402 BT Band edge


		Cable	Ant	Preamp	Kead		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2386.56	4.90	32.32	38.46	68.21	66.97	74.00	-7.03
2	2390.00	4.90	32.35	38.46	59.56	58.35	74.00	-15.65
3 pp	2402.29	4.92	32.41	38.46	96.41	95.28	74.00	21.28



Report No.: SZEM150900590201

Page: 90 of 97

Worse case mode:	GFSK (DH5)	Test channel:	Lowest	Remark:	Average	Vertical
------------------	------------	---------------	--------	---------	---------	----------

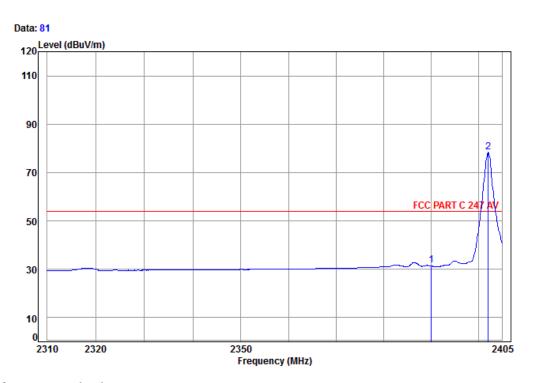

Site : chamber

Condition: FCC PART C 247 AV 3m Vertical

Job No: : 5902CR

Mode: : 2402 BT Band edge

Ant Preamp Limit Cable 0ver Read Frea Loss Factor Factor Line Limit Level Level MHz dB/m dB dBuV dBuV/m dBuV/m 4.90 32.35 38.46 32.79 31.58 54.00 -22.42 2390.00 2 pp 2402.09 4.92 32.41 38.46 79.47 78.34 54.00 24.34






Report No.: SZEM150900590201

Page: 91 of 97

Worse case mode:	GESK (DH5)	Test channel:	Lowest	Remark:	Average	Horizontal
Worde dasc mode.	ai oit (Di io)	i cot oriaririor.	LOWCSI	i tomant.	rivolage	i ionzontai

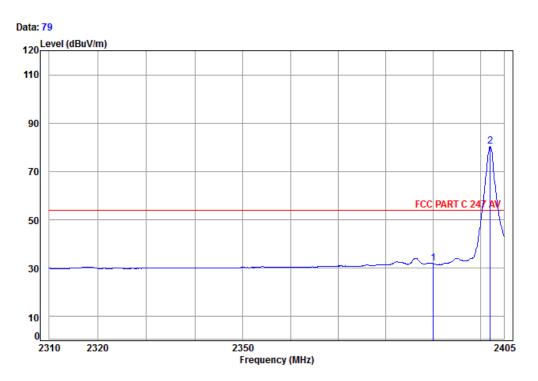

Site : chamber

Condition: FCC PART C 247 AV 3m Horizontal

Job No: : 5902CR

Mode: : 2402 BT Band edge


Ant Preamp Cable Read Limit Over Freq Loss Factor Factor Limit Line Level Level MHz dB dB/m dΒ dBuV dBuV/m dBuV/m 4.90 32.35 38.46 33.10 31.89 54.00 -22.11 2390.00 2 pp 2402.09 4.92 32.41 38.46 81.50 80.37 54.00 26.37



Report No.: SZEM150900590201

Page: 92 of 97

Worse case mode: GFSK (DH5) Test channel: Highest Remark: Peak Vertical

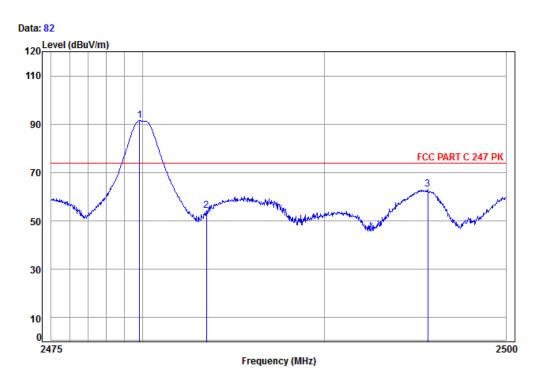

Site : chamber

Condition: FCC PART C 247 PK 3m Vertical

Job No: : 5902CR

Mode: : 2480 BT Band edge


	Freq			Preamp Factor				
_	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
2	2479.83 2483.50 2495.68	5.03	32.44	38.47	55.11	54.11	74.00	-19.89



Report No.: SZEM150900590201

Page: 93 of 97

Worse case mode:	GFSK (DH5)	Test channel:	Highest	Remark:	Peak	Horizontal
			9			

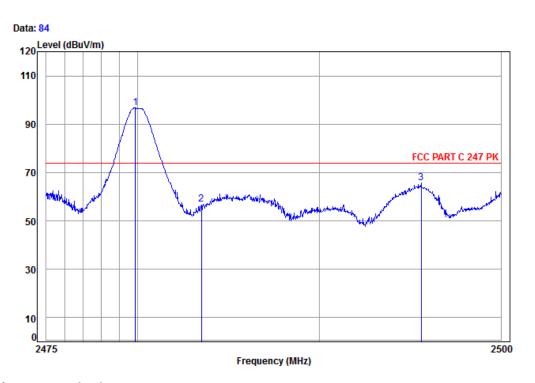

Site : chamber

Condition: FCC PART C 247 PK 3m Horizontal

Job No: : 5902CR

Mode: : 2480 BT Band edge


		Cable	Ant	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
_								
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2479.88	5.02	32.44	38.47	97.73	96.72	74.00	22.72
2	2483.50	5.03	32.44	38.47	57.86	56.86	74.00	-17.14
3	2495.61	5.04	32.44	38.47	66.66	65.67	74.00	-8.33



Report No.: SZEM150900590201

Page: 94 of 97

		Worse case mode:	GFSK (DH5)	Test channel:	Highest	Remark:	Average	Vertical
--	--	------------------	------------	---------------	---------	---------	---------	----------

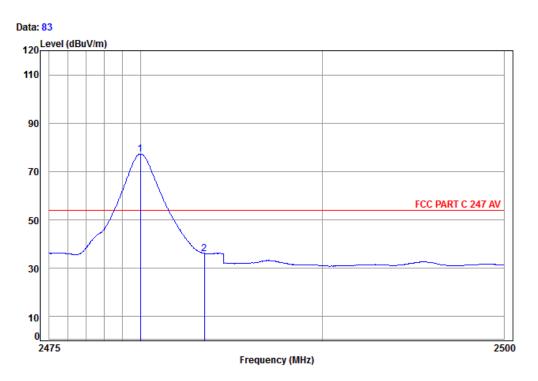

Site : chamber

Condition: FCC PART C 247 AV 3m Vertical

Job No: : 5902CR


Mode: : 2480 BT Band edge

Ant Preamp Limit Cable 0ver Read Freq Loss Factor Factor Line Limit Level Level MHz dB/m dB dBuV dBuV/m dBuV/m 2479.98 5.02 32.44 38.47 78.34 77.33 54.00 23.33 2483.50 5.03 32.44 38.47 37.10 36.10 54.00 -17.90



Report No.: SZEM150900590201

Page: 95 of 97

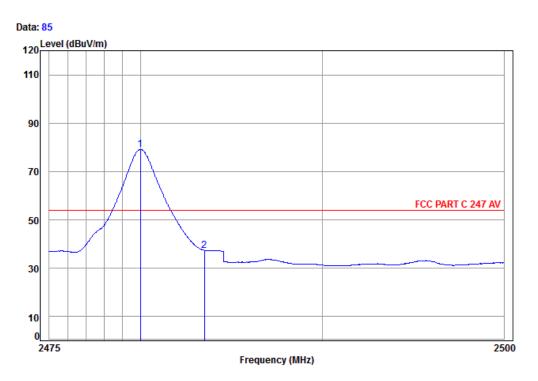

Site : chamber

Condition: FCC PART C 247 AV 3m Horizontal

Job No: : 5902CR

Mode: : 2480 BT Band edge

		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
			•			•	•	
pp	2479.98	5.02	32.44	38.47	80.23	79.22	54.00	25.22
	2483.50	5.03	32.44	38.47	38.32	37.32	54.00	-16.68

Note:

1

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor



Report No.: SZEM150900590201

Page: 96 of 97


7 Photographs - EUT Test Setup

Test model No.: UA HEADPHONES WIRELESS

7.1 Conducted Emission



7.2 Radiated Emission

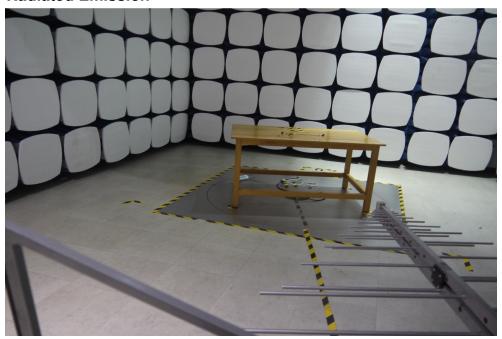




Report No.: SZEM150900590201

Page: 97 of 97

7.3 Radiated Spurious Emission

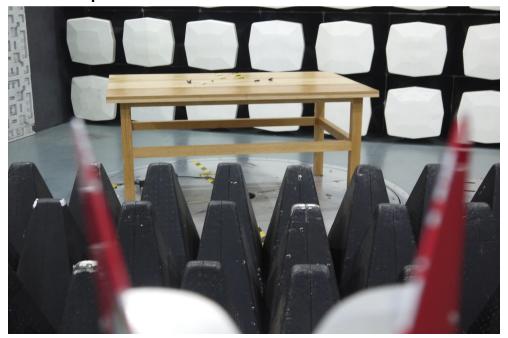

8 Photographs - EUT Constructional Details

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1509005902CR.