

# FCC/ISED RF TEST REPORT



Test Report Number.....	CMP-19092722-LC-FCC-IC-PCB
Applicant.....	<b>CalAmp</b>
Applicant Address.....	2177 Salk Ave, Suite 200, Carlsbad, CA 92008 USA
Product Name.....	Fleet Management and Tracking Device
Model Number.....	LMU2630MB
Family Product/Model.....	N/A
FCC ID.....	APV-2630MB
ISED ID.....	5843C-2630MB
Date of EUT received.....	10/11/2019
Date of Test.....	10/11/2019 – 10/30/2019
Report Issue Date.....	11/01/2019
Test Standards.....	<b>47CFR Part 22</b> <b>47CFR Part 24</b> <b>47CFR Part 27</b> <b>RSS-130 Issue 2: Feb 2019</b> <b>RSS-132 Issue 3: Jan 2013</b> <b>RSS-133 Issue 6: Jan 2018</b> <b>RSS-139 Issue 3: Jul 2015</b>
Test Result.....	Pass

Issued By:

**Vista Laboratories**

**1261 Puerta Del Sol, San Clemente, CA 92673 USA**

[www.vista-compliance.com](http://www.vista-compliance.com)

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report. This report is not to be reproduced by any means except in full and in any case not without the written approval of Vista Laboratories.

Tested by:

Bruce Li/Test Engineer

Approved By:

David Zhang/Technical Manager

Report Number:	CMP-19092722-LC-FCC-IC-PCB
Product:	Fleet Management and Tracking Device
Model Number:	LMU2630MB



## Laboratory Introduction

Vista Labs is an A2LA accredited 17025 compliant regulatory compliance testing laboratories (Cert. number: 4848-01) strategically located in Orange County, providing services in the electrical and telecommunication industries. Vista labs is also recognized testing facility for Australia (ACMA), Chinese Taipei (BSMI), Chinese Taipei (NCC), Hong Kong (OFCA), Israel (MOC), Korea (RRA), Singapore (IMDA), Vietnam (MIC), etc.

Our comprehensive testing services include safety testing, EMC emission and susceptibility testing, RF and wireless testing (including DFS).

As your partner, Vista investigates appropriate test standards, develops test plans, performs troubleshooting & failure analysis, reviews documentation, and provides test reports for a complete compliance testing and certification package.



### 17025 Product Testing Accreditation Certificate



### 17065 Product Certification Accreditation Certificate

## TABLE OF CONTENTS

<b>1 GENERAL INFORMATION .....</b>	<b>5</b>
1.1 Applicant .....	5
1.2 Product information .....	5
1.3 Test standard and method .....	6
1.4 Test Purpose and statement .....	6
<b>2 TEST SITE INFORMATION .....</b>	<b>7</b>
<b>3 MODIFICATION OF EUT .....</b>	<b>7</b>
<b>4 TEST CONFIGURATION AND OPERATION .....</b>	<b>7</b>
4.1 EUT test configuration .....	7
4.2 Supporting Equipment .....	7
4.3 EUT setup diagram .....	8
4.4 EUT operation .....	8
4.5 Test software .....	8
<b>5 EUT AND TEST SETUP PICTURES .....</b>	<b>9</b>
<b>6 TEST SUMMARY .....</b>	<b>10</b>
<b>7 UNCERTAINTY OF MEASUREMENT .....</b>	<b>11</b>
<b>8 TEST SUMMARY AND RESULT .....</b>	<b>12</b>
8.1 Radiated Spurious Emissions into Restricted Frequency Bands .....	12
8.2 Field Strength of Spurious Radiation .....	25
<b>9 TEST INSTRUMENT LIST .....</b>	<b>47</b>

**Report Number:** CMP-19092722-LC-FCC-IC-PCB  
**Product:** Fleet Management and Tracking Device  
**Model Number:** LMU2630MB



Page 4 of 47

## REVISION HISTORY

Revision	Issue Date	Description	Note
Original	11/01/2019	Original release	N/A

## 1 General Information

### 1.1 Applicant

Applicant:	CalAmp
Applicant address:	2177 Salk Ave, Suite 200, Carlsbad, CA 92008 USA
Manufacturer:	CalAmp
Manufacturer Address:	2177 Salk Ave, Suite 200, Carlsbad, CA 92008 USA

### 1.2 Product information

Product Name	Fleet Management and Tracking Device
Model Number	LMU2630MB
Family Model Number	N/A
Serial Number	N/A
Frequency Band	BLE: 2402-2480MHz GSM850: 824.2 - 848.8 MHz GSM1900: 1850.2 - 1909.8 MHz LTE CAT-M1 Band 2: 1850.7-1909.3MHz LTE CAT-M1 Band 4: 1710.7-1754.3MHz LTE CAT-M1 Band 5: 824.7-848.3MHz LTE CAT-M1 Band 12: 699.7-715.3MHz LTE CAT-M1 Band 13: 779.5-784.5 MHz LTE CAT-M1 Band 25: 1850.7 - 1914.3 MHz
Type of modulation	BLE: GFSK GSM: GMSK, 8PSK LTE CAT-M1: QPSK, 16QAM
Equipment Class/ Category	DTS, PCB
Maximum output power	See test result
Antenna Information	Bluetooth ceramic antenna, peak Gain: 1.88dBi; P/N: 1001312 Cellular LPWA antenna: peak gain: 3.1dBi; P/N: 1004795
Clock Frequencies	12MHz, 24MHz, 26MHz
Port/Connectors	CAN bus
Input Power	Vehicle Battery powered: 12-24VDC
Power Adapter Manu/Model	N/A
Power Adapter SN	N/A
Hardware version	N/A
Software version	N/A
Simultaneous Transmission	BT and GSM/LTE can transmit simultaneously
Additional Info	N/A

<b>Report Number:</b>	CMP-19092722-LC-FCC-IC-PCB
<b>Product:</b>	Fleet Management and Tracking Device
<b>Model Number:</b>	LMU2630MB



### 1.3 Test standard and method

<b>Test standard</b>	47CFR Part 15 Subpart B: 2019 ICES-003 Issue 6: April 2019 47CFR Part 22: 2019 47CFR Part 24: 2019 47CFR Part 27: 2019 RSS-130 Issue 2: Feb 2019 RSS-132 Issue 3: Jan 2013 RSS-133 Issue 6: Jan 2018 RSS-139 Issue 3: Jul 2015 SRSP-510 Issue 5: Feb 2009 RSS-Gen Issue 5: Mar 2019
<b>Test method</b>	ANSI C63.26: 2015 KDB 971168 D01 Power Meas License Digital Systems v03r01 KDB 412172 D01 Determining ERP and EIRP v01r01

### 1.4 Test Purpose and statement

The purpose of this test report is intended to demonstrate the compliance of product listed in section 1.2, received from company listed in section 1.1, to the requirements of standard and method listed in section 1.3. Based on our test results, we conclude that the product tested complies with the requirements of the standards indicated.

## 2 Test site information

Lab performing tests	Vista Laboratories		
Lab Address	1261 Puerta Del Sol, San Clemente, CA 92673 USA		
Phone Number	+1 (949) 393-1123		
Website	www.Vista-compliance.com		

Test condition	Test Engineer	Test Environment	Test Date
RF conducted	Bruce Li	23.5°C / 58.2%/996 mbar	10/11/2019 – 10/30/2019
Radiated	Bruce Li	23.5°C / 58.2%/996 mbar	10/11/2019 – 10/30/2019

## 3 Modification of EUT

N/A

## 4 Test configuration and operation

### 4.1 EUT test configuration

EUT is powered by external DC power supply for testing purpose. The cellular radio of EUT is connected to and controlled by Anritsu MS8821C, the base station emulator, communicate continuously in different modulation, test channel and data rate. For BLE, the test software is used to set EUT to different transmission mode in terms of radio mode, test channel, data rate, etc.


### 4.2 Supporting Equipment

Index	Description	Model	S/N	Brand	Remark
1	DC Power Supply	DP712	DP7B194900487	RIGOL	N/A

Report Number:	CMP-19092722-LC-FCC-IC-PCB
Product:	Fleet Management and Tracking Device
Model Number:	LMU2630MB



#### 4.3 EUT setup diagram

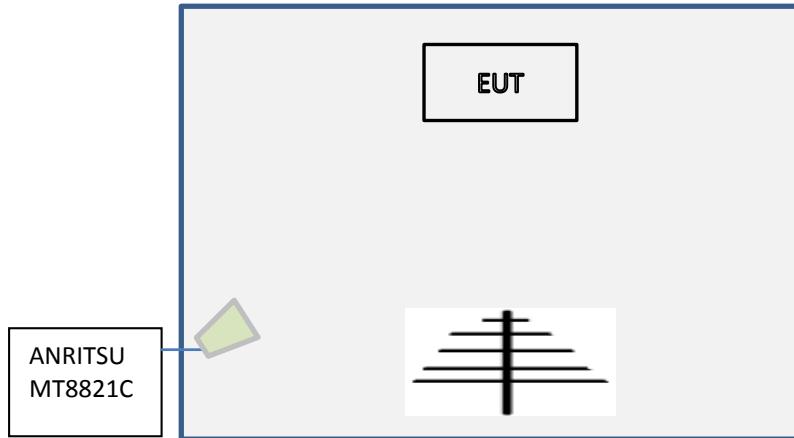

#### 4.4 EUT operation

The radio can be set to transmit continuously in different modulation, test channel and data rate.

#### 4.5 Test software

Index	Description	Remark
1	Putty.exe	To set EUT into continuous TX and RX mode under different modulation, data rate and channel, etc.
2	EMISoft Vasona 6.0049	EMC/Spurious emission test software used during testing

**Report Number:** CMP-19092722-LC-FCC-IC-PCB  
**Product:** Fleet Management and Tracking Device  
**Model Number:** LMU2630MB



Page 9 of 47

## 5 EUT and test setup pictures

See FCC filing



Electromagnetic Compatibility  
Radio Frequency  
Product Certification  
International Approval

1261 Puerta Del Sol  
San Clemente, CA, 92673  
+1 (949) 393-1123  
[www.vista-compliance.com](http://www.vista-compliance.com)

**Report Number:** CMP-19092722-LC-FCC-IC-PCB  
**Product:** Fleet Management and Tracking Device  
**Model Number:** LMU2630MB



Page 10 of 47

## 6 Test Summary

FCC Rules	ISED Rules	Test Item	Section	Verdict
15.247, 15.209	RSS-247, RSS-Gen	Radiated Spurious Emissions into Restricted Frequency Bands (intentional)	8.1	Pass
2.1046 22.917 (a), 24.238 (a), 27.53 (f), (g), (h), (c)(2) and (5)	RSS-130(4.7.1) and (4.7.2) RSS-132 (5.5) RSS-133 (6.5) RSS-139 (6.6) SRSP-510(5.1.2)	Field Strength of Spurious Radiation (licensed band)	8.2	Pass

**Report Number:** CMP-19092722-LC-FCC-IC-PCB  
**Product:** Fleet Management and Tracking Device  
**Model Number:** LMU2630MB



Page 11 of 47

## 7 Uncertainty of Measurement

Test item	Measurement Uncertainty (dB)
Radiated Emission (9KHz-30MHz)	±3.5 dB
Radiated Emission (30MHz-1GHz)	±4.6 dB
Radiated Emission (1-18GHz)	±4.9 dB
Radiated Emission (18-40GHz)	±3.5 dB



Electromagnetic Compatibility  
Radio Frequency  
Product Certification  
International Approval

1261 Puerta Del Sol  
San Clemente, CA, 92673  
+1 (949) 393-1123  
[www.vista-compliance.com](http://www.vista-compliance.com)

## 8 Test summary and result

### 8.1 Radiated Spurious Emissions into Restricted Frequency Bands

#### 8.1.1 Requirement


§ 15.247 (d)



In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Attenuation below the general limits specified in §15.209(a) and RSS-Gen is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Frequency range (MHz)	Field Strength ( $\mu$ V/m)
0.009~0.490	2400/F(KHz)
0.490~1.705	24000/F(KHz)
1.705~30.0	30
30 – 88	100
88 – 216	150
216 – 960	200
Above 960	500

#### 8.1.2 Test setup

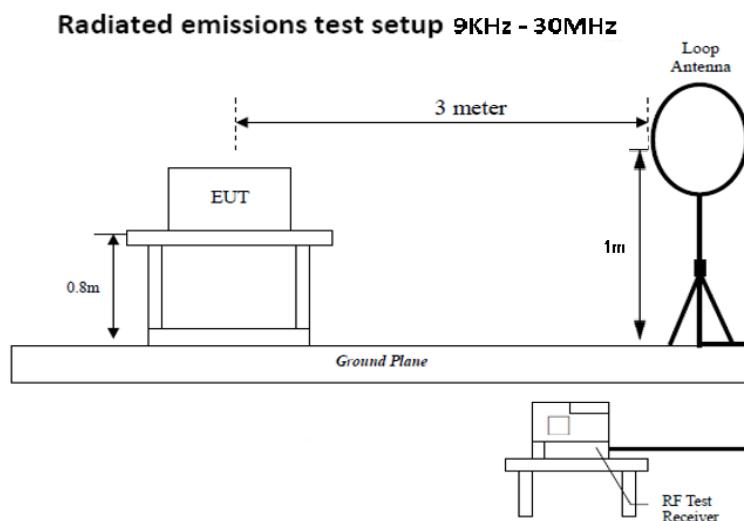

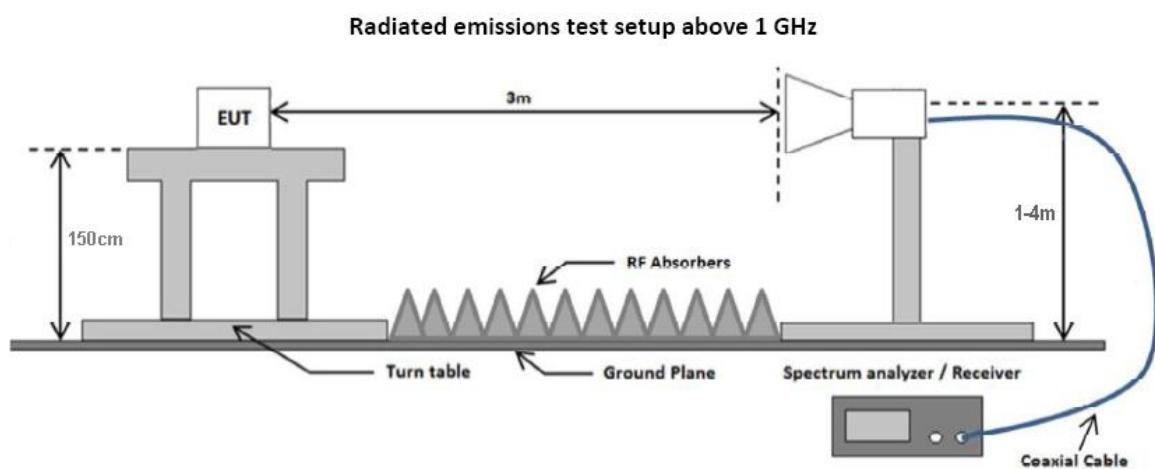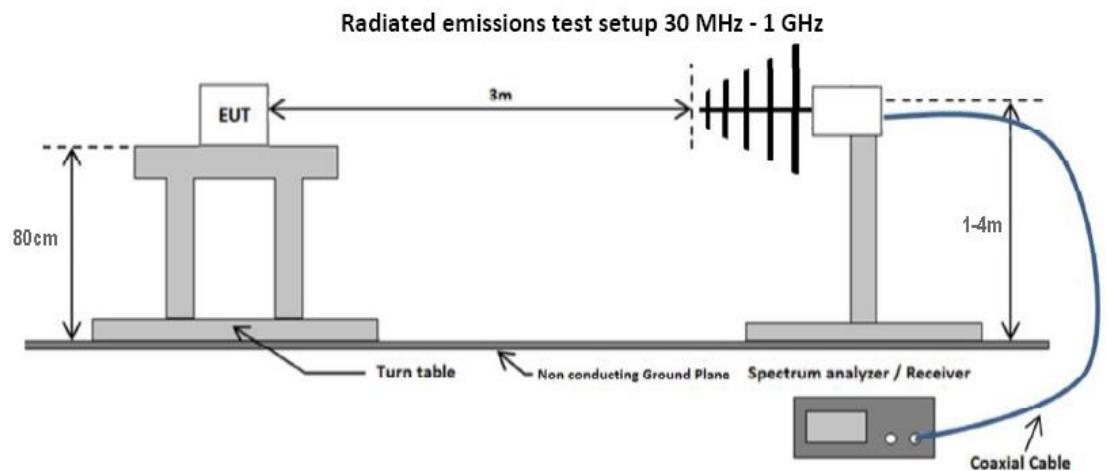

### 8.1.3 Test Procedure


According to section 8.6 in KDB 558074 D01 DTS Meas Guidance v05r01 and subclause 11.12.2.7 Radiated spurious emission measurements in ANSI C62.10-2013 as well as the procedures for maximizing and measuring radiated emissions that are described in ANSI C63.10 was followed. Boresight antenna mast was used during the scanning to point to EUT to maximize the emission. The process will be repeated in 3 EUT orientations.

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
  - a. Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen.
  - b. The EUT was then rotated to the direction that gave the maximum emission.
  - c. Finally, the antenna height was adjusted to the height that gave the maximum emission.
3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 300 Hz for frequency below 150KHz.
4. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 10 kHz for frequency between 150KHz – 30MHz.
5. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-Peak detection at frequency between 30MHz - 1GHz.
6. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak and average measurement at frequency above 1GHz.
7. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.

#### 8.1.4 *Test Result*

## 30-1000MHz test result under FCC Part 15C

<b>Test Standard:</b>	<b>15.209</b>	<b>Mode:</b>	<b>BLE+GSM B2</b>
<b>Frequency Range:</b>	<b>30-1000MHz</b>	<b>Test Date:</b>	<b>11/14/2019</b>
<b>Antenna Type/Polarity:</b>	<b>Bi-Log/Hor &amp; Ver</b>	<b>Test Personnel:</b>	<b>Bruce Li</b>
<b>Remark:</b>	<b>N/A</b>	<b>Test Result:</b>	<b>Pass</b>

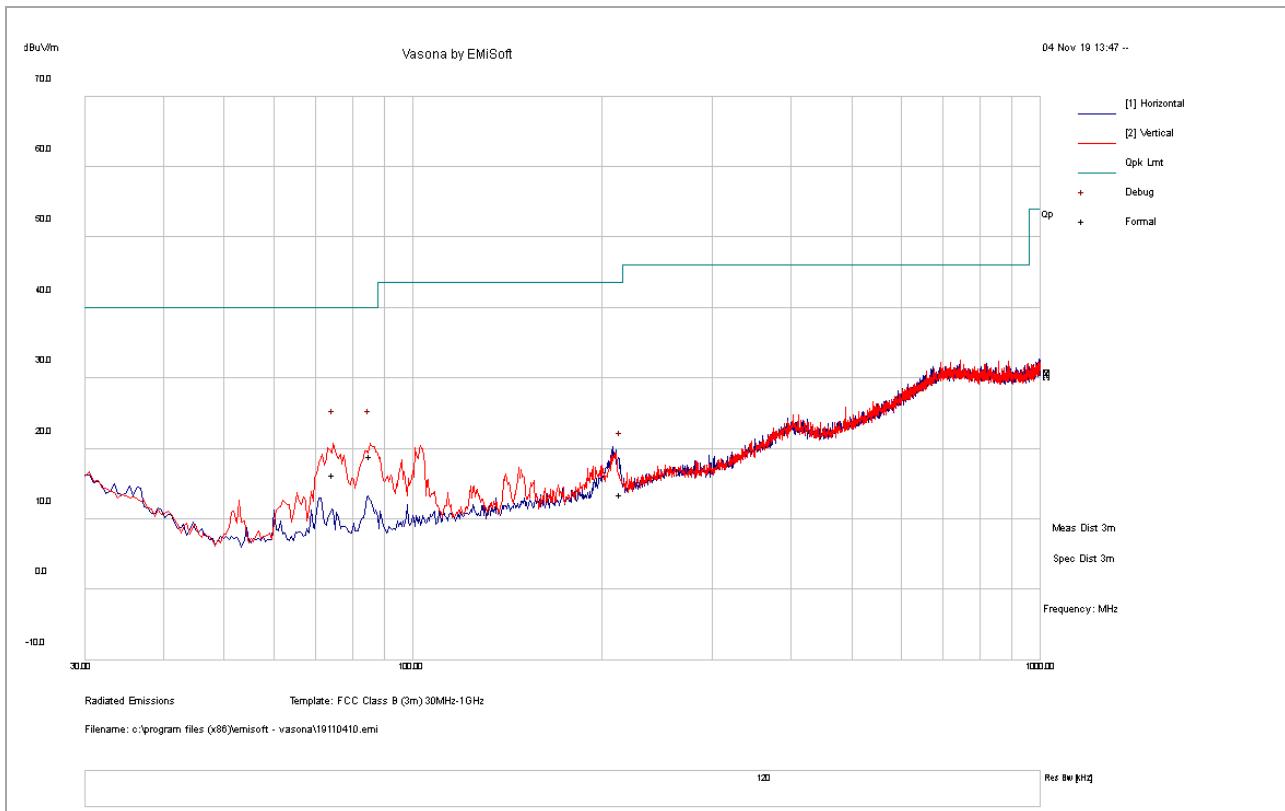


Frequency MHz	Raw dB	Cable dB	AF dB	Level dBuV/m	Det	Pol deg	Height cm	Table deg	Limit dBuV/m	Margin dB
74.63	37.54	3.24	-24.40	16.38	QP	V	230	212	40.00	-23.62
85.47	40.27	3.39	-24.61	19.05	QP	V	100	191	40.00	-20.95
214.11	29.73	4.89	-21.03	13.59	QP	H	127	336	43.50	-29.91
43.45	23.69	2.64	-22.25	4.08	QP	H	258	225	40.00	-35.92
72.94	24.78	3.21	-24.33	3.67	QP	H	183	46	40.00	-36.33

Note:

- 1) For below 1GHz, all different channel and modes were verified but only the worst case result is shown here.
  - 2) No outstanding result was found for below 30MHz other than ambient noise floor.

### 30-1000MHz test result under FCC Part 15C

Test Standard:	15.209	Mode:	BLE+LTE B5
Frequency Range:	30-1000MHz	Test Date:	11/14/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

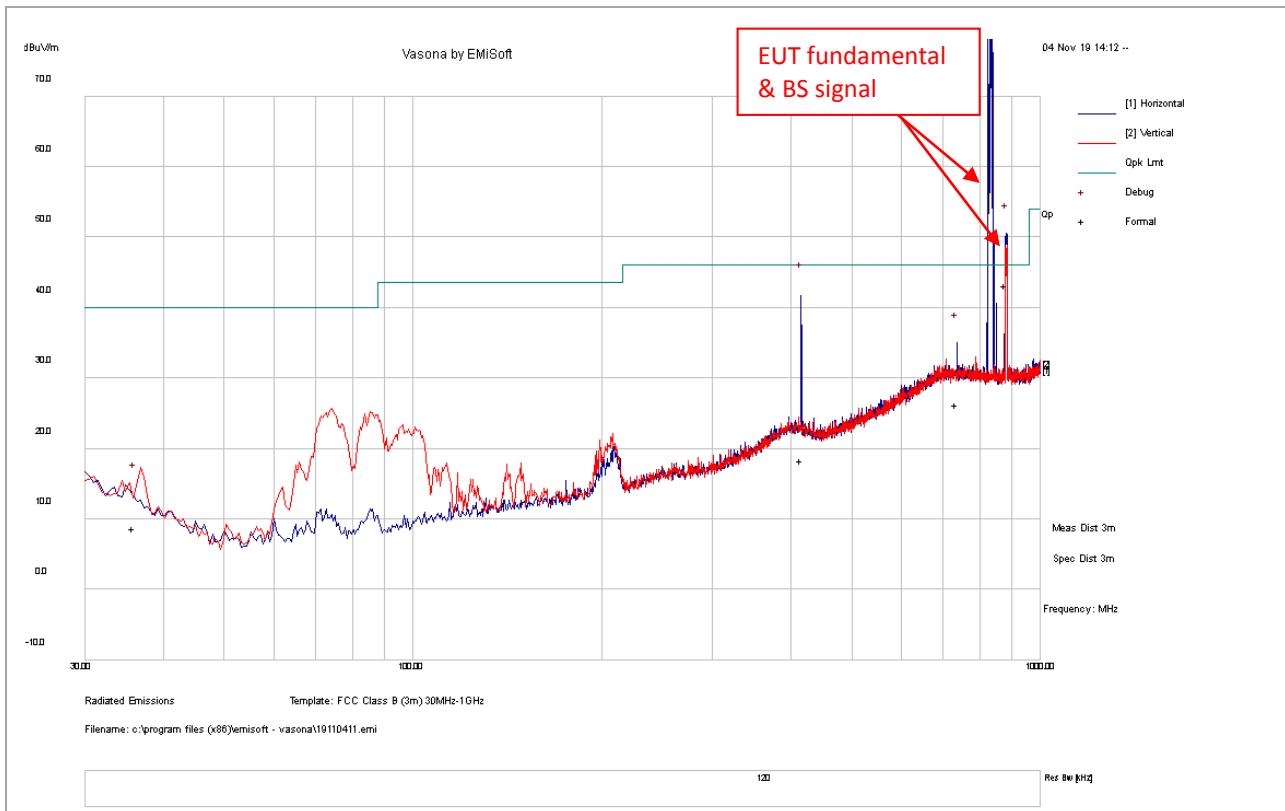


Frequency MHz	Raw dB	Cable dB	AF dB	Level dBuV/m	Det	Pol deg	Height cm	Table deg	Limit dBuV/m	Margin dB
881.17	42.77	7.54	-7.15	43.17	QP	H	217	360	46.00	-2.83
415.48	25.75	6.32	-13.65	18.42	QP	H	123	235	46.00	-27.58
735.02	25.58	7.29	-6.55	26.31	QP	V	275	292	46.00	-19.69
35.90	24.34	2.42	-18.11	8.66	QP	H	149	26	40.00	-31.34

#### Note:

- 1) For below 1GHz, all different channel and modes were verified but only the worst case result is shown here.
- 2) No outstanding result was found for below 30MHz other than ambient noise floor.

### 1GHz – 18GHz test result under FCC Part 15C


Test Standard:	15.209	Mode:	BLE+GSM
Frequency Range:	1GHz-18GHz	Test Date:	11/01/2019
Antenna Type/Polarity:	Horn/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

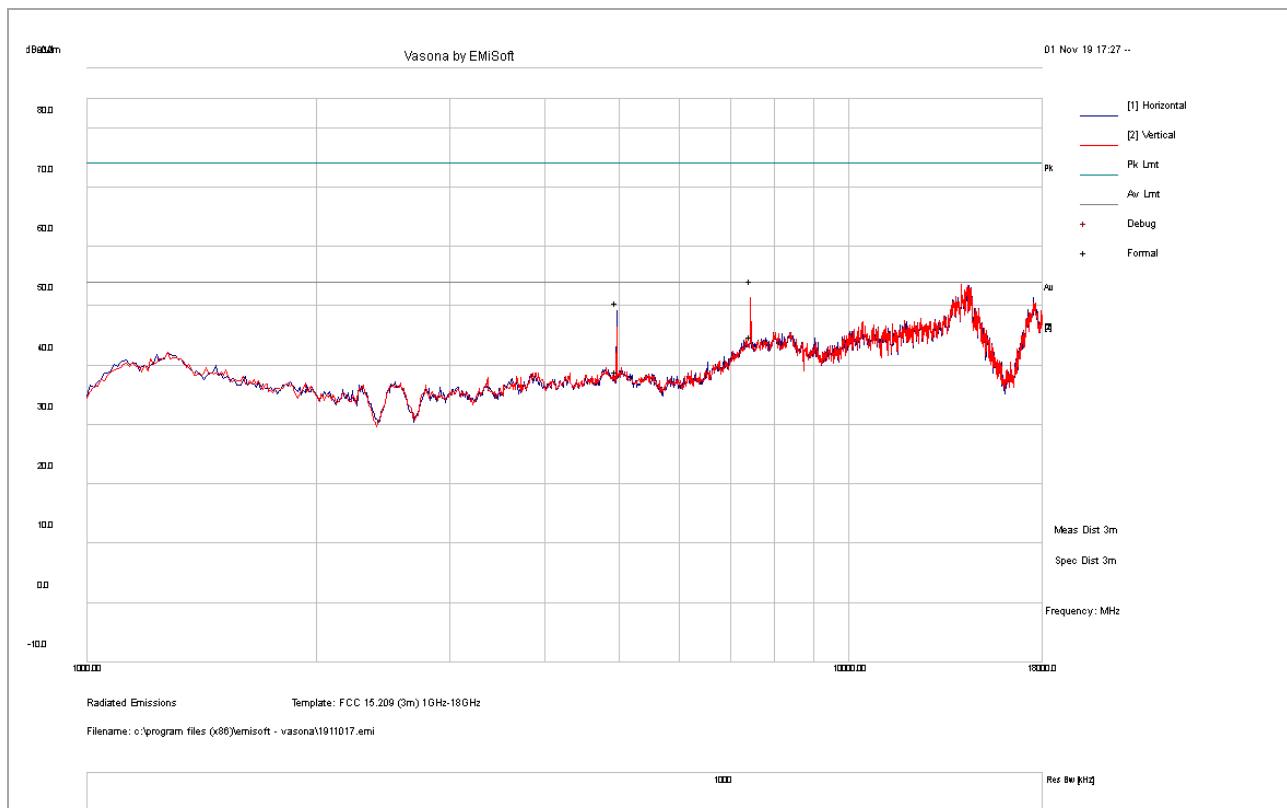

Frequency MHz	Raw dB	Cable dB	AF dB	Level dBuV/m	Det	Pol deg	Height cm	Table deg	Limit dBuV/m	Margin dB
7439.93	40.93	20.90	-7.64	54.20	PK	V	124	45	74.00	-19.80
4959.29	46.40	17.39	-13.25	50.54	PK	V	139	340	74.00	-23.46
7439.93	31.64	20.90	-7.64	44.90	AV	V	124	45	54.00	-9.10
4959.29	34.85	17.39	-13.25	38.99	AV	V	139	340	54.00	-15.01

### 1GHz – 18GHz test result under FCC Part 15C


Test Standard:	15.209	Mode:	BLE+LTE B2
Frequency Range:	1GHz-18GHz	Test Date:	11/01/2019
Antenna Type/Polarity:	Horn/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

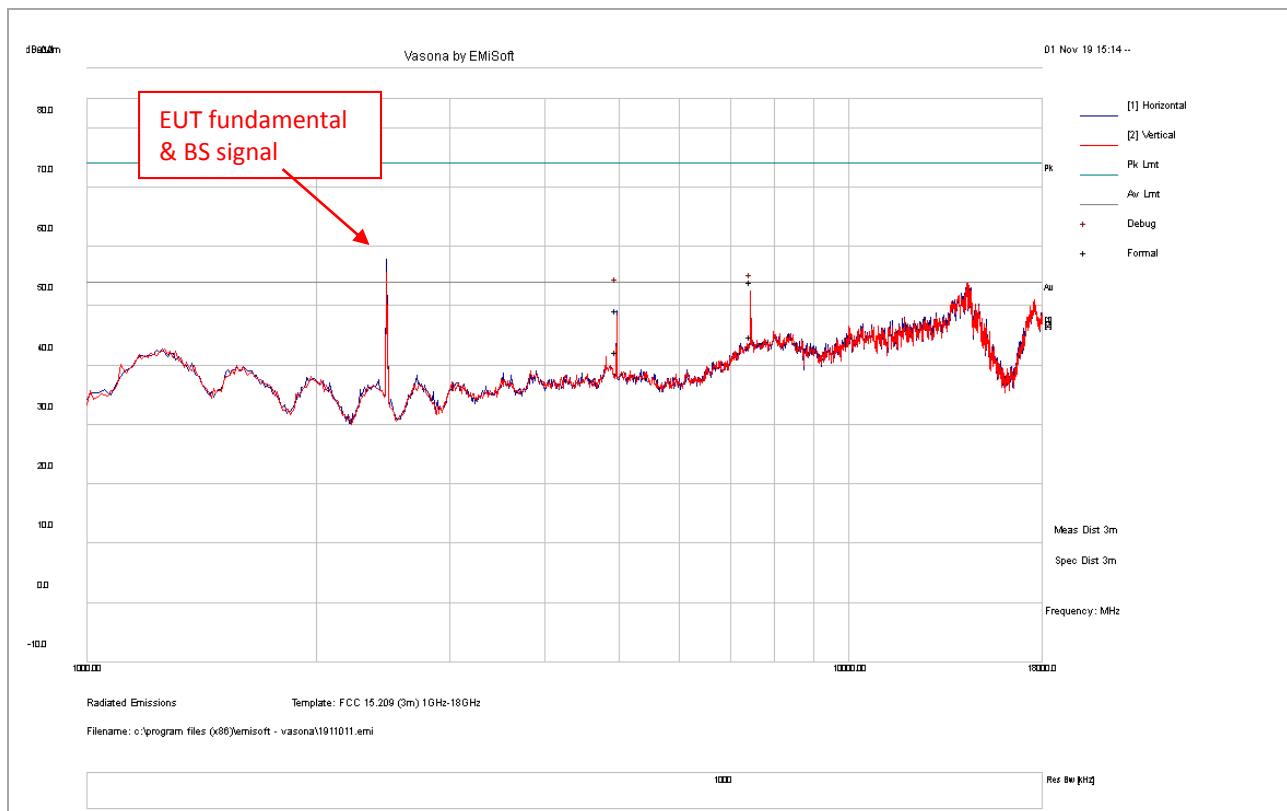

Frequency MHz	Raw dB	Cable dB	AF dB	Level dBuV/m	Det	Pol deg	Height cm	Table deg	Limit dBuV/m	Margin dB
7439.76	40.82	20.90	-7.64	54.08	PK	V	100	308	74.00	-19.92
4960.02	45.21	17.39	-13.24	49.36	PK	V	100	192	74.00	-24.64
7439.76	31.62	20.90	-7.64	44.88	AV	V	100	308	54.00	-9.12
4960.02	38.24	17.39	-13.24	42.38	AV	V	100	192	54.00	-11.62

### 1GHz – 18GHz test result under FCC Part 15C


Test Standard:	15.209	Mode:	BLE+LTE B4
Frequency Range:	1GHz-18GHz	Test Date:	11/01/2019
Antenna Type/Polarity:	Horn/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

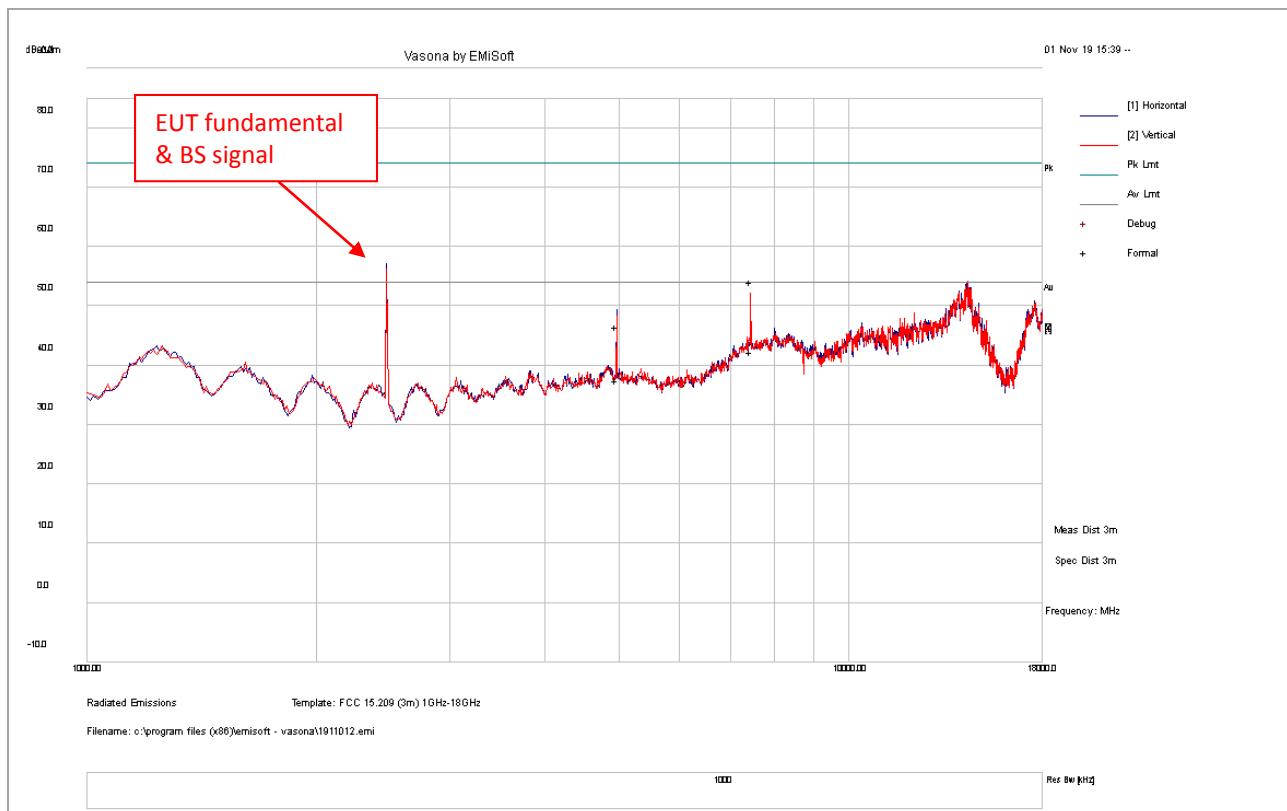

Frequency MHz	Raw dB	Cable dB	AF dB	Level dBuV/m	Det	Pol deg	Height cm	Table deg	Limit dBuV/m	Margin dB
7439.10	40.79	20.90	-7.64	54.05	PK	V	124	54	74.00	-19.96
4959.58	42.47	17.39	-13.24	46.61	PK	V	120	138	74.00	-27.39
7439.10	29.05	20.90	-7.64	42.31	AV	V	124	54	54.00	-11.69
4959.58	33.38	17.39	-13.24	37.53	AV	V	120	138	54.00	-16.47

1GHz – 18GHz test result under FCC Part 15C


Test Standard:	15.209	Mode:	BLE+LTE B5
Frequency Range:	1GHz-18GHz	Test Date:	11/01/2019
Antenna Type/Polarity:	Horn/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

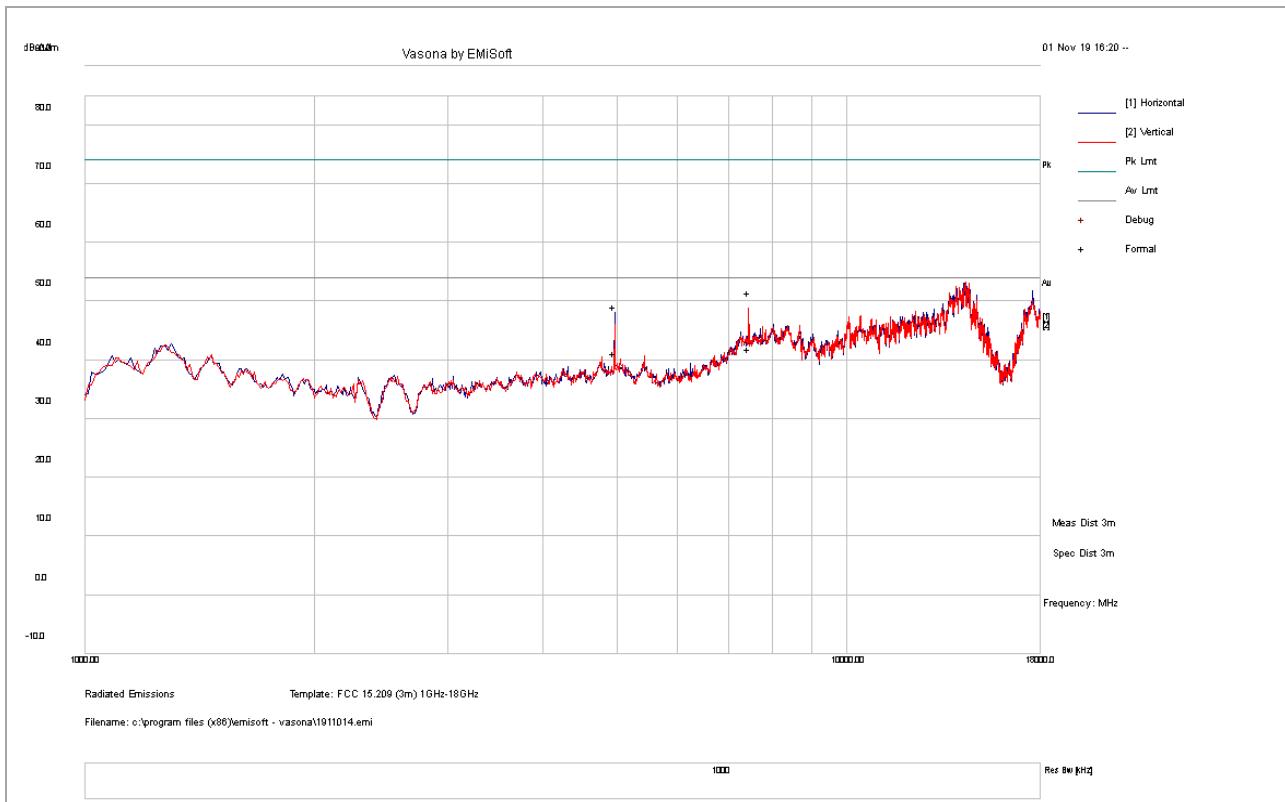

Frequency MHz	Raw dB	Cable dB	AF dB	Level dBuV/m	Det	Pol deg	Height cm	Table deg	Limit dBuV/m	Margin dB
7439.54	38.20	20.90	-7.64	51.46	PK	V	110	32	74.00	-22.54
4959.68	45.04	17.39	-13.24	49.18	PK	V	133	345	74.00	-24.82
7439.54	28.74	20.90	-7.64	42.00	AV	V	110	32	54.00	-12.00
4959.68	37.11	17.39	-13.24	41.25	AV	V	133	345	54.00	-12.75

1GHz – 18GHz test result under FCC Part 15C


Test Standard:	15.209	Mode:	BLE+LTE B12
Frequency Range:	1GHz-18GHz	Test Date:	11/01/2019
Antenna Type/Polarity:	Horn/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

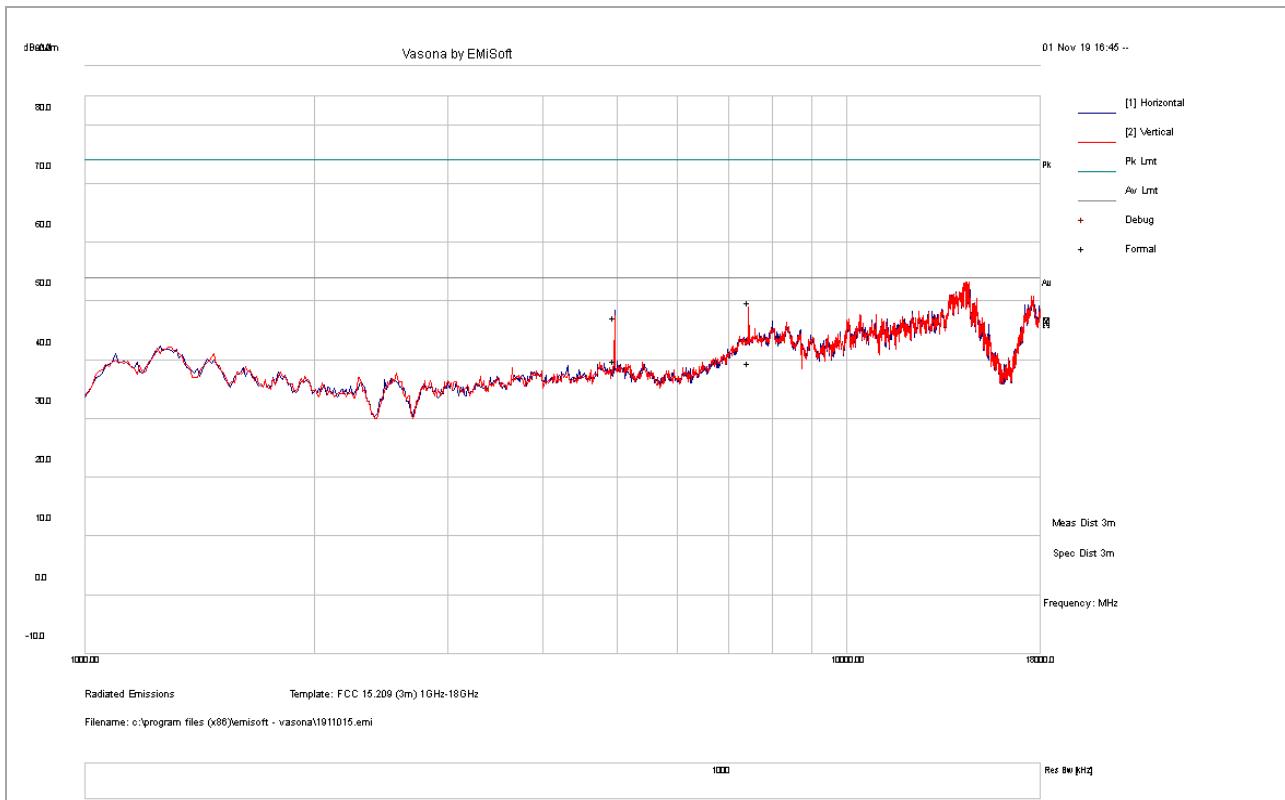

Frequency MHz	Raw dB	Cable dB	AF dB	Level dBuV/m	Det	Pol deg	Height cm	Table deg	Limit dBuV/m	Margin dB
7439.84	36.63	20.90	-7.64	49.90	PK	V	104	296	74.00	-24.10
4959.89	43.15	17.39	-13.24	47.29	PK	V	100	110	74.00	-26.71
7439.84	26.23	20.90	-7.64	39.49	AV	V	104	296	54.00	-14.51
4959.89	35.70	17.39	-13.24	39.85	AV	V	100	110	54.00	-14.15

### 1GHz – 18GHz test result under FCC Part 15C


Test Standard:	15.209	Mode:	BLE+LTE B13
Frequency Range:	1GHz-18GHz	Test Date:	11/01/2019
Antenna Type/Polarity:	Horn/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

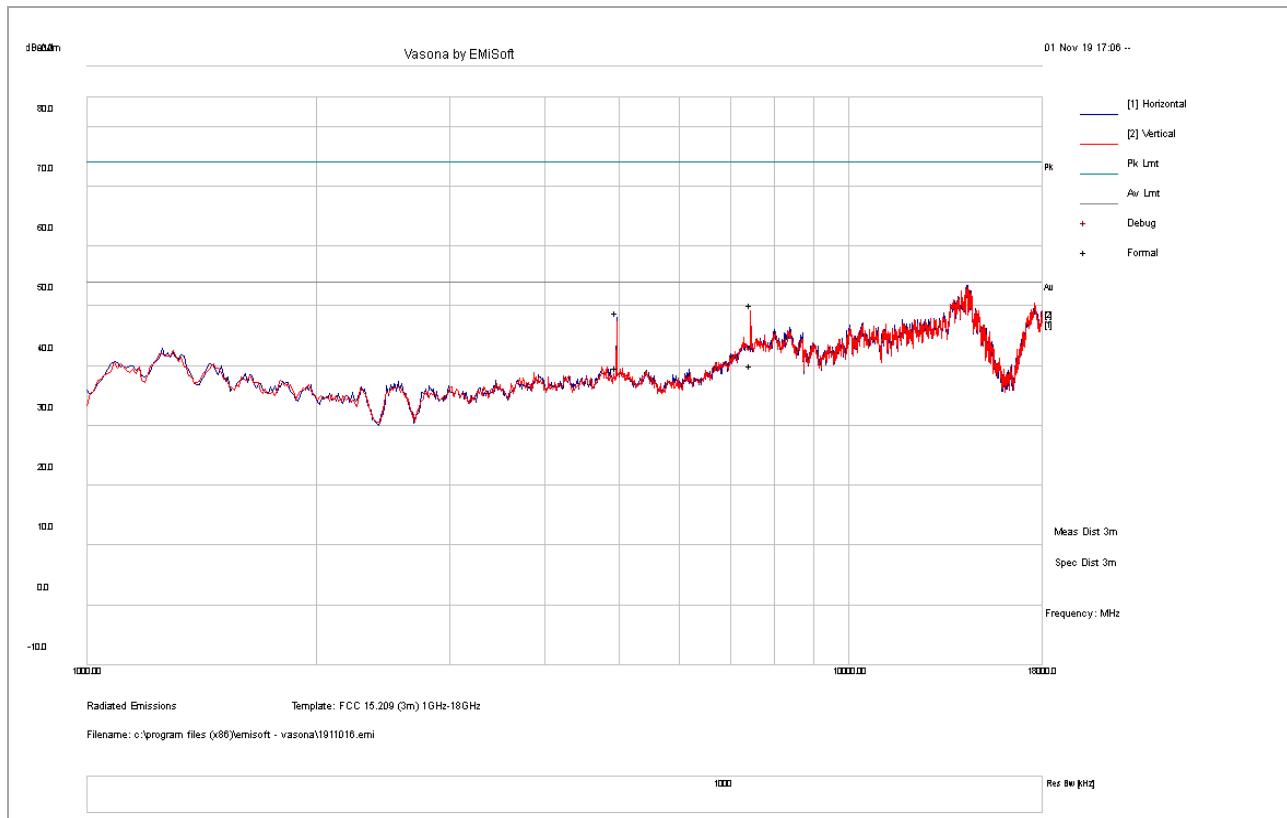

Frequency MHz	Raw dB	Cable dB	AF dB	Level dBuV/m	Det	Pol deg	Height cm	Table deg	Limit dBuV/m	Margin dB
7439.45	36.93	20.90	-7.64	50.19	PK	V	110	289	74.00	-23.81
4959.49	44.85	17.39	-13.24	48.99	PK	V	128	80	74.00	-25.01
7439.45	26.82	20.90	-7.64	40.08	AV	V	110	289	54.00	-13.92
4959.49	35.49	17.39	-13.24	39.63	AV	V	128	80	54.00	-14.37

### 1GHz – 18GHz test result under FCC Part 15C

Test Standard:	15.209	Mode:	BLE+LTE B25
Frequency Range:	1GHz-18GHz	Test Date:	11/01/2019
Antenna Type/Polarity:	Horn/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

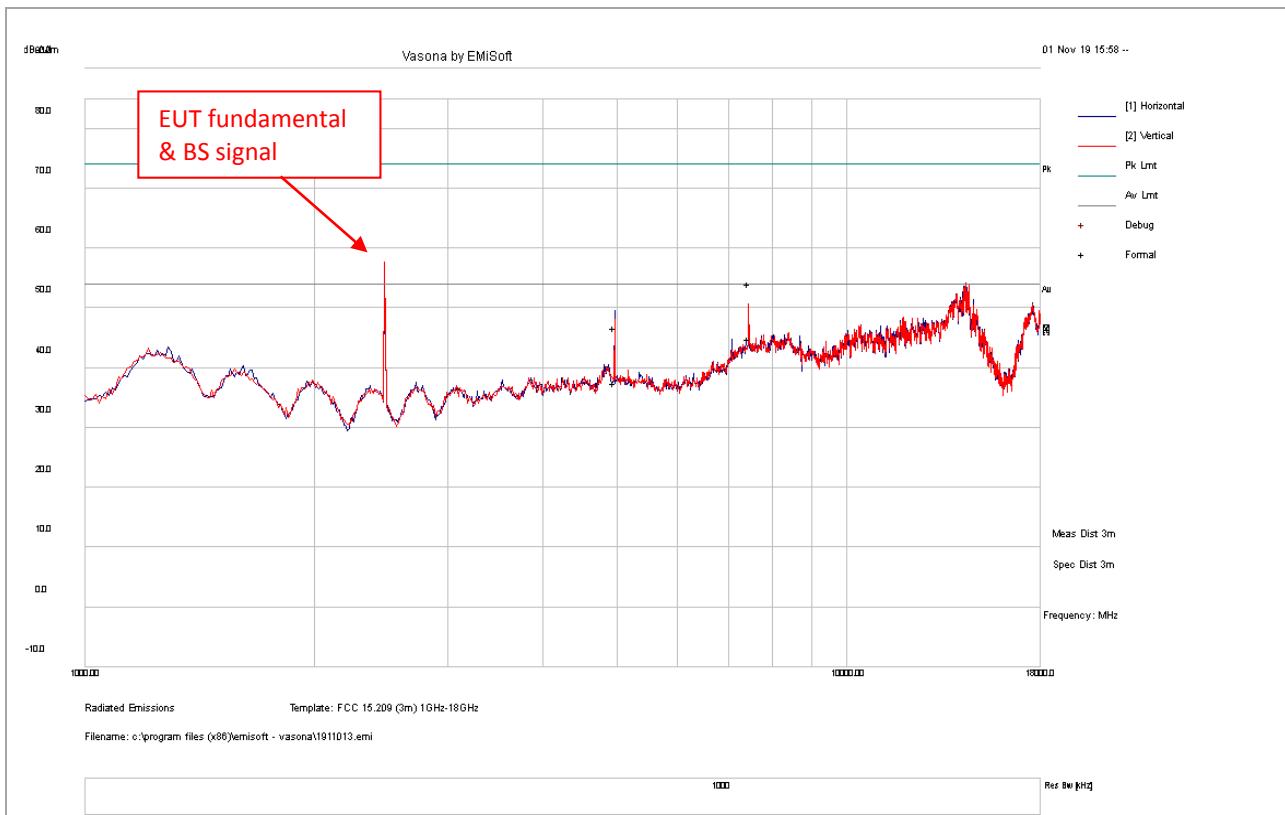

Frequency MHz	Raw dB	Cable dB	AF dB	Level dBuV/m	Det	Pol deg	Height cm	Table deg	Limit dBuV/m	Margin dB
7440.02	40.79	20.90	-7.64	54.05	PK	V	116	31	74.00	-19.95
4959.54	42.54	17.39	-13.24	46.69	PK	V	137	263	74.00	-27.32
7440.02	31.64	20.90	-7.64	44.90	AV	V	116	31	54.00	-9.10
4959.54	33.41	17.39	-13.24	37.55	AV	V	137	263	54.00	-16.45

<b>Report Number:</b>	CMP-19092722-LC-FCC-IC-PCB
<b>Product:</b>	Fleet Management and Tracking Device
<b>Model Number:</b>	LMU2630MB



**18GHz – 25GHz test result**

Note: no substantial emission is found other than the noise floor.  
Different modes have been verified.

## 8.2 Field Strength of Spurious Radiation

### 8.2.1 Requirement

§ 2.1051, 22.917(a), 24.238(a), 27.53 (f), (g), (h) and (c)(2) and (5)

RSS-130(4.7.1) and (4.7.2), RSS-132(5.5), RSS-133(6.5), RSS-139(6.6)

FCC 47 CFR Part 22, Clause 22.917 (a) and FCC 47 CFR Part 24, Clause 24.238 (a)

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

FCC 47 CFR Part 27, Clause 27.53 (c)(2) and (5)

(c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB;

(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

FCC 47 CFR Part 27, Clause 27.53 (f)

(f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to  $-70$  dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and  $-80$  dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

FCC 47 CFR Part 27, Clause 27.53 (g)

(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log (P)$  dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

FCC 47 CFR Part 27, Clause 27.53 (h)

(h) AWS emission limits — (1) General protection levels. Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10} (P)$  dB.

(3) Measurement procedure. (i) Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

RSS-130, Clause 4.7.1 and 4.7.2

The unwanted emissions in any 100 kHz bandwidth on any frequency outside the low frequency edge and the high frequency edge of each frequency block range(s), shall be attenuated below the transmitter power, P (dBW), by at least  $43 + 10 \log_{10} p$  (watts), dB. However, in the 100 kHz band immediately outside of the equipment's frequency block range, a resolution bandwidth of 30 kHz may be employed.

In addition to the limit outlined in section 4.7.1 above, equipment operating in the frequency bands 746- 756 MHz and 777-787 MHz shall also comply with the following restrictions:

a) The power of any unwanted emissions in any 6.25 kHz bandwidth for all frequencies between 763-775 MHz and 793-806 MHz shall be attenuated below the transmitter power, P (dBW), by at least:

- (i)  $76 + 10 \log_{10} p$  (watts), dB, for base and fixed equipment, and
- (ii)  $65 + 10 \log_{10} p$  (watts), dB, for mobile and portable equipment.

b) The e.i.r.p. in the band 1559-1610 MHz shall not exceed -70 dBW/MHz for wideband signal and 80 dBW for discrete emission with bandwidth less than 700 Hz.

RSS-132, Clause 5.5

Mobile and base station equipment shall comply with the limits in (i) and (ii) below.

(i) In the first 1.0 MHz band immediately outside and adjacent to each of the sub-bands specified in Section 5.1, the power of emissions per any 1% of the occupied bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least  $43 + 10 \log_{10} p$  (watts).

(ii) After the first 1.0 MHz immediately outside and adjacent to each of the sub-bands, the power of emissions in any 100 kHz bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least  $43 + 10 \log_{10} p$  (watts). If the measurement is performed using 1% of the occupied bandwidth, power integration over 100 kHz is required.

Report Number:	CMP-19092722-LC-FCC-IC-PCB
Product:	Fleet Management and Tracking Device
Model Number:	LMU2630MB



RSS-133, Clause 6.5.1


Equipment shall comply with the limits in (i) and (ii) below.

- (i) In the 1.0 MHz bands immediately outside and adjacent to the equipment's operating frequency block, the emission power per any 1% of the emission bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least  $43 + 10 \log_{10} p$  (watts).
- (ii) After the first 1.0 MHz, the emission power in any 1 MHz bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least  $43 + 10 \log_{10} p$  (watts). If the measurement is performed using 1% of the emission bandwidth, power integration over 1.0 MHz is required.

RSS-139, Clause 6.6

- (i) In the first 1.0 MHz bands immediately outside and adjacent to the equipment's smallest operating frequency block, which can contain the equipment's occupied bandwidth, the emission power per any 1% of the emission bandwidth shall be attenuated below the transmitter output power P (in dBW) by at least  $43 + 10 \log_{10} p$  (watts) dB.
- (ii) After the first 1.0 MHz outside the equipment's smallest operating frequency block, which can contain the equipment's occupied bandwidth, the emission power in any 1 MHz bandwidth shall be attenuated below the transmitter output power P (in dBW) by at least  $43 + 10 \log_{10} p$  (watts) dB.

### 8.2.2 Test setup

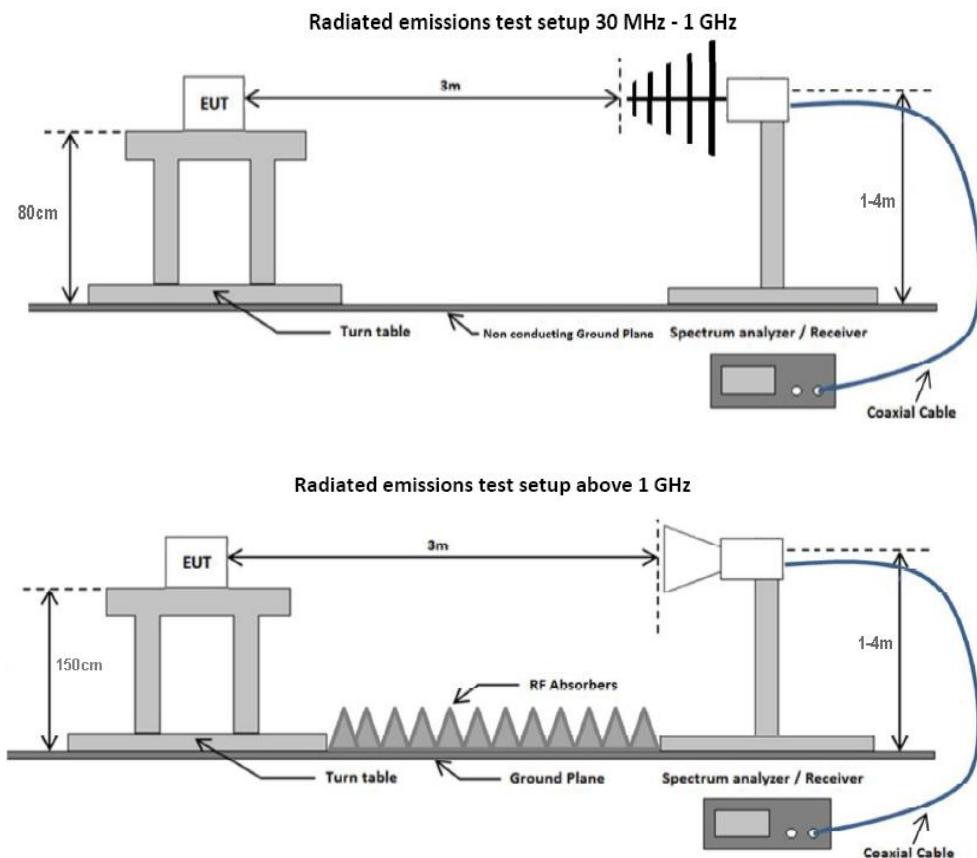

### 8.2.3 Test Procedure

ANSI C63.26: 2015 section 5.5

KDB 971168 D01 Power Meas License Digital Systems v03r01 section 7

Boresight antenna mast was used during the scanning to point to EUT to maximize the emission. The process will be repeated in 3 EUT orientations.

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
  - a. Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen.
  - b. The EUT was then rotated to the direction that gave the maximum emission.
  - c. Finally, the antenna height was adjusted to the height that gave the maximum emission.
3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 300 Hz for frequency below 150KHz.


Report Number:	CMP-19092722-LC-FCC-IC-PCB
Product:	Fleet Management and Tracking Device
Model Number:	LMU2630MB



4. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 10 kHz for frequency between 150KHz – 30MHz.
5. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-Peak detection at frequency between 30MHz - 1GHz.
6. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak and average measurement at frequency above 1GHz.
7. Remove the transmitter and replace it with a substitution antenna (the antenna should be half-wavelength for each frequency involved). The center of the substitution antenna should be approximately at the same location as the center of the transmitter.
8. Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a non-radiating cable. With the antennas at both ends horizontally polarized, and with the signal generator tuned to a particular spurious frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained.
9. Steps 2 - 8 were repeated for the next frequency point, until all selected frequency points were measured

### 8.2.4 Test Result

Test Standard:	Part 24E & RSS 133	Mode:	BLE+GSM B2
Frequency Range:	30-1000MHz	Test Date:	11/04/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

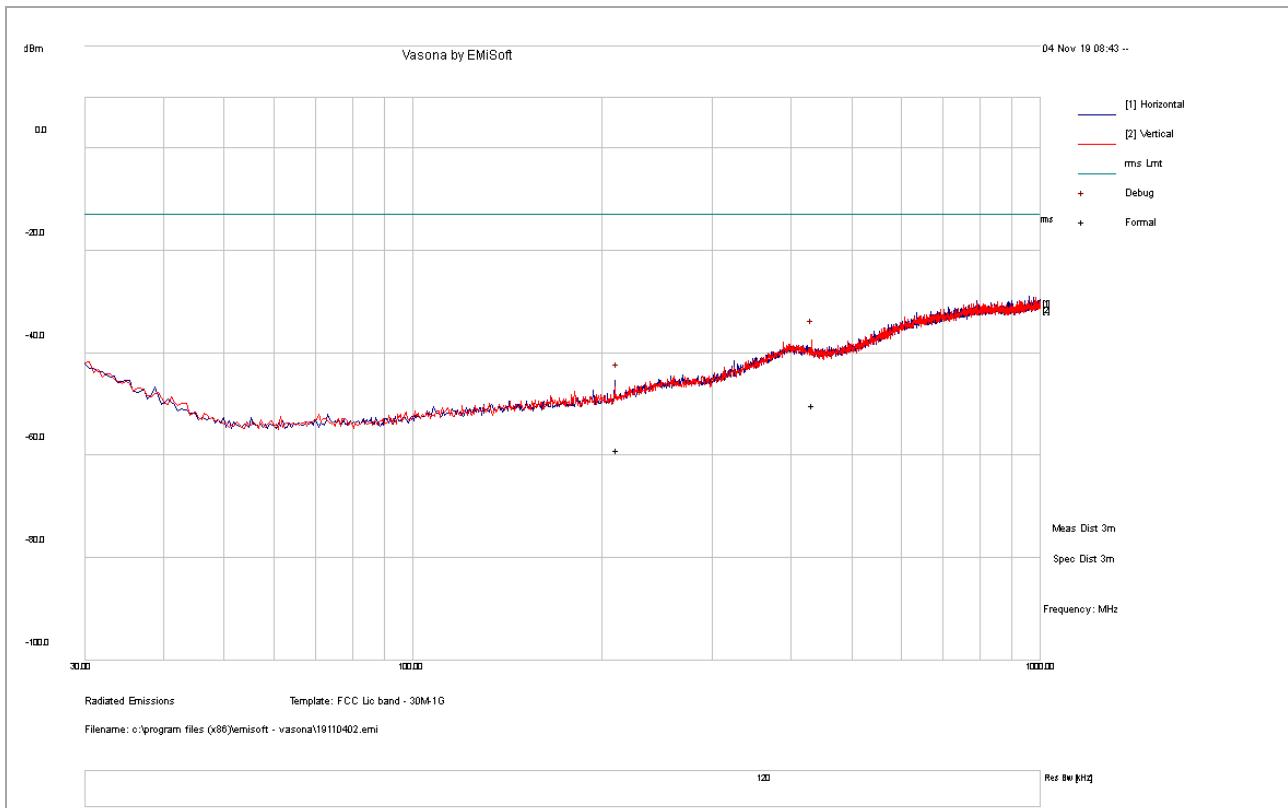

Frequency MHz	Raw dB	Cable dB	AF dB	Level dBm	Det	Pol deg	Height cm	Table deg	Limit dBm	Margin dB
895.21	-84.66	19.36	23.32	-41.97	RMS	V	344	234	-13.00	-28.97
395.44	-85.64	18.11	17.87	-49.66	RMS	V	259	132	-13.00	-36.66


#### Note:

- 1) All different channel and modes were verified but only the worst case result is shown here.
- 2) All different modes have been verified and the worst case result is presented here.
- 3) EUT was tested in 3 orientations.
- 4) Final substitution measurement is not necessary as margin is over 20 dB.

<b>Report Number:</b>	CMP-19092722-LC-FCC-IC-PCB
<b>Product:</b>	Fleet Management and Tracking Device
<b>Model Number:</b>	LMU2630MB



Test Standard:	Part 22 & RSS 132	Mode:	BLE+GSM B5
Frequency Range:	30-1000MHz	Test Date:	11/04/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

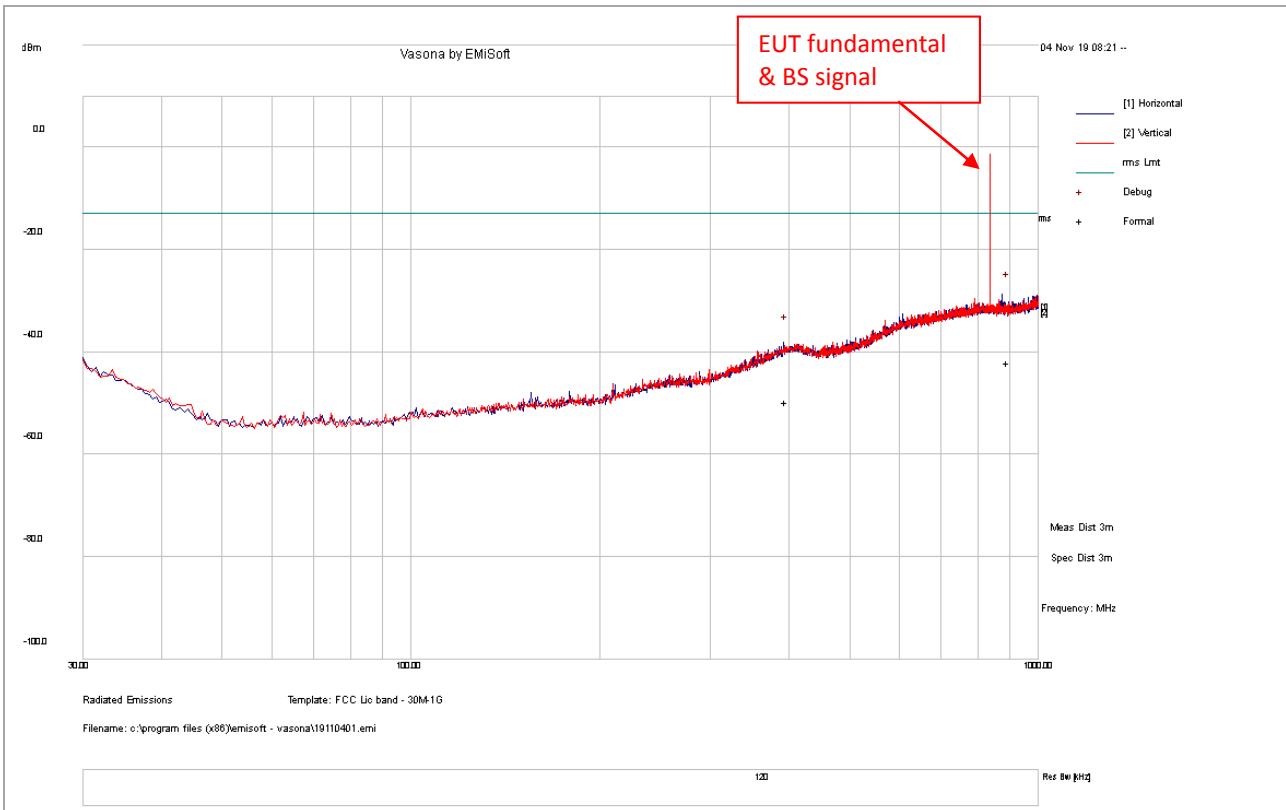


### Note:

- 1) All different channel and modes were verified but only the worst case result is shown here.
  - 2) All different modes have been verified and the worst case result is presented here.
  - 3) EUT was tested in 3 orientations.
  - 4) Final substitution measurement is not necessary as margin is over 20 dB.

<b>Report Number:</b>	CMP-19092722-LC-FCC-IC-PCB
<b>Product:</b>	Fleet Management and Tracking Device
<b>Model Number:</b>	LMU2630MB




Test Standard:	Part 24E & RSS 133	Mode:	BLE + LTE B2
Frequency Range:	30-1000MHz	Test Date:	11/04/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

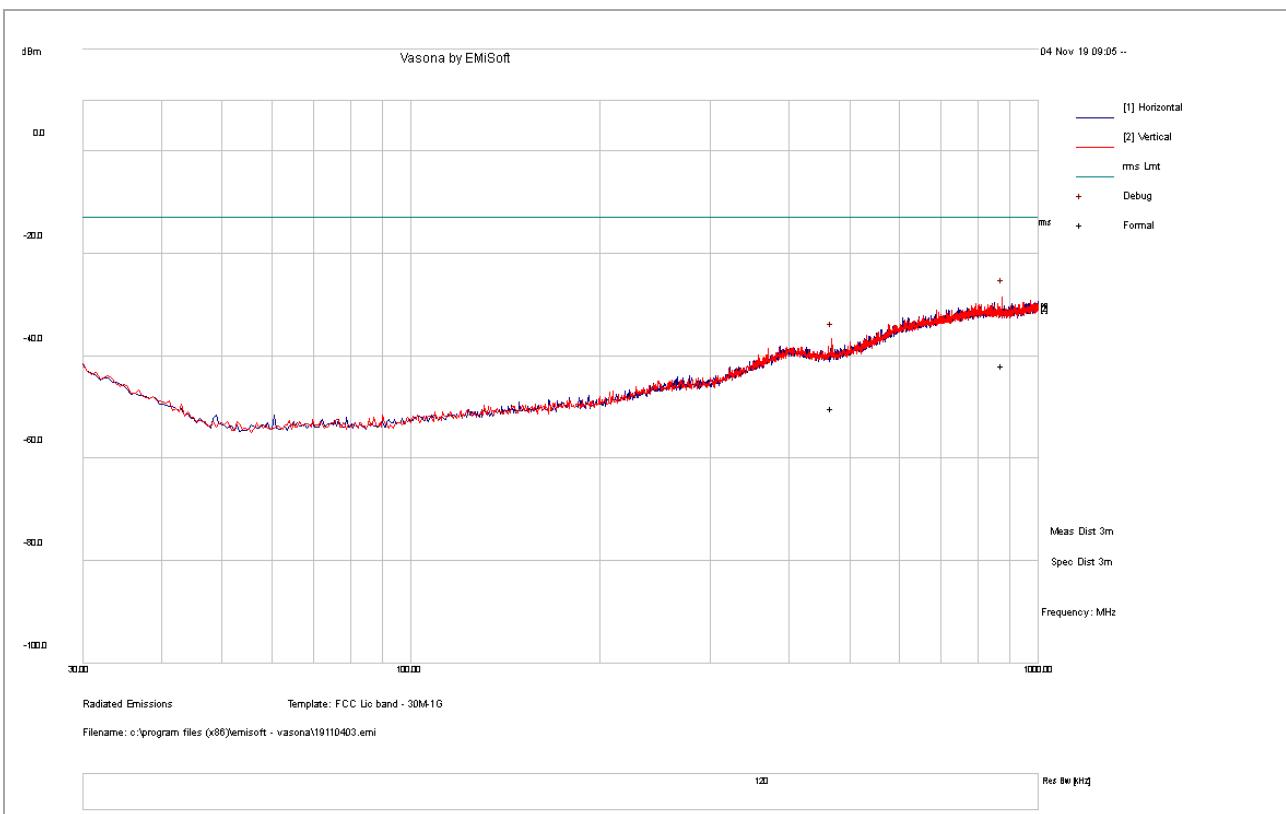

### Note:

- 1) All different channel and modes were verified but only the worst case result is shown here.
  - 2) All different modes have been verified and the worst case result is presented here.
  - 3) EUT was tested in 3 orientations.
  - 4) Final substitution measurement is not necessary as margin is over 20 dB.

Test Standard:	Part 22 & RSS 132	Mode:	BLE + LTE B5
Frequency Range:	30-1000MHz	Test Date:	11/04/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

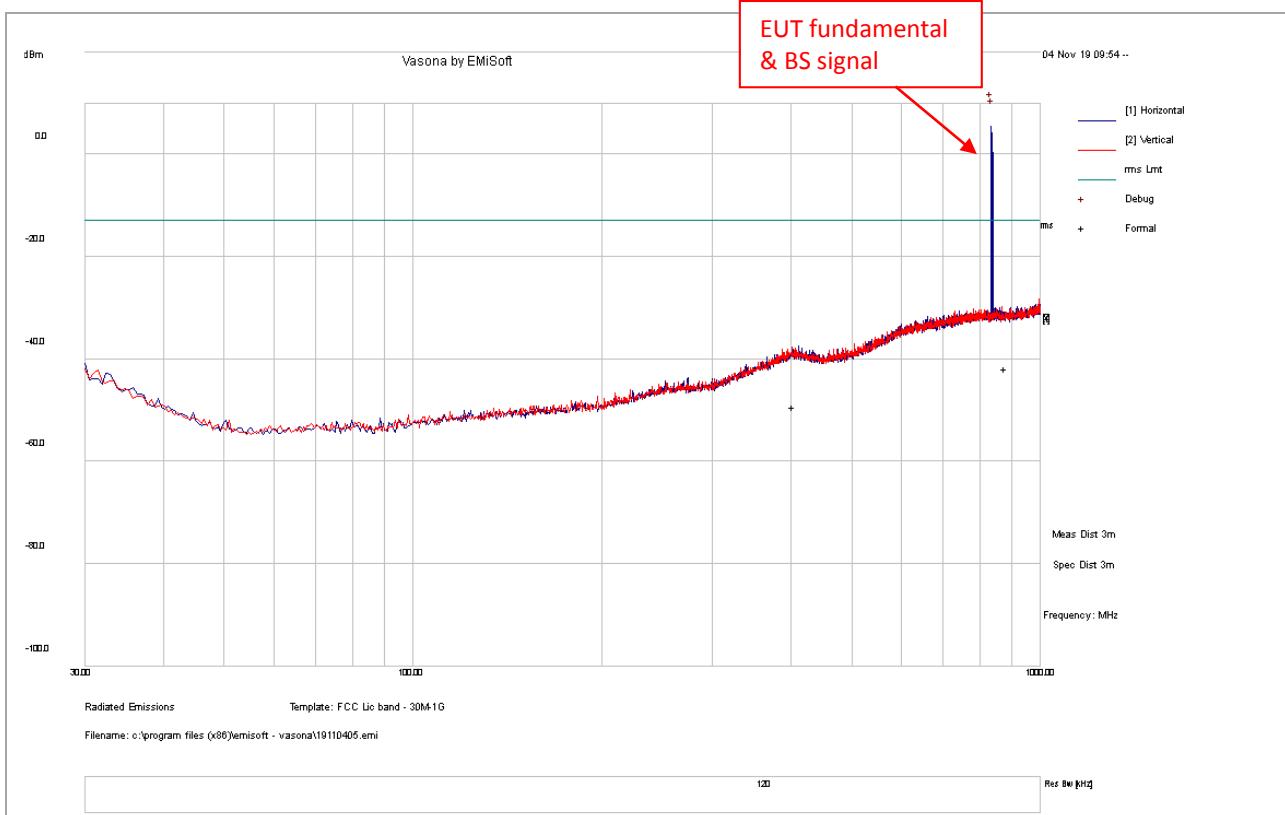


Frequency MHz	Raw dB	Cable dB	AF dB	Level dBm	Det	Pol deg	Height cm	Table deg	Limit dBm	Margin dB
878.54	-84.56	19.31	23.40	-41.85	RMS	V	341	100	-13.00	-28.85
403.20	-85.55	18.13	18.05	-49.37	RMS	V	244	124	-13.00	-36.37

## Note:

- 1) All different channel and modes were verified but only the worst case result is shown here.
- 2) All different modes have been verified and the worst case result is presented here.
- 3) EUT was tested in 3 orientations.
- 4) Final substitution measurement is not necessary as margin is over 20 dB.

Test Standard:	Part 27 & RSS 139	Mode:	BLE + LTE B4
Frequency Range:	30-1000MHz	Test Date:	11/04/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

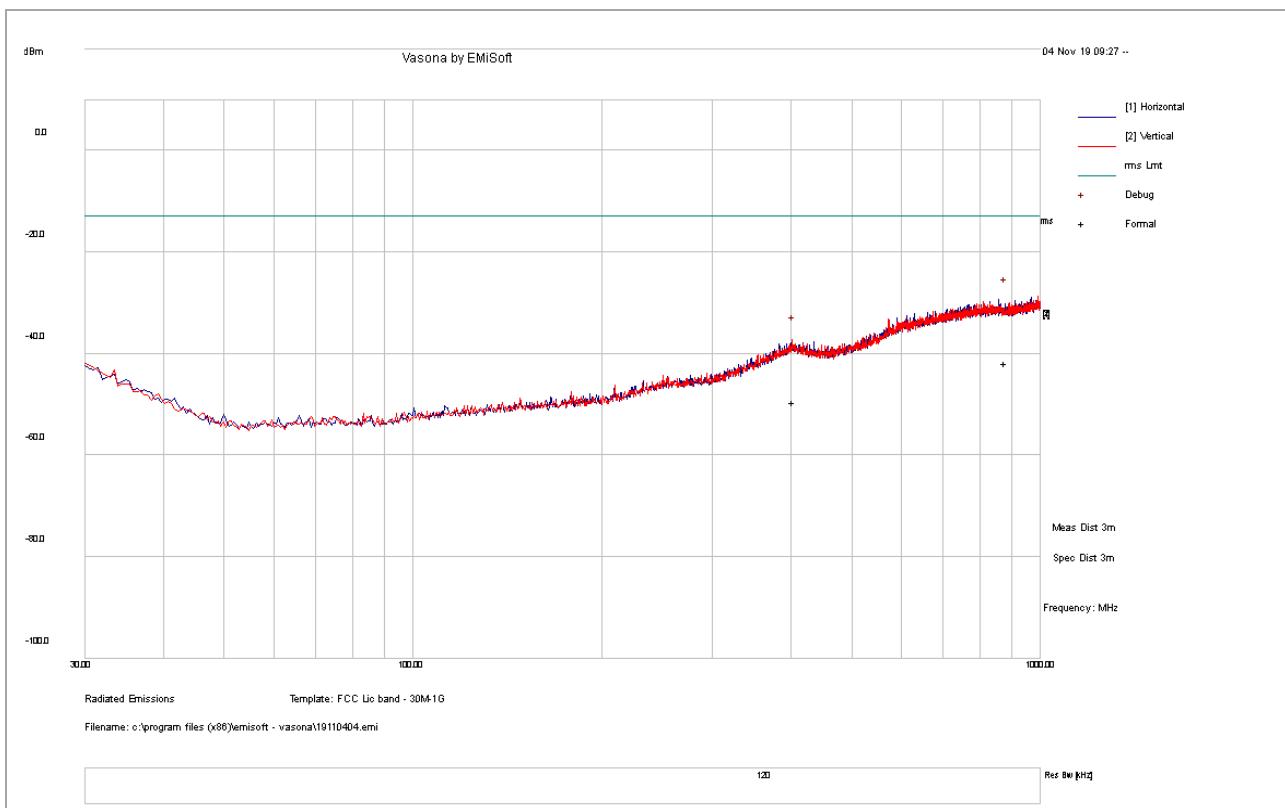


Frequency MHz	Raw dB	Cable dB	AF dB	Level dBm	Det	Pol deg	Height cm	Table deg	Limit dBm	Margin dB
878.56	-84.60	19.31	23.40	-41.89	RMS	V	346	19	-13.00	-28.89
403.42	-85.63	18.13	18.04	-49.46	RMS	V	269	37	-13.00	-36.46

## Note:

- 1) All different channel and modes were verified but only the worst case result is shown here.
- 2) All different modes have been verified and the worst case result is presented here.
- 3) EUT was tested in 3 orientations.
- 4) Final substitution measurement is not necessary as margin is over 20 dB.

Test Standard:	Part 27 & RSS 130	Mode:	BLE + LTE B12
Frequency Range:	30-1000MHz	Test Date:	11/04/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

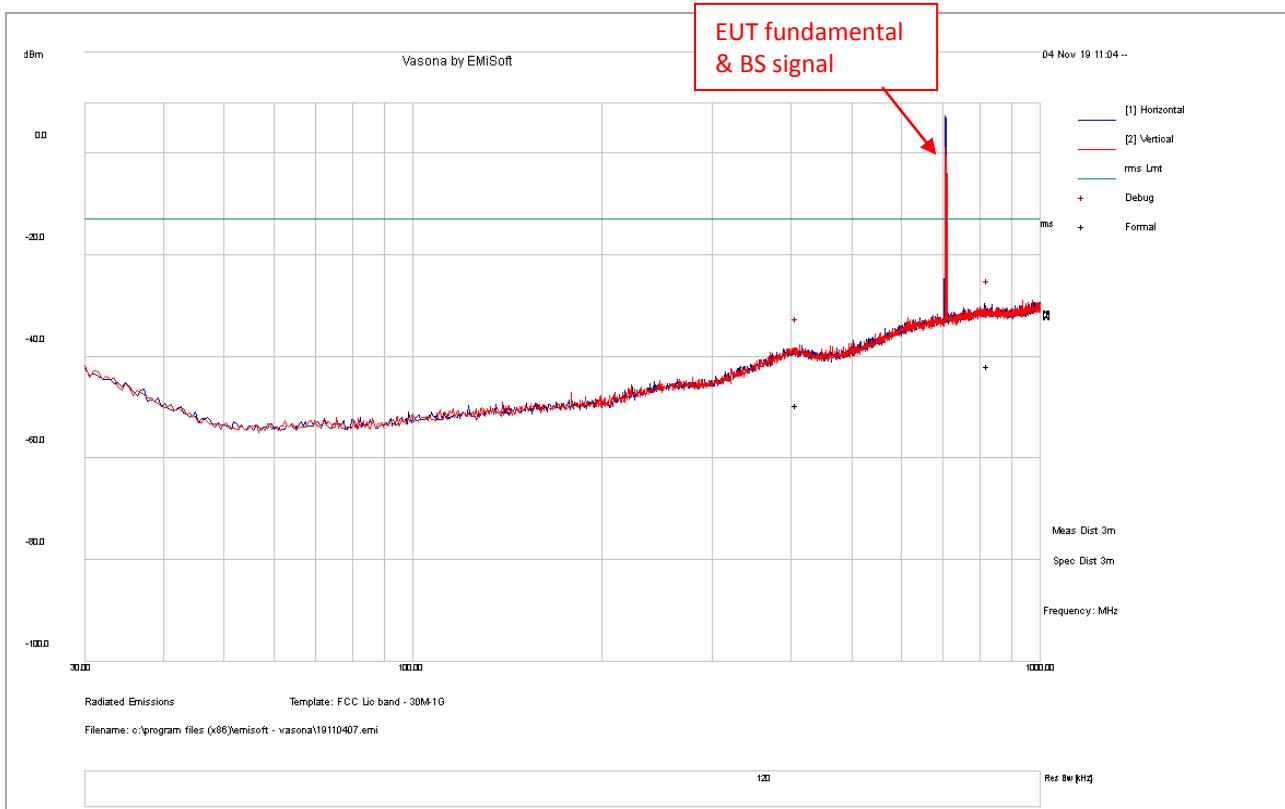


Frequency MHz	Raw dB	Cable dB	AF dB	Level dBm	Det	Pol deg	Height cm	Table deg	Limit dBm	Margin dB
823.20	-84.57	19.10	23.68	-41.79	RMS	V	191	110	-13.00	-28.79
408.05	-85.47	18.11	17.96	-49.40	RMS	V	298	231	-13.00	-36.40

## Note:

- 1) All different channel and modes were verified but only the worst case result is shown here.
- 2) All different modes have been verified and the worst case result is presented here.
- 3) EUT was tested in 3 orientations.
- 4) Final substitution measurement is not necessary as margin is over 20 dB.

Test Standard:	Part 27 & RSS 130	Mode:	BLE + LTE B13
Frequency Range:	30-1000MHz	Test Date:	11/04/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

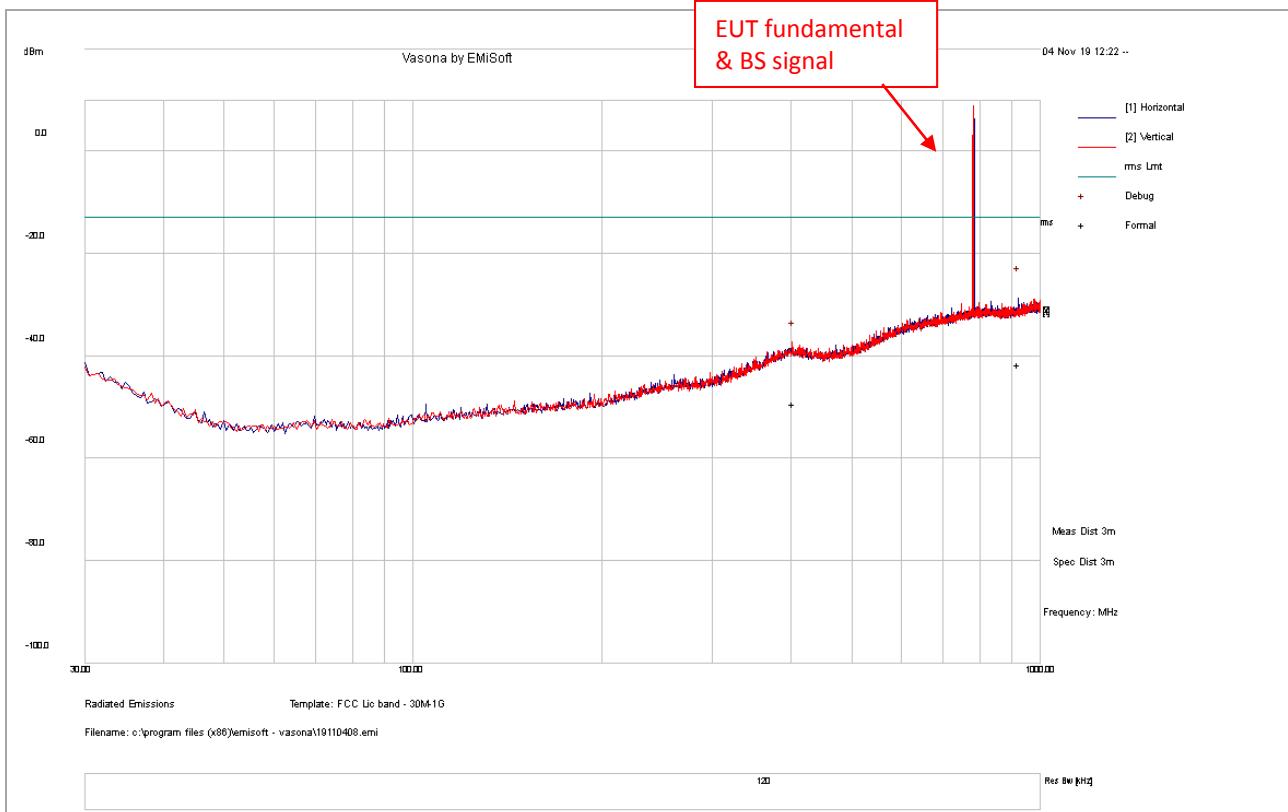


Frequency MHz	Raw dB	Cable dB	AF dB	Level dBm	Det	Pol deg	Height cm	Table deg	Limit dBm	Margin dB
921.94	-84.57	19.47	23.53	-41.58	RMS	V	297	95	-13.00	-28.58
404.74	-85.48	18.12	18.02	-49.34	RMS	V	184	346	-13.00	-36.34

## Note:

- 1) All different channel and modes were verified but only the worst case result is shown here.
- 2) All different modes have been verified and the worst case result is presented here.
- 3) EUT was tested in 3 orientations.
- 4) Final substitution measurement is not necessary as margin is over 20 dB.

Test Standard:	Part 24E & RSS 133	Mode:	BLE + LTE B25
Frequency Range:	30-1000MHz	Test Date:	11/04/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

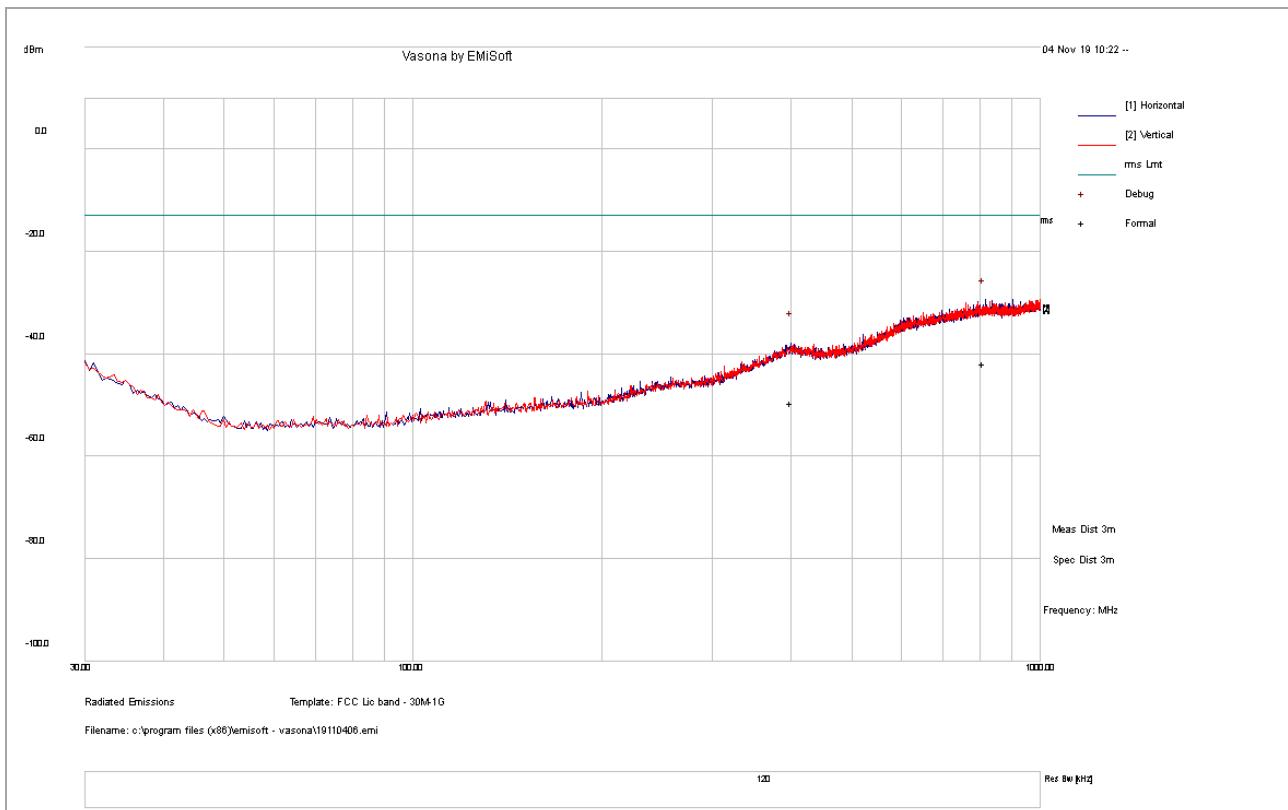


Frequency MHz	Raw dB	Cable dB	AF dB	Level dBm	Det	Pol deg	Height cm	Table deg	Limit dBm	Margin dB
813.26	-84.62	19.07	23.73	-41.83	RMS	V	268	63	-13.00	-28.83
400.37	-85.65	18.14	18.09	-49.42	RMS	V	342	312	-13.00	-36.42

## Note:

- 1) All different channel and modes were verified but only the worst case result is shown here.
- 2) All different modes have been verified and the worst case result is presented here.
- 3) EUT was tested in 3 orientations.
- 4) Final substitution measurement is not necessary as margin is over 20 dB.

Test Standard:	Part 24E & RSS 133	Mode:	BLE + GSM B2
Frequency Range:	1GHz -18GHz	Test Date:	11/04/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

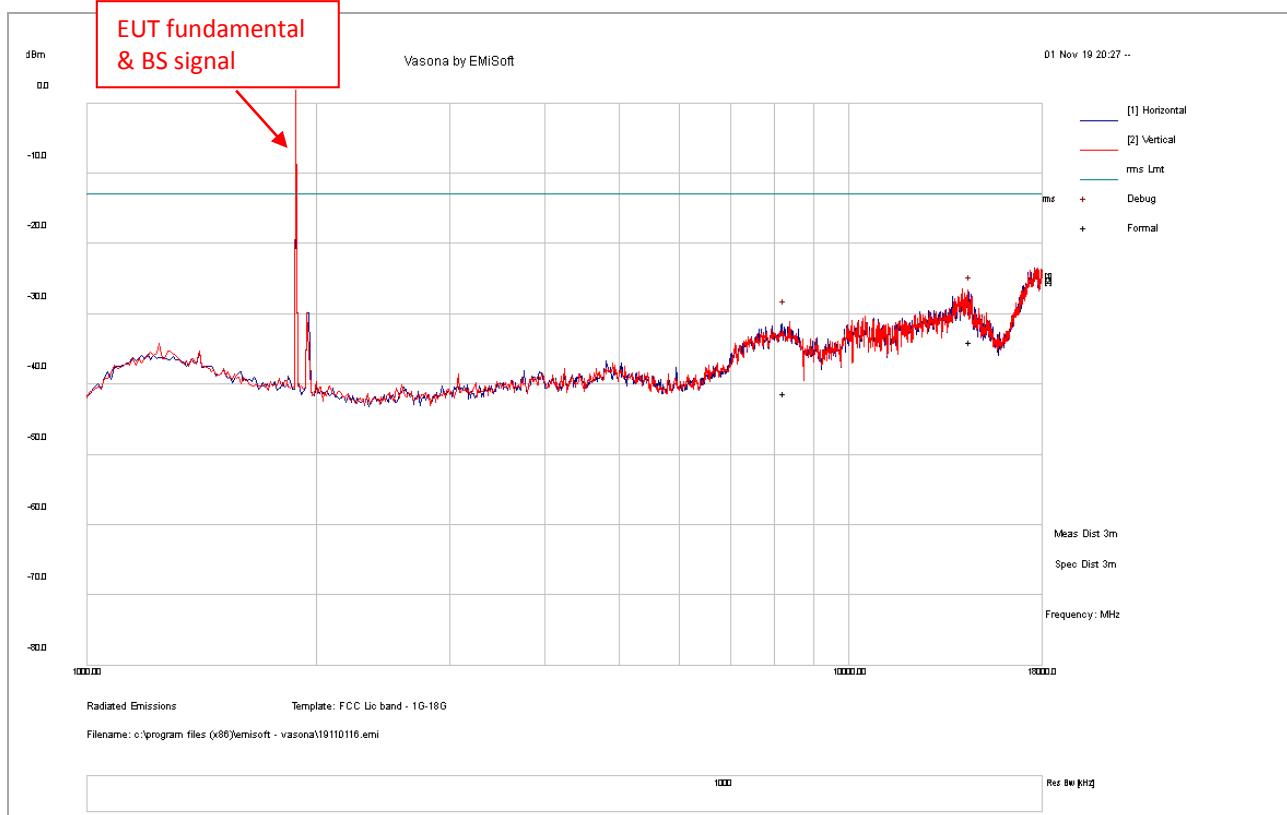


Frequency MHz	Raw dB	Cable dB	AF dB	Level dBm	Det	Pol deg	Height cm	Table deg	Limit dBm	Margin dB
14448.34	-82.35	26.53	21.85	-33.97	RMS	V	400	270	-13.00	-20.97
8237.32	-77.00	21.59	14.22	-41.19	RMS	V	267	302	-13.00	-28.19

## Note:

- 1) All different channel and modes were verified but only the worst case result is shown here.
- 2) All different modes have been verified and the worst case result is presented here.
- 3) EUT was tested in 3 orientations.
- 4) Final substitution measurement is not necessary as margin is over 20 dB.

Test Standard:	Part 22 & RSS 132	Mode:	BLE + GSM B5
Frequency Range:	1GHz -18GHz	Test Date:	11/04/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

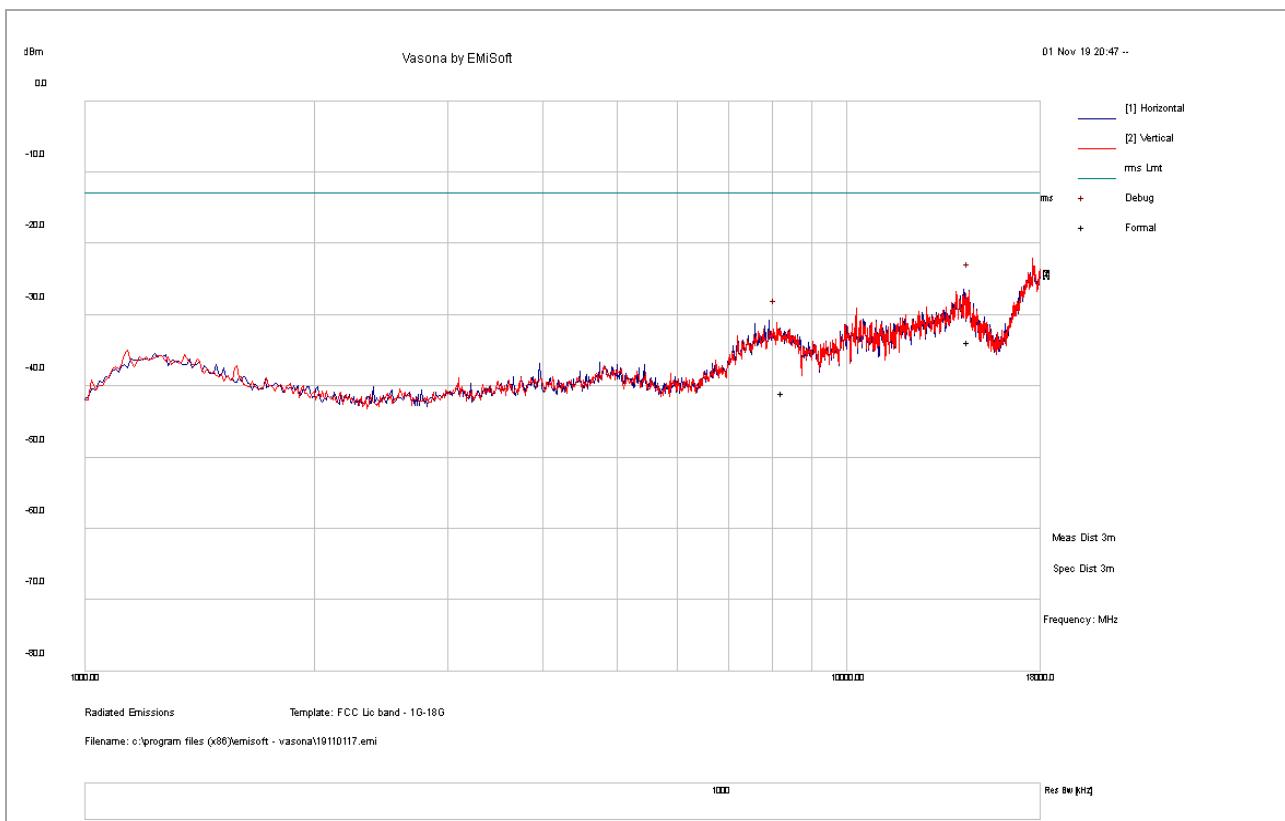


Frequency MHz	Raw dB	Cable dB	AF dB	Level dBm	Det	Pol deg	Height cm	Table deg	Limit dBm	Margin dB
14448.56	-82.12	26.53	21.85	-33.75	RMS	V	262	9	-13.00	-20.75
8239.04	-76.79	21.59	14.23	-40.97	RMS	V	317	112	-13.00	-27.97

## Note:

- 1) All different channel and modes were verified but only the worst case result is shown here.
- 2) All different modes have been verified and the worst case result is presented here.
- 3) EUT was tested in 3 orientations.
- 4) Final substitution measurement is not necessary as margin is over 20 dB.

Test Standard:	Part 24E & RSS 133	Mode:	BLE + LTE B2
Frequency Range:	1GHz -18GHz	Test Date:	11/01/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

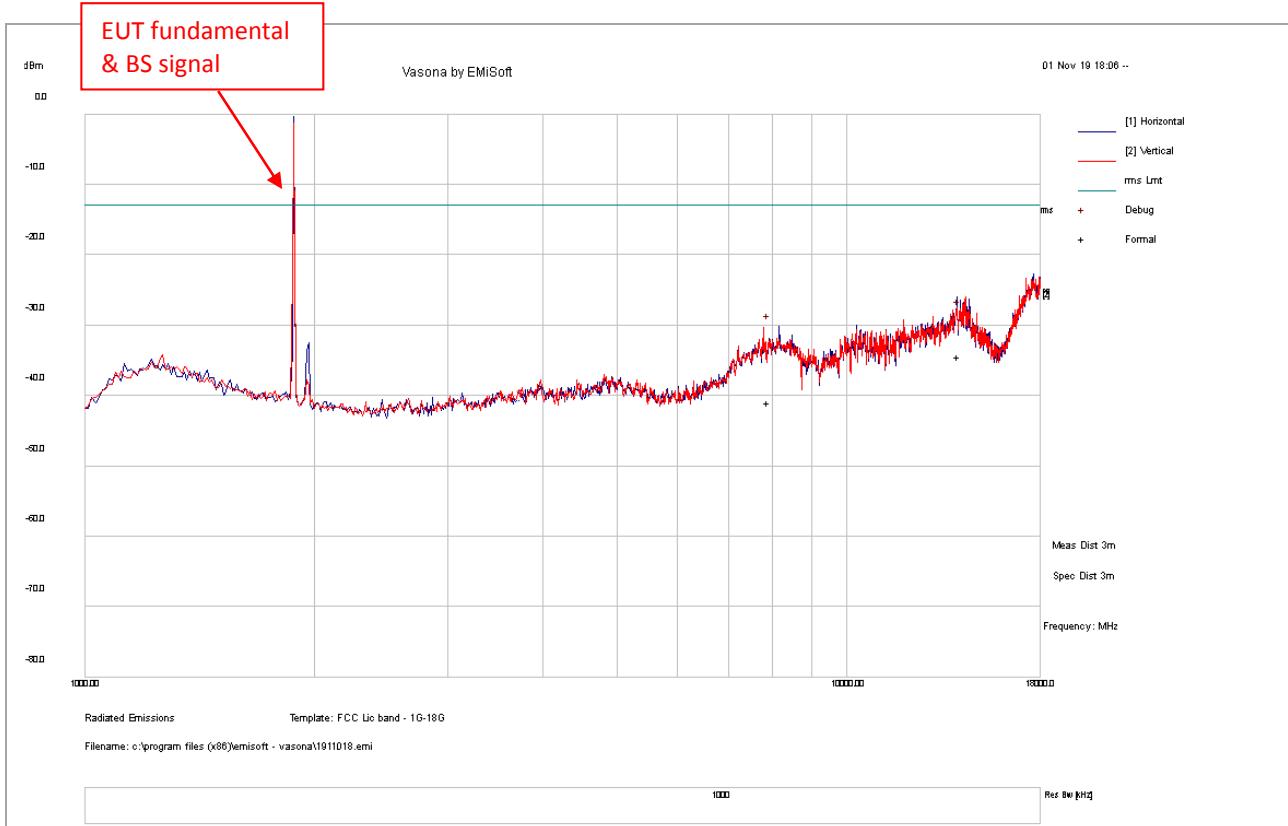


Frequency MHz	Raw dB	Cable dB	AF dB	Level dBm	Det	Pol deg	Height cm	Table deg	Limit dBm	Margin dB
14038.42	-81.22	25.52	21.21	-34.49	RMS	V	265	102	-13.00	-21.49
7898.31	-76.00	21.55	13.45	-41.01	RMS	V	214	70	-13.00	-28.01

Note:

- 1) All different channel and modes were verified but only the worst case result is shown here.
- 2) All different modes have been verified and the worst case result is presented here.
- 3) EUT was tested in 3 orientations.
- 4) Final substitution measurement is not necessary as margin is over 20 dB.

Test Standard:	Part 27 & RSS 139	Mode:	BLE + LTE B4
Frequency Range:	1GHz -18GHz	Test Date:	11/01/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

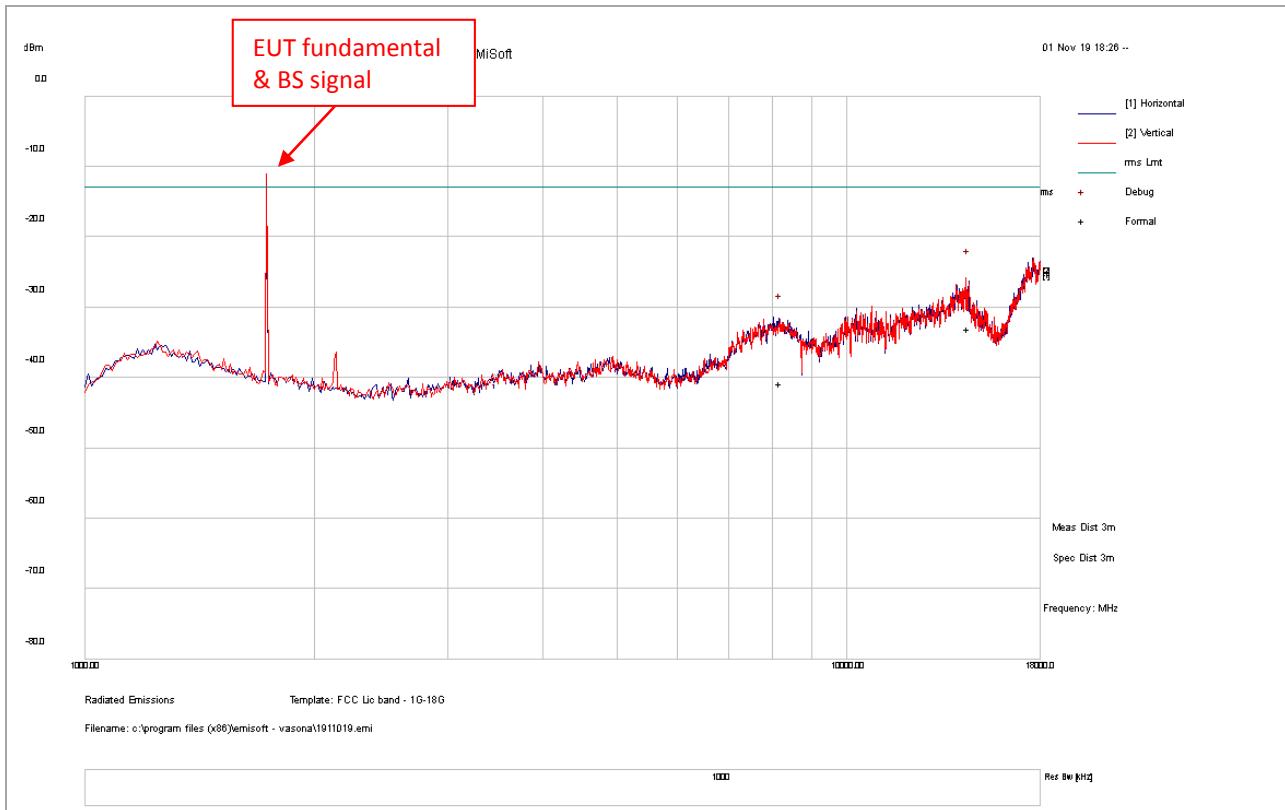


Frequency MHz	Raw dB	Cable dB	AF dB	Level dBm	Det	Pol deg	Height cm	Table deg	Limit dBm	Margin dB
14491.08	-81.15	26.63	21.49	-33.03	RMS	V	306	200	-13.00	-20.03
8188.43	-76.38	21.58	14.07	-40.73	RMS	V	312	323	-13.00	-27.73

## Note:

- 1) All different channel and modes were verified but only the worst case result is shown here.
- 2) All different modes have been verified and the worst case result is presented here.
- 3) EUT was tested in 3 orientations.
- 4) Final substitution measurement is not necessary as margin is over 20 dB.

Test Standard:	Part 22 & RSS 132	Mode:	BLE + LTE B5
Frequency Range:	1GHz -18GHz	Test Date:	11/01/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

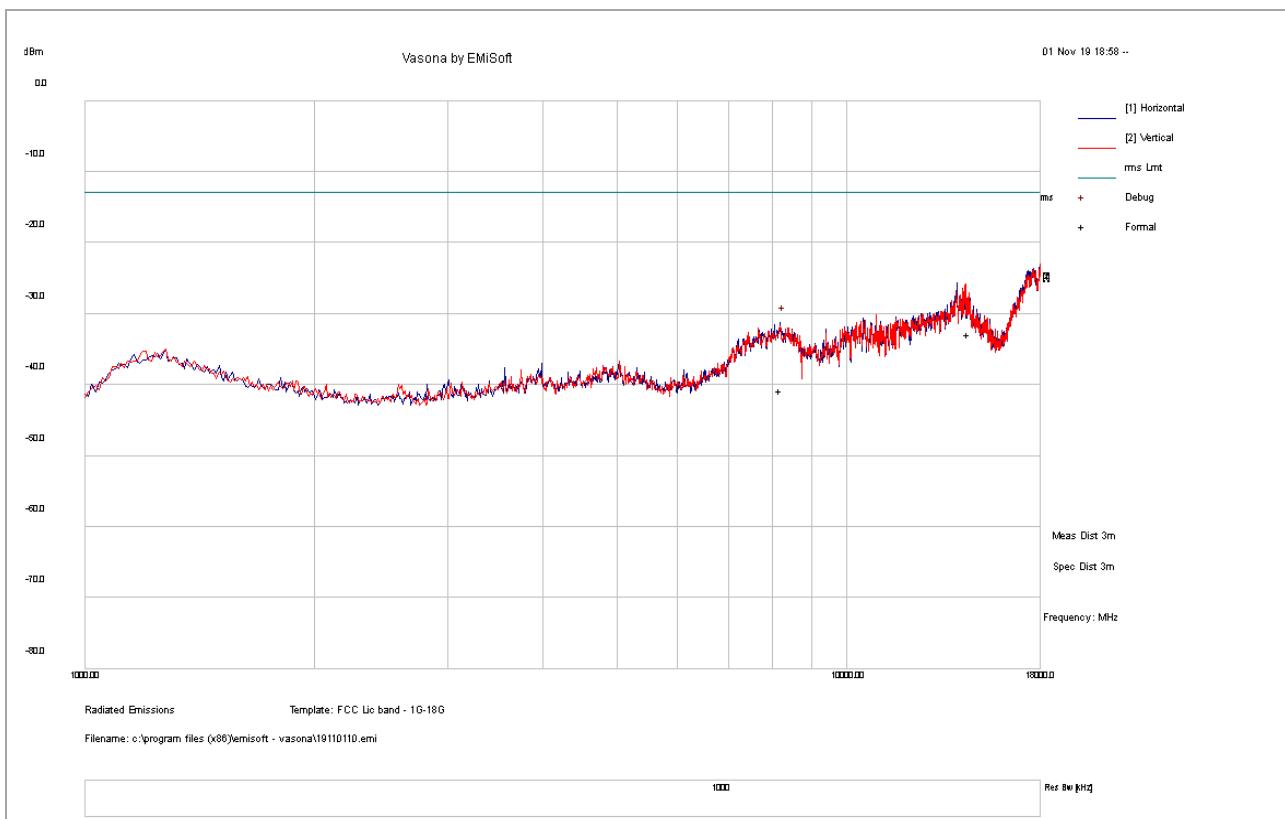


Frequency MHz	Raw dB	Cable dB	AF dB	Level dBm	Det	Pol deg	Height cm	Table deg	Limit dBm	Margin dB
14490.63	-81.01	26.63	21.50	-32.89	RMS	V	382	18	-13.00	-19.89
8186.79	-76.42	21.58	14.06	-40.77	RMS	V	384	264	-13.00	-27.77

## Note:

- 1) All different channel and modes were verified but only the worst case result is shown here.
- 2) All different modes have been verified and the worst case result is presented here.
- 3) EUT was tested in 3 orientations.
- 4) Final substitution measurement is not necessary as margin is over 20 dB.

Test Standard:	Part 27 & RSS 130	Mode:	BLE + LTE B12
Frequency Range:	1GHz -18GH	Test Date:	11/01/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

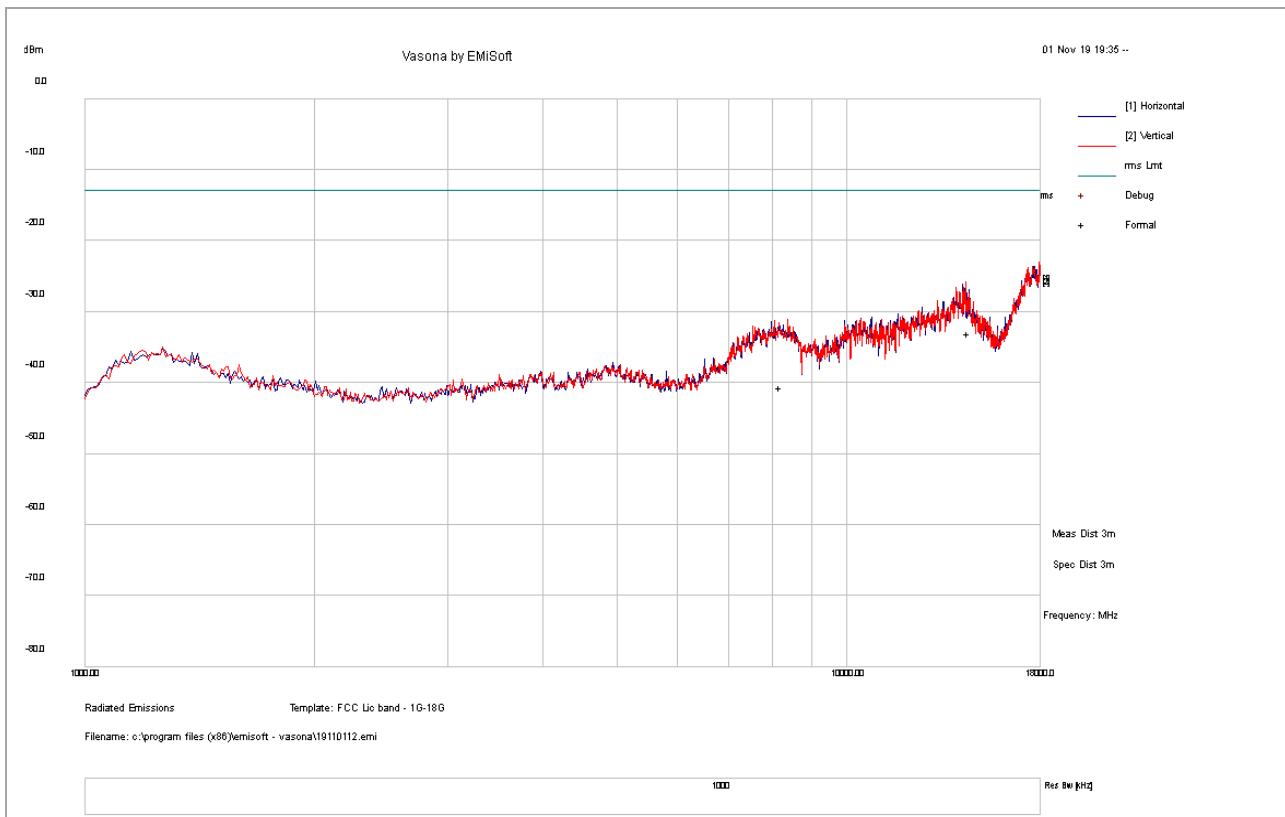


Frequency MHz	Raw dB	Cable dB	AF dB	Level dBm	Det	Pol deg	Height cm	Table deg	Limit dBm	Margin dB
14491.31	-81.14	26.63	21.49	-33.02	RMS	V	232	169	-13.00	-20.02
8184.98	-76.20	21.58	14.06	-40.56	RMS	V	163	44	-13.00	-27.56

## Note:

- 1) All different channel and modes were verified but only the worst case result is shown here.
- 2) All different modes have been verified and the worst case result is presented here.
- 3) EUT was tested in 3 orientations.
- 4) Final substitution measurement is not necessary as margin is over 20 dB.

Test Standard:	Part 27 & RSS 130	Mode:	BLE + LTE B13
Frequency Range:	1GHz -18GHz	Test Date:	11/01/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

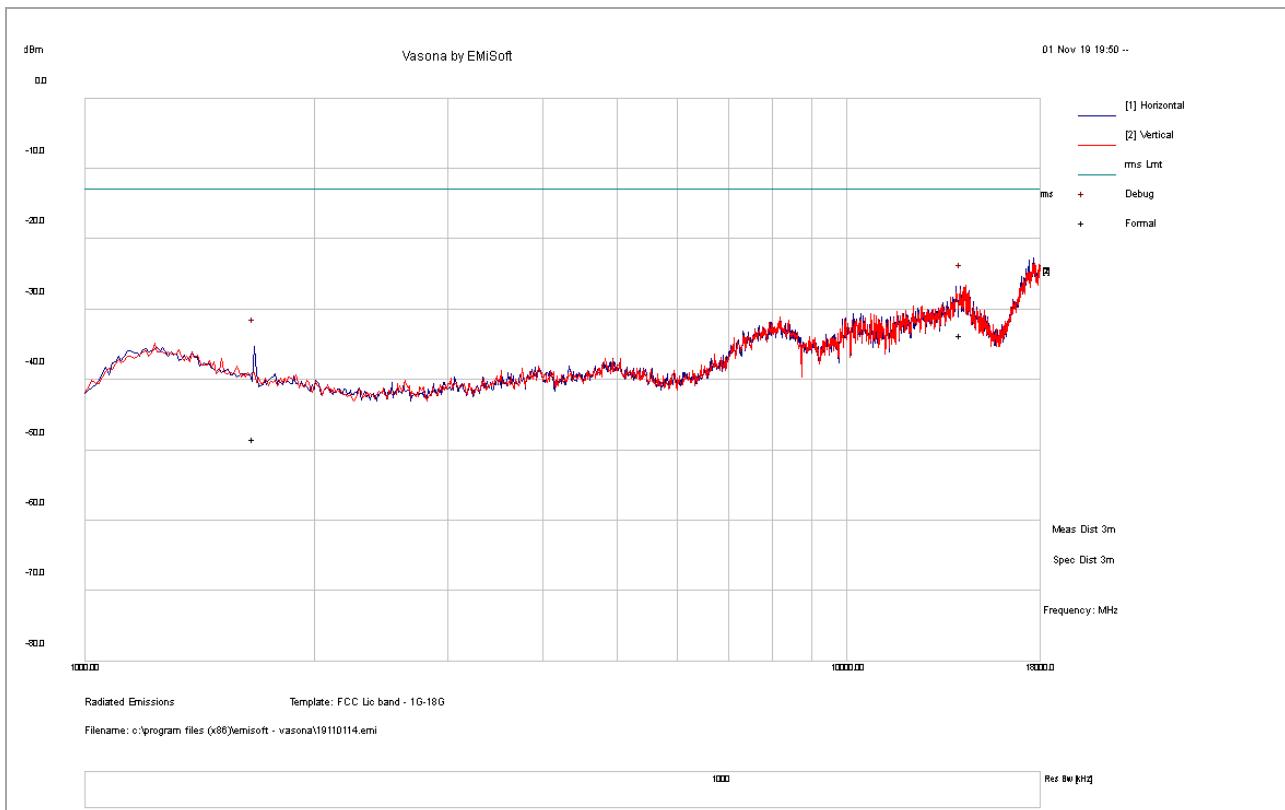

Frequency MHz	Raw dB	Cable dB	AF dB	Level dBm	Det	Pol deg	Height cm	Table deg	Limit dBm	Margin dB
14121.43	-81.02	25.73	21.71	-33.58	RMS	V	342	151	-13.00	-20.58
1666.66	-62.13	16.22	-2.53	-48.44	RMS	V	324	125	-13.00	-35.44


## Note:

- 1) All different channel and modes were verified but only the worst case result is shown here.
- 2) All different modes have been verified and the worst case result is presented here.
- 3) EUT was tested in 3 orientations.
- 4) Final substitution measurement is not necessary as margin is over 20 dB.

<b>Report Number:</b>	CMP-19092722-LC-FCC-IC-PCB
<b>Product:</b>	Fleet Management and Tracking Device
<b>Model Number:</b>	LMU2630MB



Test Standard:	Part 24E & RSS 133	Mode:	BLE + LTE B25
Frequency Range:	1GHz -18GH	Test Date:	11/01/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

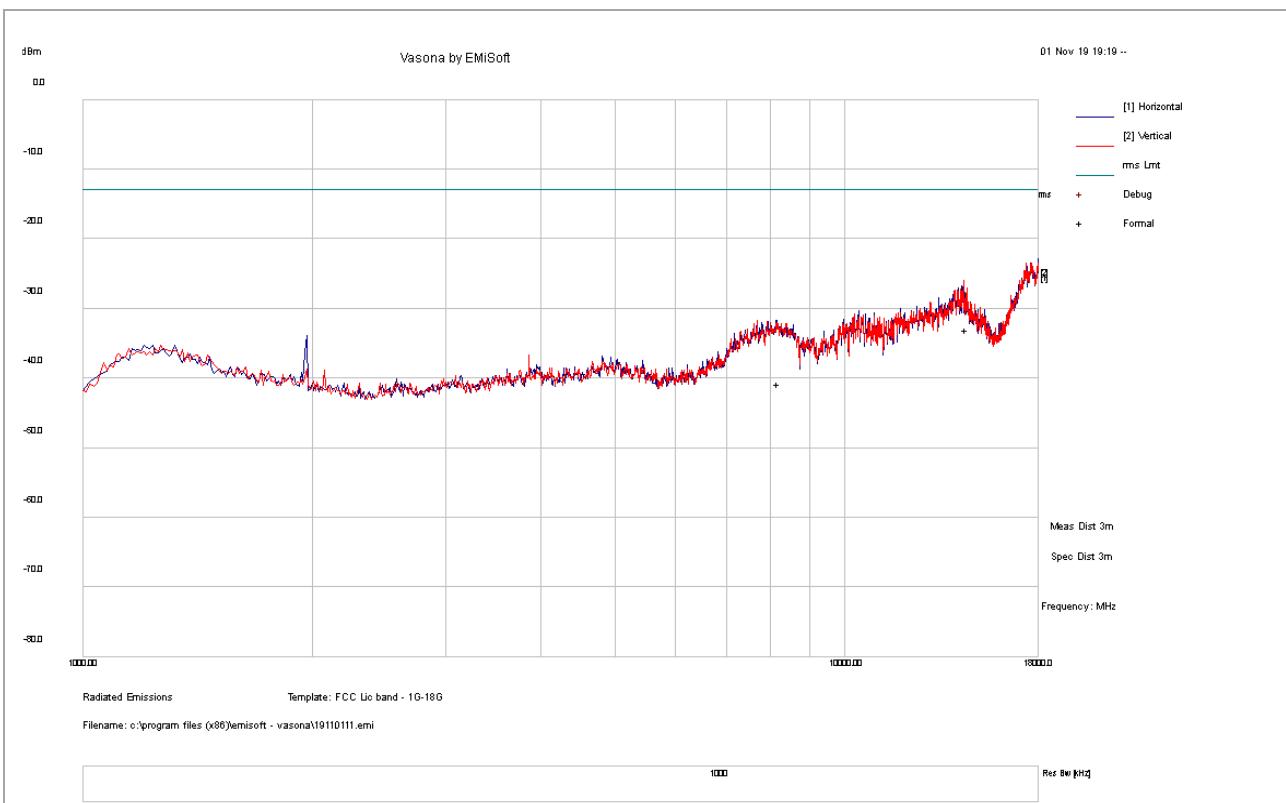

### Note:

- 1) All different channel and modes were verified but only the worst case result is shown here.
  - 2) All different modes have been verified and the worst case result is presented here.
  - 3) EUT was tested in 3 orientations.
  - 4) Final substitution measurement is not necessary as margin is over 20 dB.

Report Number:	CMP-19092722-LC-FCC-IC-PCB
Product:	Fleet Management and Tracking Device
Model Number:	LMU2630MB



**18GHz – 25GHz test result**

Note: no substantial emission is found other than the noise floor.

Different modes have been verified.

## 9 Test instrument list

Equipment	Manufacturer	Model	Serial Number	Cal. Date	Cal. Due
Semi-Anechoic Chamber	ETS-Lindgren	10M	VL001	5/11/2019	5/11/2020
Shielding Control Room	ETS-Lindgren	Series 81	VL006	N/A	N/A
Spectrum Analyzer	Keysight	N9020A	MY50110074	5/4/2019	5/4/2020
EMC Test Receiver	R&S	ESL6	100230	5/7/2019	5/7/2020
LISN (9KHz – 30MHz)	EMCO	3816/2	9705-1066	5/4/2019	5/4/2020
Bi-Log Antenna	ETS-Lindgren	3142E	217921	11/15/2018	11/15/2019
Horn Antenna (1-18GHz)	Electro-Metrics	EM-6961	6292	5/2/2019	5/2/2020
Horn Antenna (18-40GHz)	Com-Power	AH-840	101109	5/2/2019	5/2/2020
Preamplifier	RF Bay, Inc.	LPA-10-20	11180621	5/10/2019	5/10/2020
True RMS Multi-meter	UNI-T	UT181A	C173014829	5/10/2019	5/10/2020
Temp / Humidity / Pressure Meter	PCE Instruments	PCE-THB 40	R062028	5/9/2019	5/9/2020
RF Attenuator	Pasternack	PE7005-3	VL061	5/10/2019	5/10/2020
Preamplifier 100KHz - 40GHz	Aeroflex	33711-392-77150-11	064	5/10/2019	5/10/2020
EM Center Control	ETS-Lindgren	7006-001	160136	N/A	N/A
Turn Table	ETS-Lindgren	2181-3.03	VL002	N/A	N/A
Boresight Antenna Tower	ETS-Lindgren	2171B	VL003	N/A	N/A
Loop Antenna (9k-30MHz)	Com-Power	AL-130	121012	5/9/2019	5/9/2020
RE test cable(below 6GHz)	Vista	RE-6GHz-01	RE-6GHz-01	5/10/2019	5/10/2020
RE test cable (1-18GHz)	PhaseTrack	II-240	RE-18GHz-01	5/10/2019	5/10/2020
RE test cable (>18GHz)	Sucoflex	104	344903/4	5/10/2019	5/10/2020
Pulse limiter	Com-Power	LIT-930A	531727	5/15/2019	5/15/2020
CE test cable #1	FIRST RF	FRF-C-1002-001	CE-6GHz-01	5/10/2019	5/10/2020
CE test cable#2	FIRST RF	FRF-C-1002-001	CE-6GHz-02	5/9/2019	5/9/2020
Wideband Communication	ANRITSU	MT8821C	6262010316	10/23/2019	10/23/2020