



RF SPOT CHECK REPORT

FCC ID: XMR202212EG21GL
Application: Quectel Wireless Solutions Co., Ltd.
Product: LTE CAT1 Module
Model No.: EG21-GL, EG21-GL MINIPCIE
Brand Name: QUECTEL
FCC Rule Part(s): Part 90 Subpart S
Test Procedure(s): ANSI C63.26: 2015
Result: Complies
Received Date: 2023-01-11
Test Date: 2023-01-12 ~ 2023-02-15

Reviewed By:

Sunny Sun

Approved By:

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.26-2015. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2212RSU048-U3	Rev. 01	Initial Report	2023-03-05	Valid

Note: The only difference between EG21-GL and EG25-GL is the type of BB chip. This report is based on FCC ID “XMR202212EG25GL” to assess the occupied bandwidth, output power, band edge, radiated spurious emissions. This application for certification is leveraging the data reuse procedures from KDB 484596 based on reference FCC ID “XMR202212EG25GL” to cover this variant.

CONTENTS

Description	Page
1. General Information	5
1.1. Applicant	5
1.2. Manufacturer	5
1.3. Testing Facility	5
1.4. Product Information.....	6
1.5. Radio Specification under Testing.....	6
1.6. Description of Available Antennas.....	7
1.7. Test Methodology	7
2. Test Configuration	8
2.1. Test System Connection Diagram.....	8
2.2. Test Environment Condition	8
3. Measuring Instrument	9
4. Decision Rules and Measurement Uncertainty.....	10
4.1. Decision Rules	10
4.2. Measurement Uncertainty	10
5. Test Result	11
5.1. Summary.....	11
5.2. Occupied Bandwidth Measurement	12
5.2.1. Test Limit	12
5.2.2. Test Procedure	12
5.2.3. Test Setting	12
5.2.4. Test Setup	12
5.2.5. Test Result	12
5.3. Conducted Output Power Measurement	13
5.3.1. Test Limit	13
5.3.2. Test Procedure	13
5.3.3. Test Setting	13
5.3.4. Test Setup	13
5.3.5. Test Result	13
5.4. Band Edge Measurement	14
5.4.1. Test Limit	14
5.4.2. Test Procedure	14
5.4.3. Test Setting	15
5.4.4. Test Setup	15

5.4.5.	Test Result	15
5.5.	Radiated Spurious Emissions Measurement.....	16
5.5.1.	Test Limit	16
5.5.2.	Test Procedure	16
5.5.3.	Test Setting	16
5.5.4.	Test Setup	17
5.5.5.	Test Result	18
Appendix A - Test Result		19
A.1	Occupied Bandwidth Test Result.....	19
A.2	Conducted Output Power Test Result	21
A.3	Band Edge Test Result	25
A.4	Radiated Spurious Emissions Test Result	29
Appendix B - Test Setup Photograph		30
Appendix C - EUT Photograph		31

1. General Information

1.1. Applicant

Quectel Wireless Solutions Co., Ltd.

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai 200233, China

1.2. Manufacturer

Quectel Wireless Solutions Co., Ltd.

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai 200233, China

1.3. Testing Facility

☒	Test Site – MRT Suzhou Laboratory Laboratory Location (Suzhou - Wuzhong) D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China Laboratory Location (Suzhou - SIP) 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China Laboratory Accreditations A2LA: 3628.01 CNAS: L10551 FCC: CN1166 ISED: CN0001 VCCI: ☐ R-20025 ☐ G-20034 ☐ C-20020 ☐ T-20020 ☐ R-20141 ☐ G-20134 ☐ C-20103 ☐ T-20104
☐	Test Site – MRT Shenzhen Laboratory Laboratory Location (Shenzhen) 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China Laboratory Accreditations A2LA: 3628.02 CNAS: L10551 FCC: CN1284 ISED: CN0105
☐	Test Site – MRT Taiwan Laboratory Laboratory Location (Taiwan) No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) Laboratory Accreditations TAF: L3261-190725 FCC: 291082, TW3261 ISED: TW3261

1.4. Product Information

Product Name	LTE CAT1 Module
Model No.	EG21-GL, EG21-GL MINIPCIE
Brand Name	QUECTEL
IMEI	Radiated Sample:865061060007503 Conducted Sample:865061060008329
GNSS Specification	GPS, GLONASS, Galileo, Bei Dou
GSM Band	GSM 850, PCS1900
UMTS Band	Band 2, 4, 5
E-UTRA Band	Band 2, 4, 5, 7, 12, 13, 25, 26, 38, 41, 66
Operating Temperature	-35 ~ 75 °C
Supply Voltage	3.3 ~ 4.3Vdc, typical 3.8Vdc
Remark: 1. The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer. 2. The models' difference by different encapsulations and all circuits are identical. The EG21-GL model was assessed in this report.	

1.5. Radio Specification under Testing

FDD Tx Frequency Range:	Band 26: 814 ~ 824 MHz
FDD Rx Frequency Range:	Band 26: 859 ~ 869 MHz
Modulation	UL & DL up to 16QAM
Power Class	3
Category	1

Note 1: For other features of this EUT, test report will be issued separately.

Note 2: The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Note 3: LTE band 26 transmit frequency for part 90 rule is 814 ~ 824MHz and part 22 rule is 824 ~ 849MHz.

ERP over 15MHz bandwidth complies the ERP limit line of part 22 rule, therefore ERP of the partial frequency spectrum which falls within part 22 also complies.

1.6. Description of Available Antennas

Technology	Frequency Range (MHz)	Antenna Type	MaxPeak Gain (dBi)
GSM 850	824 ~ 849	Dipole	2.29
PCS 1900	1850 ~ 1910		1.38
WCDMA Band II	1850 ~ 1910		1.38
WCDMA Band IV	1710 ~ 1755		2.00
WCDMA Band V	824 ~ 849		2.13
LTE Band 2	1850 ~ 1910		1.38
LTE Band 4	1710 ~ 1755		2.00
LTE Band 5	824 ~ 849		2.13
LTE Band 7	2500 ~ 2570		2.33
LTE Band 12	699 ~ 716		3.26
LTE Band 13	777 ~ 787		3.98
LTE Band 25	1850 ~ 1915		1.38
LTE Band 26	814 ~ 849		2.13
LTE Band 38	2570 ~ 2620		2.00
LTE Band 41	2496 ~ 2690		2.04
LTE Band 66	1710 ~ 1780		2.00

Note: All antenna information (Antenna type and Peak Gain) is provided by the manufacturer.


1.7. Test Methodology

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ANSI C63.26:2015
- FCC CFR 47 Part 90
- FCC KDB 971168 D01 v03r01: Power Meas License Digital Systems
- FCC KDB 971168 D02 v02r01: Misc Rev Approv License Devices
- FCC KDB 412172 D01 v01r01: Determining ERP and EIRP

2. Test Configuration

2.1. Test System Connection Diagram

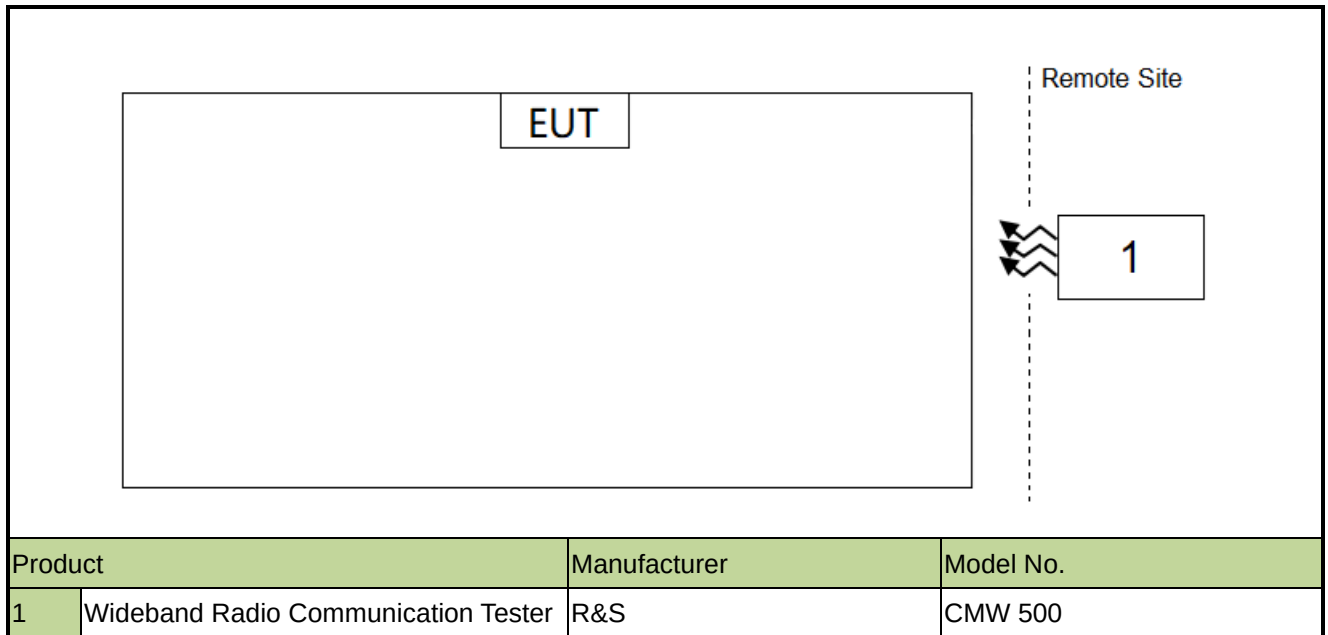

2.2. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20% ~ 75%RH

3. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
Anechoic Chamber	RIKEN	SIP-AC1	MRTSUE06554	1 year	2023-12-22	SIP-AC1
Preamplifier	EMCI	EMC051845SE	MRTSUE06600	1 year	2023-11-07	SIP-AC1
Horn Antenna	R&S	HF907	MRTSUE06610	1 year	2023-07-13	SIP-AC1
Thermohygrometer	testo	608-H1	MRTSUE06616	1 year	2023-11-01	SIP-AC1
Thermohygrometer	testo	608-H1	MRTSUE06620	1 year	2023-11-27	SIP-AC1
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06645	1 year	2023-07-30	SIP-AC1
Communication Tester	R&S	CMW500	MRTSUE06243	1 year	2023-10-08	SIP
Thermohygrometer	testo	608-H1	MRTSUE06362	1 year	2023-02-15	WZ-SR6
Shielding Room	HUAMING	WZ-SR6	MRTSUE06443	N/A	N/A	WZ-SR6
Signal Analyzer	Keysight	N9020B	MRTSUE06583	1 year	2023-10-08	WZ-SR6
Signal Generator	Keysight	N5173B	MRTSUE06606	1 year	2023-11-25	WZ-SR6
5G Wireless Test Platform	Keysight	E7515B	MRTSUE06942	1 year	2023-03-03	WZ-SR6
Thermohygrometer	testo	608-H1	MRTSUE06362	1 year	2023-02-15	WZ-SR6
Radio Communication Analyzer	Anritsu	MT8821C	MRTSUE06960	1 year	2023-07-08	WZ-SR6
Communication Tester	R&S	CMW500	MRTSUE06108	1 year	2023-11-25	WZ-SR6
Directional Coupler	MVE	MVE4816-10	MRTSUE11118	1 year	2023-08-24	WZ
Attenuator	MVE	MVE2213	MRTSUE11094	1 year	2023-06-09	WZ
Attenuator	MVE	MVE2213	MRTSUE11095	1 year	2023-06-09	WZ
Attenuator	MVE	MVE2213	MRTSUE11096	1 year	2023-06-09	WZ

Software	Version	Function
EMI V3	V 3.0.0	EMI Test Software
Controller_MF 7802BS	1.02	RE Antenna & Turntable

4. Decision Rules and Measurement Uncertainty

4.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2.
(Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

4.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

Radiated Spurious Emissions	
Measurement Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$):	
Horizontal: 9kHz ~ 300MHz: 5.04dB	
300MHz ~ 1GHz: 4.95dB	
1GHz ~ 40GHz: 6.40dB	
Vertical: 9kHz ~ 300MHz: 5.24dB	
300MHz ~ 1GHz: 6.03dB	
1GHz ~ 40GHz: 6.40dB	
Conducted Spurious Emissions	
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$):	
0.78dB	
Output Power	
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$):	
1.13dB	
Occupied Bandwidth	
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$):	
0.28%	

5. Test Result

5.1. Summary

FCC Part Section(s)	Test Description	Test Condition	Verdict
2.1049	Occupied Bandwidth	Conducted	Pass
90.635	Conducted Output Power		Pass
2.1051, 90.691(a)	Band Edge		Pass
2.1053, 90.691(a)	Spurious Emissions	Radiated	Pass

Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) All supported modulation types were evaluated. The worst-case emission of modulation was selected. Therefore, the Frequency Stability, Channel Band Edge, Radiated & Conducted Spurious Emission were presented worst-case in the test report.

5.2. Occupied Bandwidth Measurement

5.2.1. Test Limit

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.


5.2.2. Test Procedure

ANSI C63.26-2015 - Section 5.4

5.2.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency
2. RBW = The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace to stabilize
8. Use the 99% power bandwidth function of the instrument and report the measured bandwidth.

5.2.4. Test Setup

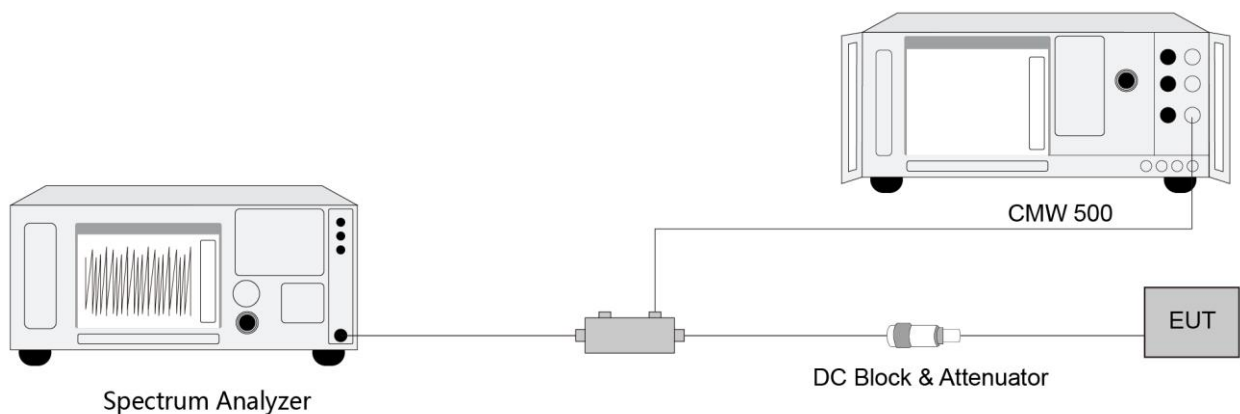

5.2.5. Test Result

Refer to Appendix A.1.

5.3. Conducted Output Power Measurement

5.3.1. Test Limit

The maximum output power of the transmitter for mobile stations is 100 watts (20dBw).

5.3.2. Test Procedure

ANSI C63.26-2015 - Section 5.2

5.3.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

5.3.4. Test Setup



5.3.5. Test Result

Refer to Appendix A.2.

5.4. Band Edge Measurement

5.4.1. Test Limit

Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

- (1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log(f/6.1)$ decibels or $50 + 10 \log(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.
- (2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.


5.4.2. Test Procedure

ANSI C63.26-2015 - Section 5.7

5.4.3. Test Setting

1. Set the analyzer frequency to low or high channel
2. $RBW \geq$ The nominal RBW shall be in the range of 1% of the anticipated OBW (in the 1MHz band immediately outside and adjacent to the band edge). For improvement of the accuracy in the measurement of the average power of a noise-like emission, a RBW narrower than the specified reference bandwidth can be used (generally limited to no less than 1% of the OBW), provided that a subsequent integration is performed over the full required measurement bandwidth. This integration should be performed using the spectrum analyzer's band power functions.
3. $VBW \geq 3 \cdot RBW$
4. Sweep time = auto
5. Detector = power averaging (rms)
6. Set sweep trigger to "free run."
7. User gate triggered such that the analyzer only sweeps when the device is transmitting at full power
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.

5.4.4. Test Setup

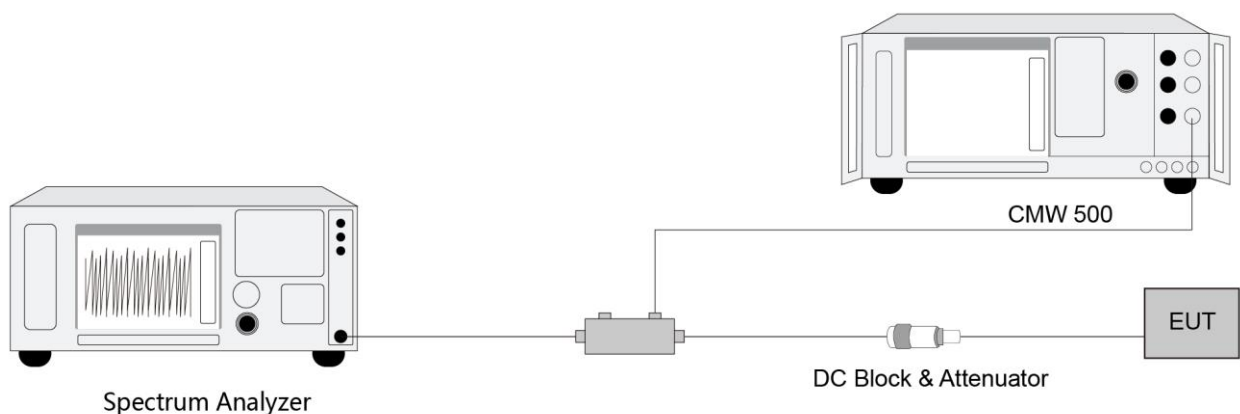

5.4.5. Test Result

Refer to Appendix A.3.

5.5. Radiated Spurious Emissions Measurement

5.5.1. Test Limit

Out of band emissions: The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm.

E (dB μ V/m) = EIRP (dBm) - $20 \log D$ + 104.8; where D is the measurement distance in meters. The emission limit equal to 82.3dB μ V/m.

5.5.2. Test Procedure


ANSI C63.26-2015 - Section 5.2.7 & 5.5

5.5.3. Test Setting


1. RBW = 1MHz
2. VBW $\geq 3 \times$ RBW
3. Sweep time $\geq 10 \times$ (number of points in sweep) $\times$ (transmission symbol period)
4. Detector = Peak
5. Trace mode = max hold
6. The trace was allowed to stabilize

5.5.4. Test Setup

Below 1GHz Test Setup:

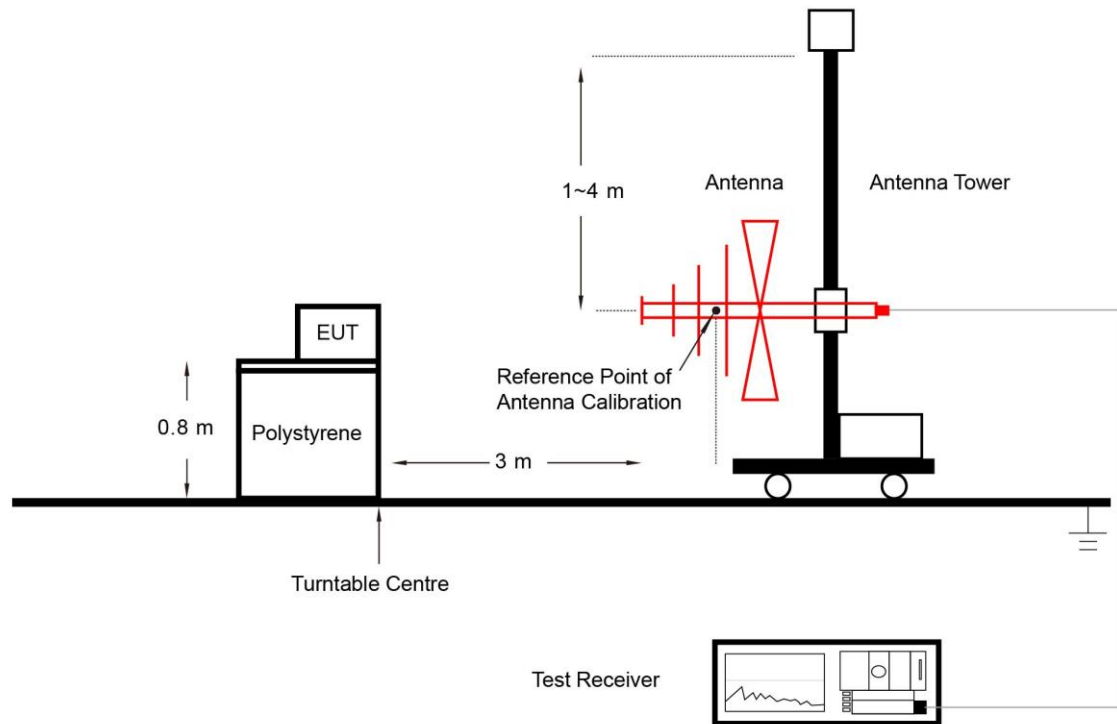

Above 1GHz Test Setup:

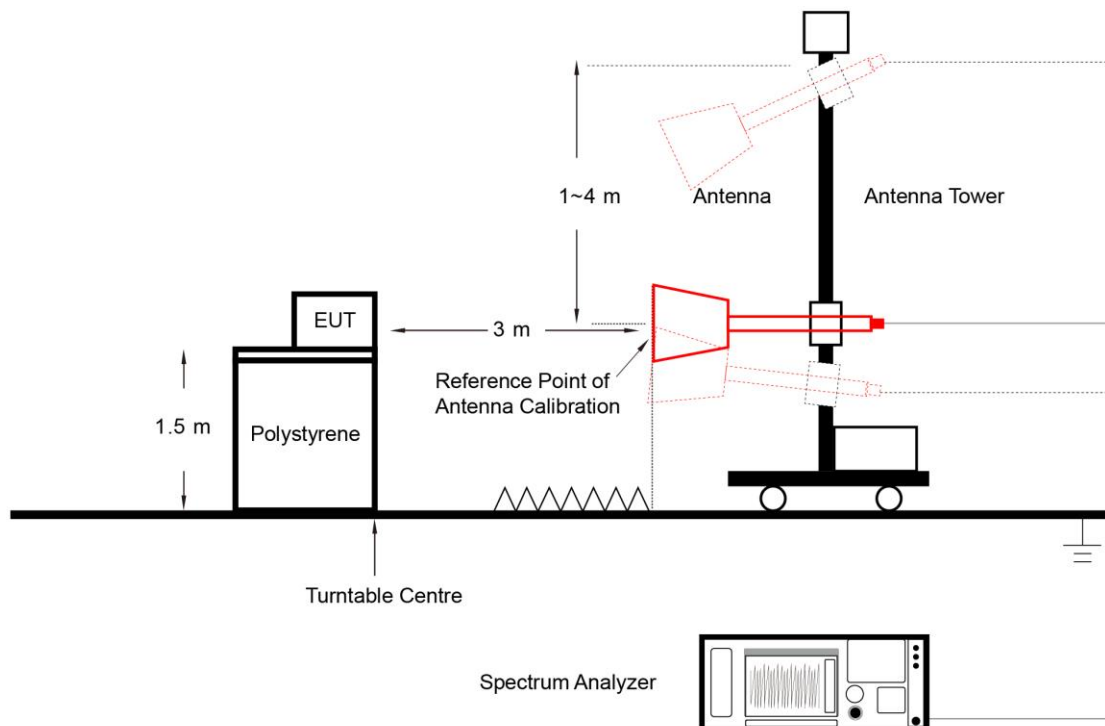

5.5.5. Test Result

Refer to Appendix A.4.

Appendix A - Test Result


A.1 Occupied Bandwidth Test Result

Test Site	WZ-SR6	Test Engineer	Cloud Guo
Test Date	2023/02/02	Test Band	LTE Band 26


Modulation	Frequency (MHz)	Bandwidth (MHz)	99% Bandwidth (MHz)
16QAM	819.0	1.4	1.08
		3	2.68
		5	4.47
		10	4.88
16QAM	821.5	15	4.95

99% Bandwidth - 16QAM


1.4MHz Channel Bandwidth

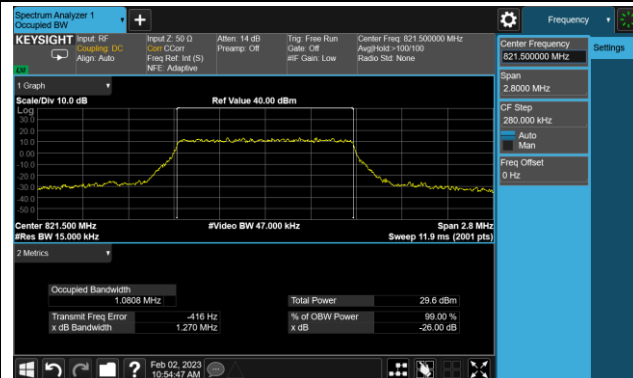

3MHz Channel Bandwidth

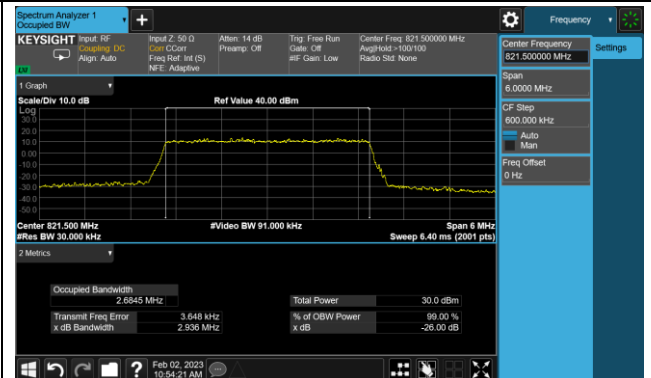

5MHz Channel Bandwidth

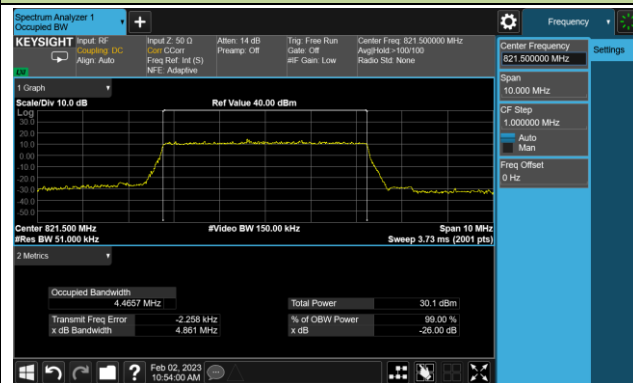

10MHz Channel Bandwidth



15MHz Channel Bandwidth



A.2 Conducted Output Power Test Result

Test Site	WZ-SR6	Test Engineer	Cloud Guo
Test Date	2023/01/28	Test Band	LTE Band 26

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	Output Power (W)	Limit (W)
QPSK						
814.7	1.4	1	0	22.61	0.1824	< 100
819.0				22.70	0.1862	< 100
823.3				22.99	0.1991	< 100
814.7	1.4	1	2	22.93	0.1963	< 100
819.0				22.94	0.1968	< 100
823.3				23.06	0.2023	< 100
814.7	1.4	1	6	22.70	0.1862	< 100
819.0				22.95	0.1972	< 100
823.3				23.11	0.2046	< 100
814.7	1.4	6	0	22.04	0.1600	< 100
819.0				22.00	0.1585	< 100
823.3				22.06	0.1607	< 100
815.5	3	1	0	22.78	0.1897	< 100
819.0				22.86	0.1932	< 100
822.5				22.96	0.1977	< 100
815.5	3	1	7	22.98	0.1986	< 100
819.0				23.12	0.2051	< 100
822.5				23.10	0.2042	< 100
815.5	3	1	14	23.06	0.2023	< 100
819.0				22.89	0.1945	< 100
822.5				22.91	0.1954	< 100
815.5	3	15	0	22.01	0.1589	< 100
819.0				22.04	0.1600	< 100
822.5				22.03	0.1596	< 100


Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	Output Power (W)	Limit (W)
QPSK						
816.5	5	1	0	22.94	0.1968	< 100
819.0				22.86	0.1932	< 100
821.5				22.93	0.1963	< 100
816.5	5	1	12	23.16	0.2070	< 100
819.0				23.14	0.2061	< 100
821.5				23.18	0.2080	< 100
816.5	5	1	24	22.70	0.1862	< 100
819.0				22.77	0.1892	< 100
821.5				22.89	0.1945	< 100
816.5	5	25	0	22.05	0.1603	< 100
819.0				22.03	0.1596	< 100
821.5				22.04	0.1600	< 100
819.0	10	1	0	22.82	0.1914	< 100
		1	24	23.20	0.2089	< 100
		1	49	22.84	0.1923	< 100
		50	0	22.19	0.1656	< 100
821.5	15	1	0	22.82	0.1914	< 100
		1	36	23.20	0.2089	< 100
		1	74	22.93	0.1963	< 100
		75	0	22.12	0.1629	< 100

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	Output Power (W)	Limit (W)
16QAM						
814.7	1.4	1	0	21.65	0.1462	< 100
819.0				21.61	0.1449	< 100
823.3				21.36	0.1368	< 100
814.7	1.4	1	2	21.63	0.1455	< 100
819.0				21.62	0.1452	< 100
823.3				21.18	0.1312	< 100
814.7	1.4	1	6	21.68	0.1472	< 100
819.0				21.58	0.1439	< 100
823.3				21.69	0.1476	< 100
814.7	1.4	6	0	20.94	0.1242	< 100
819.0				21.11	0.1291	< 100
823.3				21.19	0.1315	< 100
815.5	3	1	0	21.80	0.1514	< 100
819.0				21.48	0.1406	< 100
822.5				21.76	0.1500	< 100
815.5	3	1	7	21.82	0.1521	< 100
819.0				21.87	0.1538	< 100
822.5				21.71	0.1483	< 100
815.5	3	1	14	21.40	0.1380	< 100
819.0				21.71	0.1483	< 100
822.5				21.80	0.1514	< 100
815.5	3	15	0	21.24	0.1330	< 100
819.0				21.02	0.1265	< 100
822.5				21.18	0.1312	< 100

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	Output Power (W)	Limit (W)
16QAM						
816.5	5	1	0	21.87	0.1538	< 100
819.0				21.76	0.1500	< 100
821.5				21.79	0.1510	< 100
816.5	5	1	12	21.96	0.1570	< 100
819.0				21.54	0.1426	< 100
821.5				21.59	0.1442	< 100
816.5	5	1	24	21.35	0.1365	< 100
819.0				21.32	0.1355	< 100
821.5				21.35	0.1365	< 100
816.5	5	25	0	20.96	0.1247	< 100
819.0				21.06	0.1276	< 100
821.5				21.08	0.1282	< 100
819.0	10	1	0	21.79	0.1510	< 100
		1	24	21.78	0.1507	< 100
		1	49	21.66	0.1466	< 100
		27	0	21.45	0.1396	< 100
821.5	15	1	0	21.63	0.1455	< 100
		1	36	22.23	0.1671	< 100
		1	74	21.55	0.1429	< 100
		27	0	21.49	0.1409	< 100


A.3 Band Edge Test Result

Test Site	WZ-SR6	Test Engineer	Cloud Guo
Test Date	2023/02/01	Test Band	LTE Band 26

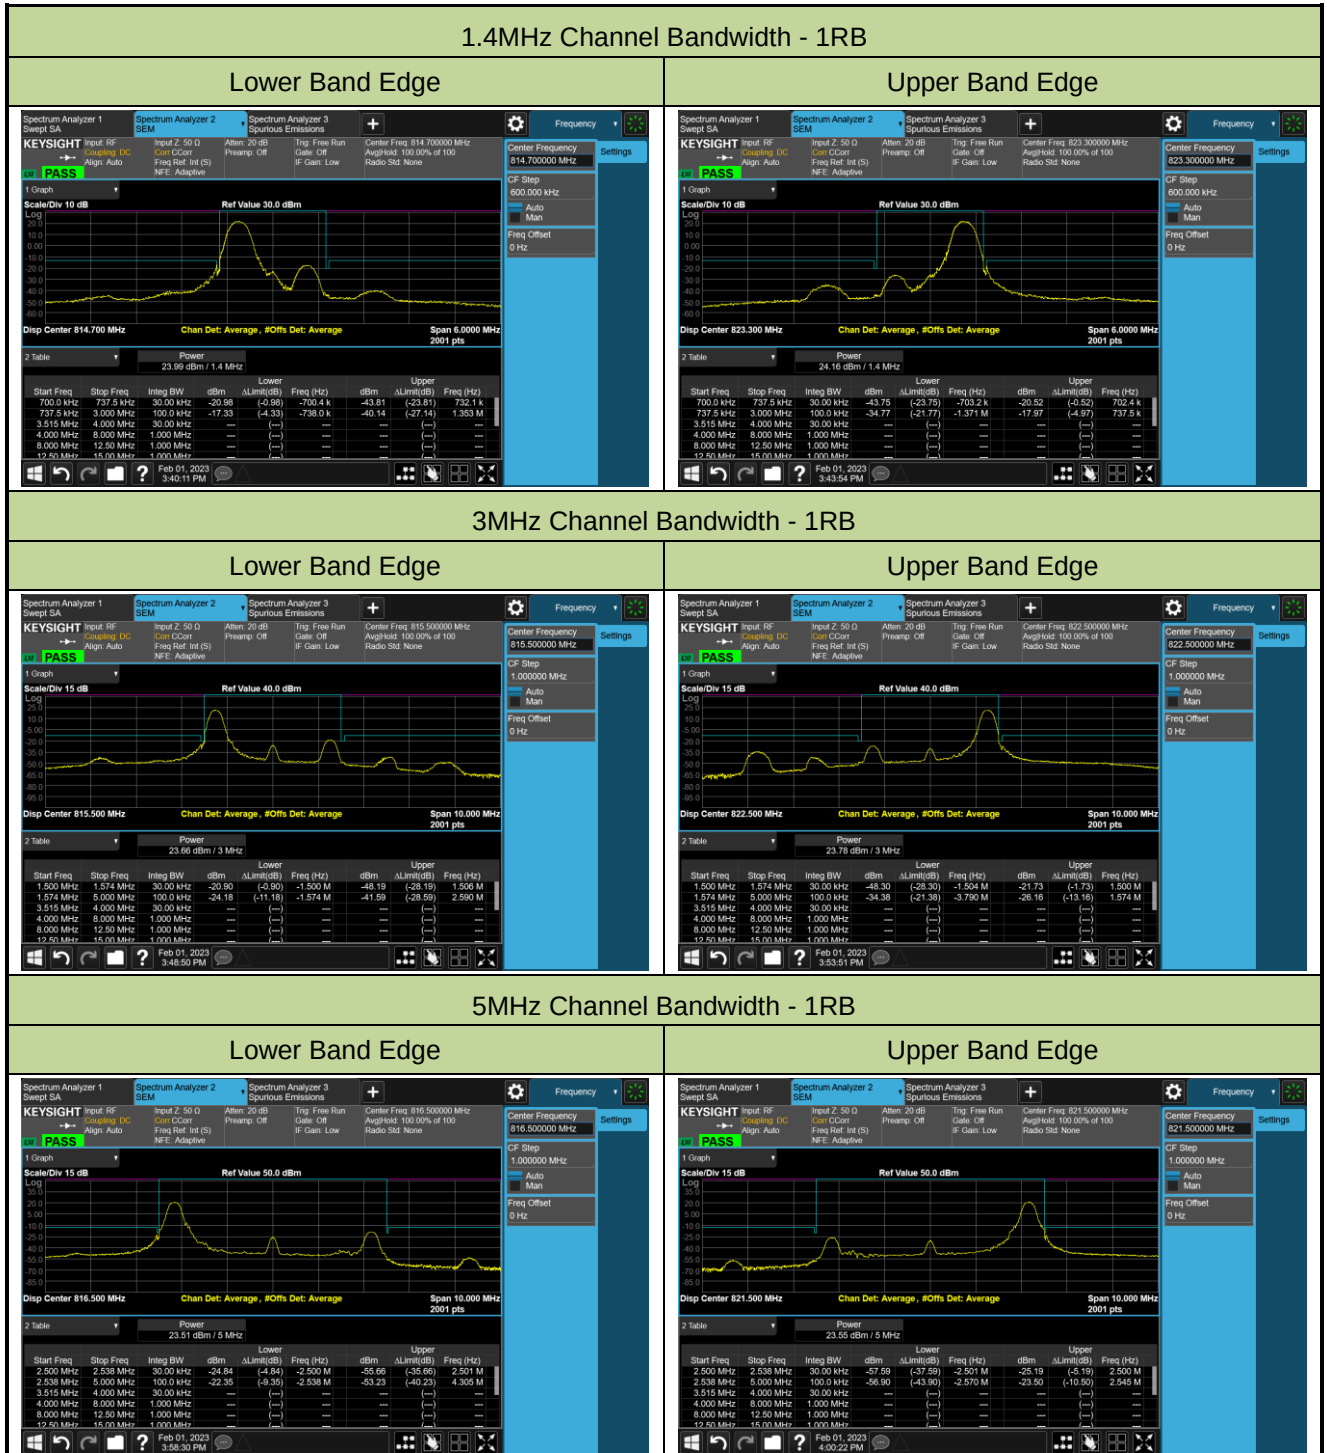


10MHz Channel Bandwidth - 1RB

Lower Band Edge

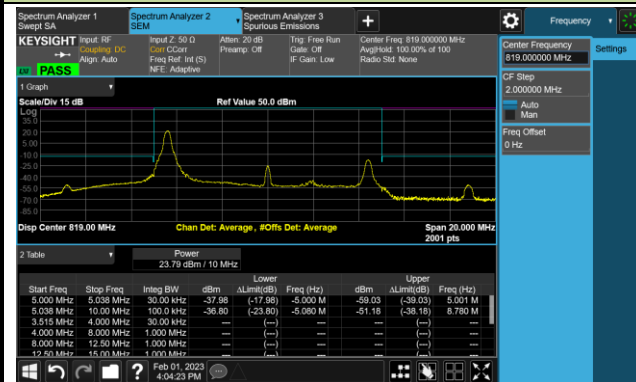


Upper Band Edge

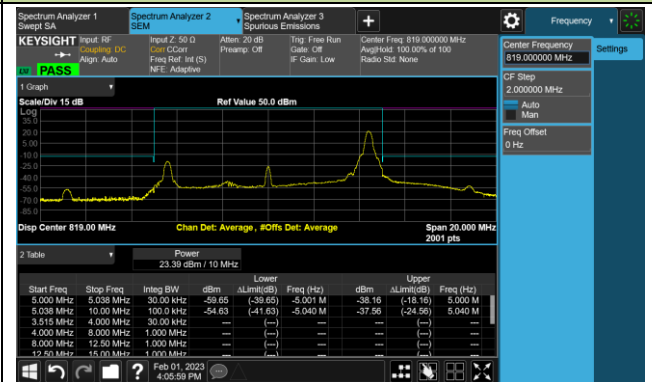


15MHz Channel Bandwidth - 1RB

Lower Band Edge

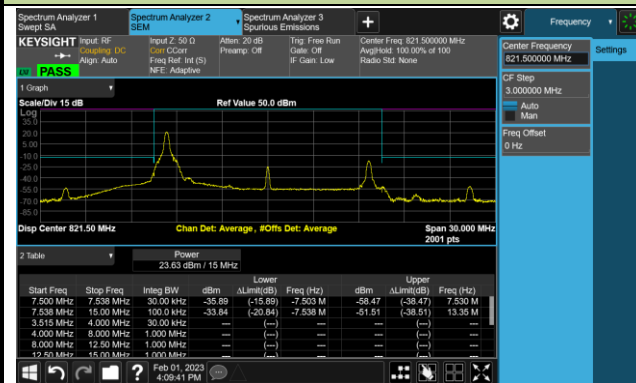


Upper Band Edge

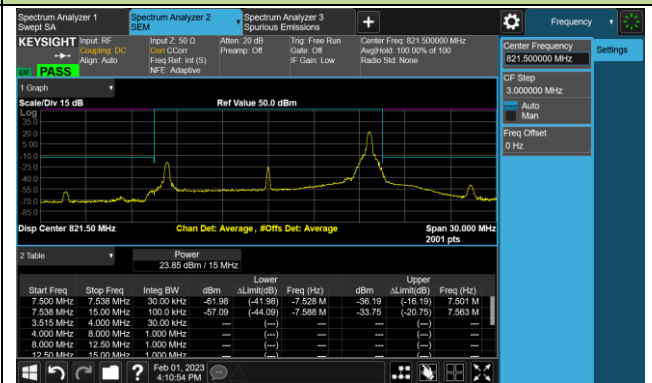


1.4MHz Channel Bandwidth - Full RB

Lower Band Edge

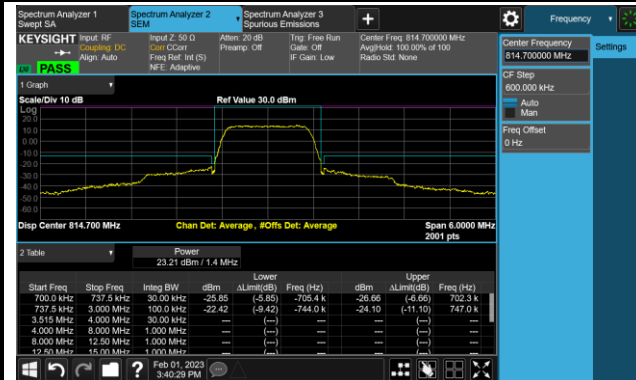


Upper Band Edge

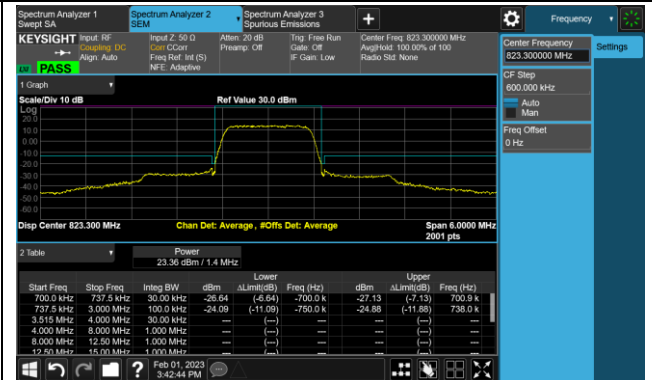


3MHz Channel Bandwidth - Full RB

Lower Band Edge

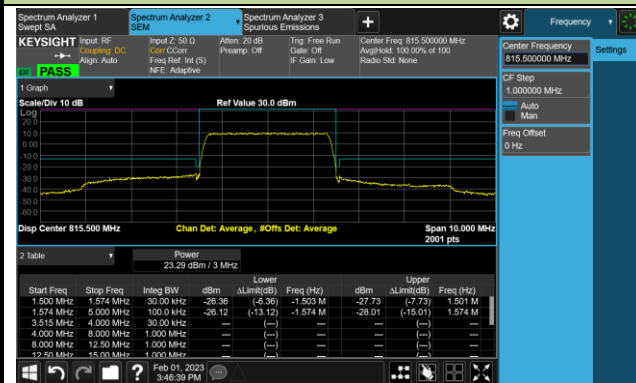


Upper Band Edge

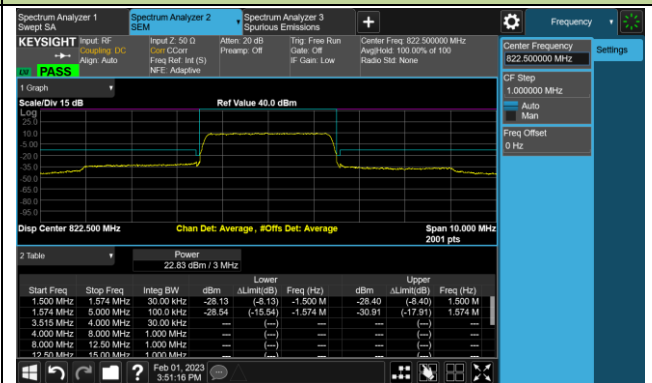


5MHz Channel Bandwidth - Full RB

Lower Band Edge

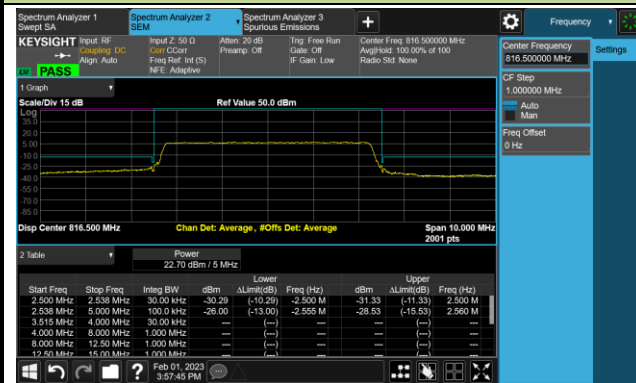


Upper Band Edge

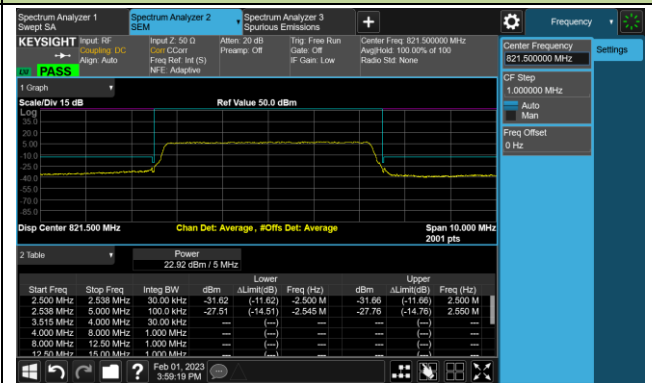


10MHz Channel Bandwidth - Full RB

Band Edge

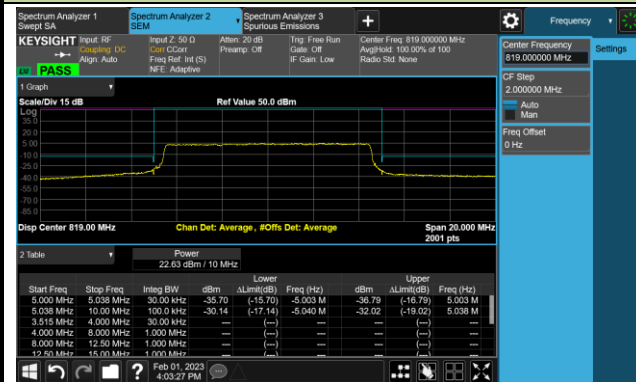

15MHz Channel Bandwidth - Full RB

Band Edge

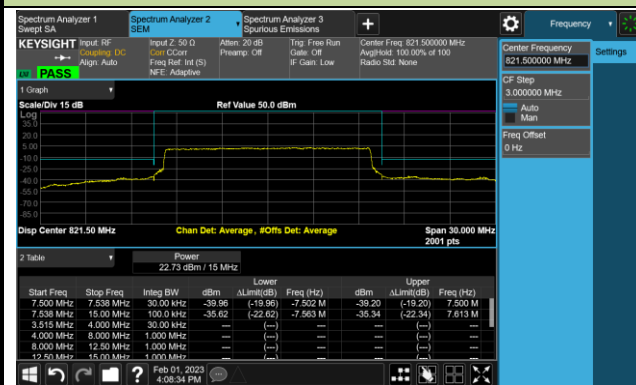

A.4 Radiated Suprious Emissions Test Result

Test Site	SIP-AC1	Test Engineer	Yien Qian
Test Date	2023/01/15 ~ 2023/01/19	Test Band	LTE Band 26, 1.4MHz, 1RB

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Low Channel							
159.5	12.6	18.1	30.7	82.3	-51.6	Peak	Horizontal
678.0	12.9	26.4	39.3	82.3	-43.0	Peak	Horizontal
143.5	11.7	17.8	29.5	82.3	-52.8	Peak	Vertical
669.2	11.8	26.6	38.4	82.3	-43.9	Peak	Vertical
1628.0	61.1	-20.2	40.9	82.3	-41.4	Peak	Horizontal
2444.0	64.0	-16.5	47.5	82.3	-34.8	Peak	Horizontal
3120.0	53.0	-13.3	39.7	82.3	-42.6	Peak	Vertical
4272.0	51.6	-10.3	41.3	82.3	-41.0	Peak	Vertical
Middle Channel							
160.5	14.0	18.0	32.0	82.3	-50.3	Peak	Horizontal
711.9	12.5	26.9	39.4	82.3	-42.9	Peak	Horizontal
139.1	13.1	17.5	30.6	82.3	-51.7	Peak	Vertical
665.8	11.6	26.6	38.2	82.3	-44.1	Peak	Vertical
2456.0	64.3	-16.3	48.0	82.3	-34.3	Peak	Horizontal
4476.0	50.6	-10.5	40.1	82.3	-42.2	Peak	Horizontal
2456.0	54.0	-16.3	37.7	82.3	-44.6	Peak	Vertical
4216.0	50.5	-10.5	40.0	82.3	-42.3	Peak	Vertical
High Channel							
157.6	14.1	18.1	32.2	82.3	-50.1	Peak	Horizontal
720.6	12.3	27.0	39.3	82.3	-43.0	Peak	Horizontal
32.9	15.9	17.1	33.0	82.3	-49.3	Peak	Vertical
66.9	15.7	16.4	32.1	82.3	-50.2	Peak	Vertical
1644.0	59.1	-19.8	39.3	82.3	-43.0	Peak	Horizontal
2468.0	62.3	-16.2	46.1	82.3	-36.2	Peak	Horizontal
3604.0	51.2	-12.5	38.7	82.3	-43.6	Peak	Vertical
4928.0	50.4	-9.7	40.7	82.3	-41.6	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Appendix B - Test Setup Photograph

Refer to “2212RSU048-UT” file.

Appendix C - EUT Photograph

Refer to “2212RSU048-UE” file.