

**EMC EMISSION - TEST REPORT**

JQA APPLICATION No. : KL8080783

Model/Type No. : R-310C

Name of Product : Microwave Oven

FCC ID : APYDMR0120

Applicant : Sharp Corporation, Reliability Control Group

Address : 22-22, Nagaike-cho, Abeno-ku, Osaka, 545-8522, Japan

Manufacturer : Sharp Appliances (Thailand) Ltd.

Address : 64 Moo 5, Tambol Bangsamuk, Amphur Bangpakong, Chachoengsao, Province, Thailand

*Final Judgement* : **Passed**

**TEST RESULTS IN THIS REPORT** are obtained in use of equipment that is traceable to Electro-technical Lab. of MITI Japan and Communications Research Lab. of PTT Japan.

**THE TEST RESULTS** only responds to the test sample. This test report shall not be reproduced except in full.

JAPAN QUALITY ASSURANCE ORGANIZATION (JQA)  
KITA-KANSAI TESTING CENTER  
EMC DIVISION

The logo for NVLAP (National Voluntary Laboratory Accreditation Program) is displayed in a stylized, outlined font. The letters 'N', 'V', 'L', 'A', and 'P' are connected, with a registered trademark symbol (®) to the upper right of the 'P'.

LAB CODE: 200191-0

DIRECTORY

	<u>Page</u>
<b>A) Documentation</b>	
<b>Test report</b>	<u>1 - 19</u>
Directory	<u>2</u>
Test Regulation / General Information	<u>3</u>
Test conditions	<u>4 - 8</u>
Configuration of EUT / Operation of EUT	<u>9 - 10</u>
EUT Modification / Responsible Party	<u>11</u>
Test results / Uncertainty	<u>12 - 13</u>
Summary	<u>14</u>
<b>EUT-Arrangement (Drawings)</b>	<u>15</u>
<b>Preliminary Test and Test-setup (Drawings)</b>	<u>16 - 18</u>
<b>Test-setup (Photographs) at worst case</b>	<u>19</u>
<b>B) Test data</b>	
Radiated Emission (Magnetic Field)      9 kHz - 30 MHz	<u>20</u>
Radiated Emission (Electric Field)      30 MHz - 1000 MHz	<u>21</u>
Radiated Emission (Electric Field)      1 GHz - 26 GHz	<u>22</u>
ISM Frequency	<u>23</u>
RF Power Output	<u>24</u>

### TEST REGULATION

FCC Rules and Regulations Part 18 Subpart A,B and C (September 5, 1985)

- - Miscellaneous equipment
- - Industrial heaters and RF stabilized arc welder
- - Medical diathermy
- - Induction cooking ranges
- - ISM Frequency Device
- - Non-ISM Frequency Device

#### Test procedure:

Radiated emission test was performed according to the procedures in FCC/OET MP-5 (1985).

### GENERAL INFORMATION

#### Test facility:

- 1) Test Facility located at Kita-Kansai : 1st and 2nd Open Sites (3 m Site)  
Test Facility located at Kameoka Open Site (3, 10 and 30 m, on common plane)  
FCC filing No. : 31040/SIT 1300F2
- 2) KITA-KANSAI TESTING CENTER is recognized under the National Voluntary Laboratory Accreditation Program for satisfactory compliance established in Title 15, Part 285 Code of Federal Regulations.  
NAVLAP Lab Code: 200191-0
- 3) Average Measurement Method  
FCC filing No. : 950523A 1300F2

#### Description of the Equipment Under Test (EUT):

- 1) Name : Microwave Oven
- 2) Model/Type No. : R-310C
- 3) Product Type : Prototype
- 4) Category : ISM frequency Device
- 5) EUT Authorization : ○ - Verification ● - Certification ○ - D.o.C
- 6) Highest frequency used/generated : 2450 MHz
- 7) Power Rating : 120V 60Hz
- 8) Rated Output Power : 1100 W

#### Definitions for symbols used in this test report:

- - Black box indicates that the listed condition, standard or equipment is applicable for this Report.
- - Blank box indicates that the listed condition, standard or equipment is not applicable for this Report.

### TEST CONDITIONS

#### The measurement of the Radiated Emission (9 kHz - 30 MHz)

was performed in the frequency range of 9 kHz - 30 MHz, in the following test site.

#### Test location:

KITA-KANSAI Testing Center

7-7, Ishimaru, 1-Chome, Minoh-Shi, Osaka, 562-0027, Japan

- - 1st site (3 meters)
- - 2nd site (3 meters)

KAMEOKA EMC Branch

9-1, Ozaki, Inukanno, Nishibetsuin-Cho, Kameoka-Shi, Kyoto, 621-0126, Japan

- - 3 meters
- - 10 meters
- - 30 meters

#### Used test instruments:

Model No.	Device I.D No.	Last Cal. Date	Cal. Interval
○ - ESH 3	A - 1		
● - ESH 2	A - 2	December, 1998	1 Year
○ - ESH 2	A - 3		
● - HPF2-Z2	C - 2	February, 1999	1 Year
○ - HPF2-Z2	C - 3		

#### Environmental conditions:

Temperature: 22 °C      Humidity: 46 %

**The measurement of the Radiated Emission (30 MHz - 1000 MHz)**

was performed in horizontal and vertical polarization, in the frequency range of 30 MHz - 1000 MHz, in the following test site.

**Test location:**

**KITA-KANSAI Testing Center**

7-7, Ishimaru, 1-Chome, Minoh-Shi, Osaka, 562-0027, Japan

- - 1st site (3 meters)
- - 2nd site (3 meters)

**KAMEOKA EMC Branch**

9-1, Ozaki, Inukanno, Nishibetsuin-Cho, Kameoka-Shi, Kyoto, 621-0126, Japan

- - 3 meters
- - 10 meters
- - 30 meters

**Validation of Site Attenuation:**

- 1) Last Confirmed Date: November 24, 1998
- 2) Interval : 1 Year

**Used test instruments:**

Model No.	Device I.D No.	Last Cal. Date	Cal. Interval		
○ - ESV/ESV-Z3	A - 7 / A - 17	December, 1998	1 Year		
○ - ESV/ESV-Z3	A - 6 / A - 18				
○ - ESV/ESV-Z3	A - 5 / A - 16				
● - ESV/ESV-Z3	A - 4 / A - 20				
○ - ESV/ESV-Z3	A - 8 / A - 19				
○ - KBA-511A	C - 12	November, 1998	1 Year		
○ - KBA-611	C - 22				
○ - KBA-511A	C - 13				
○ - KBA-611	C - 19				
● - KBA-511A	C - 11				
● - KBA-611	C - 21				
● - Cable	H - 2				
				November, 1998	1 Year
				November, 1998	1 Year
				November, 1998	1 Year

**Environmental conditions:**

Temperature: 16 °C Humidity: 68 %

**The measurement of the Radiated Emission (1 GHz - 26 GHz)**

was performed in horizontal and vertical polarization, in the frequency range of 1 GHz - 26 GHz, in the following test site.

**Test location:**

KITA-KANSAI Testing Center

7-7, Ishimaru, 1-Chome, Minoh-Shi, Osaka, 562-0027, Japan

● - 1st site (3 meters)

○ - 2nd site (3 meters)

KAMEOKA EMC Branch

9-1, Ozaki, Inukanno, Nishibetsuin-Cho, Kameoka-Shi, Kyoto, 621-0126, Japan

○ - 3 meters

○ - 10 meters

**Used test instruments:**

Model No.	Device I.D No.	Last Cal. Date	Cal. Interval
● - 8566B	A - 13	October, 1998	1 Year
○ - 8593A	A - 15		
● - ESV	A - 5	December, 1998	1 Year
● - WJ-6611-513	A - 23	May, 1998	1 Year
● - WJ-6882-824	A - 21	May, 1998	1 Year
● - DBL-0618N515	A - 33	October, 1998	1 Year
● - 91888-2	C - 41 - 1	May, 1998	1 Year
● - 91889-2	C - 41 - 2	May, 1998	1 Year
● - 94613-1	C - 41 - 3	May, 1998	1 Year
● - 91891-2	C - 41 - 4	May, 1998	1 Year
● - 94614-1	C - 41 - 5	May, 1998	1 Year
● - 3160-09	C - 48	October, 1998	1 Year
● - 4T-10	D - 73	May, 1998	1 Year
○ - 4T-10	D - 74		
● - MZ5010C	D - 81	October, 1998	1 Year
● - TRA-603D	D - 24	May, 1998	1 Year
○ - 8494H/8595H	D - 76		
● - Cable	C - 40 - 11	May, 1998	1 Year
● - Cable	C - 40 - 12	May, 1998	1 Year

**Setting of the spectrum analyzer:**

RES B.W : 3 MHz      Video B.W : 3 MHz  
SCALE : LINEAR      Sweep Time: 20 msec

**Environmental conditions:**

Temperature: 22 °C      Humidity: 46 %

**The measurement of the ISM Frequency**

was performed for line voltage variation from 80 % to 125 % of normal rated voltage, in the following test site.

**Test location:**

KITA-KANSAI Testing Center

7-7, Ishimaru, 1-Chome, Minoh-Shi, Osaka, 562-0027, Japan

- - 1st open test site
- - 2nd open test site
- - Shielded room
- - Anechoic chamber

KAMEOKA EMC Branch

9-1, Ozaki, Inukanno, Nishibetsuin-Cho, Kameoka-Shi, Kyoto, 621-0126, Japan

- - Shielded room
- - Open test site

**Used test instruments:**

Model No.	Device I.D No.	Last Cal. Date	Cal. Interval
● - 8566B	A - 13	October, 1998	1 Year
○ - 8593A	A - 15		
● - 8673D	B - 2	April, 1998	1 Year
○ - WJ-6611-513	A - 23		
○ - WJ-6882-824	A - 21		
○ - DBL-0618N515	A - 33		
○ - 91888-2	C - 41 - 1		
● - 91889-2	C - 41 - 2	May, 1998	1 Year
○ - 94613-1	C - 41 - 3		
○ - 91891-2	C - 41 - 4		
○ - 94614-1	C - 41 - 5		
○ - 4T-10	D - 73		
○ - 4T-10	D - 74		
○ - 2-10	D - 40		
● - TR5212	B - 30	March, 1998	1 Year

**Setting of the spectrum analyzer:**

RES B.W : 10 kHz      Video B.W : 30 kHz  
SCALE : LOG 5dB/div   Sweep Time: 300 msec

**Environmental conditions:**

Temperature: 20 °C      Humidity: 36 %

**The measurement of the RF Power Output**

was performed in the following test site.

**Test location:**

KITA-KANSAI Testing Center

7-7, Ishimaru, 1-Chome, Minoh-Shi, Osaka, 562-0027, Japan

- - Shielded room
- - Anechoic chamber

KAMEOKA EMC Branch

9-1, Ozaki, Inukanno, Nishibetsuin-Cho, Kameoka-Shi, Kyoto, 621-0126, Japan

- - Shielded room

**Used test instruments:**

Model No.	Assigned C/N	Last Cal. Date	Cal. Interval
● - 3167	08011116	June, 1998	1 Year
● - 245506	Q47097361	April, 1998	1 Year
● - SIII-5000	Q47097350	February, 1999	1 Year

**Environmental conditions:**

**Temperature:** 20 °C    **Humidity:** 54 %

CONFIGURATION OF EUT

The Equipment Under Test (EUT) consists of:

Description	Applicant (Manufacturer)	Model No. (Serial No.)	FCC ID
Microwave Oven	Sharp Corporation (Sharp Appliances (Thailand) Ltd.)	R-310C (--)	APYDMR0120

The measurement was carried out with the following equipment connected:

Description	Grantee/Distributor	Model No. (Serial No.)	FCC ID
None			

Type of Interference Cable(s) and the AC Power Cord used with the EUT:

No.	Cable	Shielded	Ferrite Core	Length
1	AC Power Cord (EUT) with 3-pin plug	NO	NO	1.2m

## Operation - mode of the EUT:

The EUT was operated during the measurement under following load condition according to Sec.4.1 in FCC/OET MP-5 (1985).

- 1) Radiated Emissions Measurement (9 kHz - 30 MHz)  
1050ml of water, with the beaker located in the center of the removable turntable.
- 2) Radiated Emissions Measurement (30 MHz - 1000 MHz)  
1050ml of water, with the beaker located in the center of the removable turntable.
- 3) Radiated Emissions Measurement (1 GHz - 26 GHz)  
General radiated emissions : 1050ml of water, with the beaker located in the center of the removable turntable.  
Second and third harmonics : Two loads, one of 1050ml and the other of 450ml, of water are used. Each load is tested both with the beaker located in the center of the removable turntable and with it in the right front center.
- 4) ISM Frequency Measurement  
1500ml of water in the beaker located in the center of the removable turntable.
- 5) RF Power Output Measurement  
1500ml of water in the beaker located in the center of the removable turntable.

## Test system:

The EUT is a microwave oven intended for the household use.  
There is not any interface port on the EUT.

## Detailed the Magnetron:

Cat. No. OM75P (manufactured by Samsung Electronics)

## The used (generated) frequencies in the EUT:

Magnetron : 2450 MHz  
CPU : 4 MHz

### EUT Modification

- - No modifications were conducted by JQA to achieve compliance to the applied levels.
- - To achieve compliance to the applied levels, the following change(s) were made by JQA during the compliance test.

The modification(s) will be implemented in all production models of this equipment.

Applicant :     N/A                          Date :      N/A  
Typed Name :      N/A                      Position :      N/A

### Responsible Party

Responsible Party of Test Item(Product)

Responsible party :

Contact Person :

\_\_\_\_\_  
Signatory



TEST RESULTS

ISM Frequency 2.4 GHz - 2.5 GHz

The requirements are

● - KEPT      ○ - NOT KEPT

Worst (lowest/highest) range  
against 2.45 GHz  $\pm$  50 MHz

2425.40 MHz - 2478.00 MHz at 96 V ( 80 %)

Uncertainty of measurement results

$\pm 0.05$  ppm

Remarks: \_\_\_\_\_  
\_\_\_\_\_

RF Power Output

Measurement results (Calorimetric method)

889.8 W

Applied limits of Radiated Emission

33.4 dB( $\mu$ V/m) at 300 m  
10.0 dB( $\mu$ V/m) at 1600 m

Remarks: \_\_\_\_\_  
\_\_\_\_\_

SUMMARY

GENERAL REMARKS :

The EUT was tested according to the requirements of FCC Rules and Regulations Part 18 Subpart A, B and C (September 5, 1985) under the test configuration, as shown in page 15.

The conclusion for the test items of which are required by the applied regulation is indicated under the final judgement.

FINAL JUDGEMENT :

The "as received" sample;

- - fulfill the test requirements of the regulation mentioned on page 3.
- - fulfill the test requirements of the regulation mentioned on page 3, but with certain qualifications.
- - doesn't fulfill the test regulation mentioned on page 3.


Begin of testing : March 1, 1999

End of testing : March 12, 1999


- JAPAN QUALITY ASSURANCE ORGANIZATION -

Approved Signatory :

  
\_\_\_\_\_  
Takashi Yamanaka  
Manager  
EMC Div.  
JQA KITA-KANSAI Testing Center

  
\_\_\_\_\_  
Akio Hosoda  
Project Manager  
EMC Div.  
JQA KITA-KANSAI Testing Center

Test System-Arrangement (Drawings)

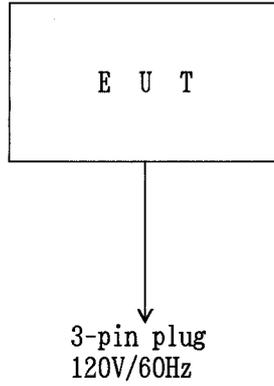

## Preliminary Test and Test-setup(Drawings)

### Radiated Emission (Magnetic Field) 9 kHz - 30 MHz:

The preliminary test was performed according to the description of FCC/OET MP-5 (1985) Sec.5.1 (Preliminary Radiated Emissions Tests) and Sec.5.2 (Equipment Configurations), the preliminary test was carried out to investigate the frequency of the emission that has the highest amplitude relative to the limits within normal operating modes, cable positions and a typical system configuration. In order to find out to the maximum emission, the preliminary test and a final test were performed in accordance with the following steps.

Step 1: One operation mode of the test system was setting.


Step 2: In order to investigate the frequencies of maximum emissions, the loop antenna position was approached to the EUT and the significant frequency of the emission's circumstance from the test system were investigated. These data were recorded in the specified frequency band (9 kHz - 30 MHz).

Step 3: Using a test receiver and a loop antenna, the emission's circumstance from the test system was measured in according with FCC/OET MP-5 (1985) Sec.5.6 (Final Radiated Emissions Tests) at each frequency which was found the higher emission referred to level vs. frequency on the list and which was measured by the loop antenna.

Step 4: Return to step 1, if the other operation mode was possible to be setting.

Step 5: The worst result was reported arranging data of which was obtained and performed by one or plural operation modes as the final test.

At the worst point that has the highest amplitude relative to the limit the repeatability of the level was reconfirmed. The photographs of the tests system setup on the worst point were taken and recorded.

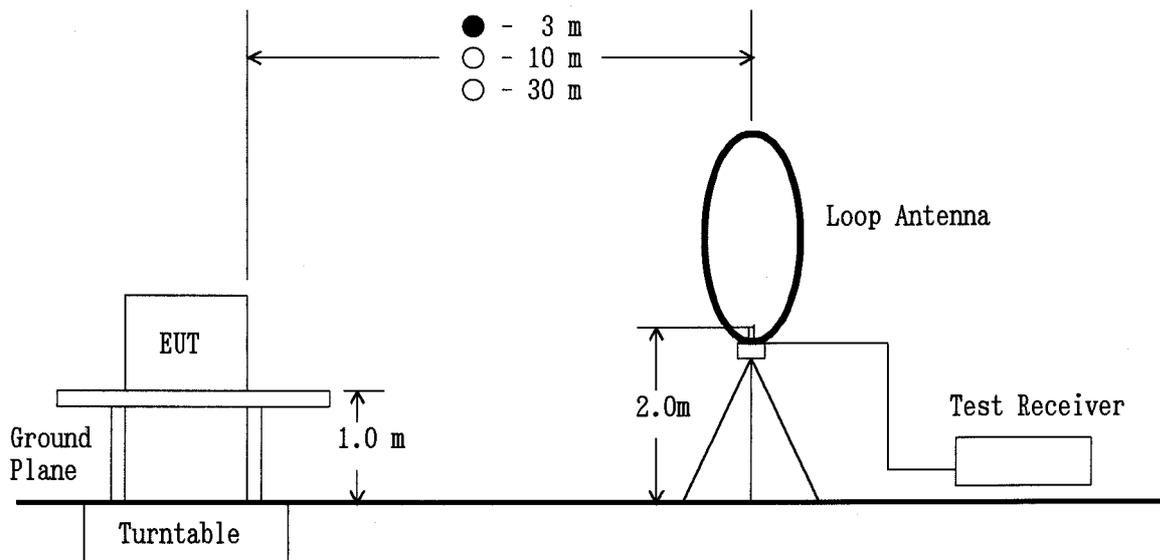

Radiated Emission (Electric Field) 30 MHz - 1000 MHz:

The preliminary test was performed according to the description of FCC/OET MP-5 (1985) Sec.5.1 (Preliminary Radiated Emissions Tests) and Sec.5.2 (Equipment Configurations), the preliminary test was carried out to investigate the frequency of the emission that has the highest amplitude relative to the limits within normal operating modes, cable positions and a typical system configuration. In order to find out to the maximum emission, the preliminary test and a final test were performed in accordance with the following steps.

Step 1: One operation mode of the test system was setting.


Step 2: Using a test receiver and a test antenna probe, the significant frequency of the emission's circumstance from the test system were investigated. These data were recorded every one of 22 divided bands in the specified frequency band (30 MHz - 1000 MHz).

Step 3: Using a test receiver and a resonant tuned dipole antenna, the emission's circumstance from the test system was measured in according with FCC/OET MP-5 (1985) Sec.5.6 (Final Radiated Emissions Tests) at each frequency which was found the higher emission referred to level vs. frequency on the list and which was measured by the resonant tuned dipole antenna.

Step 4: Return to step 1, if the other operation mode was possible to be setting.

Step 5: The worst result was reported arranging data of which was obtained and performed by one or plural operation modes as the final test.

At the worst point that has the highest amplitude relative to the limit the repeatability of the level was reconfirmed. The photographs of the tests system setup on the worst point were taken and recorded.

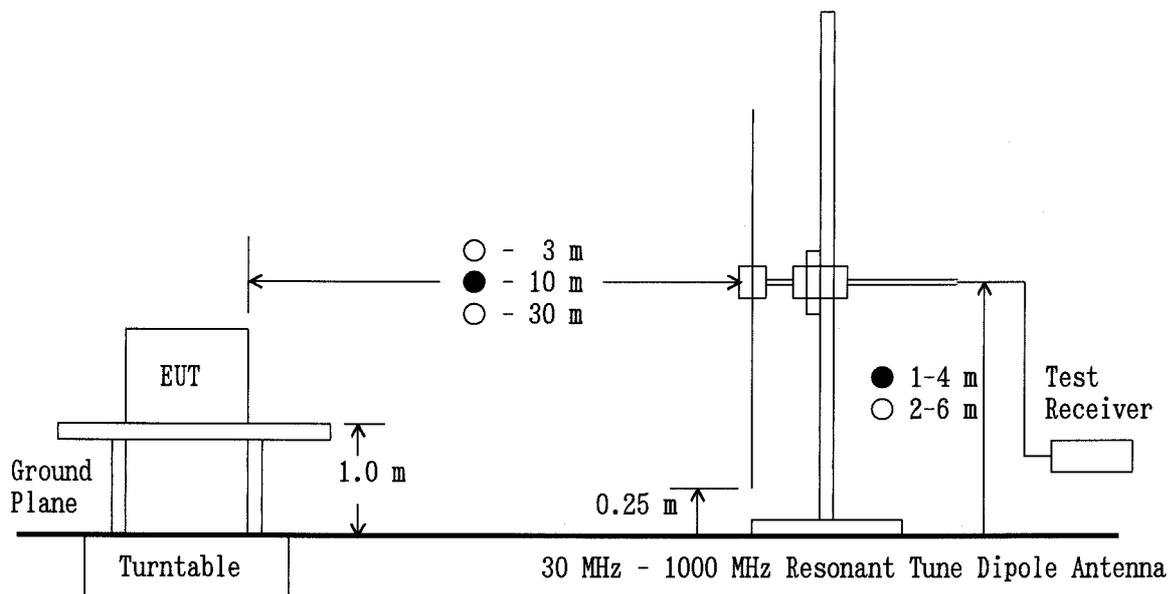

Radiated Emission (Electric Field) 1 GHz - 26 GHz:

The preliminary test was performed according to the description of FCC/OET MP-5 (1985) Sec.5.1 (Preliminary Radiated Emissions Tests) and Sec.5.2 (Equipment Configurations), the preliminary test was carried out to investigate the frequency of the emission that has the highest amplitude relative to the limits within normal operating modes, cable positions and a typical system configuration. In order to find out to the maximum emission, the preliminary test and a final test were performed in accordance with the following steps.

Step 1: One operation mode of the test system was setting.


Step 2: In order to investigate the frequencies of maximum emissions, the horn antenna position was approached to the EUT and the significant frequency of the emission's circumstance from the test system were investigated. These data were recorded in the specified frequency band (1 GHz - 26 GHz).

Step 3: The emission's circumstance from the test system was measured in accordance with FCC/OET MP-5 (1985) Sec.5.6 (Final Radiated Emissions Tests) at each frequency which was found higher emission referred to level vs. frequency on the list and which was measured in the specified distance using the horn antenna.

Step 4: Return to step 1, if the other operation mode was possible to be setting.

Step 5: The worst result was reported arranging data of which was obtained and performed by one or plural operation modes as the final test.

At the worst point that has the highest amplitude relative to the limit the repeatability of the level was reconfirmed. The photographs of the tests system setup on the worst point were taken and recorded.

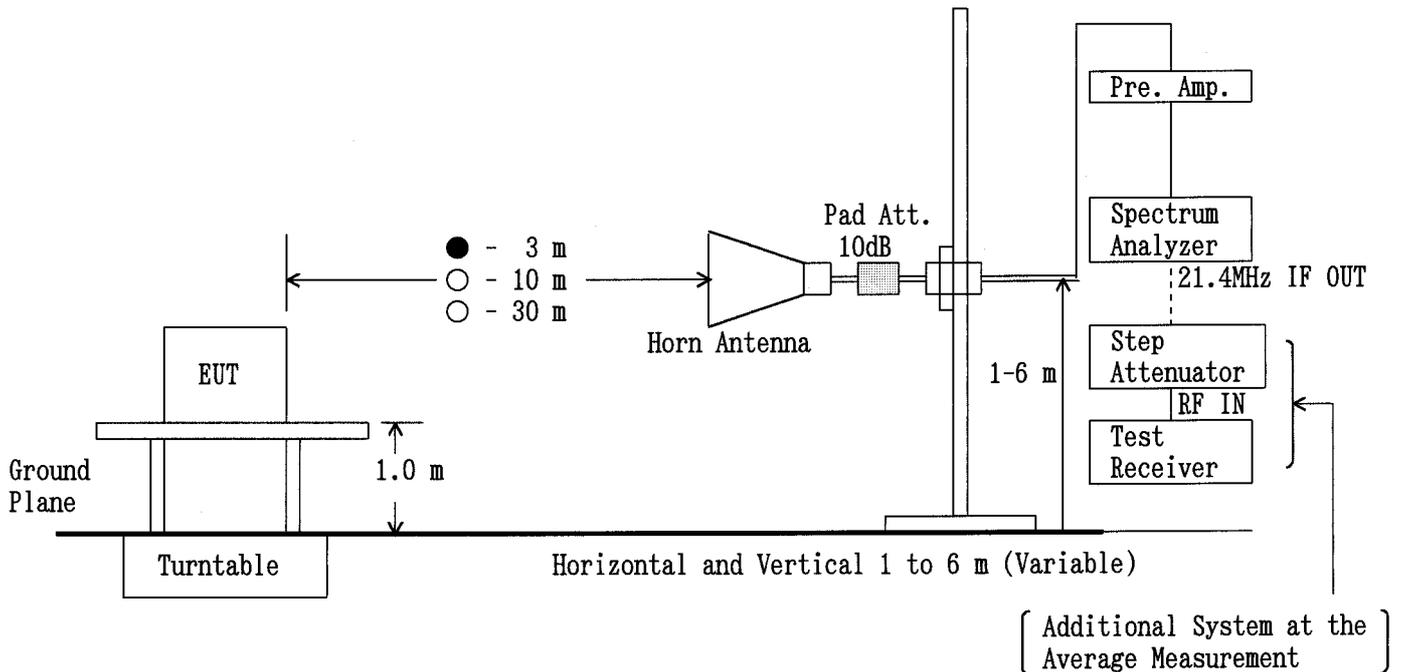

Spectrum Analyzer Setting:

Detector	Peak	*)Average
RES BW	1 MHz	3 MHz
VIDEO BW	1 MHz	3 MHz
SPAN	0 Hz	0 Hz

Test Receiver Setting:

SCALE	LINEAR
I.F.B.W.	1 MHz
Detector	Average

\*) For the average measurement, it is made using a test receiver and a step attenuator.

**Test-Setup (Photographs) at worst case**

Conducted Emission 450kHz - 30MHz:

Not Applicable

Radiated Emission 9kHz - 26GHz:



Front View



Rear View

## Electromagnetic Radiation Disturbance Measurement

### ISM Frequency Device

Based on the test result of every test mode, the mode of operation that produce the Radiated emission that has the highest amplitude is shown as follows:

Test Date: March 4, 1999  
 Temp.: 22 °C ; Humi.: 46 %

Frequency [MHz]	Corr. Factor [dB]	Meter Readings at 3m [dB(μV/m)]	Limits [μV/m]		Results [μV/m]		Margin [dB]	Remarks (Note 2)
			at 300m	at 1600m	at 300m	at 1600m		
0.01	0.0	< 40.0	33.4	10.0	<10.00×10 <sup>-3</sup>	< 0.35×10 <sup>-3</sup>	>+70.5	C
0.03	0.0	< 40.0	33.4	10.0	<10.00×10 <sup>-3</sup>	< 0.35×10 <sup>-3</sup>	>+70.5	C
0.05	0.0	< 40.0	33.4	10.0	<10.00×10 <sup>-3</sup>	< 0.35×10 <sup>-3</sup>	>+70.5	C
0.10	0.0	< 40.0	33.4	10.0	<10.00×10 <sup>-3</sup>	< 0.35×10 <sup>-3</sup>	>+70.5	C
0.15	0.0	< 40.0	33.4	10.0	<10.00×10 <sup>-3</sup>	< 0.35×10 <sup>-3</sup>	>+70.5	D
1.00	0.0	< 40.0	33.4	10.0	<10.00×10 <sup>-3</sup>	< 0.35×10 <sup>-3</sup>	>+70.5	D
3.00	0.0	< 40.0	33.4	10.0	<10.00×10 <sup>-3</sup>	< 0.35×10 <sup>-3</sup>	>+70.5	D
5.00	0.0	< 40.0	33.4	10.0	<10.00×10 <sup>-3</sup>	< 0.35×10 <sup>-3</sup>	>+70.5	D
10.00	0.0	< 40.0	33.4	10.0	<10.00×10 <sup>-3</sup>	< 0.35×10 <sup>-3</sup>	>+70.5	D
20.00	0.0	< 40.0	33.4	10.0	<10.00×10 <sup>-3</sup>	< 0.35×10 <sup>-3</sup>	>+70.5	D
30.00	0.0	< 40.0	33.4	10.0	<10.00×10 <sup>-3</sup>	< 0.35×10 <sup>-3</sup>	>+70.5	D

Sample of calculated result at 0.15 MHz, as the Minimum Margin point:

Correction Factor = 0.0 dB

Conversion Factor = -80.0 dB (-40dB/decade)

+ ) Meter Reading = < 40.0 dB(μV/m)

Result = < -40.0 dB(μV/m) at 300 m

Minimum Margin :  $20\log(33.4/10^{<-40.0/20}) = 20\log\{33.4/(< 10.00 \times 10^{-3})\} = > 70.5$  (dB)

The point shown on "\_\_\_" is the Minimum Margin Point.

Note 1:

1) The highest frequency generated or used in the EUT: 2.45 GHz

2) The upper frequency of measurement range : 24.5 GHz

3) The limits at 300 m were conducted as the RF power 889.8 W :  $25 \times \sqrt{889.8/500} = 33.4$  (μV/m)

Remarks:

Note 2	Detector Function	IF Bandwidth
A	CISPR QP	200 Hz
B	CISPR QP	9 kHz
C	Average	200 Hz
D	Average	10 kHz

Tester Signature : A. Hosoda

Type Name : Akio Hosoda

## Electromagnetic Radiation Disturbance Measurement

### ISM Frequency Device

Based on the test result of every test mode, the mode of operation that produce the Radiated emission that has the highest amplitude is shown as follows:

Test Date: March 5, 1999  
 Temp.: 16 °C ; Humi.: 68 %

Frequency [MHz]	Antenna Factor dB(1/m)	Cable Loss [dB]	Meter Readings at 10m dB(μV)		Limits [μV/m]		Results (Highest) [μV/m]		Margin [dB]	Remarks (Note 2)
			Hori.	Vert.	at 300m	at 1600m	at 300m	at 1600m		
31.0	-0.6	0.6	< 2.0	< 5.0	33.4	10.0	< 0.06	< 0.01	>+54.9	B
45.0	2.0	0.7	< -3.0	< -3.0	33.4	10.0	< 0.03	< 0.01	>+60.9	B
56.0	3.9	0.8	< -5.0	< -5.0	33.4	10.0	< 0.03	< 0.01	>+60.9	B
86.0	7.6	1.0	< -5.0	< -5.0	33.4	10.0	< 0.05	< 0.01	>+56.5	B
120.0	10.5	1.3	< -5.0	< -5.0	33.4	10.0	< 0.07	< 0.01	>+53.6	B
150.0	12.4	1.5	< -5.0	< -5.0	33.4	10.0	< 0.09	< 0.02	>+51.4	B
200.0	14.9	1.7	< -5.0	< -5.0	33.4	10.0	< 0.13	< 0.02	>+48.2	B
400.0	21.1	2.6	< -10.0	< -10.0	33.4	10.0	< 0.16	< 0.03	>+46.4	B
760.0	27.3	3.9	< -15.0	< -15.0	33.4	10.0	< 0.22	< 0.04	>+43.6	B
900.0	28.9	4.3	< -15.0	< -15.0	33.4	10.0	< 0.27	< 0.05	>+41.8	B

Sample of calculated result at 900.0 MHz, as the Minimum Margin point:

Antenna Factor = 28.9 dB(1/m)

Cable Loss = 4.3 dB

Conversion Factor = -29.5 dB (-20dB/decade)

+ ) Meter Reading = < -15.0 dB(μV)

Result = < -11.3 dB(μV/m) at 300 m

Minimum Margin :  $20\log(33.4/10^{-11.3/20}) = 20\log(33.4/<0.27) = >41.8$  (dB)

The point shown on "\_\_\_\_" is the Minimum Margin Point.

Note 1:

1) The highest frequency generated or used in the EUT: 2.45 GHz

2) The upper frequency of measurement range : 24.5 GHz

3) The limits at 300 m were conducted as the RF power 889.8 W :  $25 \times \sqrt{889.8/500} = 33.4$  (μV/m)

Remarks:

Note 2	Detector Function	IF Bandwidth
A	CISPR QP	120 kHz
B	Average	120 kHz
C	Average	12 kHz
D	Average	7.5 kHz

Tester Signature : M. Urano

Type Name : Masaharu Urano

## Electromagnetic Radiation Disturbance Measurement

### ISM Frequency Device

Based on the test result of every test mode, the mode of operation that produce the Radiated emission that has the highest amplitude is shown as follows:

Test Date: March 4, 1999  
 Temp.: 22 °C ; Humi.: 46 %

Frequency [MHz]	Antenna Factor dB(1/m)	Corr. Factor [dB]	Meter Readings at 3m dB(μV)		Limits [μV/m]		Results (Highest) [μV/m]		Margin [dB]	Remarks (Note 2)
			Hori.	Vert.	at 300m	at 1600m	at 300m	at 1600m		
2398.5	21.6	-31.9	46.0	46.0	33.4	10.0	0.61	0.11	+34.8	C
2501.5	21.4	-31.9	45.0	44.0	33.4	10.0	0.53	0.10	+36.0	C
2712.4	21.5	-31.6	48.0	47.0	33.4	10.0	0.79	0.15	+32.5	C
4900.0	36.4	-31.4	41.0	41.0	33.4	10.0	2.00	0.37	+24.5	C
7350.0	37.2	-29.6	41.0	42.0	33.4	10.0	3.02	0.57	+20.9	C
14700.0	46.2	-36.8	42.0	42.0	33.4	10.0	3.72	0.70	+19.1	C
17150.0	44.2	-37.2	43.0	44.0	33.4	10.0	3.55	0.67	+19.5	C
19600.0	40.3	-16.5	< 40.0	< 40.0	33.4	10.0	< 15.49	< 2.90	>+ 6.7	C
22050.0	40.3	-16.2	< 40.0	< 40.0	33.4	10.0	< 16.03	< 3.01	>+ 6.4	C
24500.0	40.4	-16.3	< 40.0	< 40.0	33.4	10.0	< 16.03	< 3.01	>+ 6.4	C

Sample of calculated result at 22050.0 MHz, as the Minimum Margin point:

Antenna Factor = 40.3 dB(1/m)

Corr. Factor = -16.2 dB

Conversion Factor = -40.0 dB (-20dB/decade)

+ )Meter Reading = < 40.0 dB(μV)

Result = < 24.1 dB(μV/m) at 300 m

Minimum Margin :  $20\log(33.4/10^{<sup>24.1</sup>/20}) = 20\log(33.4/<lt; 16.03) = >6.4$  (dB)

The point shown on "\_\_\_" is the Minimum Margin Point.

Note 1:

1)The highest frequency generated or used in the EUT : 2.45 GHz

2)The upper frequency of measurement range : 24.5 GHz

3)Corr. Factor ( 1GHz - 18GHz) = Cable Loss + 10dB Pad Attenuator - Amp. Gain (dB)

Corr. Factor (18GHz - 26GHz) = Cable Loss - Amp. Gain + 10dB Pad Attenuator + Mixer Conversion Loss (dB)

4)The limits at 300 m were conducted as the RF power 889.8 W :  $25 \times \sqrt{889.8/500} = 33.4$  (μV/m)

Remarks:

Note 2	Detector Function	RES. B.W	V.B.W	Sweep T	Span
A	Peak (SP)	1 MHz	1 MHz	20 msec	0 Hz
B	Peak (SP)	100 kHz	100 kHz	20 msec	0 Hz
*) C	Average (ESV)	1 MHz (3 MHz)	3 MHz	20 msec	0 Hz

( ):Setting of spectrum analyzer

\*)For the average measurement method, it is made measurement using a test receiver, a step attenuator and a spectrum analyzer(950523A)

Tester Signature : A. Hosoda

Type Name : Akio Hosoda

### ISM Frequency Measurement ISM Frequency Device

Test Date: March 12, 1999  
Temp.: 20 °C ; Humi.: 36 %

The maximum frequency deviation was measured at -26dB with respect to the maximum level.

Maximum Frequency Deviation [MHz]		Voltage Variation	Remarks (Note 1)
Lower Frequency	Upper Frequency		
2425.40	2478.00	96 V ( 80 %)	A
2437.00	2460.00	120 V (100 %)	A
2437.70	2469.60	150 V (125 %)	A

The point shown on "\_\_\_" is the Minimum Margin Point.

The results were within 2450 MHz±50 MHz

Remarks:

Note 1	Detector Function	RES. B.W	V.B.W	Sweep T	Span
A	Peak (SP)	10 kHz	30 kHz	300 msec	100 MHz

Tester Signature : A. Hosoda  
Type Name : Akio Hosoda

RF Power Output Measurement  
ISM Frequency Device

Test Date: March 1, 1999  
Temp.: 20 °C ; Humi.: 54 %

The power output was measured by the calorimetric method, computing the power output from the observed temperature rise of the load over a period of time.

Results of RF Output Power : 889.8 W

The limit of the radiated emission at 300 m :  $25 \times \sqrt{889.8/500} = 33.4$  ( $\mu\text{V/m}$ )

Tester Signature : A. Hosoda  
Type Name : Akio Hosoda