
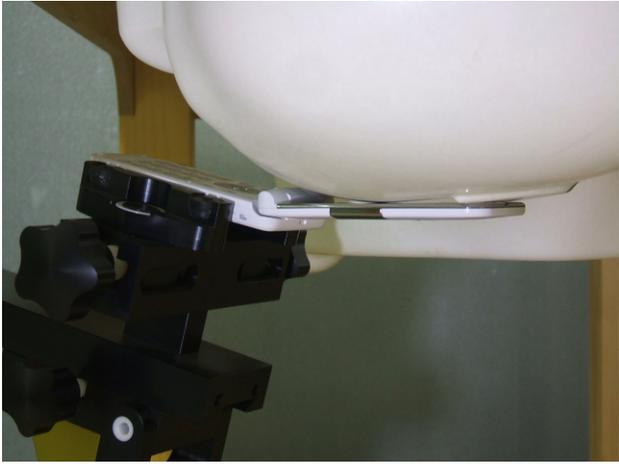
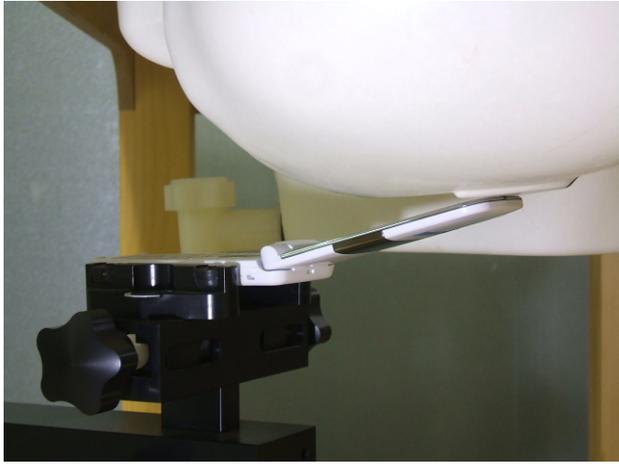


### A.3 SAR Measurement Data

#### A.3.1 Left Side

								
<b>Cheek/Touch Position</b>				<b>Ear/Tilt Position</b>				
GSM 1900 (Duty Cycle: 12.0 %, Crest Factor: 8.3)						Date : December 5, 2006		
EUT Set-up Configuration		Frequency		Power [dBm] (Peak)		Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
EUT Position	Antenna	Channel	MHz	Start	End			
Cheek/Touch	Fixed	0512	1850.20	29.28	29.25	1.6	0.894	21.0
		0661	1880.00	29.47	29.44		0.953	21.0
		0810	1909.80	29.76	29.72		1.01	21.0
Ear/Tilt	Fixed	0512	1850.20	--	--	1.6	**	--
		0661	1880.00	29.47	29.44		0.300	21.0
		0810	1909.80	--	--		**	--
NOTES :								
1. Depth of Liquid : 15.0 cm								
2. Transmitter power was measured at the antenna-conducted terminal.								
3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.								
4. Please refer to attachment for the result presentation in plot format.								

**A.3.2 Right Side**

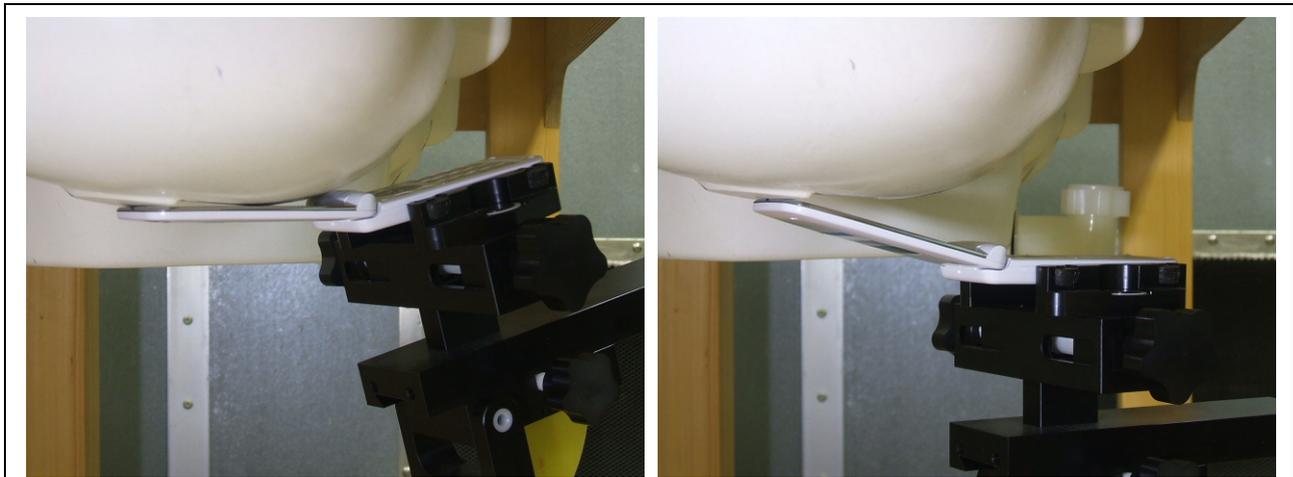


**Cheek/Touch Position**

**Ear/Tilt Position**

GSM 1900 (Duty Cycle: 12.0 %, Crest Factor: 8.3)						Date : December 5, 2006		
EUT Set-up Configuration		Frequency		Power [dBm] (Peak)		Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
EUT Position	Antenna	Channel	MHz	Start	End			
Cheek/Touch	Fixed	0512	1850.20	29.28	29.25	1.6	0.933	21.0
		0661	1880.00	29.47	29.44		1.08	21.0
		0810	1909.80	29.76	29.72		1.22	21.0
Ear/Tilt	Fixed	0512	1850.20	--	--	1.6	**	--
		0661	1880.00	29.47	29.44		0.319	21.0
		0810	1909.80	--	--		**	--
GSM 1900 (Duty Cycle: 12.0 %, Crest Factor: 8.3) co-located with Bluetooth								
Cheek/Touch	Fixed	0810	1909.80	29.76	29.72	1.6	<b>1.27</b>	21.0
NOTES :								
<ol style="list-style-type: none"> <li>1. Depth of Liquid : 15.0 cm</li> <li>2. Transmitter power was measured at the antenna-conducted terminal.</li> <li>3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.</li> <li>4. Please refer to attachment for the result presentation in plot format.</li> </ol>								

**A.3.3 Body-worn Position**

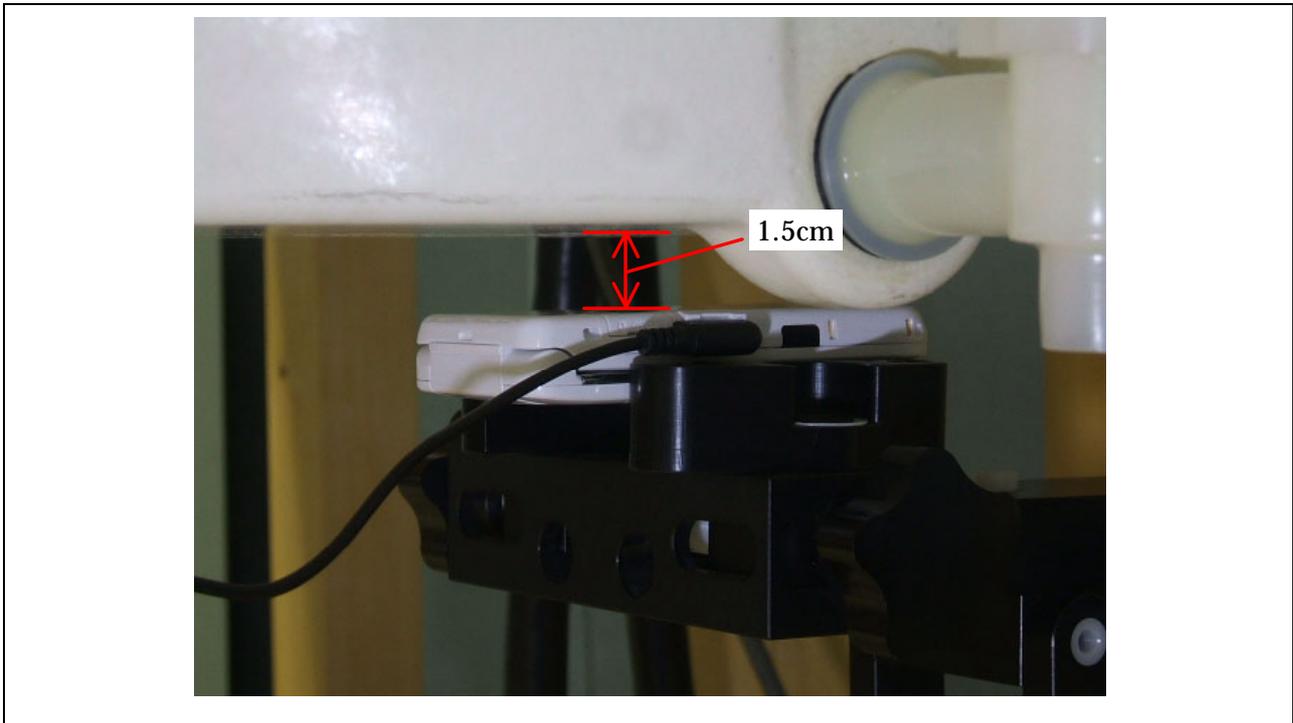

GSM 1900 (Duty Cycle: 12.0 %, Crest Factor: 8.3)						Date : December 4, 2006		
EUT Set-up Configuration		Frequency		Power [dBm] (Peak)		Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
Separation	Antenna	Channel	MHz	Start	End			
1.5 cm	Fixed	0512	1850.20	--	--	1.6	**	--
		0661	1880.00	29.47	29.44		0.387	21.0
		0810	1909.80	--	--		**	--
GSM 1900 (Duty Cycle: 12.0 %, Crest Factor: 8.3) co-located with Bluetooth								
1.5 cm	Fixed	0661	1880.00	29.47	29.44	1.6	0.391	21.0
GSM 1900 GSM+GPRS (Duty Cycle: 24.0 %, Crest Factor: 4.2)								
1.5 cm	Fixed	0512	1850.20	29.28	29.25	1.6	0.716	21.0
		0661	1880.00	29.44	29.42		0.750	21.0
		0810	1909.80	29.78	29.75		<b>0.770</b>	21.0
NOTES :								
1. Depth of Liquid : 15.0 cm								
2. Transmitter power was measured at the antenna-conducted terminal.								
3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.								
4. The earphone wire connected to the EUT to simulate hand-free operation in a body-worn configuration.								
5. Please refer to attachment for the result presentation in plot format.								