



A.3 SAR Measurement Data

A.3.1 Left Side

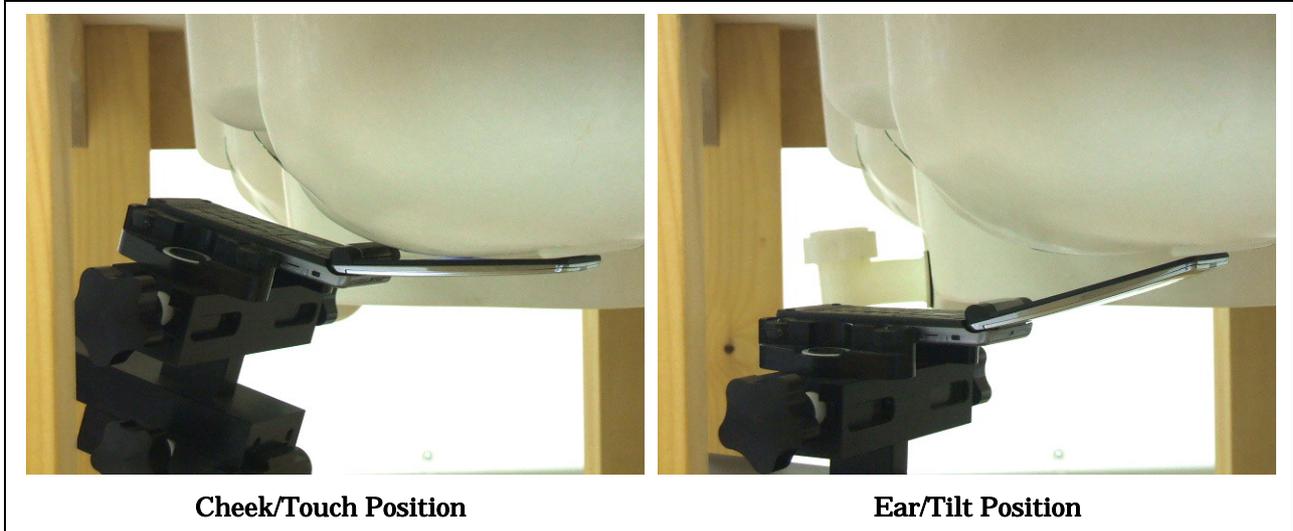

GSM 1900 (Duty Cycle: 12.0 %, Crest Factor: 8.3)						Date : May 2, 2007		
EUT Set-up Configuration		Frequency		Power [dBm] (Peak)		Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
EUT Position	Antenna	Channel	MHz	Start	End			
Cheek/Touch	Fixed	0512	1850.20	29.18	29.18	1.6	0.761	23.0
		0661	1880.00	29.17	29.17		0.854	23.0
		0810	1909.80	29.22	29.22		0.931	23.0
Ear/Tilt	Fixed	0512	1850.20	--	--	1.6	**	--
		0661	1880.00	29.17	29.17		0.237	23.0
		0810	1909.80	--	--		**	--
GSM 1900 (Duty Cycle: 12.0 %, Crest Factor: 8.3) co-located with Bluetooth								
Cheek/Touch	Fixed	0810	1909.80	29.22	29.22	1.6	0.947	23.0
NOTES :								
1. Depth of Liquid : 15.0 cm								
2. Transmitter power was measured at the antenna-conducted terminal.								
3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.								
4. Please refer to attachment for the result presentation in plot format.								

A.3.2 Right Side

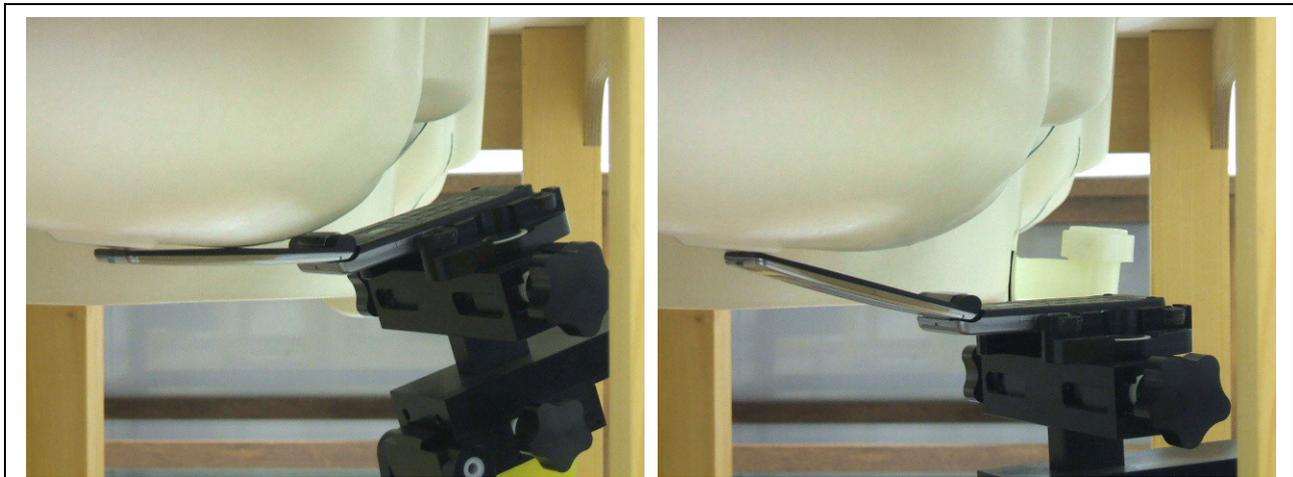

Cheek/Touch Position


Ear/Tilt Position

GSM 1900 (Duty Cycle: 12.0 %, Crest Factor: 8.3)						Date : May 2, 2007		
EUT Set-up Configuration		Frequency		Power [dBm] (Peak)		Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
EUT Position	Antenna	Channel	MHz	Start	End			
Cheek/Touch	Fixed	0512	1850.20	29.18	29.18	1.6	0.731	23.0
		0661	1880.00	29.17	29.17		0.810	23.0
		0810	1909.80	29.22	29.22		0.903	23.0
Ear/Tilt	Fixed	0512	1850.20	--	--	1.6	**	--
		0661	1880.00	29.17	29.17		0.228	23.0
		0810	1909.80	--	--		**	--

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
4. Please refer to attachment for the result presentation in plot format.

A.3.3 Body-worn Position

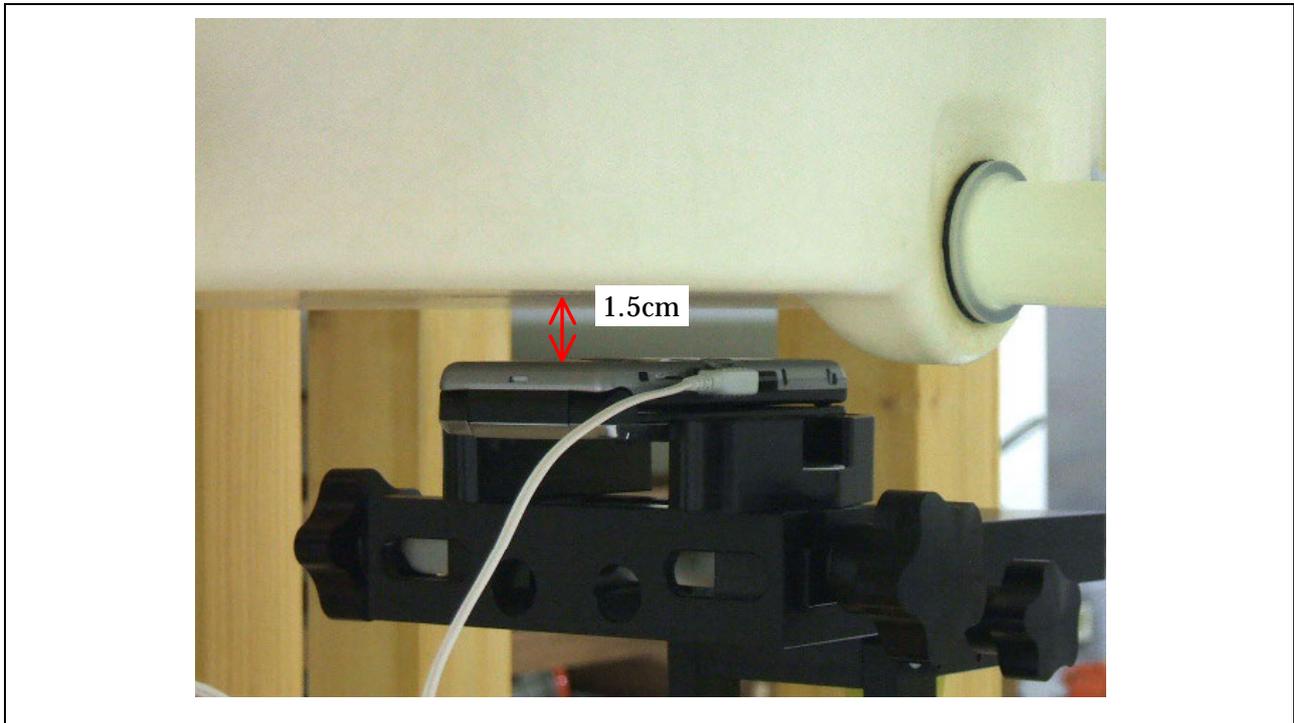

GSM 1900 (Duty Cycle: 12.0 %, Crest Factor: 8.3)						Date : May 7, 2007		
EUT Set-up Configuration		Frequency		Power [dBm] (Peak)		Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
Separation	Antenna	Channel	MHz	Start	End			
1.5 cm	Fixed	0512	1850.20	--	--	1.6	**	--
		0661	1880.00	29.17	29.17		0.338	23.0
		0810	1909.80	--	--		**	--
GSM 1900 (Duty Cycle: 12.0 %, Crest Factor: 8.3) co-located with Bluetooth								
1.5 cm	Fixed	0661	1880.00	29.17	29.17	1.6	0.332	23.0
GSM 1900 GSM+GPRS (Duty Cycle: 24.0 %, Crest Factor: 4.2)								
1.5 cm	Fixed	0512	1850.20	29.14	29.14	1.6	0.537	23.0
		0661	1880.00	29.13	29.13		0.607	23.0
		0810	1909.80	29.19	29.19		0.666	23.0
NOTES :								
1. Depth of Liquid : 15.0 cm								
2. Transmitter power was measured at the antenna-conducted terminal.								
3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.								
4. The earphone wire connected to the EUT to simulate hand-free operation in a body-worn configuration.								
5. Please refer to attachment for the result presentation in plot format.								