



Attachment 2 – SAR Test Plots

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Left Head, Cheek/Touch 661ch (1880.00MHz)**DUT: WCDMA & Tri-band GSM Dual mode Mobile Phone / Bluetooth Enable; Type: 920SH; Serial: 004401/11/076407/9**

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

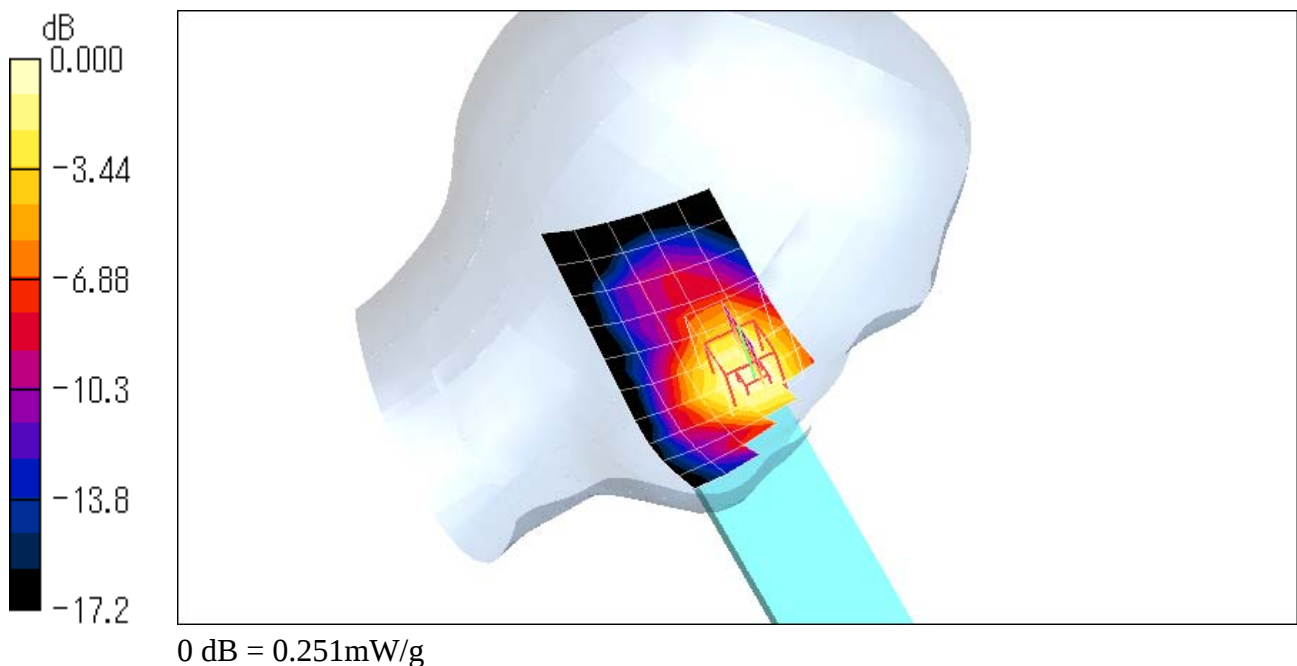
Medium: HSL1900 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 39.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(5.22, 5.22, 5.22); Calibrated: 2006/11/16
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2006/11/09
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek/Touch Position/Area Scan (11x6x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.216 mW/g**Cheek/Touch Position/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 10.4 V/m; Power Drift = 0.019 dB
Peak SAR (extrapolated) = 0.329 W/kg
SAR(1 g) = 0.233 mW/g; SAR(10 g) = 0.150 mW/g
Maximum value of SAR (measured) = 0.251 mW/g

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Left Head, Ear/Tilt 661ch (1880.00MHz)

DUT: WCDMA & Tri-band GSM Dual mode Mobile Phone / Bluetooth Enable; Type: 920SH; Serial: 004401/11/076407/9

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(5.22, 5.22, 5.22); Calibrated: 2006/11/16
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2006/11/09
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DAS4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Ear/Tilt Position/Area Scan (11x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.091 mW/g

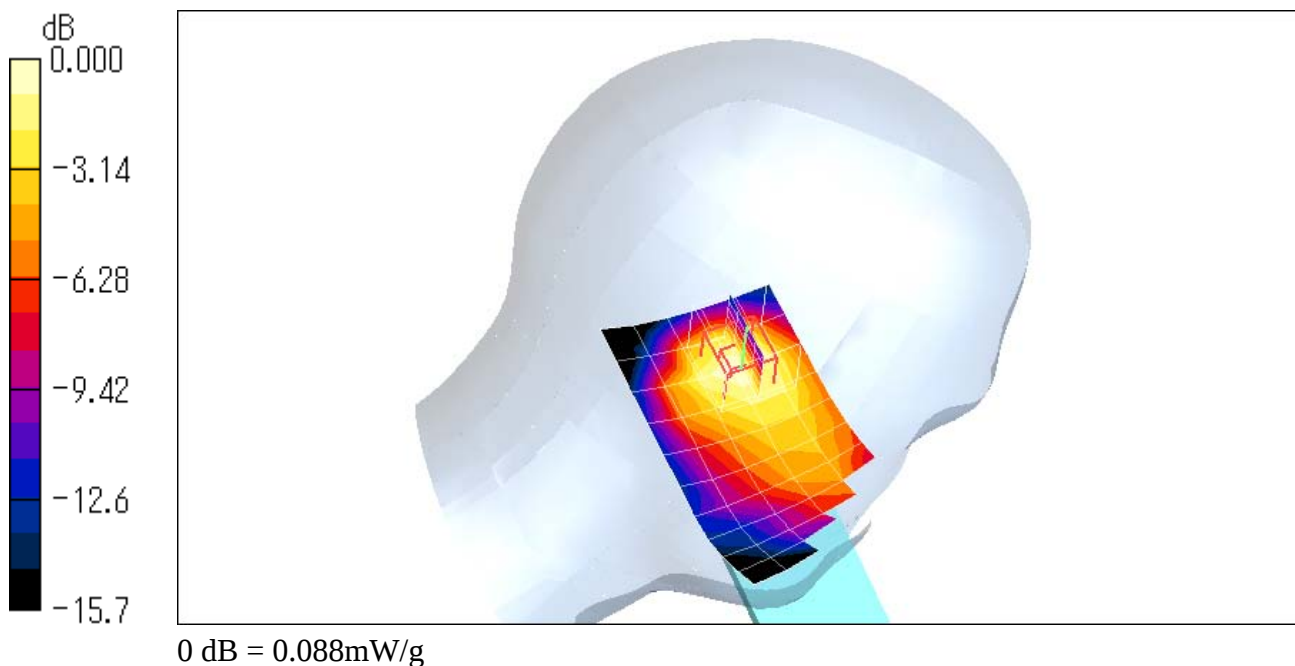
Ear/Tilt Position/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.97 V/m; Power Drift = -0.061 dB

Peak SAR (extrapolated) = 0.125 W/kg

SAR(1 g) = 0.083 mW/g; SAR(10 g) = 0.051 mW/g

Maximum value of SAR (measured) = 0.088 mW/g



Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Right Head, Cheek/Touch 512ch (1850.20MHz)**DUT: WCDMA & Tri-band GSM Dual mode Mobile Phone / Bluetooth Enable; Type: 920SH; Serial: 004401/11/076407/9**

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

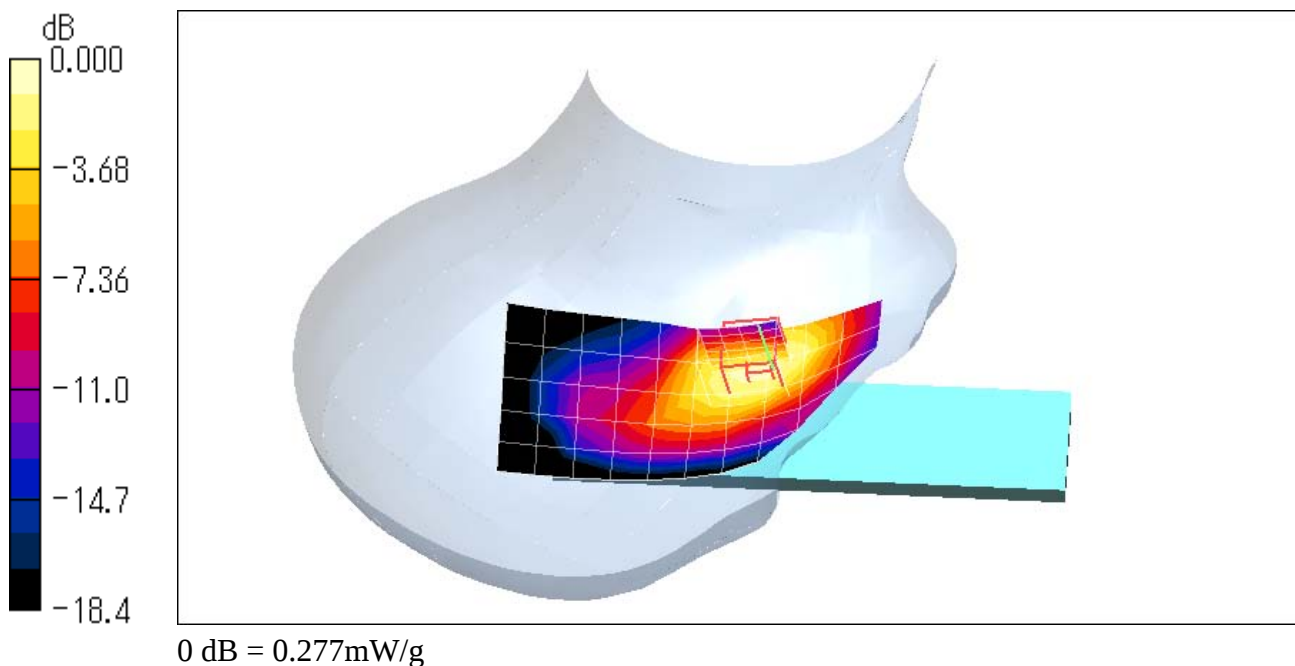
Medium: HSL1900 Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 39.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(5.22, 5.22, 5.22); Calibrated: 2006/11/16
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2006/11/09
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DAS4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek/Touch Position/Area Scan (11x6x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.268 mW/g**Cheek/Touch Position/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 8.95 V/m; Power Drift = 0.009 dB
Peak SAR (extrapolated) = 0.386 W/kg
SAR(1 g) = 0.255 mW/g; SAR(10 g) = 0.153 mW/g
Maximum value of SAR (measured) = 0.277 mW/g

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Right Head, Cheek/Touch 661ch (1880.00MHz)**DUT: WCDMA & Tri-band GSM Dual mode Mobile Phone / Bluetooth Enable; Type: 920SH; Serial: 004401/11/076407/9**

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

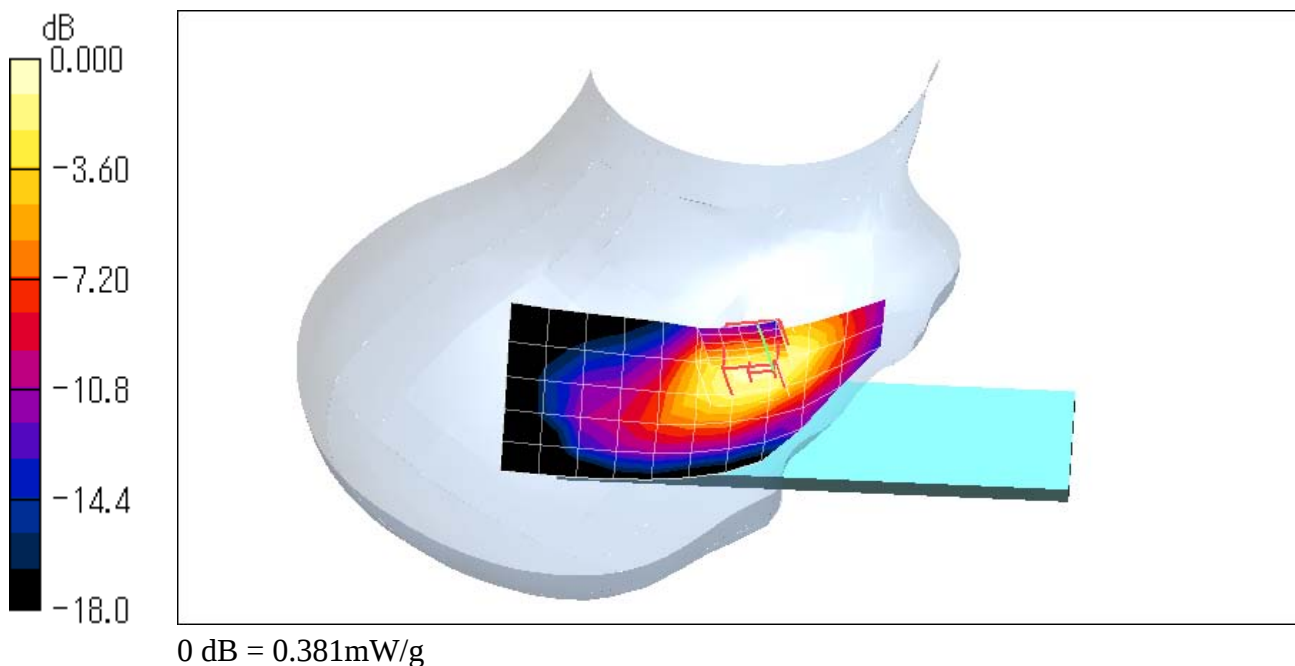
Medium: HSL1900 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 39.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(5.22, 5.22, 5.22); Calibrated: 2006/11/16
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2006/11/09
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek/Touch Position/Area Scan (11x6x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.346 mW/g**Cheek/Touch Position/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 10.6 V/m; Power Drift = -0.025 dB
Peak SAR (extrapolated) = 0.523 W/kg
SAR(1 g) = 0.350 mW/g; SAR(10 g) = 0.208 mW/g
Maximum value of SAR (measured) = 0.381 mW/g

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Right Head, Cheek/Touch 810ch (1909.80MHz)**DUT: WCDMA & Tri-band GSM Dual mode Mobile Phone / Bluetooth Enable; Type: 920SH; Serial: 004401/11/076407/9**

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

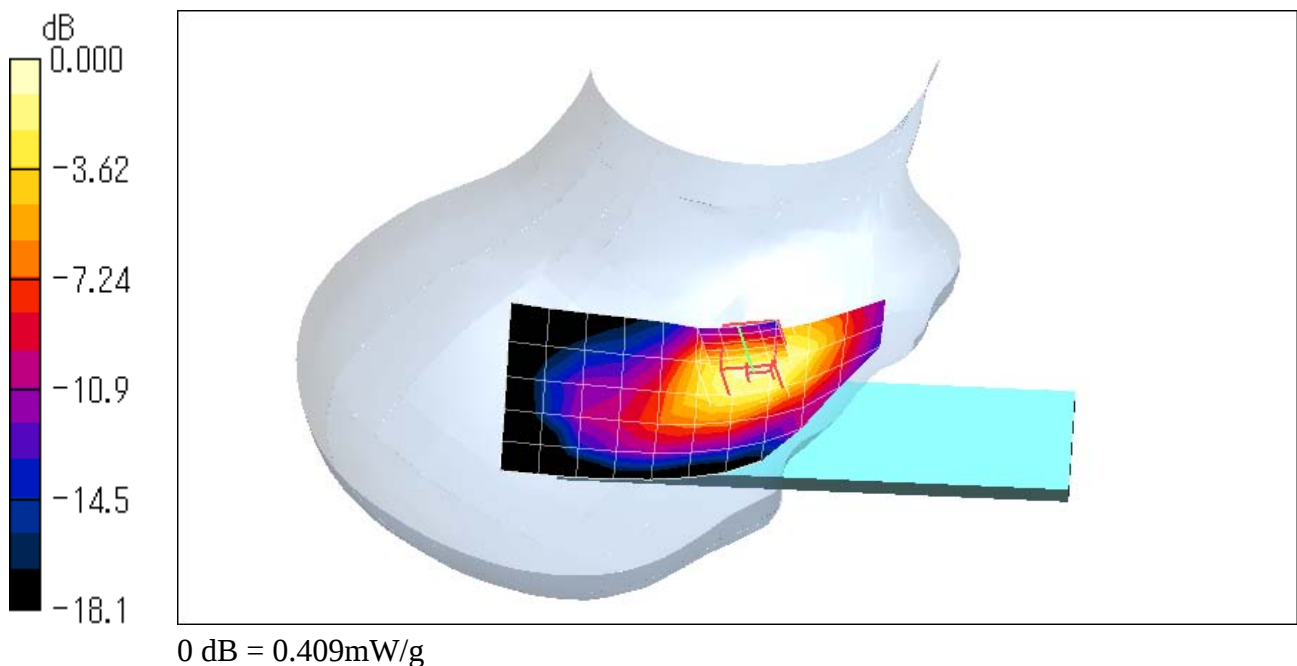
Medium: HSL1900 Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 39.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(5.22, 5.22, 5.22); Calibrated: 2006/11/16
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2006/11/09
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek/Touch Position/Area Scan (11x6x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.375 mW/g **Cheek/Touch Position/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 10.8 V/m ; Power Drift = -0.047 dB
Peak SAR (extrapolated) = 0.559 W/kg
SAR(1 g) = 0.373 mW/g ; SAR(10 g) = 0.221 mW/g
Maximum value of SAR (measured) = 0.409 mW/g 

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Right Head, Cheek/Touch 810ch (1909.80MHz) co-located with Bluetooth**DUT: WCDMA & Tri-band GSM Dual mode Mobile Phone / Bluetooth Enable; Type: 920SH; Serial: 004401/11/076407/9**

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

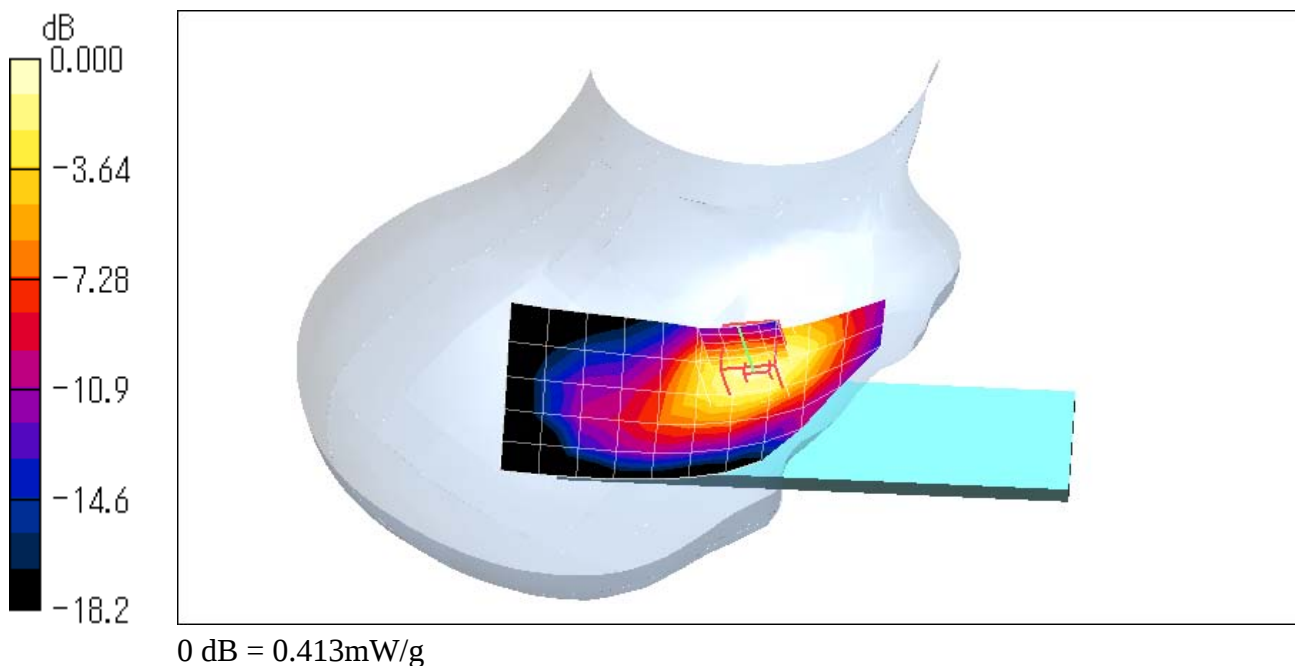
Medium: HSL1900 Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 39.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(5.22, 5.22, 5.22); Calibrated: 2006/11/16
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2006/11/09
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DAS4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek/Touch Position/Area Scan (11x6x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.378 mW/g **Cheek/Touch Position/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 10.7 V/m ; Power Drift = 0.038 dB
Peak SAR (extrapolated) = 0.562 W/kg
SAR(1 g) = 0.375 mW/g ; SAR(10 g) = 0.221 mW/g
Maximum value of SAR (measured) = 0.413 mW/g 

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Right Head, Cheek/Touch 810ch (1909.80MHz) co-located with Bluetooth

DUT: WCDMA & Tri-band GSM Dual mode Mobile Phone / Bluetooth Enable; Type: 920SH; Serial: 004401/11/076407/9

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 39.1$; $\rho = 1000 \text{ kg/m}^3$

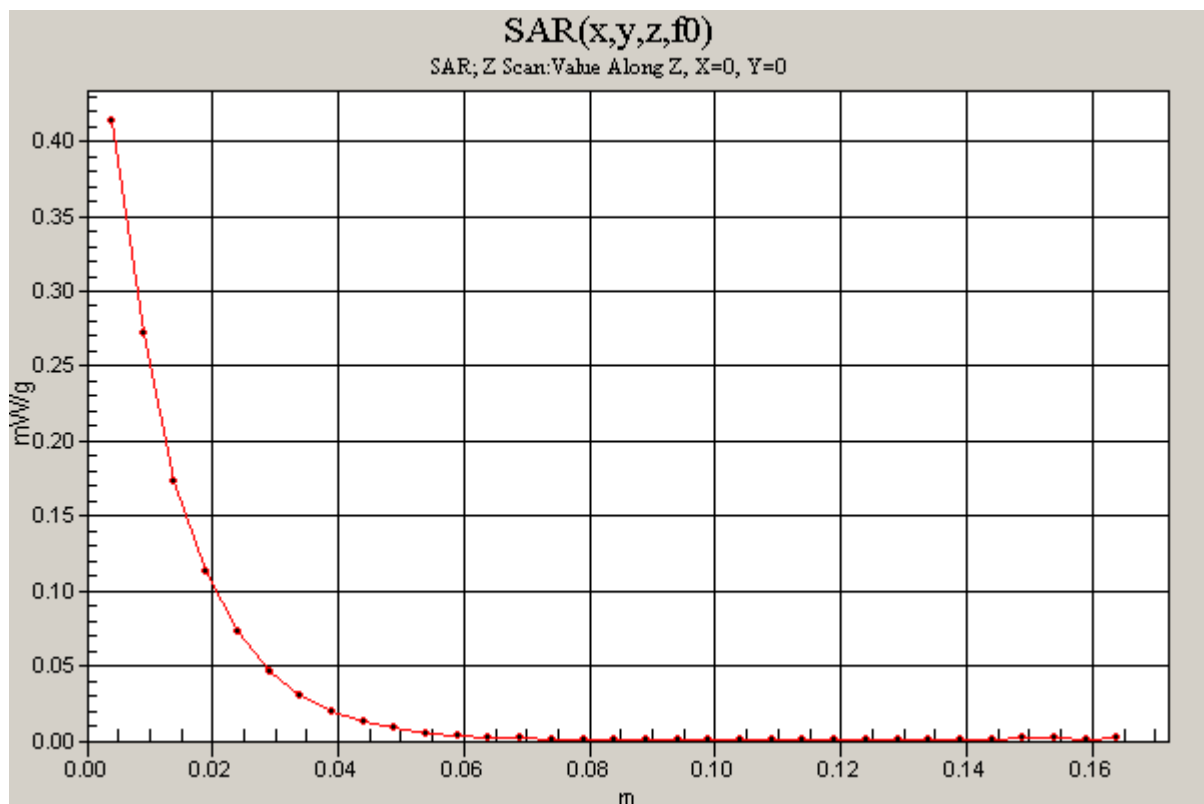
Phantom section: Right Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(5.22, 5.22, 5.22); Calibrated: 2006/11/16
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2006/11/09
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DAS4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek/Touch Position/Z Scan (1x1x33): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$, $dz=5\text{mm}$
Maximum value of SAR (measured) = 0.414 mW/g



Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Right Head, Ear/Tilt 661ch (1880.00MHz)**DUT: WCDMA & Tri-band GSM Dual mode Mobile Phone / Bluetooth Enable; Type: 920SH; Serial: 004401/11/076407/9**

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 39.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(5.22, 5.22, 5.22); Calibrated: 2006/11/16
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2006/11/09
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Ear/Tilt Position/Area Scan (11x6x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.102 mW/g

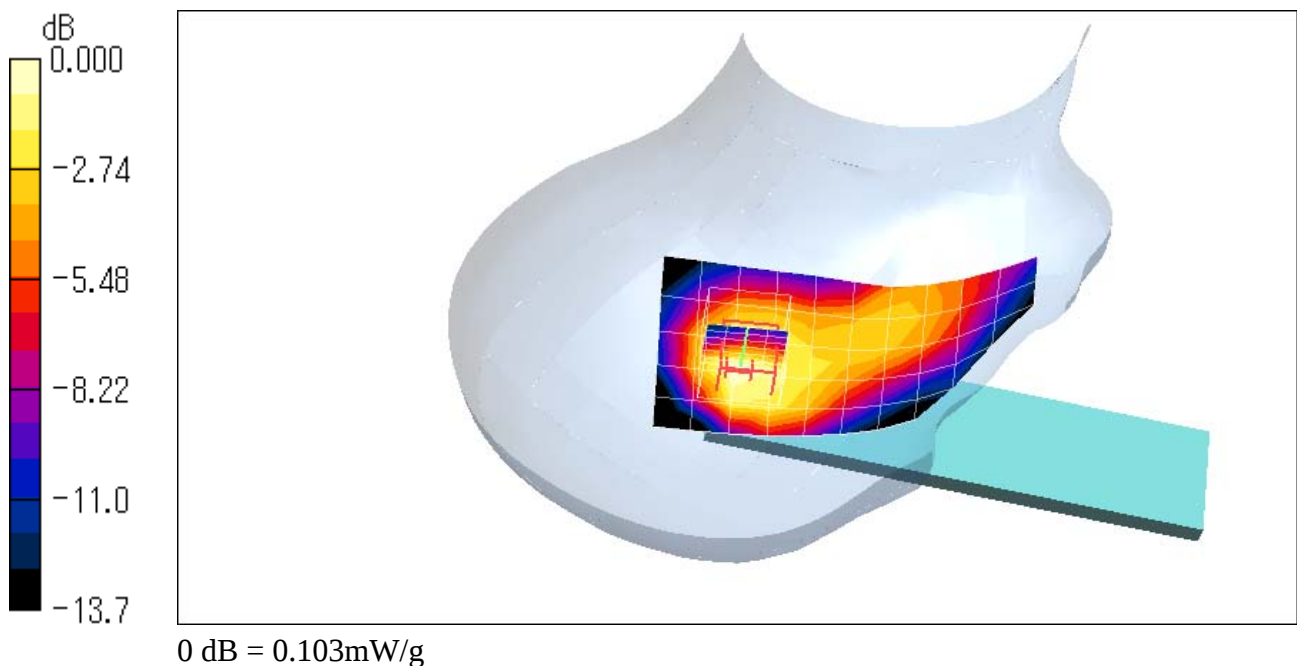
Ear/Tilt Position/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.50 V/m; Power Drift = -0.014 dB

Peak SAR (extrapolated) = 0.134 W/kg

SAR(1 g) = 0.095 mW/g; SAR(10 g) = 0.060 mW/g

Maximum value of SAR (measured) = 0.103 mW/g



Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Body-worn 661ch (1880.00MHz)**DUT: WCDMA & Tri-band GSM Dual mode Mobile Phone / Bluetooth Enable; Type: 920SH; Serial: 004401/11/076407/9**

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

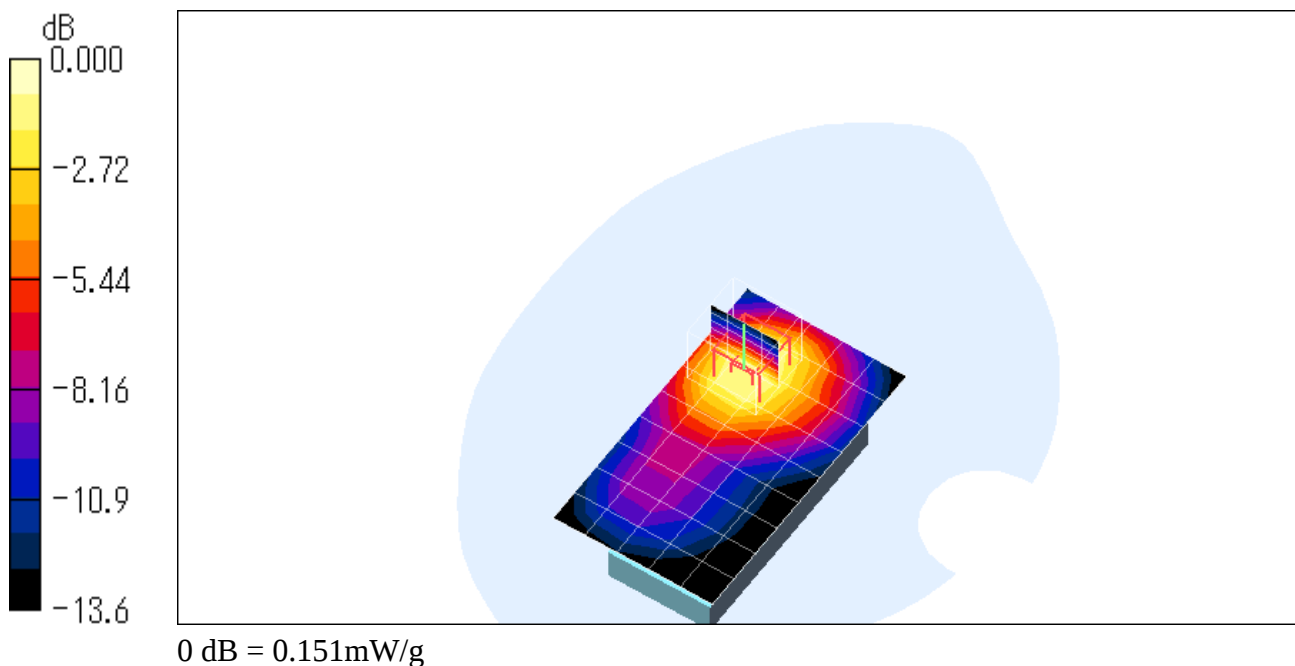
Medium: M1900 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.56 \text{ mho/m}$; $\epsilon_r = 51.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(4.61, 4.61, 4.61); Calibrated: 2006/11/16
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2006/11/09
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.127 mW/g**Body-worn/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 8.05 V/m; Power Drift = -0.020 dB
Peak SAR (extrapolated) = 0.223 W/kg
SAR(1 g) = 0.138 mW/g; SAR(10 g) = 0.082 mW/g
Maximum value of SAR (measured) = 0.151 mW/g

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Body-worn 661ch (1880.00MHz) co-located with Bluetooth**DUT: WCDMA & Tri-band GSM Dual mode Mobile Phone / Bluetooth Enable; Type: 920SH; Serial: 004401/11/076407/9**

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

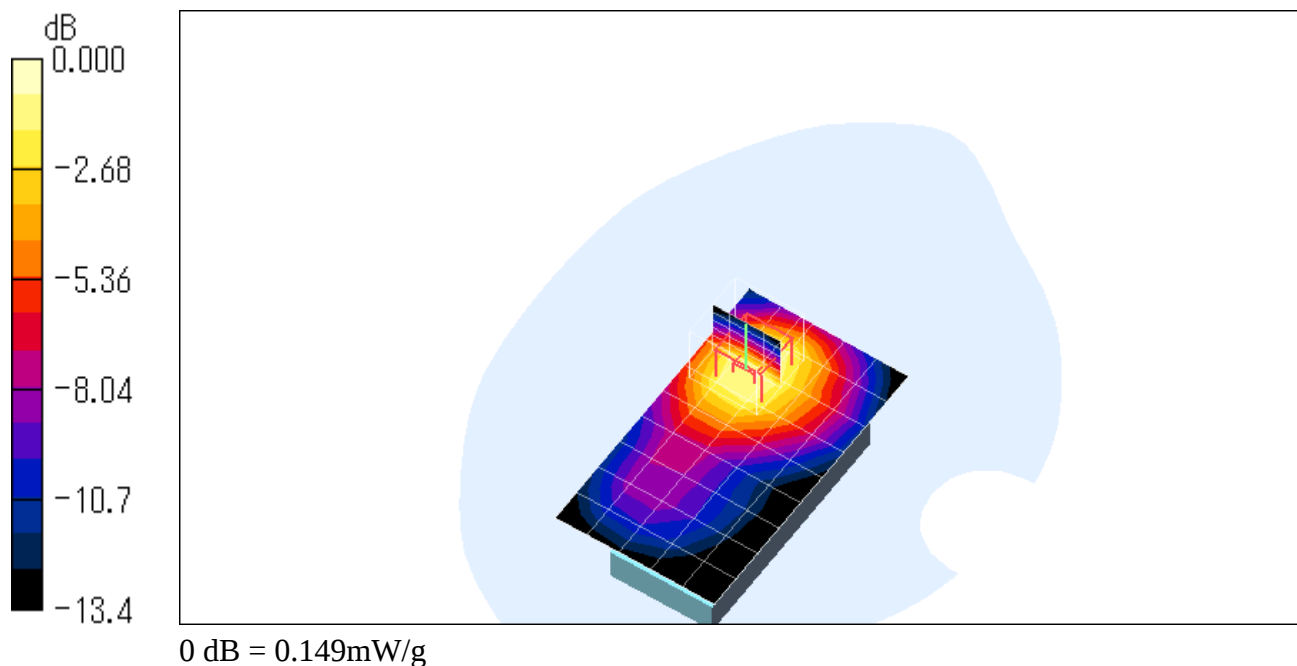
Medium: M1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(4.61, 4.61, 4.61); Calibrated: 2006/11/16
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2006/11/09
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.125 mW/g**Body-worn/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.03 V/m; Power Drift = 0.009 dB
Peak SAR (extrapolated) = 0.217 W/kg
SAR(1 g) = 0.137 mW/g; SAR(10 g) = 0.081 mW/g
Maximum value of SAR (measured) = 0.149 mW/g

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Body-worn 512ch (1850.20MHz) - GPRS mode**DUT: WCDMA & Tri-band GSM Dual mode Mobile Phone / Bluetooth Enable; Type: 920SH; Serial: 004401/11/076407/9**

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4.2

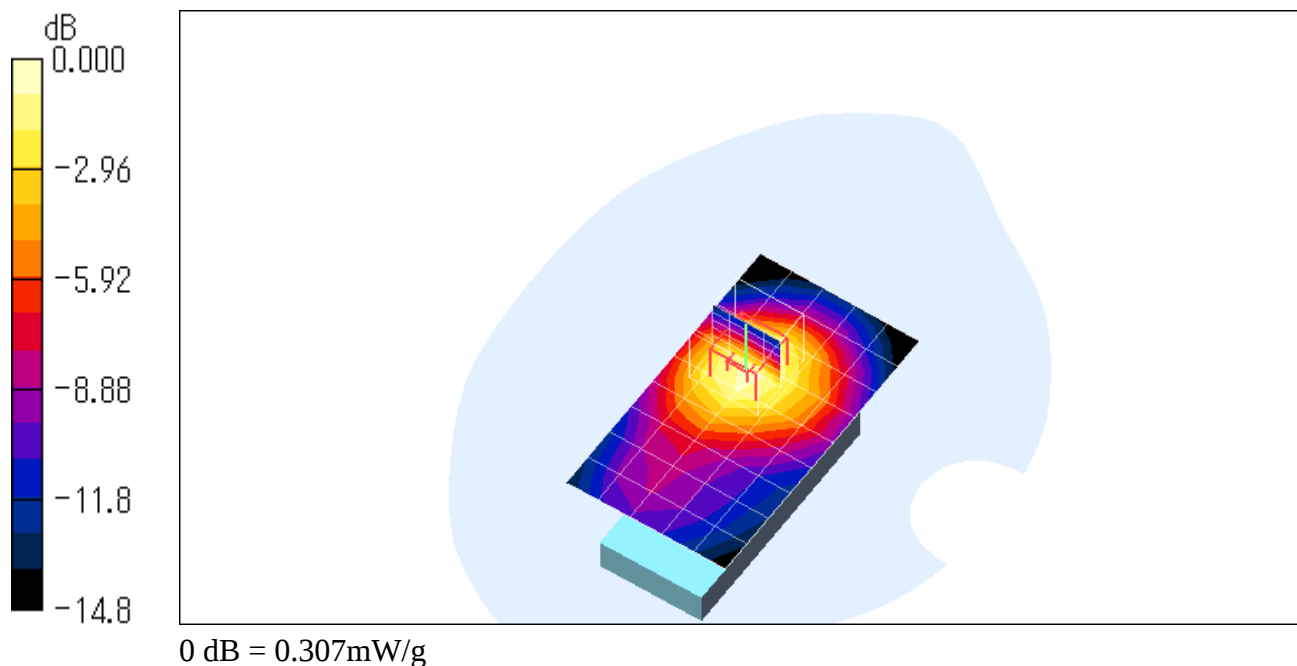
Medium: M1900 Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.56 \text{ mho/m}$; $\epsilon_r = 51.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(4.61, 4.61, 4.61); Calibrated: 2006/11/16
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2006/11/09
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DAS4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.296 mW/g**Body-worn/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 13.0 V/m; Power Drift = -0.080 dB
Peak SAR (extrapolated) = 0.440 W/kg
SAR(1 g) = 0.279 mW/g; SAR(10 g) = 0.167 mW/g
Maximum value of SAR (measured) = 0.307 mW/g

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Body-worn 661ch (1880.00MHz) - GPRS mode**DUT: WCDMA & Tri-band GSM Dual mode Mobile Phone / Bluetooth Enable; Type: 920SH; Serial: 004401/11/076407/9**

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:4.2

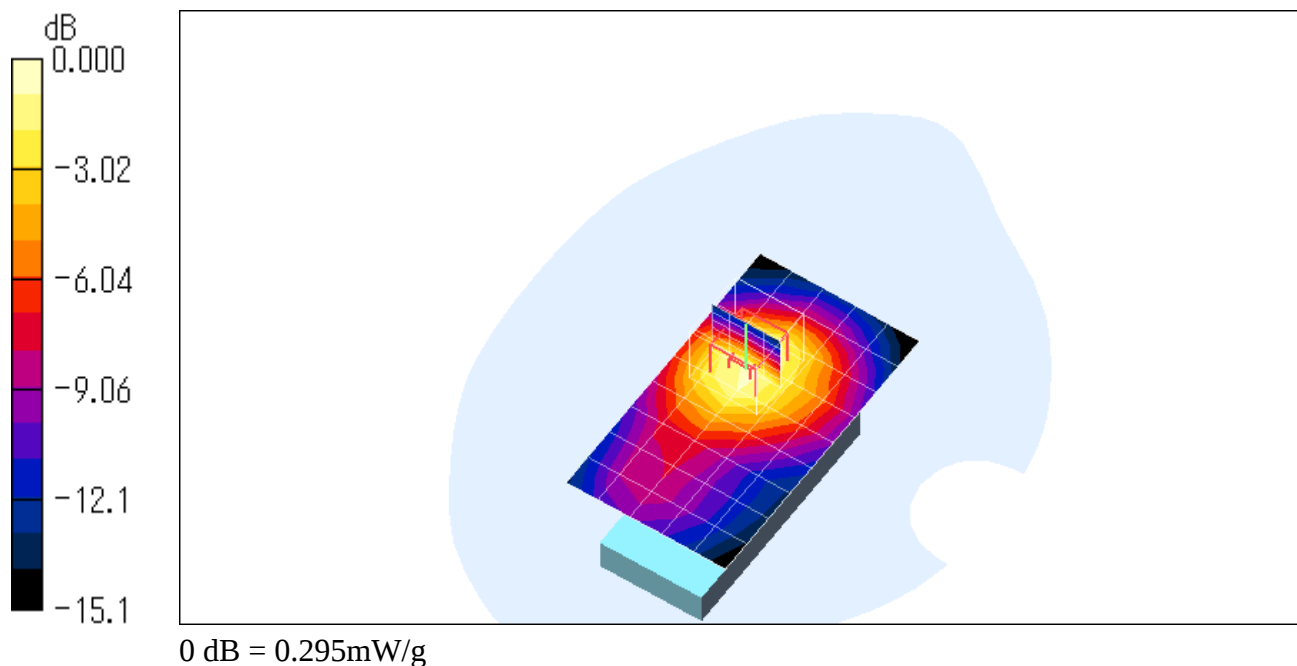
Medium: M1900 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.56 \text{ mho/m}$; $\epsilon_r = 51.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(4.61, 4.61, 4.61); Calibrated: 2006/11/16
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2006/11/09
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DAS4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.279 mW/g**Body-worn/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 12.4 V/m; Power Drift = 0.024 dB
Peak SAR (extrapolated) = 0.428 W/kg
SAR(1 g) = 0.269 mW/g; SAR(10 g) = 0.159 mW/g
Maximum value of SAR (measured) = 0.295 mW/g

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Body-worn 810ch (1909.80MHz) - GPRS mode**DUT: WCDMA & Tri-band GSM Dual mode Mobile Phone / Bluetooth Enable; Type: 920SH; Serial: 004401/11/076407/9**

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4.2

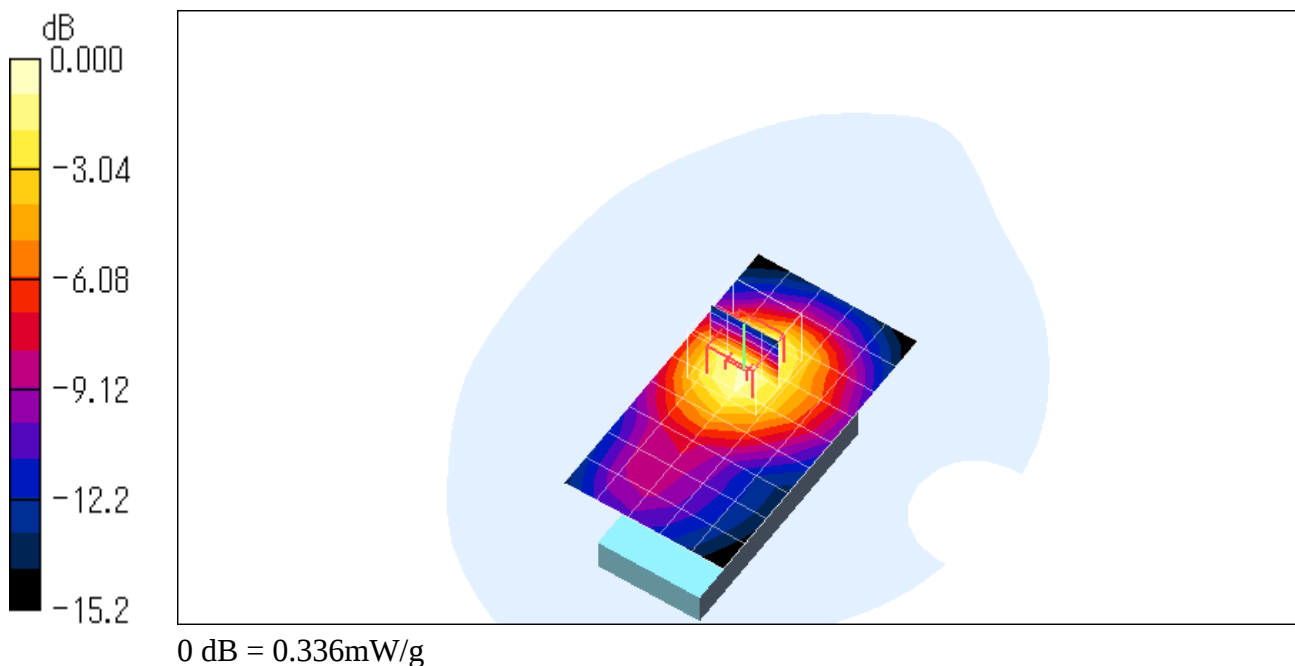
Medium: M1900 Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.56 \text{ mho/m}$; $\epsilon_r = 51.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(4.61, 4.61, 4.61); Calibrated: 2006/11/16
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2006/11/09
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DAS4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.319 mW/g**Body-worn/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 13.3 V/m; Power Drift = -0.077 dB
Peak SAR (extrapolated) = 0.501 W/kg
SAR(1 g) = 0.308 mW/g; SAR(10 g) = 0.180 mW/g
Maximum value of SAR (measured) = 0.336 mW/g

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Body-worn 810ch (1909.80MHz) - GPRS mode

DUT: WCDMA & Tri-band GSM Dual mode Mobile Phone / Bluetooth Enable; Type: 920SH; Serial: 004401/11/076407/9

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4.2

Medium: M1900 Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.56 \text{ mho/m}$; $\epsilon_r = 51.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(4.61, 4.61, 4.61); Calibrated: 2006/11/16
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2006/11/09
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DAS4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn/Z Scan (1x1x33): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$, $dz=5\text{mm}$
Maximum value of SAR (measured) = 0.336 mW/g

