


A.3 SAR Measurement Data

A.3.1 Left Side

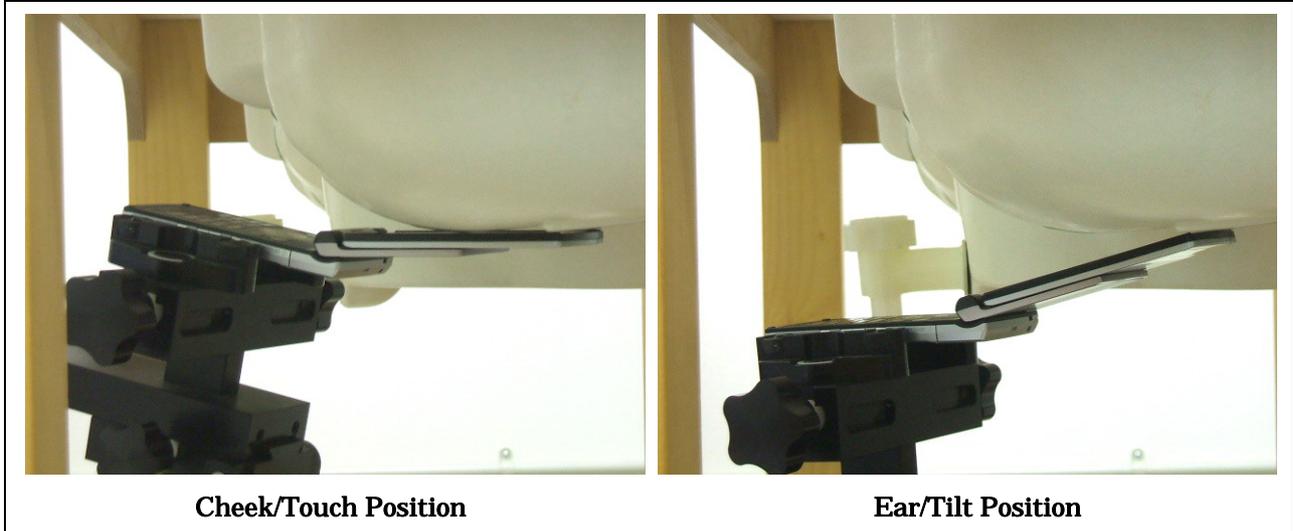


GSM 1900 (Duty Cycle: 12.0 %, Crest Factor: 8.3)					Date : September 9, 2007			
EUT Set-up Configuration		Frequency		Power [dBm] (Peak)		Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
EUT Position	Antenna	Channel	MHz	Start	End			
Cheek/Touch	Fixed	0512	1850.20	--	--	1.6	**	--
		0661	1880.00	28.74	28.74		0.233	22.0
		0810	1909.80	--	--		**	--
Ear/Tilt	Fixed	0512	1850.20	--	--	1.6	**	--
		0661	1880.00	28.74	28.74		0.0826	22.0
		0810	1909.80	--	--		**	--

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
4. Please refer to attachment for the result presentation in plot format.

A.3.2 Right Side

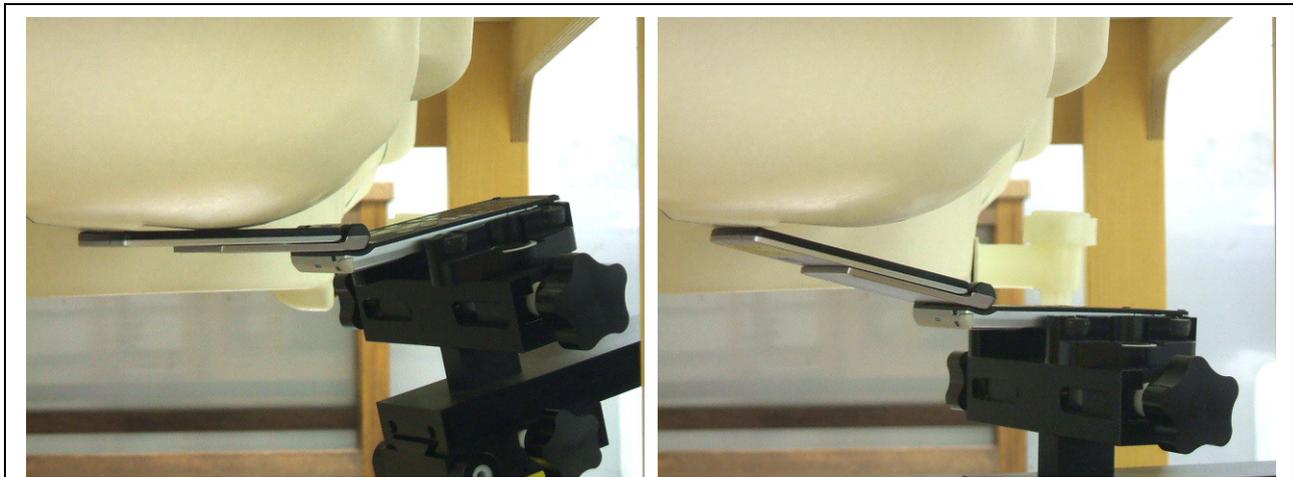


Cheek/Touch Position

Ear/Tilt Position

GSM 1900 (Duty Cycle: 12.0 %, Crest Factor: 8.3)						Date : September 9, 2007		
EUT Set-up Configuration		Frequency		Power [dBm] (Peak)		Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
EUT Position	Antenna	Channel	MHz	Start	End			
Cheek/Touch	Fixed	0512	1850.20	28.95	28.95	1.6	0.255	22.0
		0661	1880.00	28.74	28.74		0.350	22.0
		0810	1909.80	28.72	28.72		0.373	22.0
Ear/Tilt	Fixed	0512	1850.20	--	--	1.6	**	--
		0661	1880.00	28.74	28.74		0.0947	22.0
		0810	1909.80	--	--		**	--
GSM 1900 (Duty Cycle: 12.0 %, Crest Factor: 8.3) co-located with Bluetooth								
Cheek/Touch	Fixed	0810	1909.80	28.72	28.72	1.6	0.375	22.0
NOTES :								
1. Depth of Liquid : 15.0 cm								
2. Transmitter power was measured at the antenna-conducted terminal.								
3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.								
4. Please refer to attachment for the result presentation in plot format.								

A.3.3 Body-worn Position

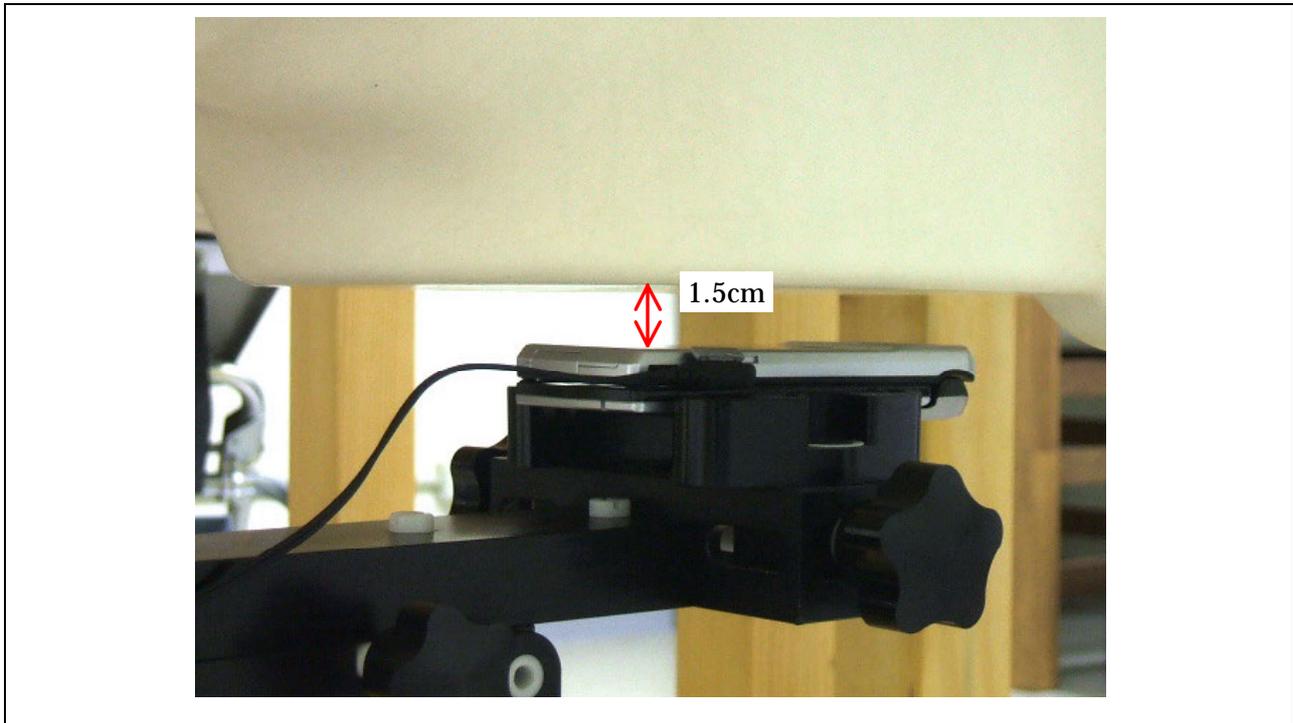

GSM 1900 (Duty Cycle: 12.0 %, Crest Factor: 8.3)						Date : September 10, 2007		
EUT Set-up Configuration		Frequency		Power [dBm] (Peak)		Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
Separation	Antenna	Channel	MHz	Start	End			
1.5 cm	Fixed	0512	1850.20	--	--	1.6	**	--
		0661	1880.00	28.74	28.74		0.138	22.0
		0810	1909.80	--	--		**	--
GSM 1900 (Duty Cycle: 12.0 %, Crest Factor: 8.3) co-located with Bluetooth								
1.5 cm	Fixed	0661	1880.00	28.74	28.74	1.6	0.137	22.0
GSM 1900 GSM+GPRS (Duty Cycle: 24.0 %, Crest Factor: 4.2)								
1.5 cm	Fixed	0512	1850.20	28.93	28.93	1.6	0.279	22.0
		0661	1880.00	28.73	28.73		0.269	22.0
		0810	1909.80	28.70	28.70		0.308	22.0
NOTES :								
1. Depth of Liquid : 15.0 cm								
2. Transmitter power was measured at the antenna-conducted terminal.								
3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.								
4. The earphone wire connected to the EUT to simulate hand-free operation in a body-worn configuration.								
5. Please refer to attachment for the result presentation in plot format.								