


A.3 SAR Measurement Data

A.3.1 Left Side

								
Cheek/Touch Position		Ear/Tilt Position						
GSM 1900 (Duty Cycle: 12.5 %, Crest Factor: 8)						Date : December 13, 2007		
EUT Set-up Configuration		Frequency		Power [dBm] (Peak)		Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
EUT Position	Antenna	Channel	MHz	Start	End			
Cheek/Touch	Fixed	0512	1850.20	29.13	29.13	1.6	0.464	22.0
		0661	1880.00	29.24	29.24		0.354	22.0
		0810	1909.80	29.12	29.12		0.288	22.0
Ear/Tilt	Fixed	0512	1850.20	--	--	1.6	**	--
		0661	1880.00	29.24	29.24		0.282	22.0
		0810	1909.80	--	--		**	--
GSM 1900 (Duty Cycle: 12.5 %, Crest Factor: 8) co-located with Bluetooth								
Cheek/Touch	Fixed	0512	1850.20	29.13	29.13	1.6	0.471	22.0
NOTES :								
1. Depth of Liquid : 15.0 cm								
2. Transmitter power was measured at the antenna-conducted terminal.								
3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.								
4. Please refer to attachment for the result presentation in plot format.								

A.3.2 Right Side

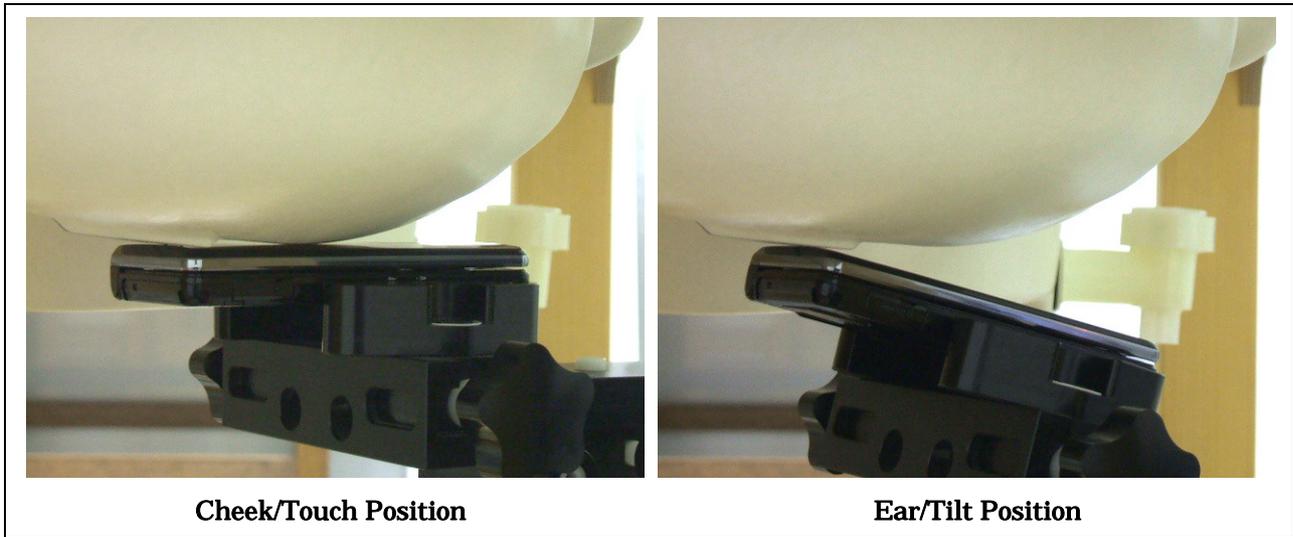


GSM 1900 (Duty Cycle: 12.5 %, Crest Factor: 8)						Date : December 13, 2007		
EUT Set-up Configuration		Frequency		Power [dBm] (Peak)		Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
EUT Position	Antenna	Channel	MHz	Start	End			
Cheek/Touch	Fixed	0512	1850.20	--	--	1.6	**	--
		0661	1880.00	29.24	29.24		0.339	22.0
		0810	1909.80	--	--		**	--
Ear/Tilt	Fixed	0512	1850.20	--	--	1.6	**	--
		0661	1880.00	29.24	29.24		0.261	22.0
		0810	1909.80	--	--		**	--

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
4. Please refer to attachment for the result presentation in plot format.

A.3.3 Body-worn Position

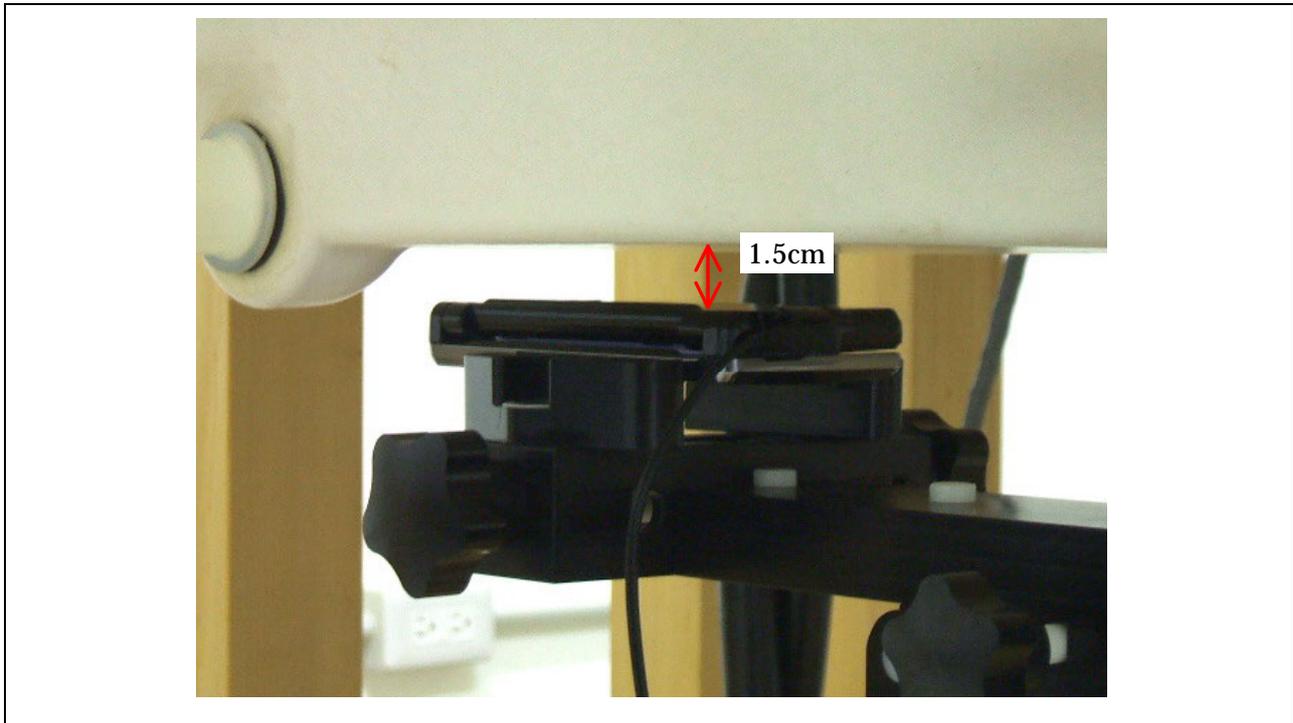

GSM 1900 (Duty Cycle: 12.5 %, Crest Factor: 8)						Date : December 17, 2007		
EUT Set-up Configuration		Frequency		Power [dBm] (Peak)		Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
Separation	Antenna	Channel	MHz	Start	End			
1.5 cm	Fixed	0512	1850.20	--	--	1.6	**	--
		0661	1880.00	29.24	29.24		0.305	22.0
		0810	1909.80	--	--		**	--
GSM 1900 (Duty Cycle: 12.5 %, Crest Factor: 8) co-located with Bluetooth								
1.5 cm	Fixed	0661	1880.00	29.24	29.24	1.6	0.312	22.0
GSM 1900 GSM+GPRS (Duty Cycle: 25.0 %, Crest Factor: 4)								
1.5 cm	Fixed	0512	1850.20	29.06	29.03	1.6	0.598	22.0
		0661	1880.00	29.16	29.12		0.542	22.0
		0810	1909.80	29.04	29.02		0.493	22.0
NOTES :								
<ol style="list-style-type: none"> 1. Depth of Liquid : 15.0 cm 2. Transmitter power was measured at the antenna-conducted terminal. 3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit. 4. The earphone wire connected to the EUT to simulate hand-free operation in a body-worn configuration. 5. Please refer to attachment for the result presentation in plot format. 								