


A.3 SAR Measurement Data

A.3.1 WCDMA 850 MHz (Band-V) Band

A.3.1.1 Left Side

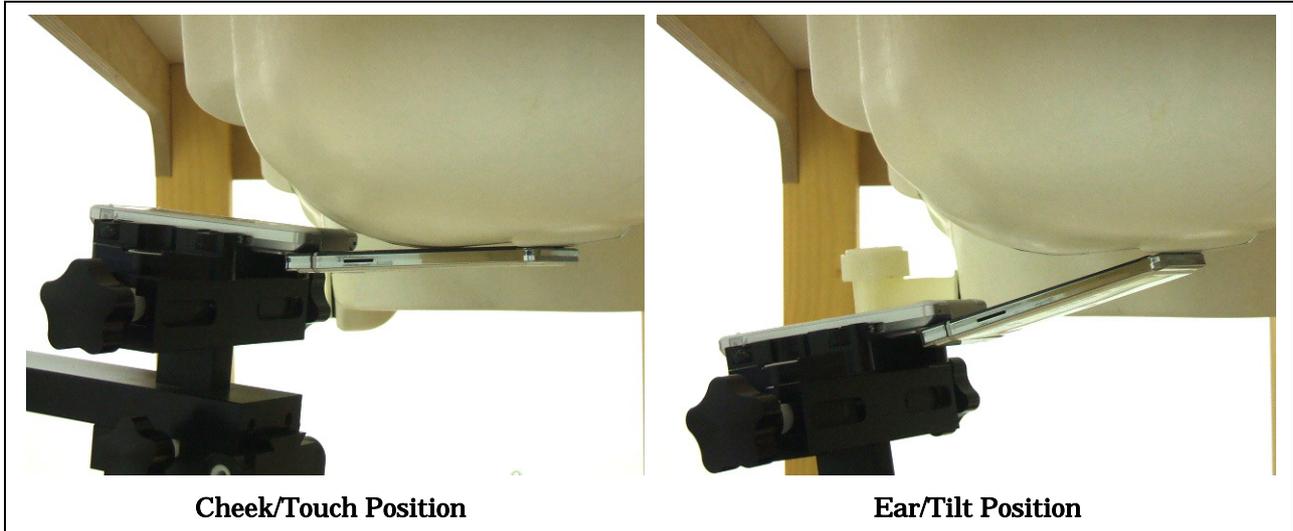


WCDMA Band-V (Duty Cycle: 100 %, Crest Factor: 1)							Date : March 25, 2008	
Test Position	Frequency		Average Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]	
	Channel	MHz						
Cheek/Touch	4132	826.40	23.26	-0.059	1.6	0.441	22.0	
	4182	836.40	23.39	-0.064		0.477	22.0	
	4233	846.60	22.94	-0.027		0.520	22.0	
Ear/Tilt	4132	826.40	--	--	1.6	**	--	
	4182	836.40	23.39	-0.010		0.176	22.0	
	4233	846.60	--	--		**	--	

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
4. Please refer to attachment for the result presentation in plot format.

A.3.1.2 Right Side

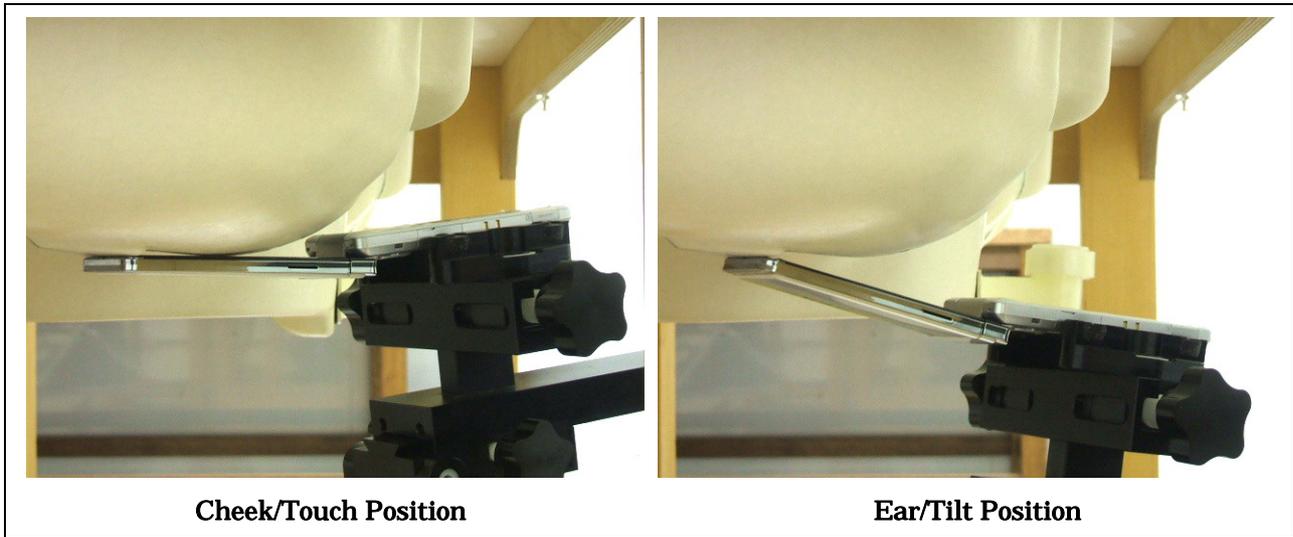


WCDMA Band-V (Duty Cycle: 100 %, Crest Factor: 1)					Date : March 25, 2008		
Test Position	Frequency		Average Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	4132	826.40	--	--	1.6	**	--
	4182	836.40	23.39	0.004		0.450	22.0
	4233	846.60	--	--		**	--
Ear/Tilt	4132	826.40	--	--	1.6	**	--
	4182	836.40	23.39	0.008		0.187	22.0
	4233	846.60	--	--		**	--

NOTES :


1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
4. Please refer to attachment for the result presentation in plot format.

A.3.1.3 Body-worn Position – Close Style

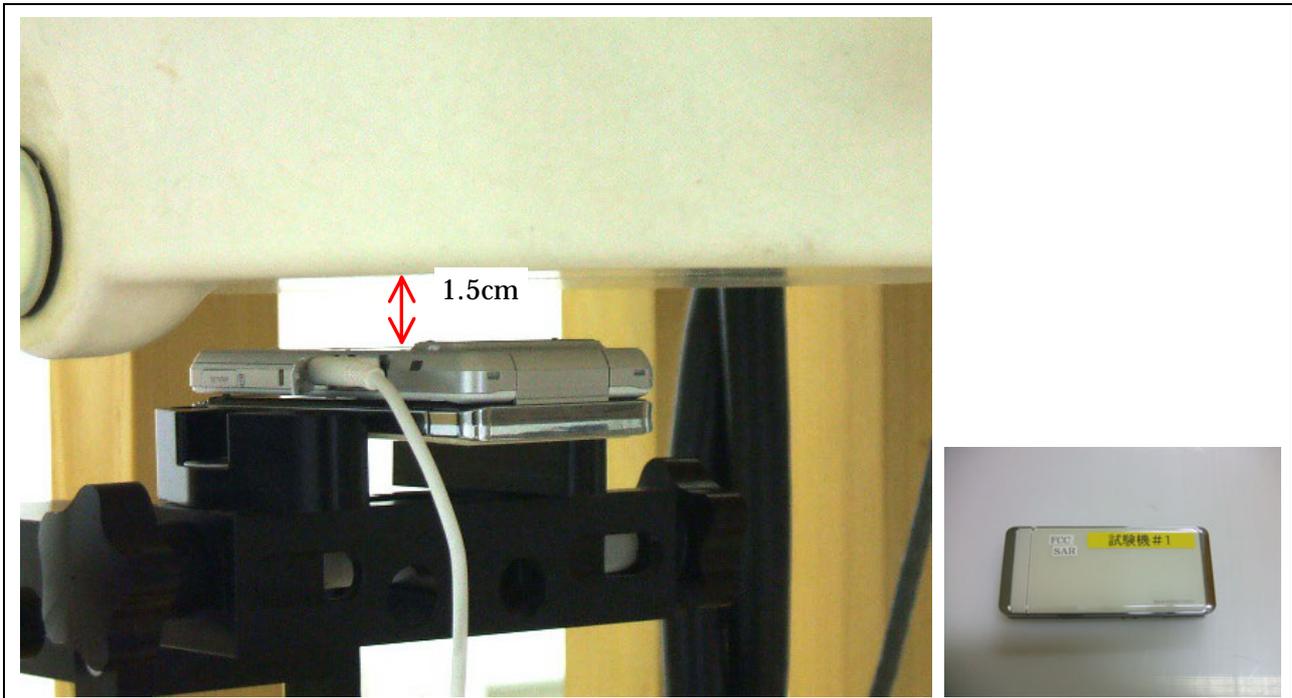

WCDMA Band-V (Duty Cycle: 100 %, Crest Factor: 1)					Date : March 26, 2008		
Separation Distance	Frequency		Average Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
1.5 cm	4132	826.40	--	--	1.6	**	--
	4182	836.40	23.39	0.015		0.414	22.0
	4233	846.60	--	--		**	--
NOTES : 1. Depth of Liquid : 15.0 cm 2. Transmitter power was measured at the antenna-conducted terminal. 3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit. 4. The earphone wire connected to the EUT to simulate hand-free operation in a body-worn configuration. 5. Please refer to attachment for the result presentation in plot format.							

A.3.1.4 Body-worn Position – Viewer Style

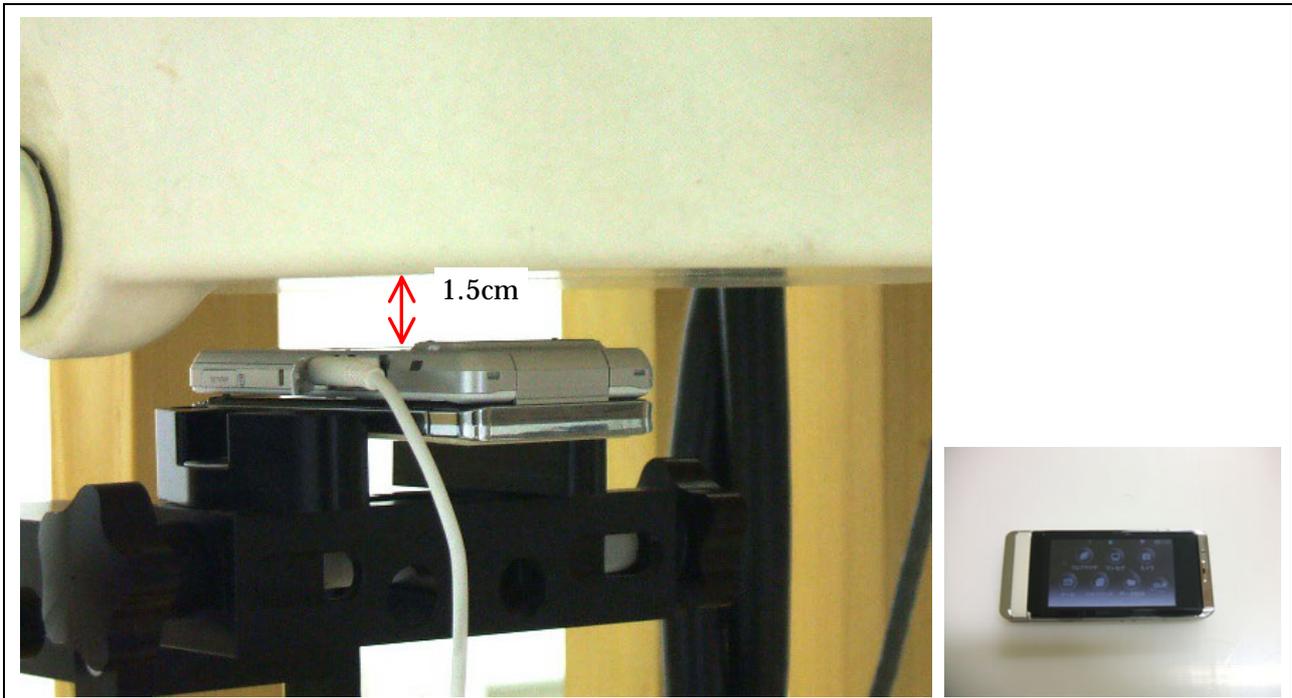


WCDMA Band-V (Duty Cycle: 100 %, Crest Factor: 1)						Date : March 26, 2008	
Separation Distance	Frequency		Average Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
1.5 cm	4132	826.40	23.26	0.023	1.6	0.442	22.0
	4182	836.40	23.39	-0.026		0.437	22.0
	4233	846.60	22.94	0.016		0.328	22.0

- NOTES :
1. Depth of Liquid : 15.0 cm
 2. Transmitter power was measured at the antenna-conducted terminal.
 3. The earphone wire connected to the EUT to simulate hand-free operation in a body-worn configuration.
 4. Please refer to attachment for the result presentation in plot format.

A.3.2 PCS 1900 MHz Band

A.3.2.1 Left Side

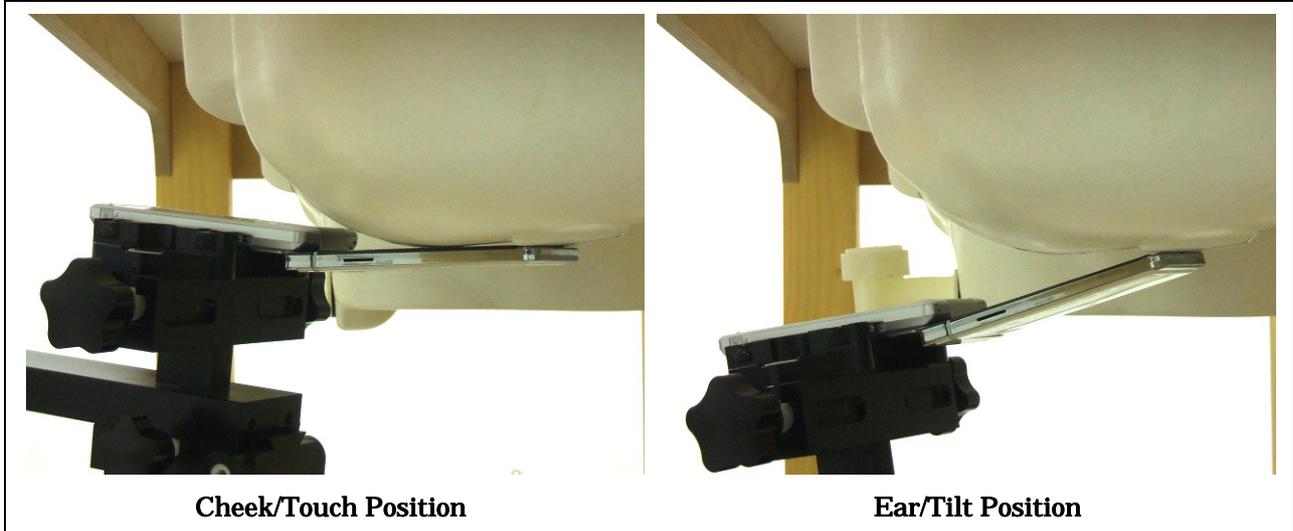


GSM 1900 (Duty Cycle: 12.5 %, Crest Factor: 8)							Date : March 21, 2008
Test Position	Frequency		Peak Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	0512	1850.20	30.12	-0.006	1.6	0.615	22.0
	0661	1880.00	29.71	-0.076		0.538	22.0
	0810	1909.80	29.32	-0.038		0.462	22.0
Ear/Tilt	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	29.71	-0.002		0.127	22.0
	0810	1909.80	--	--		**	--

NOTES :


1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
4. Please refer to attachment for the result presentation in plot format.

A.3.2.2 Right Side

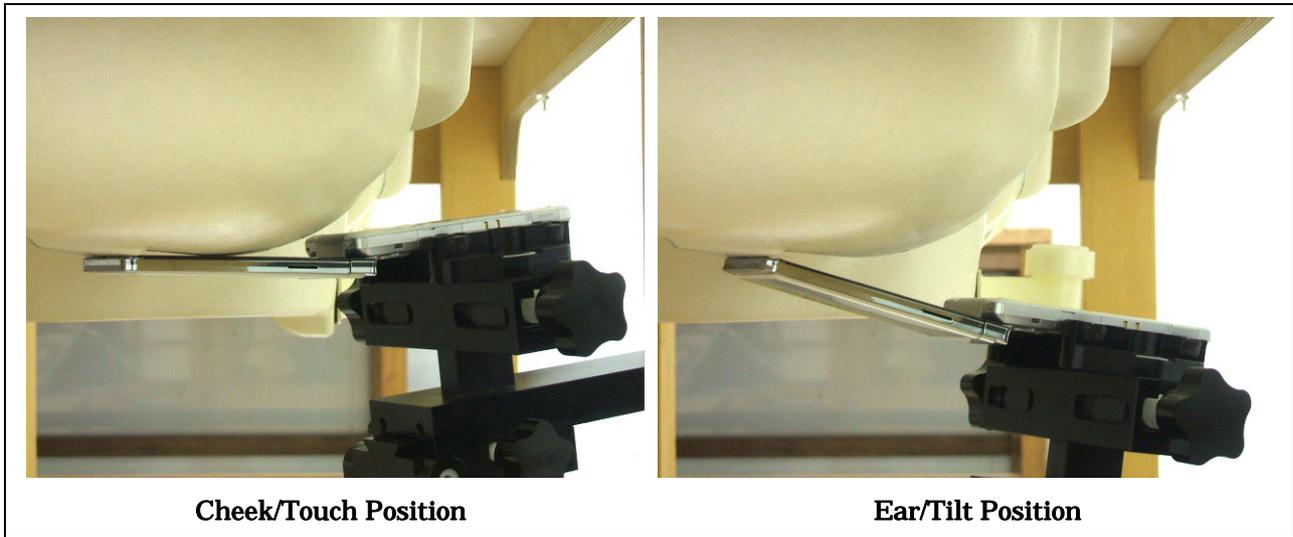

GSM 1900 (Duty Cycle: 12.5 %, Crest Factor: 8)					Date : March 21, 2008		
Test Position	Frequency		Peak Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	29.71	-0.061		0.489	22.0
	0810	1909.80	--	--		**	--
Ear/Tilt	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	29.71	-0.060		0.199	22.0
	0810	1909.80	--	--		**	--
NOTES : 1. Depth of Liquid : 15.0 cm 2. Transmitter power was measured at the antenna-conducted terminal. 3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit. 4. Please refer to attachment for the result presentation in plot format.							


A.3.2.3 Body-worn Position – Close Style

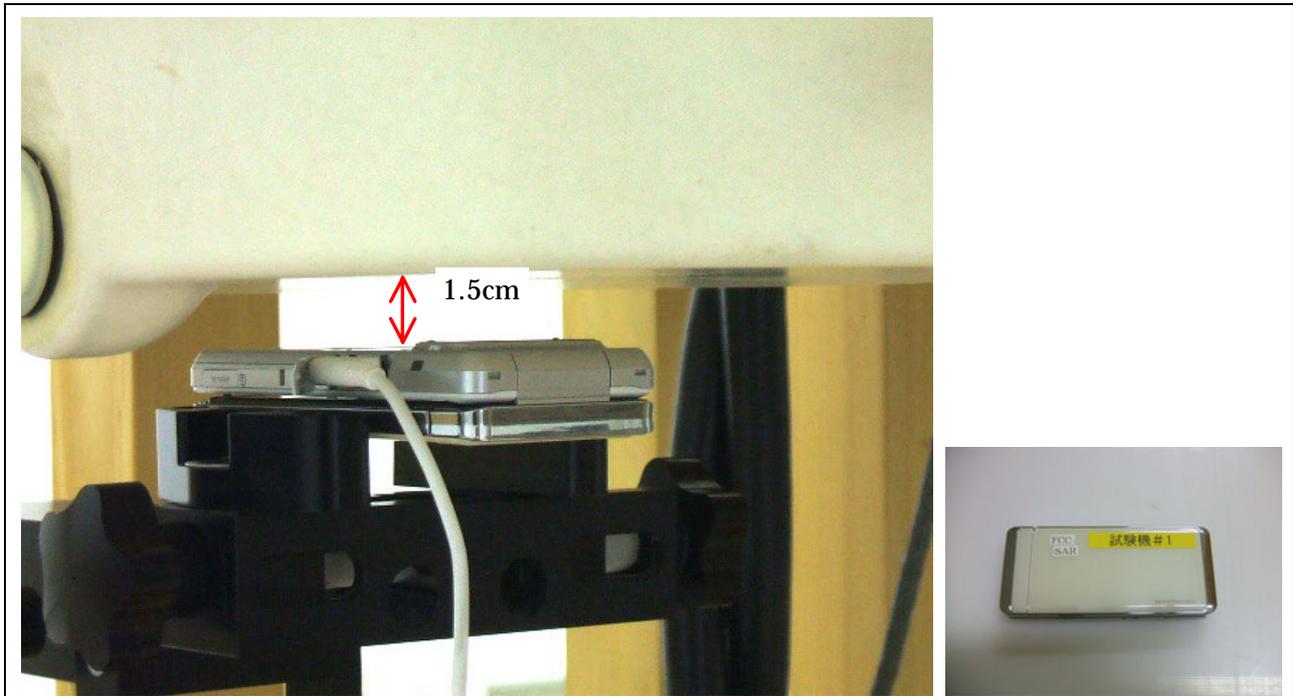

GSM 1900 (Duty Cycle: 12.5 %, Crest Factor: 8)						Date : March 24, 2008	
Separation Distance	Frequency		Peak Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
1.5 cm	0512	1850.20	30.12	-0.047	1.6	0.439	22.0
	0661	1880.00	29.71	-0.086		0.334	22.0
	0810	1909.80	29.32	-0.037		0.244	22.0
GSM 1900 GSM+GPRS (Duty Cycle: 12.5 %, Crest Factor: 8)							
1.5 cm	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	29.71	-0.003		0.324	22.0
	0810	1909.80	--	--		**	--

- NOTES :
1. Depth of Liquid : 15.0 cm
 2. Transmitter power was measured at the antenna-conducted terminal.
 3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
 4. The earphone wire connected to the EUT to simulate hand-free operation in a body-worn configuration.
 5. Please refer to attachment for the result presentation in plot format.

A.3.2.4 Body-worn Position – Viewer Style

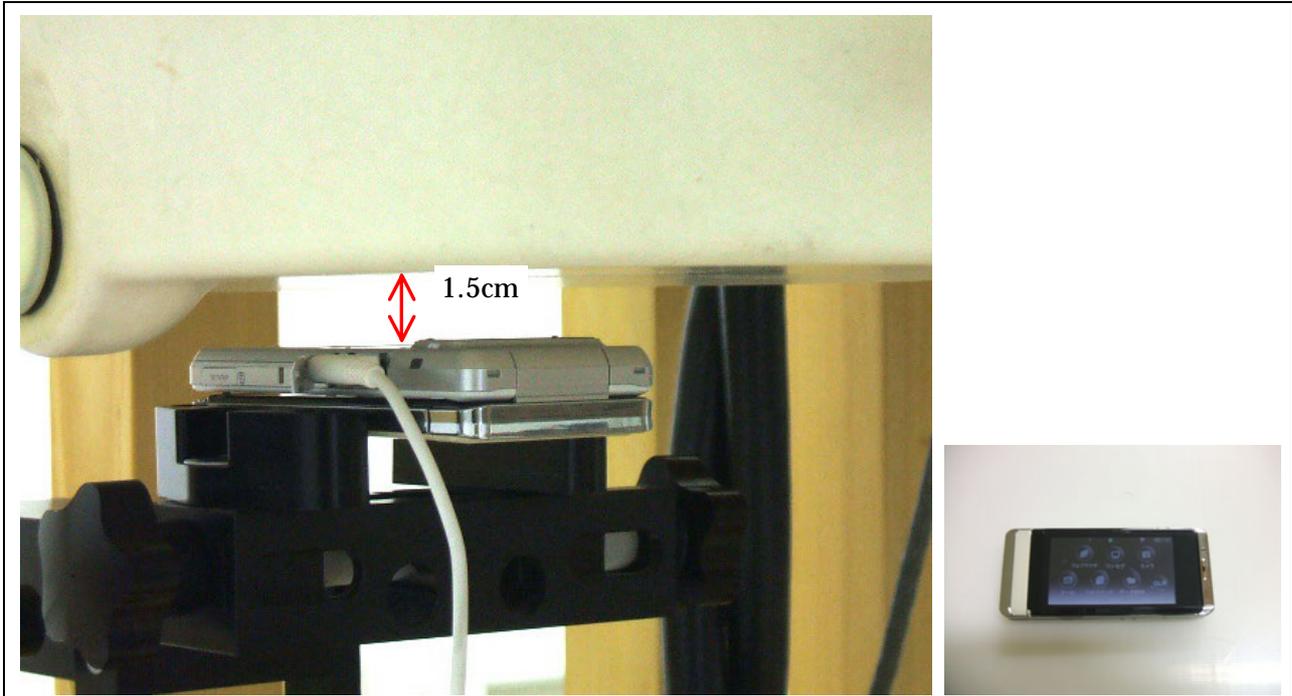

GSM 1900 (Duty Cycle: 12.5 %, Crest Factor: 8)						Date : March 24, 2008	
Separation Distance	Frequency		Peak Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
1.5 cm	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	29.71	-0.015		0.311	22.0
	0810	1909.80	--	--		**	--
GSM 1900 GSM+GPRS (Duty Cycle: 12.5 %, Crest Factor: 8)							
1.5 cm	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	29.71	-0.065		0.304	22.0
	0810	1909.80	--	--		**	--

- NOTES :
1. Depth of Liquid : 15.0 cm
 2. Transmitter power was measured at the antenna-conducted terminal.
 3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
 4. The earphone wire connected to the EUT to simulate hand-free operation in a body-worn configuration.
 5. Please refer to attachment for the result presentation in plot format.