


A.3 SAR Measurement Data

A.3.1 WCDMA 850 MHz (Band-V) Band

A.3.1.1 Left Side

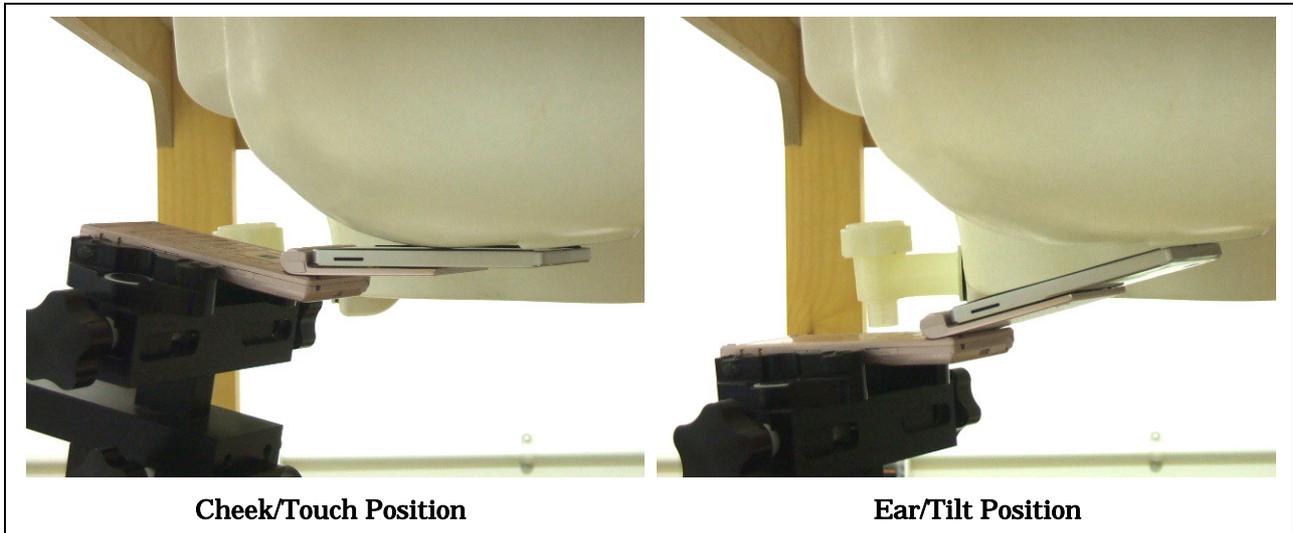


WCDMA Band-V (Duty Cycle: 100 %, Crest Factor: 1)							Date : April 24, 2008	
Test Position	Frequency		Average Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]	
	Channel	MHz						
Cheek/Touch	4132	826.40	--	--	1.6	**	--	
	4182	836.40	23.41	0.044		0.289	22.0	
	4233	846.60	--	--		**	--	
Ear/Tilt	4132	826.40	--	--	1.6	**	--	
	4182	836.40	23.41	0.075		0.187	22.0	
	4233	846.60	--	--		**	--	

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
4. Please refer to attachment for the result presentation in plot format.

A.3.1.2 Right Side

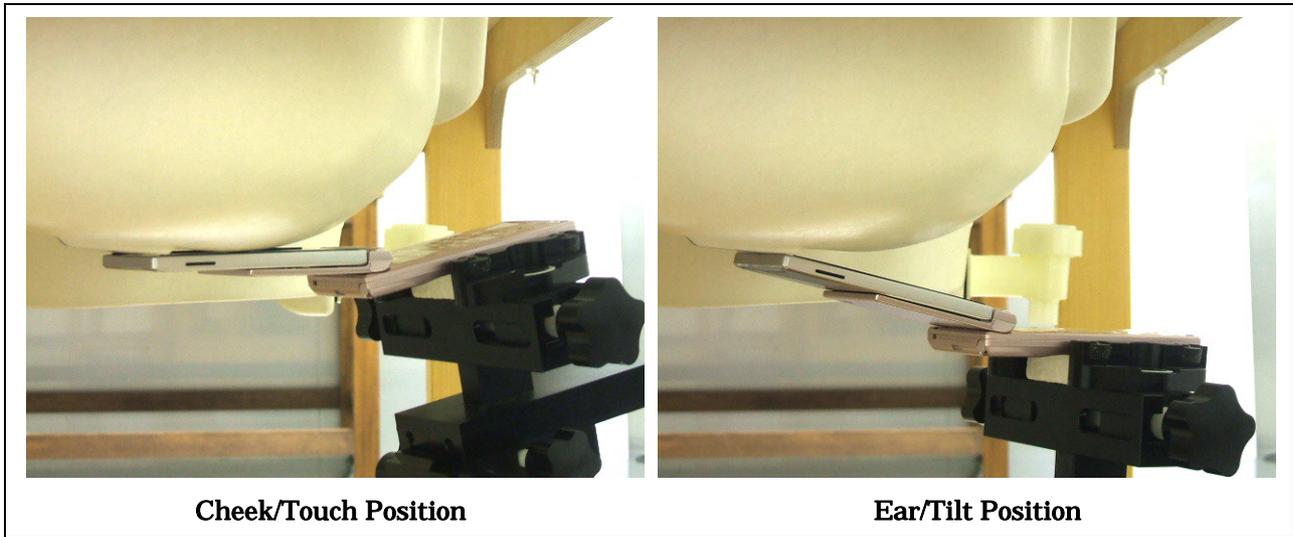


WCDMA Band-V (Duty Cycle: 100 %, Crest Factor: 1)						Date : April 24, 2008	
Test Position	Frequency		Average Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	4132	826.40	23.45	-0.031	1.6	0.370	22.0
	4182	836.40	23.41	-0.042		0.334	22.0
	4233	846.60	23.24	-0.088		0.257	22.0
Ear/Tilt	4132	826.40	--	--	1.6	**	--
	4182	836.40	23.41	-0.006		0.201	22.0
	4233	846.60	--	--		**	--

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
4. Please refer to attachment for the result presentation in plot format.

A.3.1.3 Body-worn Position

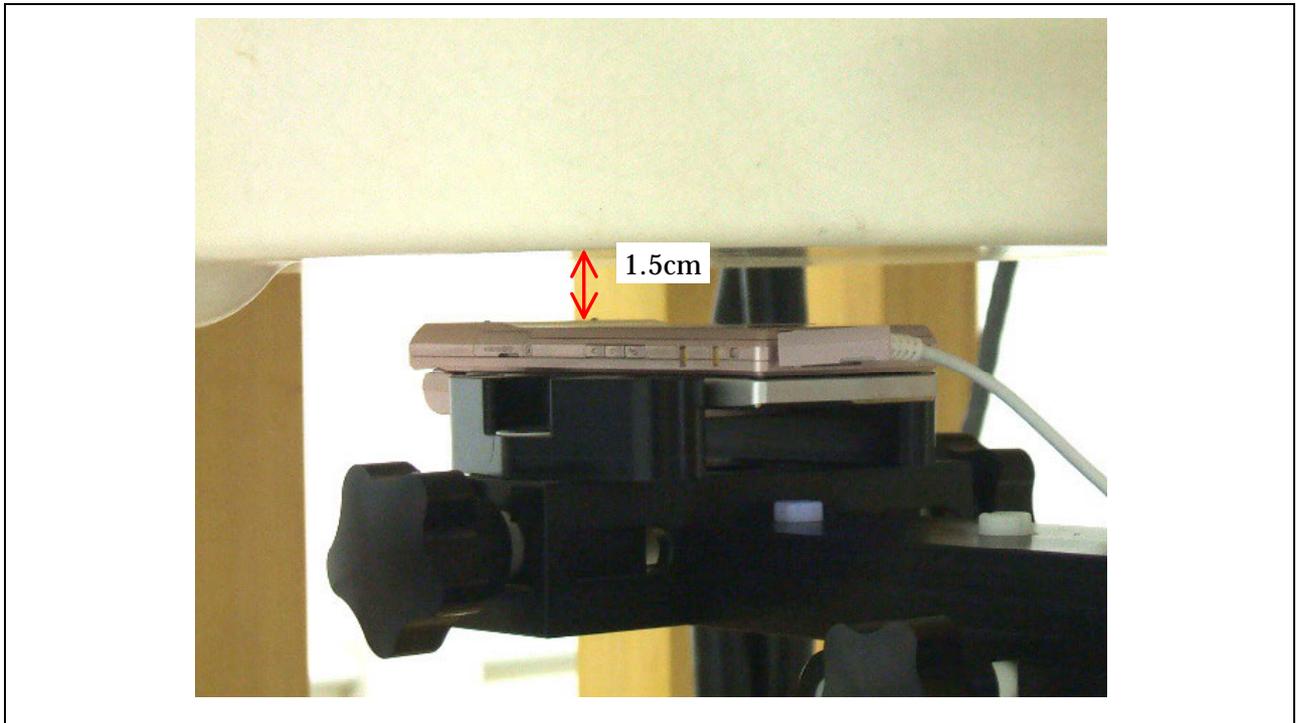


WCDMA Band-V (Duty Cycle: 100 %, Crest Factor: 1)						Date : April 24, 2008	
Separation Distance	Frequency		Average Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
1.5 cm	4132	826.40	23.45	-0.028	1.6	0.738	22.0
	4182	836.40	23.41	0.001		0.748	22.0
	4233	846.60	23.24	0.004		0.650	22.0

- NOTES :
1. Depth of Liquid : 15.0 cm
 2. Transmitter power was measured at the antenna-conducted terminal.
 3. The earphone wire connected to the EUT to simulate hand-free operation in a body-worn configuration.
 4. Please refer to attachment for the result presentation in plot format.

A.3.2 PCS 1900 MHz Band

A.3.2.1 Left Side

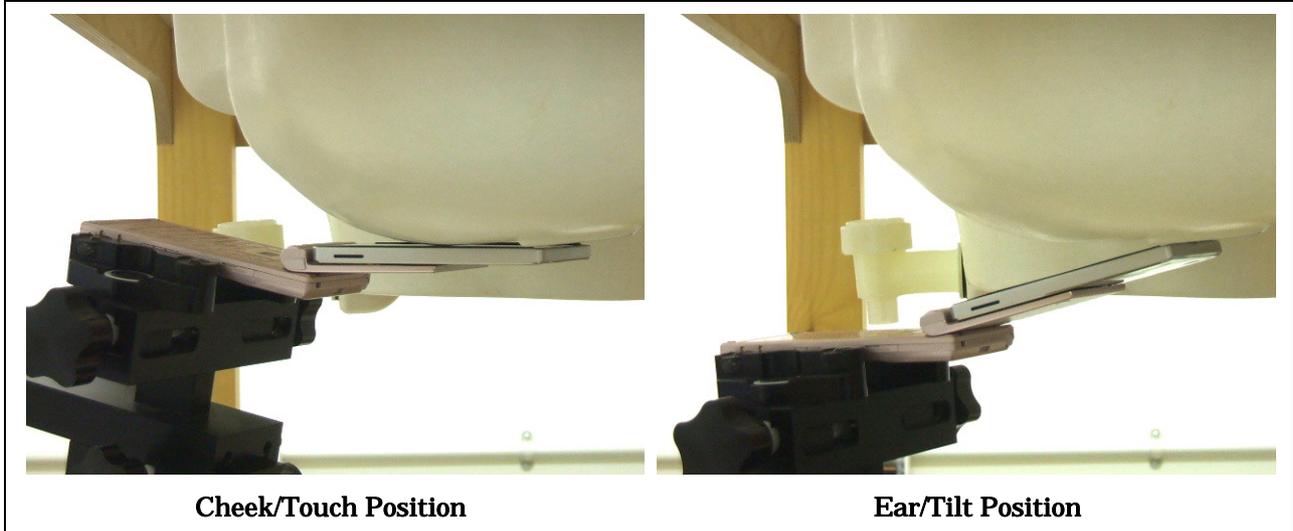


GSM 1900 (Duty Cycle: 12.5 %, Crest Factor: 8)							Date : April 22, 2008
Test Position	Frequency		Peak Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	29.68	-0.008		0.169	22.0
	0810	1909.80	--	--		**	--
Ear/Tilt	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	29.68	-0.152		0.097	22.0
	0810	1909.80	--	--		**	--

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
4. Please refer to attachment for the result presentation in plot format.

A.3.2.2 Right Side

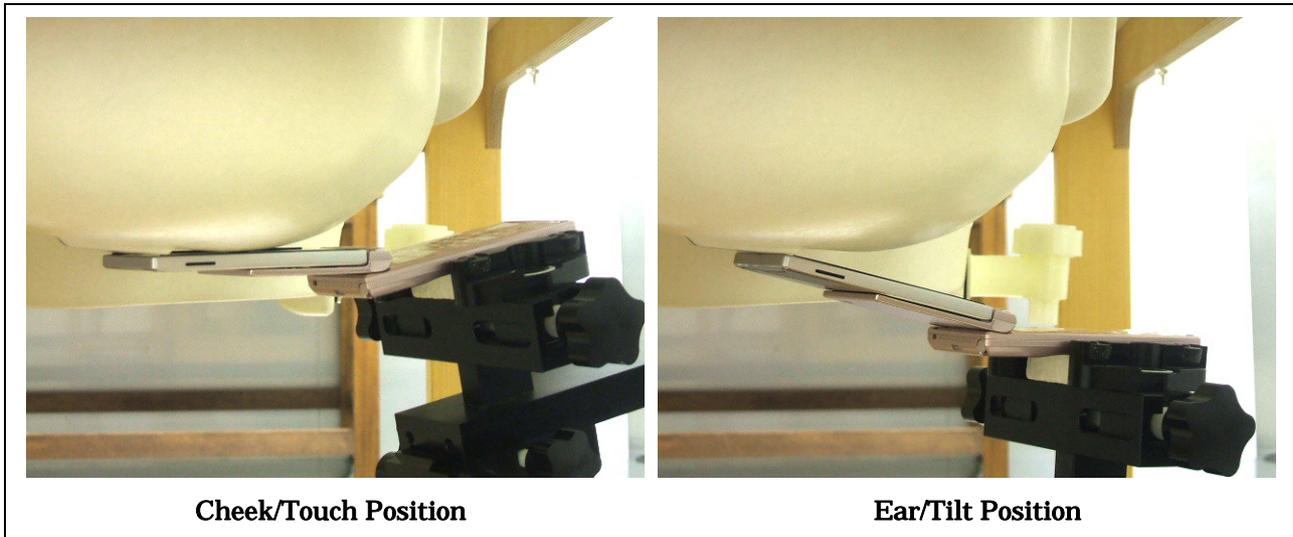


GSM 1900 (Duty Cycle: 12.5 %, Crest Factor: 8) Date : April 22, 2008

Test Position	Frequency		Peak Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	0512	1850.20	29.75	-0.043	1.6	0.141	22.0
	0661	1880.00	29.68	0.020		0.170	22.0
	0810	1909.80	29.49	-0.081		0.178	22.0
Ear/Tilt	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	29.68	-0.071		0.135	22.0
	0810	1909.80	--	--		**	--

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
4. Please refer to attachment for the result presentation in plot format.

A.3.2.3 Body-worn Position

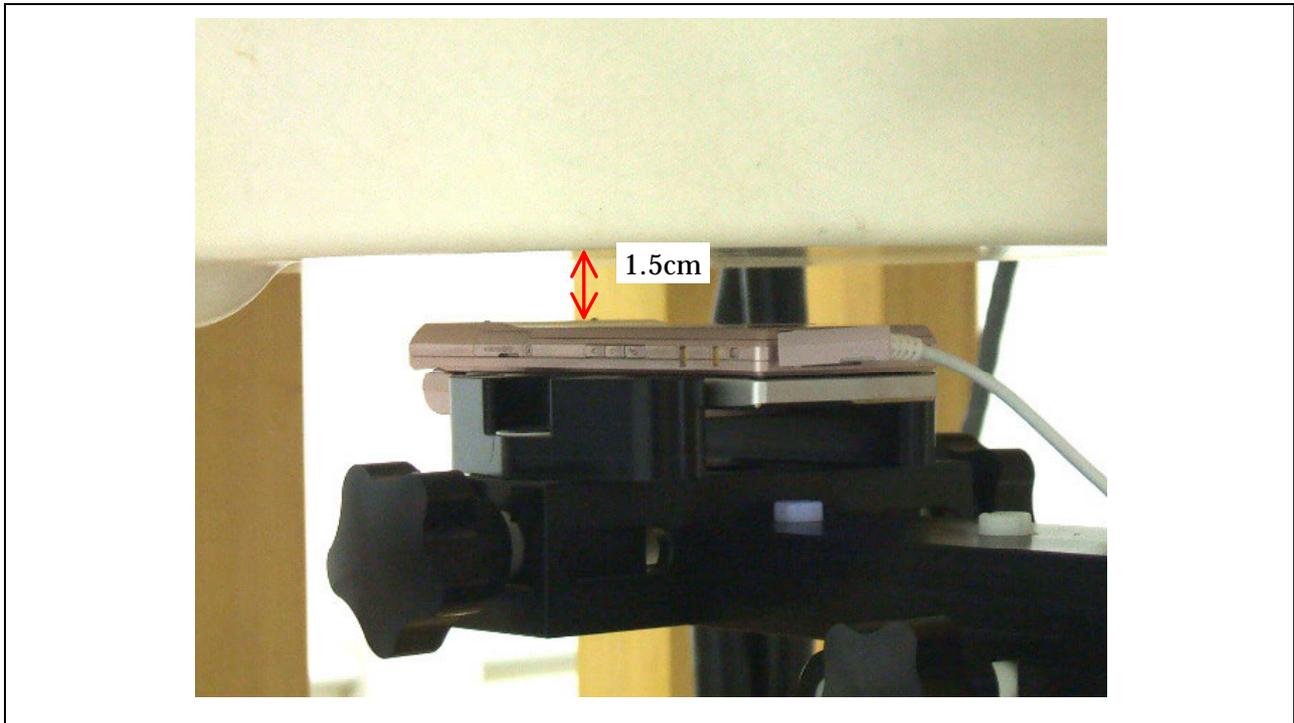

GSM 1900 (Duty Cycle: 12.5 %, Crest Factor: 8)						Date : April 23, 2008	
Separation Distance	Frequency		Peak Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
1.5 cm	0512	1850.20	29.75	-0.076	1.6	0.210	22.0
	0661	1880.00	29.68	-0.032		0.221	22.0
	0810	1909.80	29.49	-0.041		0.272	22.0
GSM 1900 GSM+GPRS (Duty Cycle: 12.5 %, Crest Factor: 8)							
1.5 cm	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	29.68	-0.003		0.213	22.0
	0810	1909.80	--	--		**	--

- NOTES :
1. Depth of Liquid : 15.0 cm
 2. Transmitter power was measured at the antenna-conducted terminal.
 3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
 4. The earphone wire connected to the EUT to simulate hand-free operation in a body-worn configuration.
 5. Please refer to attachment for the result presentation in plot format.