


A.3 SAR Measurement Data

A.3.1 Left Head

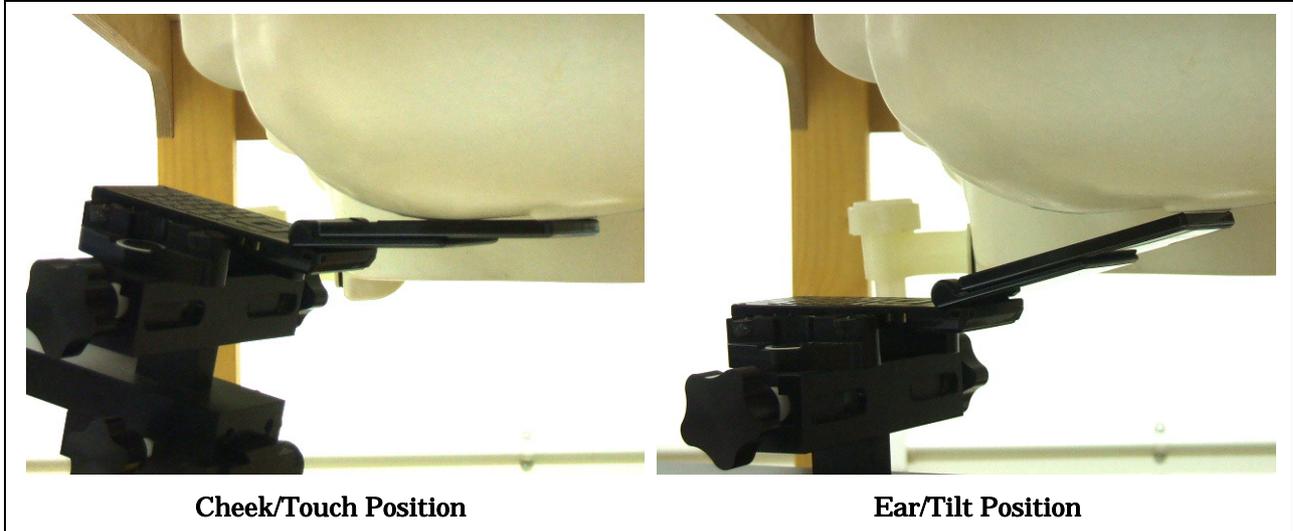


GSM 1900 (Duty Cycle: 12.5 %, Crest Factor: 8)							Date : May 1, 2008
Test Position	Frequency		Peak Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	28.70	-0.019		0.153	22.0
	0810	1909.80	--	--		**	--
Ear/Tilt	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	28.70	-0.001		0.078	22.0
	0810	1909.80	--	--		**	--

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
4. Please refer to attachment for the result presentation in plot format.

A.3.2 Right Head

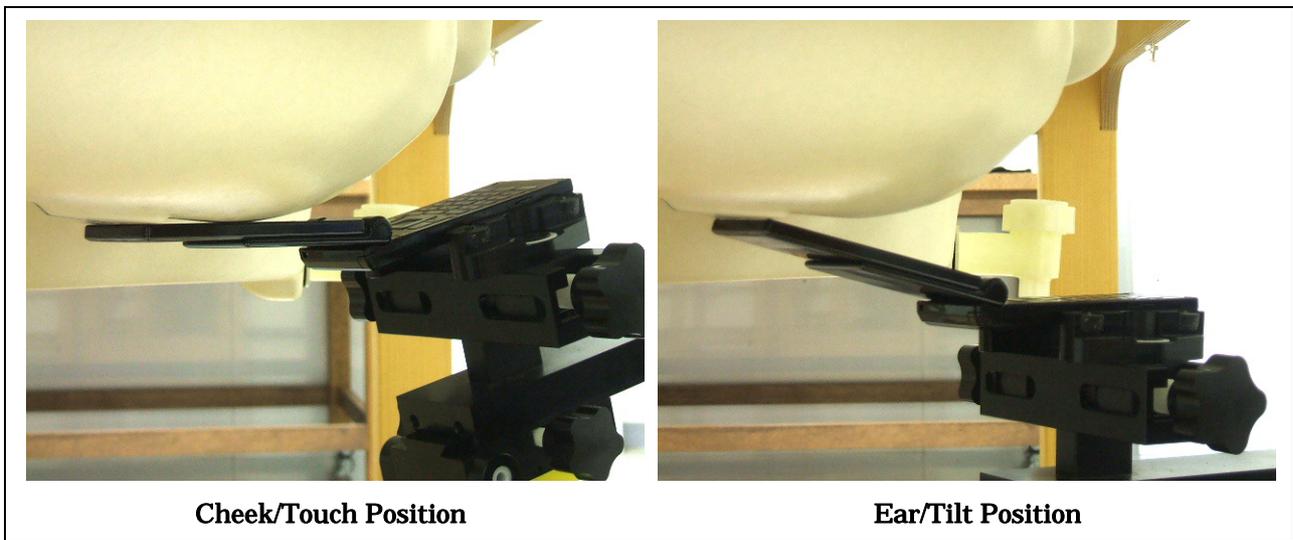


GSM 1900 (Duty Cycle: 12.5 %, Crest Factor: 8)					Date : May 1, 2008		
Test Position	Frequency		Peak Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	0512	1850.20	28.72	-0.039	1.6	0.213	22.0
	0661	1880.00	28.70	0.002		0.244	22.0
	0810	1909.80	28.74	0.019		0.261	22.0
Ear/Tilt	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	28.70	-0.009		0.076	22.0
	0810	1909.80	--	--		**	--

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
4. Please refer to attachment for the result presentation in plot format.

A.3.3 Body-worn Position

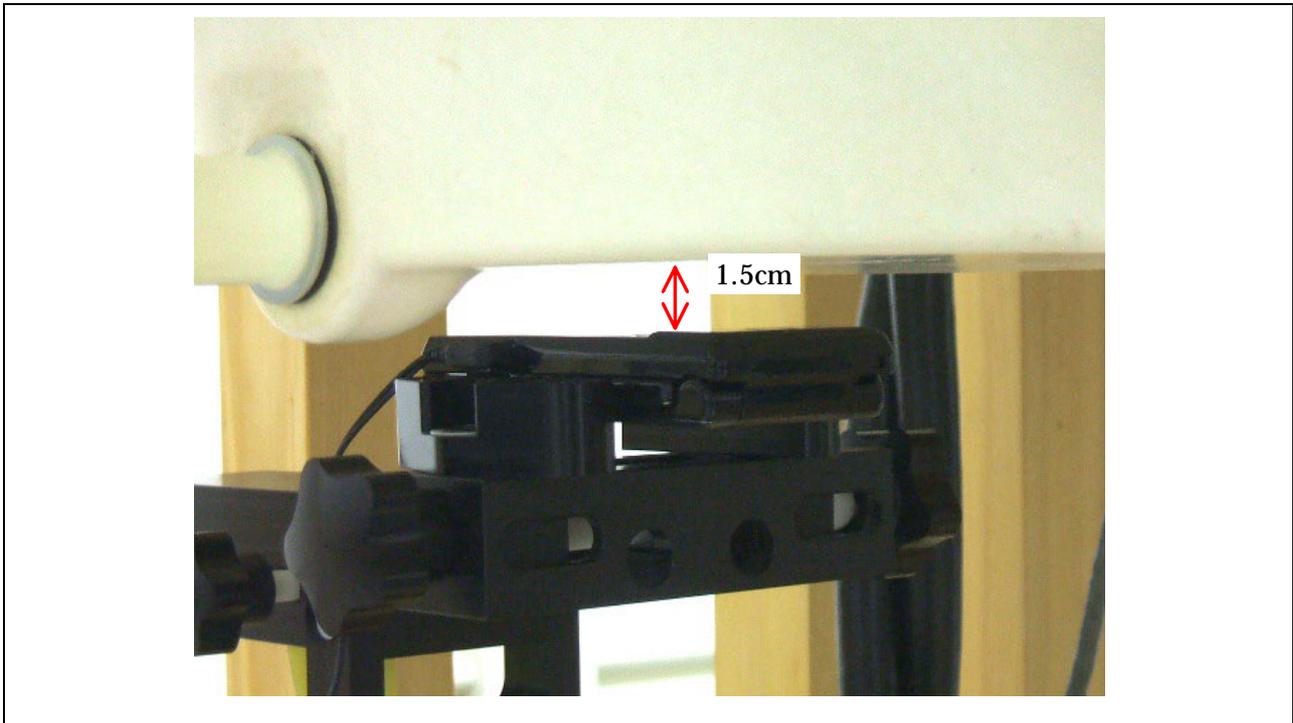

GSM 1900 (Duty Cycle: 12.5 %, Crest Factor: 8)						Date : May 2, 2008	
Separation Distance	Frequency		Peak Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
1.5 cm	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	28.70	-0.021		0.185	22.0
	0810	1909.80	--	--		**	--
GSM 1900 GSM+GPRS (Duty Cycle: 25.0 %, Crest Factor: 4)							
1.5 cm	0512	1850.20	28.61	-0.050	1.6	0.391	22.0
	0661	1880.00	28.60	-0.009		0.344	22.0
	0810	1909.80	28.63	-0.012		0.335	22.0

- NOTES :
1. Depth of Liquid : 15.0 cm
 2. Transmitter power was measured at the antenna-conducted terminal.
 3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
 4. The earphone wire connected to the EUT to simulate hand-free operation in a body-worn configuration.
 5. Please refer to attachment for the result presentation in plot format.