

TEST REPORT

APPLICANT : Sharp Corporation, Communication Systems Group
ADDRESS : 2-13-1, Iida Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,
739-0192, JAPAN
PRODUCTS : Cellular Phone
MODEL NO. : SH8010C
SERIAL NO. : 004401/11/136043/0
FCC ID : APYHRO00072
TEST STANDARD : CFR 47 FCC Rules and Regulations Part 24
TESTING LOCATION : Japan Quality Assurance Organization
KITA-KANSAI Testing Center
1-7-7, Ishimaru, Minoh-shi, Osaka 562-0027, Japan
TEST RESULTS : **Passed**
DATE OF TEST : June 28, 2008 - July 2, 2008

This report must not be used by the client to
claim product endorsement by NVLAP or
NIST or any agency of the U.S. Government.



Yuichi Fukumoto
Manager
Japan Quality Assurance Organization
KITA-KANSAI Testing Center
Testing Dept. EMC Division
1-7-7, Ishimaru, Minoh-shi, Osaka 562-0027, Japan

- The measurement values stated in Test Report was made with traceable to National Institute of Advanced Industrial Science and Technology (AIST) of Japan and National Institute of Information and Communications Technology (NICT) of Japan.
- The applicable standard, testing condition and testing method which were used for the tests are based on the request of the applicant.
- The test results presented in this report relate only to the offered test sample.
- The contents of this test report cannot be used for the purposes, such as advertisement for consumers.
- This test report shall not be reproduced except in full without the written approval of JQA.

TABLE OF CONTENTS

	Page
Documentation	3
1 Test Regulation.....	3
2 Test Location.....	3
3 Recognition of Test Laboratory.....	3
4 Description of the Equipment Under Test.....	4
5 Test Condition.....	5
6 Preliminary Test and Test Setup	7
7 Equipment Under Test Modification.....	16
8 Responsible Party	16
9 Deviation from Standard.....	16
10 Test Results.....	17
11 Summary	20
12 Operating Condition.....	21
13 Test Configuration.....	21
14 Equipment Under Test Arrangement (Drawings)	22
Appendix A: Test Data	23
Appendix B: Test Arrangement (Photographs)	44
Appendix C: Test Instruments.....	46

DEFINITIONS FOR ABBREVIATION AND SYMBOLS USED IN THIS TEST REPORT**EUT** : Equipment Under Test**AE** : Associated Equipment**N/A** : Not Applicable**N/T** : Not Tested**EMC** : Electromagnetic Compatibility**EMI** : Electromagnetic Interference**EMS** : Electromagnetic Susceptibility☒ - indicates that the listed condition, standard or equipment is applicable for this report.☐ - indicates that the listed condition, standard or equipment is not applicable for this report.

Documentation

1 Test Regulation

Applied Standard : CFR 47 FCC Rules and Regulations Part 24
Subpart E - Broadband PCS

Test Requirements : CFR 47 FCC Rules and Regulations Part 2
§2.1046, §2.1047, §2.1049, §2.1051, §2.1053, §2.1055 and §2.1057

Test Procedure : ANSI C63.4-2003, TIA/EIA-603-C-2004

2 Test Location

KITA-KANSAI Testing Center

1-7-7, Ishimaru, Minoh-shi, Osaka 562-0027, Japan

KAMEOKA EMC Branch

9-1, Ozaki, Inukanno, Nishibetsuin-cho, Kameoka-shi, Kyoto 621-0126, Japan

3 Recognition of Test Laboratory

JQA KITA-KANSAI Testing Center Testing Department EMC Division is accredited under ISO/IEC 17025 by following accreditation bodies and the test facility of Testing Division is registered by the following bodies.

VLAC Code : VLAC-001-2 (Effective through : April 3, 2010)

NVLAP Lab Code : 200191-0 (Effective through : June 30, 2009)

BSMI Recognition No. : SL2-IS-E-6006, SL2-IN-E-6006, SL2-AI-E-6006
(Effective through : September 14, 2010)

VCCI Registration No. : R-008, R-1117, C-006, C-007, C-1674, C-2143, T-1418, T-1419
(Effective through : April 3, 2010)

IC Registration No. : IC 4125-1, IC 6217-1, IC 6217-2 (Effective through : November 16, 2008)

Accredited as conformity assessment body for Japan electrical appliances and material law by METI.
(Effective through : February 22, 2010)

4 Description of the Equipment Under Test

4.1 General Information

1. Manufacturer : Sharp Corporation, Communication Systems Group
2-13-1, Iida Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,
739-0192, JAPAN
2. Products : Cellular Phone
3. Model No. : SH8010C
4. Serial No. : 004401/11/136043/0
5. Product Type : Prototype
6. Date of Manufacture : June 1, 2008
7. Transmitting Frequency : 1850.2 MHz(512CH) – 1909.8MHz(810CH)
8. Receiving Frequency : 1930.2 MHz(512CH) – 1989.8MHz(810CH)
9. Emission Designations : 248KGXW(GSM) / 248KG7W(EGPRS)
10. Max. RF Output Power : 1.738W (EIRP) (GSM) / 1.622W(EGPRS)
11. Power Rating : 4.0VDC (Lithium-ion Battery Pack XN-1BT82 680mAh)
12. EUT Grounding : None
13. Category : Broadband PCS
14. EUT Authorization : Certification
15. Receive Date of EUT : June 23, 2008

4.2 Channel Plan

The carrier spacing is 200 kHz.

The carrier frequency is designated by the absolute frequency channel number (ARFCN).

The carrier frequency is expressed in the equation shown as follows:

$$\text{Transmitting Frequency (in MHz)} = 1850.2 + 0.2 \times (n - 512)$$

$$\text{Receiving Frequency (in MHz)} = 1930.2 + 0.2 \times (n - 512)$$

where, n : channel number ($512 \leq n \leq 810$)

5 Test Condition

5.1 RF Power Output (§2.1046)

5.1.1 Conducted RF Power Output

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

Test site : KITA-KANSAI ☐ - Shielded room ☒ - 2nd Shielded room
KAMEOKA ☐ - Shielded room ☐ - Conducted emission facility

Test instruments : Refer to Appendix C.

5.1.2 ERP / EIRP RF Power Output

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

Test site : ☒ - KAMEOKA 1st open site ☒ - 3 m ☐ - 10 m
☐ - KAMEOKA 2nd open site ☐ - 3 m ☐ - 10 m

Test instruments : Refer to Appendix C.

5.2 Modulation Characteristics (§2.1047)

The requirements are ☐ - Applicable ☐ - Tested. ☐ - Not tested by applicant request.]
☒ - Not Applicable

Test site : KITA-KANSAI ☐ - Shielded room ☐ - Anechoic chamber
KAMEOKA ☐ - Shielded room

Test instruments : Refer to Appendix C.

5.3 Occupied Bandwidth (§2.1049)

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

Test site : KITA-KANSAI ☐ - Shielded room ☒ - 2nd Shielded room
KAMEOKA ☐ - Shielded room ☐ - Conducted emission facility

Test instruments : Refer to Appendix C.

5.4 Spurious Emissions at Antenna Terminals (§2.1051)

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

Test site : KITA-KANSAI ☐ - Shielded room ☒ - 2nd Shielded room
KAMEOKA ☐ - Shielded room ☐ - Conducted emission facility

Test instruments : Refer to Appendix C.

5.5 Band-Edge Emission (§2.1051)

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

Test site : KITA-KANSAI ☐ - Shielded room ☒ - 2nd Shielded room
KAMEOKA ☐ - Shielded room ☐ - Conducted emission facility

Test instruments : Refer to Appendix C.

5.6 Field Strength of Spurious Radiation (§2.1053)

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

Test site : ☒ - KAMEOKA 1st open site ☒ - 3 m ☐ - 10 m
☐ - KAMEOKA 2nd open site ☐ - 3 m ☐ - 10 m

Test instruments : Refer to Appendix C.

5.7 Frequency Stability (§2.1055)

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

Test site : KITA-KANSAI Environment Testing Room


Test instruments : Refer to Appendix C.

6 Preliminary Test and Test Setup

6.1 RF Power Output (§2.1046)

6.1.1 Conducted RF Power Output

The Conducted RF Power Output was measured with a power meter, two 10dB attenuator and a short, low loss cable.



6.1.2 ERP / EIRP RF Power Output

Step 1:

In order to obtain the maximum emission, the EUT was placed at the height 1.8 m on the non-conducted support and was varying at three orthogonal axes (Refer to clause 15), at the distance 3 m from the receiving antenna and rotated around 360 degrees.

The receiving antenna height was varied from 1 m to 4 m.

The EUT on the table was placed to be maximum emission against at the receiving antenna polarized (vertical and horizontal).

Then the meter reading of the spectrum analyzer at the maximum emission was A dB(μV).

Step 2:

The EUT was replaced to substitution antenna at the same polarized under the same condition as step 1.

The RF power was fed to the transmitting antenna through the RF amplifier from the signal generator.

In order to obtain the maximum emission level, the height of the receiving antenna was varied from 1 m to 4 m.

The level of maximum emission was A dB(μV), same as the recorded level in the step 1.

Then the RF power into the substitution horn antenna was P (dBm).


The ERP/EIRP output power was calculated in the following equation.

$$\text{ERP (dBm)} = P \text{ (dBm)} - \text{Balun loss of the half-wave dipole antenna (dB)} + \text{Cable loss (dB)}$$


$$\text{EIRP (dBm)} = P \text{ (dBm)} + G_h \text{ (dBi)}$$

where, $G_h \text{ (dBi)}$: Gain of the substitution horn antenna.

– Side View –

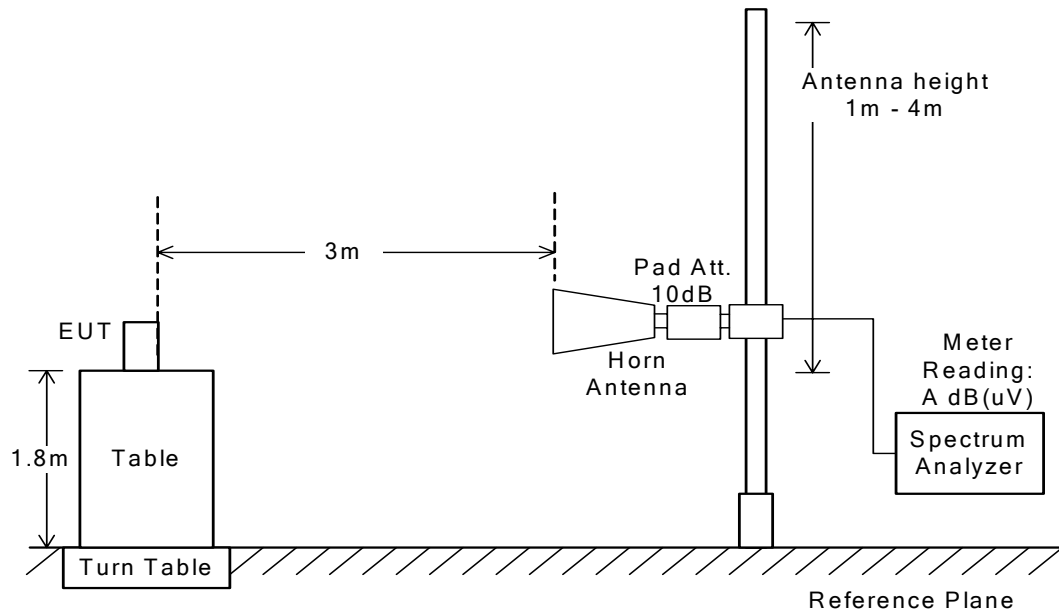

(a) EUT

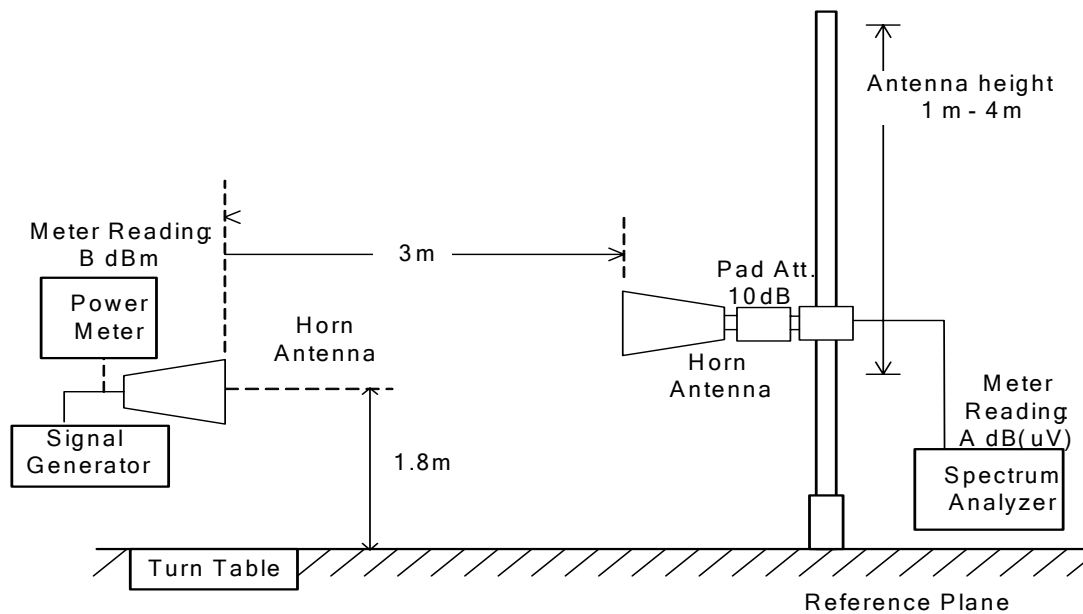


(b) Substitution Horn Antenna

6.2 Modulation Characteristics (§2.1047)

Not Applicable

6.3 Occupied Bandwidth (§2.1049)

The test system is shown as follows:




The setting of the spectrum analyzer are shown as follows:

Res. Bandwidth	10 kHz
Video Bandwidth	30 kHz
Span	1 MHz
Sweep Time	AUTO
Trace	Maxhold

6.4 Spurious Emissions at Antenna Terminals (§2.1051)

The Antenna Conducted Emission was with a spectrum analyzer. The test system is shown as follows:

a) Frequency Range : 9kHz - 2GHz



b) Frequency Range : 2GHz - 20GHz




The setting of the spectrum analyzer are shown as follows:

Frequency Range	9 kHz - 150 kHz	150 kHz - 30 MHz	30 MHz - 20 GHz
Res. Bandwidth	200 Hz	10 kHz	1 MHz
Video Bandwidth	1 kHz	30 kHz	3 MHz
Sweep Time	AUTO	AUTO	AUTO
Trace	Maxhold	Maxhold	Maxhold

6.5 Band-Edge Emission (§2.1051)

The test system is shown as follows:



The setting of the spectrum analyzer are shown as follows:

TX Frequency	1850.20 MHz / 1909.80 MHz
Band-Edge Frequency	1850.00 MHz / 1910.00 MHz
Res. Bandwidth	3 kHz
Video Bandwidth	10 kHz
Span	2 MHz
Sweep Time	AUTO
Trace	Maxhold

6.6 Field Strength of Spurious Radiation (§2.1053)

Step 1) The spurious radiation for transmitter were measured at the distance 3 m away from the EUT which was placed on a non-conducted support 1.0 m in height and was varying at three orthogonal axes (Refer to clause 15). The receiving antenna was oriented for vertical polarization and varied from 1 m to 4 m until the maximum emission level was detected on the measuring instrument. The EUT was rotated 360 degrees until the maximum emission was received. The measurement was also repeated with the receiving antenna in the horizontal polarization.

This test was carried out using the half-wave dipole antenna for up to 1GHz and using the horn antenna for above 1 GHz.

Step 2) The ERP measurement was carried out with according to Step 2 in page 8. Then the RF power in the substitution antenna half-wave dipole antenna for up to 1 GHz and the substitution horn antenna for above 1 GHz.

The ERP is calculated in the following equation.

A) Up to 1 GHz

$$\text{ERP(dBm)} = P \text{ (dBm)} - (\text{Balun Loss of the half-wave dipole Ant. (dB)}) + \text{Cable Loss(dB)}$$

B) Above 1 GHz


$$\text{ERP(dBm)} = P \text{ (dBm)} + G_h(\text{dBi}) - G_d(\text{dBi})$$

Where, $G_h(\text{dBi})$: Gain of the substitution horn antenna


$G_d(\text{dBi})$: Gain of the substitution half-wave dipole antenna

The respective calculated ERP of the spurious and harmonics were compared with the ERP of fundamental frequency by specified attenuation limits, $43 + 10 \log_{10}(\text{TP in watt})[\text{dB}]$. Where, TP = Transmitter power at the ANT OUT under test configuration as the hands free unit used.

Radiated Emission 30 MHz to 1000 MHz

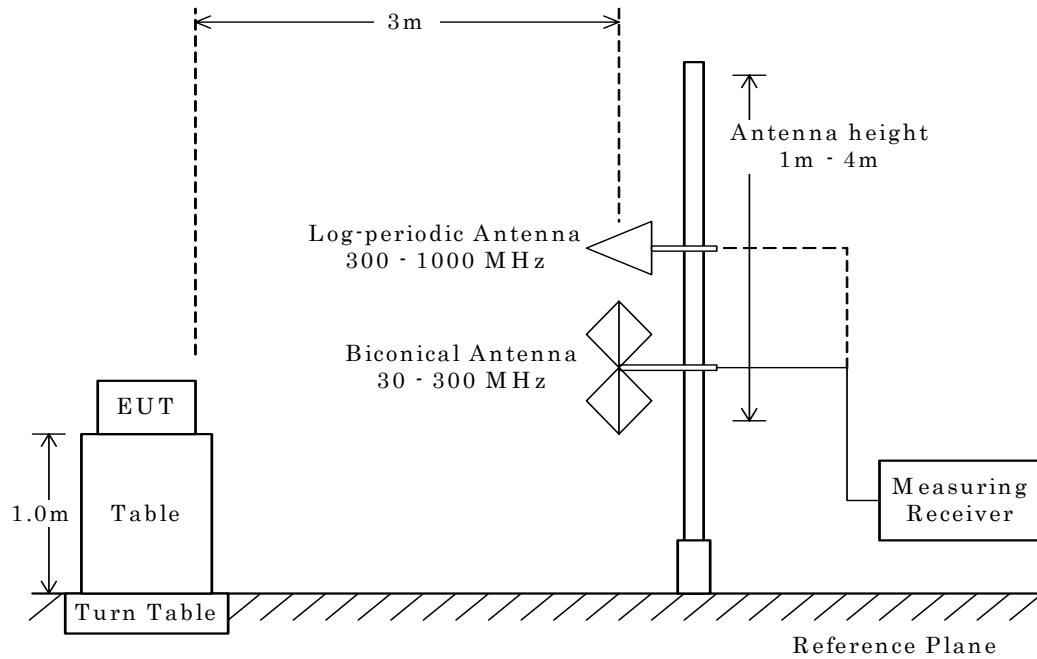


Radiated Emission above 1 GHz

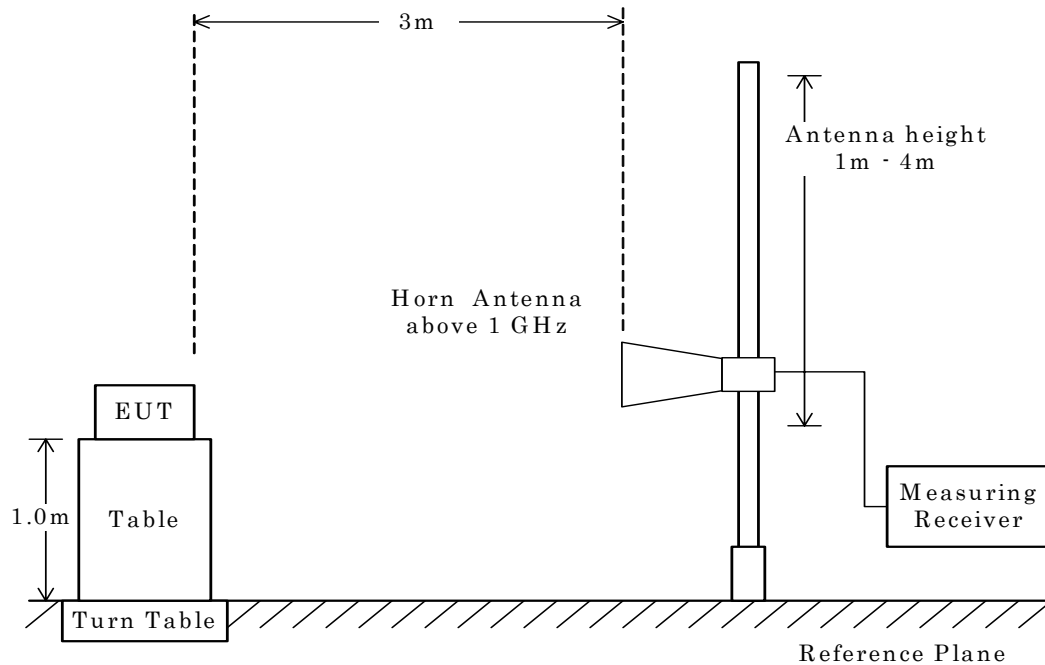


NOTE

The antenna height is scanned depending on the EUT's size and mounting height.

Radiated Emission 30 to 1000 MHz – Substitution Method

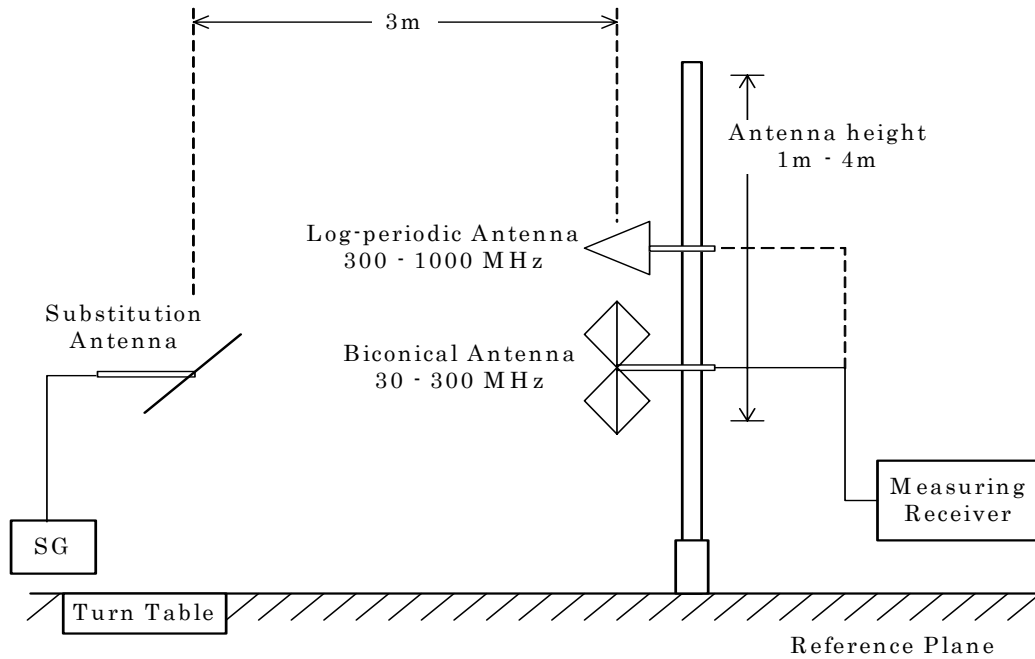

Radiated Emission above 1 GHz – Substitution Method

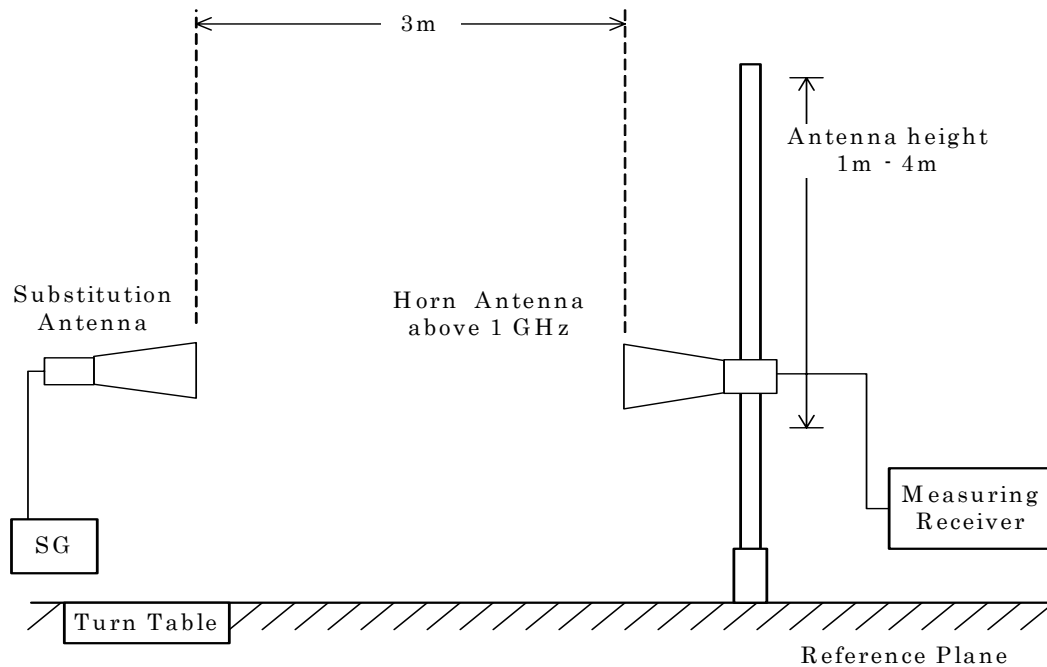


6.7 Frequency Stability (§2.1055)

Frequency Stability versus Temperature

The EUT was placed in an environmental chamber and was tested in the range from –30 to +50 degrees Celsius. The EUT was stabilized at each temperature. The power (4.0VDC) supplied was applied to the transmitter and allowed to stabilize for 10 minutes. The transmitting frequency was measured at startup and 2 minutes, 5 minutes and 10 minutes after startup. This procedure was repeated from –30 to +50 degrees Celsius at the interval of 10 degrees.

Frequency Stability versus Power Supply Voltage

The EUT was placed in an environmental chamber and was tested at the temperature of +20 degrees Celsius. The EUT was stabilized at the temperature. The power (4.0VDC) and the power (3.7VDC, the ending voltage) was applied to the EUT allowed to stabilize for 10 minutes. The transmitting frequency was measured at startup and 2 minutes, 5 minutes and 10 minutes after startup.

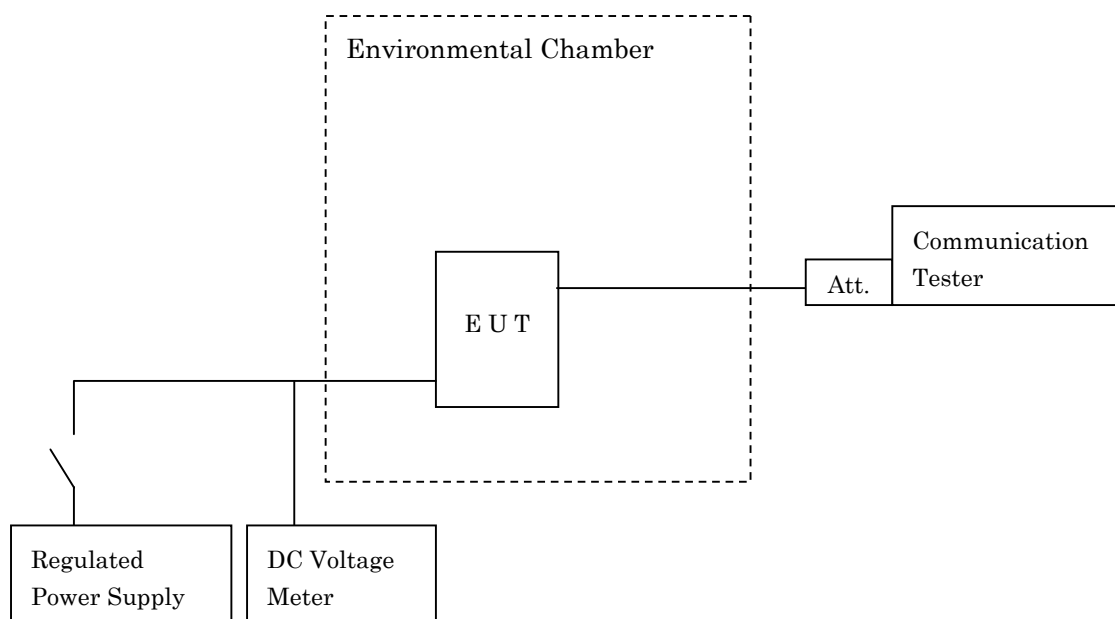

7 Equipment Under Test Modification

- ☒ - No modifications were conducted by JQA to achieve compliance to the limitations.
☐ - To achieve compliance to the limitations, the following changes were made by JQA during the compliance test.

The modifications will be implemented in all production models of this equipment.

Applicant : Not Applicable

Date : Not Applicable

Typed Name : Not Applicable

Position : Not Applicable

Signatory : Not Applicable

8 Responsible PartyResponsible Party of Test Item (Product)

Responsible Party :

Contact Person :

Signatory

9 Deviation from Standard

- ☒ - No deviations from the standard described in clause 1.
☐ - The following deviations were employed from the standard described in clause 1.

10 Test Results

10.1 RF Power Output (§2.1046)

10.1.1 Conducted RF Power Output

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

Transmitter Power is 712.9 mW at 1909.800 MHz

Uncertainty of Measurement Results at Amplitude +/-0.19 dB(2σ)

Remarks : GSM

10.1.2 ERP / EIRP RF Power Output

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

☒ - Passed ☐ - Failed ☐ - Not judged

Min. Limit Margin	0.6	dB	at	1850.200	MHz
-------------------	-----	----	----	----------	-----

Max. Limit Exceeding	dB	at	MHz
----------------------	----	----	-----

Uncertainty of Measurement Results at Amplitude +/-1.3 dB(2σ)

Remarks : The maximum EIRP is 1.738 W at 1850.200 MHz(GSM). The measurement result is within the range of measurement uncertainty.

10.2 Modulation Characteristics (§2.1047)

The requirements are ☐ - Applicable ☐ - Tested. ☐ - Not tested by applicant request.]
☒ - Not Applicable

☐ - Passed ☐ - Failed ☐ - Not judged

Remarks :

10.3 Occupied Bandwidth (§2.1049)

The requirements are ☒ - Applicable ☐ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

☒ - Passed ☐ - Failed ☐ - Not judged

(GSM-PCS1900)

The 99% Bandwidth is 247.7 kHz at 1909.800 MHzThe 26dB Bandwidth is 315.5 kHz at 1880.000 MHz

(EGPRS-PCS1900)

The 99% Bandwidth is 247.6 kHz at 1909.800 MHzThe 26dB Bandwidth is 315.2 kHz at 1850.200 MHzUncertainty of Measurement Results at Frequency +/-1.7 kHz(2 σ)Uncertainty of Measurement Results at Amplitude +/-0.24 dB(2 σ)

Remarks : _____

10.4 Spurious Emissions at Antenna Terminals (§2.1051)

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

☒ - Passed ☐ - Failed ☐ - Not judged

Min. Limit Margin 28.9 dB at 5729.400 MHz

Max. Limit Exceeding _____ dB at _____ MHz

Uncertainty of Measurement Results at Amplitude +/-0.24 dB(2 σ)

Remarks : _____

10.5 Band-Edge Emission (§2.1051)

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

☒ - Passed ☐ - Failed ☐ - Not judged

The Band-Edge level is -39.2 dBc at 1850.00 MHz

Uncertainty of Measurement Results at Frequency +/-1.7 kHz(2 σ)
Uncertainty of Measurement Results at Amplitude +/-0.24 dB(2 σ)

Remarks : _____

10.6 Field Strength of Spurious Radiation (§2.1053)

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

☒ - Passed ☐ - Failed ☐ - Not judged

Min. Limit Margin >21.7 dB at 13368.600 MHz

Max. Limit Exceeding _____ dB at _____ MHz

Uncertainty of Measurement Results 30 MHz – 1000 MHz +1.4/-1.3 dB(2 σ)
above 1 GHz +/-1.3 dB(2 σ)

Remarks : _____

10.7 Frequency Stability (§2.1055)

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

The Frequency Stability level is +0.06 ppm at 1880.000 MHz

Uncertainty of Measurement Results +/-10 Hz(2 σ)

Remarks : _____

11 Summary

General Remarks :

The EUT was tested according to the requirements of the following standard.

CFR 47 FCC Rules and Regulations Part 24

The test configuration is shown in clause 12 to 14.

The conclusion for the test items of which are required by the applied regulation is indicated under the test results.

Determining compliance with the limits in this report was based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

Test Results :

The "as received" sample;

- ☒ - fulfill the test requirements of the regulation mentioned on clause 1.
- ☐ - doesn't fulfill the test requirements of the regulation mentioned on clause 1.

Reviewed by:



Shigeru Kinoshita
Deputy Manager
Testing Dept. EMC Div.
JQA KITA-KANSAI Testing Center

Tested by:



Yuichi Fukumoto
Manager
Testing Dept. EMC Div.
JQA KITA-KANSAI Testing Center

12 Operating Condition

The test were carried under one modulation type shown as follows:

Modulation Burst Signal : DATA TSC 5 in accordance with GSM 05.02.

The Radiated Emission test were carried under 3 test configurations shown in clause 14.

In all tests, the fully charged battery is used for the EUT.

Detailed Transmitter portion:

Transmitter frequency : 1850.2 MHz(512CH) – 1909.8 MHz(810CH)

Local frequency : 1850.2 MHz(512CH) – 1909.8 MHz(810CH)

Detailed Transmitter portion:

Receiver frequency : 1930.2 MHz(512CH) – 1989.8 MHz(810CH)

Local frequency : 3860.4 MHz(512CH) – 3979.6 MHz(810CH)

Other Clock Frequency

RTC : 32.768 kHz

Reference : 26.0 MHz

13 Test Configuration

The equipment under test (EUT) consists of :

	Item	Manufacturer	Model No.	Serial No.	FCC ID
A	Cellular Phone	Sharp	SH8010C	004401/11/136 043/0	APYHRO00072
B	Lithium-ion Battery	SANYO	XN-1BT82	--	N/A
C	AC Charger	HOSIDEN	XN-1QC73	--	N/A
D	Headset	HOSIDEN	XN-1ER90	--	N/A

The auxiliary equipment used for testing :


None

Type of Cable:


No.	Description	Identification (Manu. etc.)	Connector Shielded	Cable Shielded	Ferrite Core	Length (m)
1	DC Power Cord	--	NO	--	NO	1.5
2	Headset Cable	--	NO	--	NO	1.7

14 Equipment Under Test Arrangement (Drawings)

a) Single Unit



b) AC Charger used

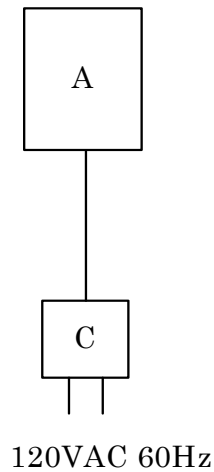

c) Headset used



Appendix A: Test Data

A.1 RF Power Output (§2.1046)

A.1.1 Conducted RF Power Output

A.1.1.1 GSM-PCS1900

(GSM-PCS1900)

Test Date: July 2, 2008
Temp.: 26 °C, Humi: 60 %

Transmitting Frequency CH	[MHz]	Correction Factor [dB]	Meter Reading (Peak) [dBm]	Results (Peak) [dBm]	[mW]
512	1850.200	20.00	8.37	28.37	687.1
661	1880.000	20.00	8.38	28.38	688.7
810	1909.800	20.00	8.53	28.53	712.9

Calculated result at 1909.800 MHz, as the maximum level point shown on underline:

Correction Factor	=	20.00	dB
+) Meter Reading	=	8.53	dBm
Result	=	28.53	dBm = 712.9 mW

NOTE : The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.

A.1.1.2 EGPRS-PCS1900

(EGPRS-PCS1900)

Test Date: July 2, 2008
Temp.: 26 °C, Humi: 60 %

Transmitting Frequency CH	[MHz]	Correction Factor [dB]	Meter Reading (Peak) [dBm]	Results (Peak) [dBm]	[mW]
512	1850.200	20.00	7.80	27.80	602.6
661	1880.000	20.00	7.77	27.77	598.4
810	1909.800	20.00	7.72	27.72	591.6

Calculated result at 1850.200 MHz, as the maximum level point shown on underline:

Correction Factor	=	20.00	dB
+) Meter Reading	=	7.80	dBm
Result	=	27.80	dBm = 602.6 mW

NOTE : The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.

A.1.2 ERP /EIRP Power Output

A.1.2.1 GSM-PCS1900

(GSM-PCS1900)

Test Date: June 28, 2008
Temp.: 24 °C, Humi: 62 %

1. Measurement Results

CH	Transmitting Frequency [MHz]	Emission Measurement [dB(μV)]		Substitution Measurement [dB(μV)]		Supplied Power to Substitution Antenna [dBm]	Gain of Substitution Antenna [dB]
		Hori. (Mh)	Vert. (Mv)	Hori. (Msh)	Vert. (Msv)		
512	1850.200	95.4	93.4	74.0	74.2	- 3.2	14.2
661	1880.000	95.1	93.9	74.3	74.5	- 3.2	14.2
810	1909.800	95.1	94.1	74.5	74.5	- 3.2	14.3

2. Calculation Results

CH	Transmitting Frequency [MHz]	Peak EIRP [dBm]		Maximum Peak EIRP [W]	Limits [dBm]	Margin [dB]
		(EIRPh)	Vert. (EIRPv)			
512	1850.200	32.4	30.2	1.738	33.0	+ 0.6
661	1880.000	31.8	30.4	1.514	33.0	+ 1.2
810	1909.800	31.7	30.7	1.479	33.0	+ 1.3

Calculated result at 1850.200 MHz, as the worst point shown on underline:

Emission Measurement (Mh)	=	95.4 dB(uV)
Substitution Measurement (Msh)	=	-74.0 dB(uV)
Supplied Power to Substitution Antenna	=	-3.2 dBm
+) Gain of Substitution Antenna	=	14.2 dB
Result (ERPh)	=	32.4 dBm = 1.738 W

Minimum Margin: 33.0 - 32.4 = 0.6 (dB)

NOTE : Setting of measuring instrument(s) :

Detector Function	Resolution B.W.	V.B.W.	Sweep Time
Peak	1 MHz	1 MHz	20 msec.

A.1.2.2 EGPRS-PCS1900

(EGPRS-PCS1900)

Test Date: June 28, 2008
Temp.: 24 °C, Humi: 62 %

1. Measurement Results

CH	Transmitting Frequency [MHz]	Emission Measurement [dB(μV)]		Substitution Measurement [dB(μV)]		Supplied Power to Substitution Antenna [dBm]	Gain of Substitution Antenna [dB]
		Hori. (Mh)	Vert. (Mv)	Hori. (Msh)	Vert. (Msv)		
512	1850.200	95.1	93.4	74.0	74.2	- 3.2	14.2
661	1880.000	94.7	94.0	74.3	74.5	- 3.2	14.2
810	1909.800	95.0	94.7	74.5	74.5	- 3.2	14.3

2. Calculation Results

CH	Transmitting Frequency [MHz]	Peak EIRP [dBm]		Maximum Peak EIRP [W]	Limits [dBm]	Margin [dB]
		(EIRPh)	Vert. (EIRPv)			
512	1850.200	32.1	30.2	1.622	33.0	+ 0.9
661	1880.000	31.4	30.5	1.380	33.0	+ 1.6
810	1909.800	31.6	31.3	1.445	33.0	+ 1.4

Calculated result at 1850.200 MHz, as the worst point shown on underline:

Emission Measurement (Mh)	=	95.1 dB(uV)
Substitution Measurement (Msh)	=	-74.0 dB(uV)
Supplied Power to Substitution Antenna	=	-3.2 dBm
+) Gain of Substitution Antenna	=	14.2 dB
Result (ERPh)	=	32.1 dBm = 1.622 W

Minimum Margin: 33.0 - 32.1 = 0.9 (dB)

NOTE : Setting of measuring instrument(s) :

Detector Function	Resolution B.W.	V.B.W.	Sweep Time
Peak	1 MHz	1 MHz	20 msec.

A.2 Modulation Characteristics (§2.1047)

Not Applicable

A.3 Occupied Bandwidth (§2.1049)

The resolution bandwidth was set to about 1% of emission bandwidth, -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

(GSM-PCS1900)


Channel	Frequency (MHz)	99% Bandwidth (kHz)	-26dBc Bandwidth (kHz)
512	1850.20	246.5	312.3
661	1880.00	247.6	315.5
810	1909.80	247.7	313.8

(EGPRS-PCS1900)

Channel	Frequency (MHz)	99% Bandwidth (kHz)	-26dBc Bandwidth (kHz)
512	1850.20	245.1	315.2
661	1880.00	244.4	308.1
30	1909.80	247.6	310.9


(GSM-PCS1900)

Low Channel

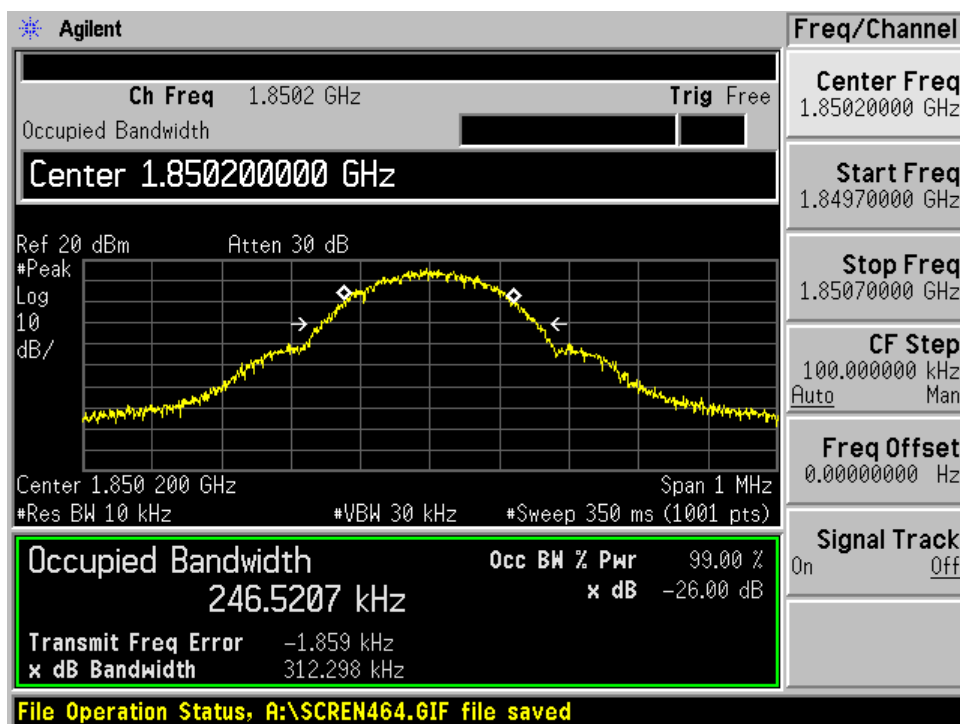


(GSM-PCS1900)

Middle Channel

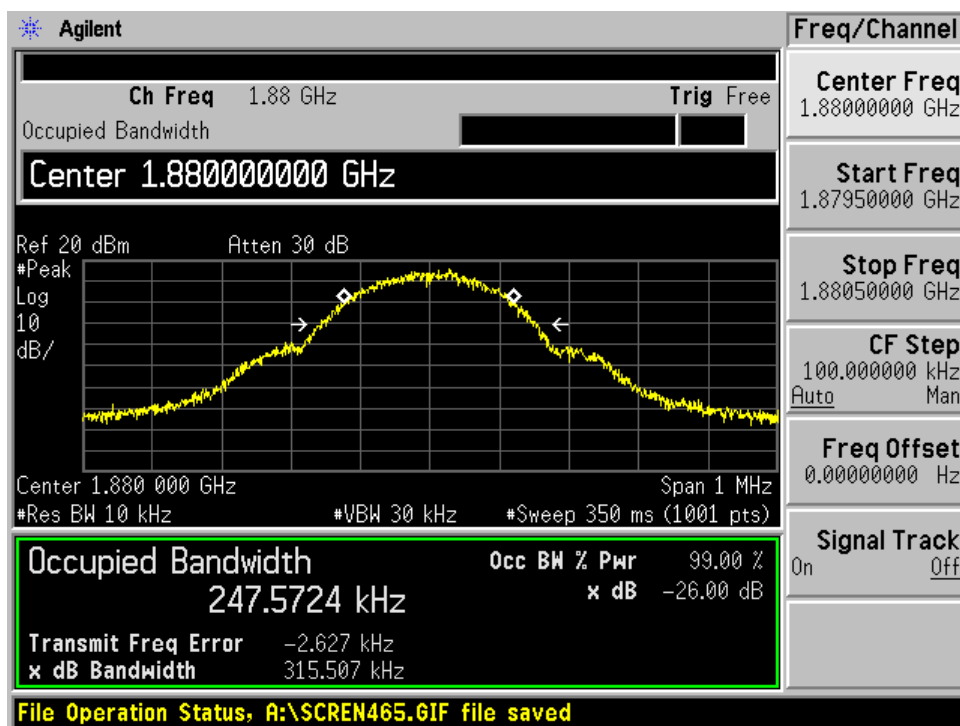

(GSM-PCS1900)

High Channel

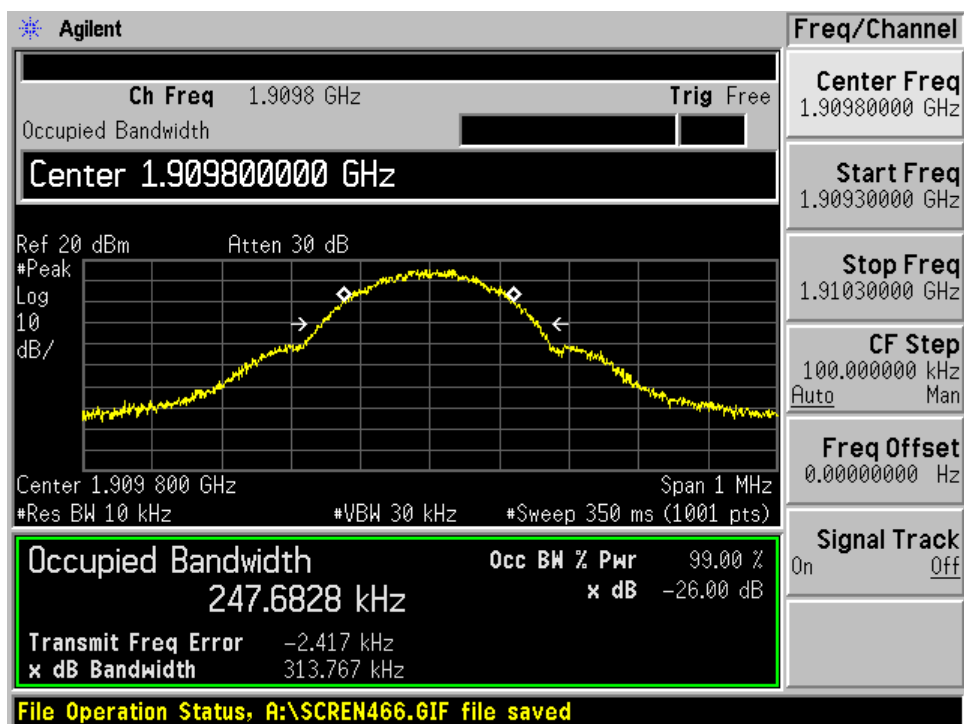

(EGPRS-PCS1900)

Low Channel



(EGPRS-PCS1900)

Middle Channel



(EGPRS-PCS1900)

High Channel



A.4 Spurious Emissions at Antenna Terminals (§2.1051)

(GSM-PCS1900)

Test Date: July 2, 2008
Temp.: 26 °C, Humi: 60 %

CH	Transmitting Frequency [MHz]	Measured Frequency [MHz]	Corr. Factor [dB]	Meter Readings [dBm]	Limits [dBm]	Results [dBm]	Margin [dB]	Remarks
512	1850.200	3700.400	11.4	< -63.0	-13.0	< -51.6	> +38.6	C
		5550.600	11.4	< -63.0	-13.0	< -51.6	> +38.6	C
		7400.800	11.4	< -63.0	-13.0	< -51.6	> +38.6	C
		9251.000	11.3	-61.9	-13.0	-50.6	+37.6	C
		11101.200	11.4	< -63.0	-13.0	< -51.6	> +38.6	C
		12951.400	11.6	< -63.0	-13.0	< -51.4	> +38.4	C
		14801.600	11.8	< -63.0	-13.0	< -51.2	> +38.2	C
		16651.800	12.0	< -63.0	-13.0	< -51.0	> +38.0	C
		18502.000	12.2	< -63.0	-13.0	< -50.8	> +37.8	C
661	1880.000	3760.000	11.4	< -63.0	-13.0	< -51.6	> +38.6	C
		5640.000	11.3	-54.1	-13.0	-42.8	+29.8	C
		7520.000	11.4	< -63.0	-13.0	< -51.6	> +38.6	C
		9400.000	11.4	< -63.0	-13.0	< -51.6	> +38.6	C
		11280.000	11.4	-59.0	-13.0	-47.6	+34.6	C
		13160.000	11.6	< -63.0	-13.0	< -51.4	> +38.4	C
		15040.000	11.8	< -63.0	-13.0	< -51.2	> +38.2	C
		16920.000	12.1	< -63.0	-13.0	< -50.9	> +37.9	C
		18800.000	12.2	< -63.0	-13.0	< -50.8	> +37.8	C
810	1909.800	3819.600	11.4	< -63.0	-13.0	< -51.6	> +38.6	C
		5729.400	11.3	-53.2	-13.0	-41.9	+28.9	C
		7639.200	11.4	< -63.0	-13.0	< -51.6	> +38.6	C
		9549.000	11.4	< -63.0	-13.0	< -51.6	> +38.6	C
		11458.800	11.4	-60.5	-13.0	-49.1	+36.1	C
		13368.600	11.6	< -63.0	-13.0	< -51.4	> +38.4	C
		15278.400	11.8	< -63.0	-13.0	< -51.2	> +38.2	C
		17188.200	12.1	< -63.0	-13.0	< -50.9	> +37.9	C
		19098.000	12.2	< -63.0	-13.0	< -50.8	> +37.8	C

Calculated result at 5729.4 MHz, as the worst point shown on underline:

Corr. Factor	=	11.3 dB
+) Meter Reading	=	-53.2 dBm
Result	=	-41.9 dBm


Minimum Margin: $-13.0 - (-41.9) = 28.9$ (dB)

NOTES


- The spectrum was checked from 9 kHz to 20 GHz.
- Applied limits : -13.0 [dBm] = $10\log(\text{TP}[\text{mW}]) - (43 + 10\log(\text{tp}[\text{W}])) = 10\log(\text{TP}[\text{mW}]) - (43 + (10 \log(\text{TP}[\text{mW}]) - 30))$
where, $\text{tp}[\text{W}] = \text{TP}[\text{mW}] / 1000$: Transmitter power at antenna terminal
- The correction factor is shown as follows:
Corr. Factor [dB] = Cable Loss + 10dB Pad Att. [dB] (9 kHz - 2 GHz)
Corr. Factor [dB] = Cable Loss + 10dB Pad Att. + High Pass Filter Loss (D-96) [dB] (over 2 GHz)
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- Setting of measuring instrument(s) :

	Detector Function	RES B.W.	V.B.W.	Sweep Time
A	Peak	200 Hz	1 kHz	AUTO
B	Peak	10 kHz	30 kHz	AUTO
C	Peak	1 MHz	3 MHz	AUTO


Low Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

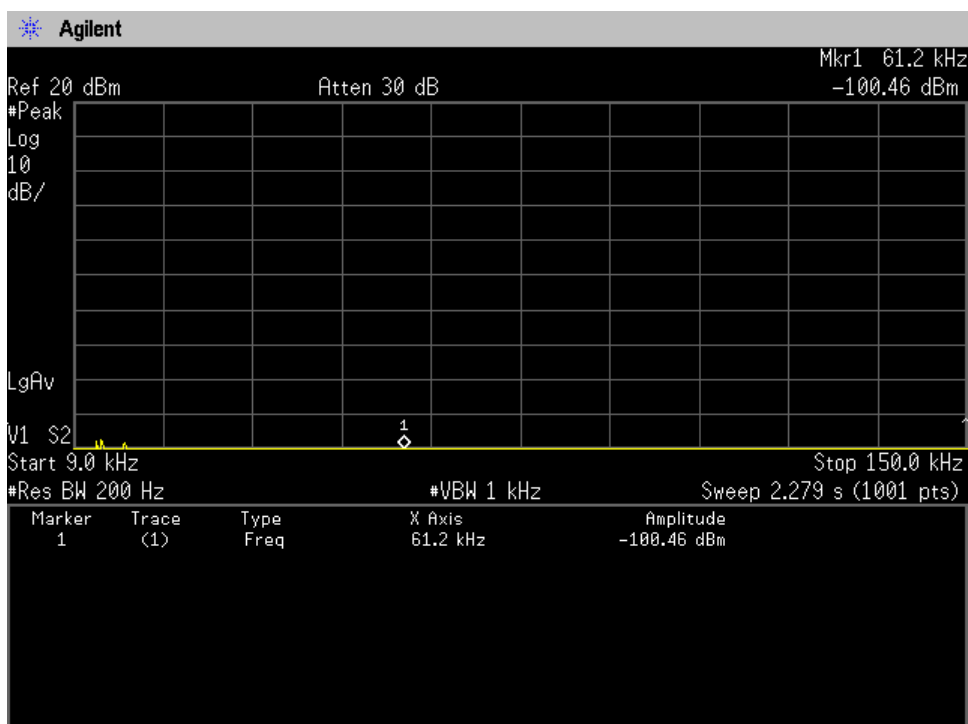


Low Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

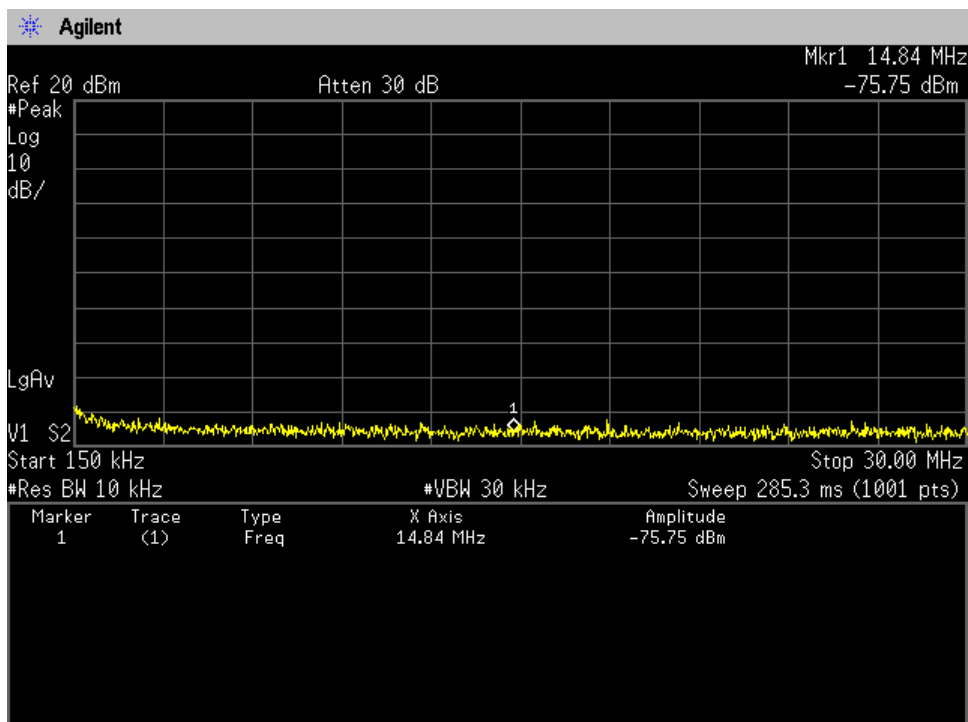


Low Channel, Out-Of-Band Emissions (30 MHz – 2 GHz)

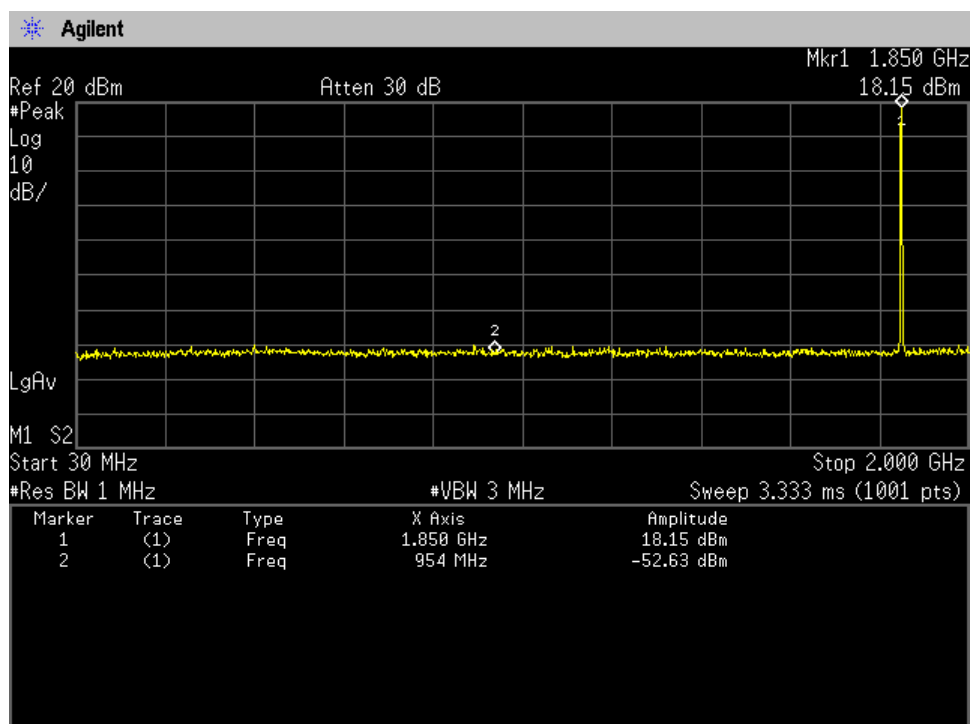


Low Channel, Out-Of-Band Emissions (2 GHz – 20 GHz)

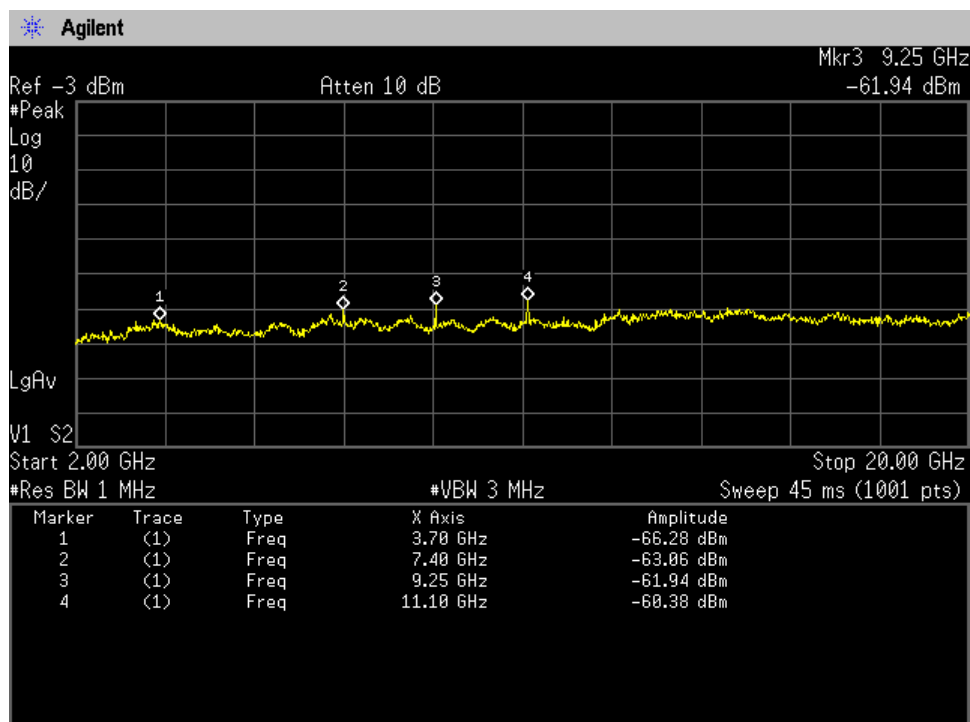


Middle Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

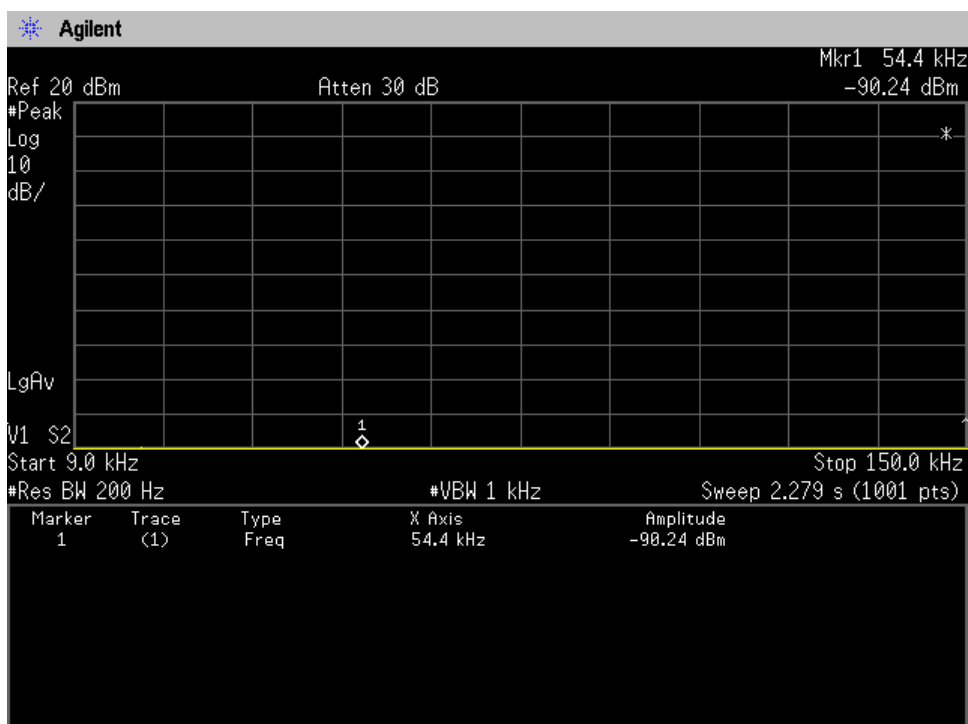


Middle Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

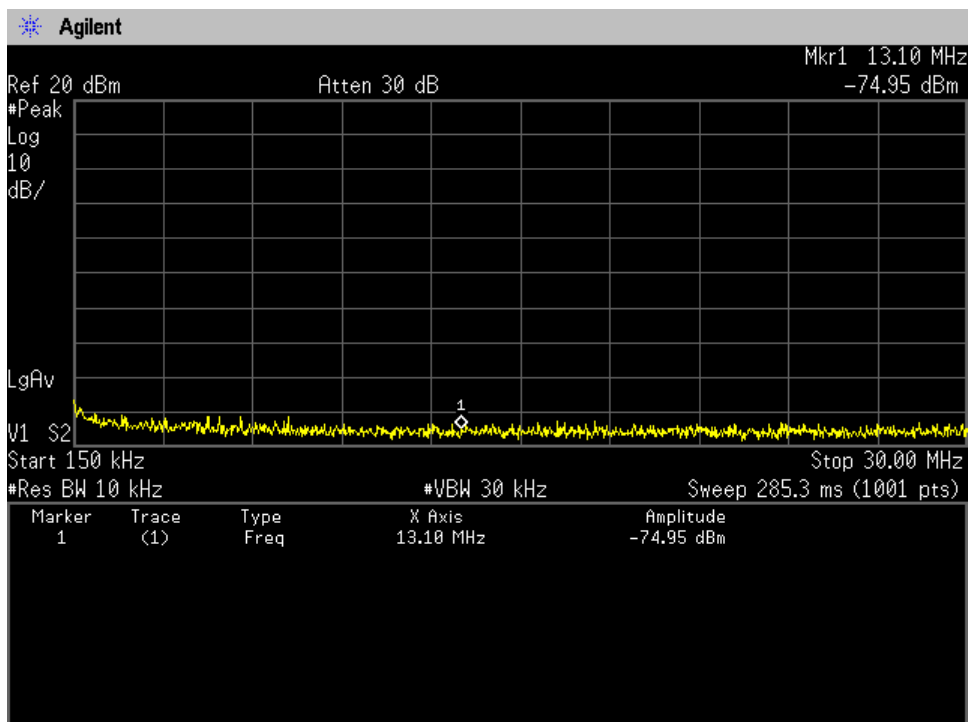


Middle Channel, Out-Of-Band Emissions (30 MHz – 2 GHz)

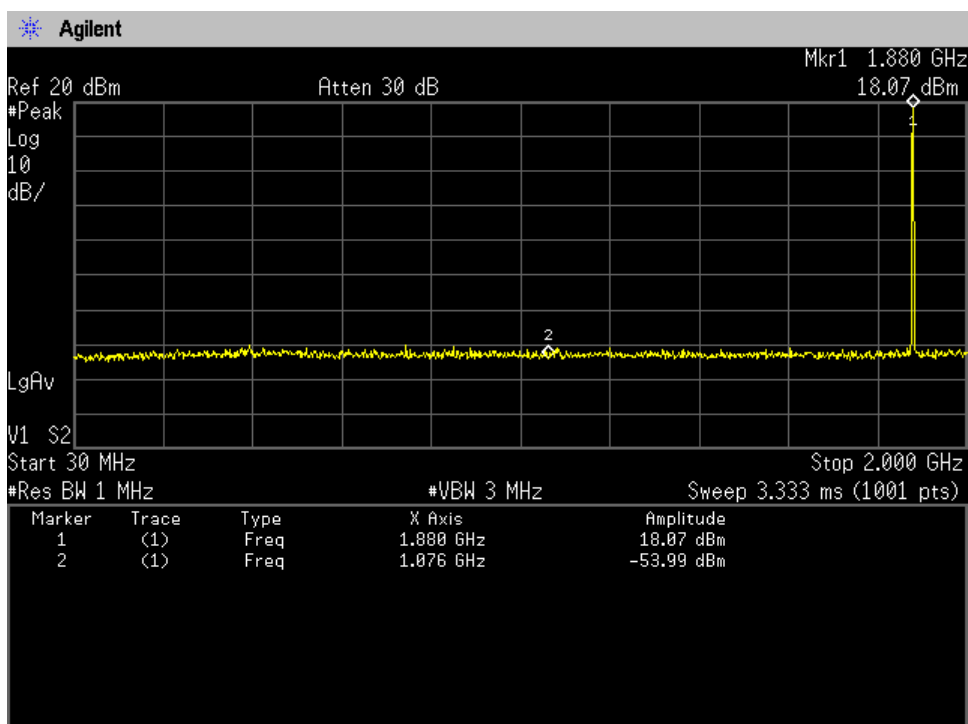


Middle Channel, Out-Of-Band Emissions (2 GHz – 20 GHz)

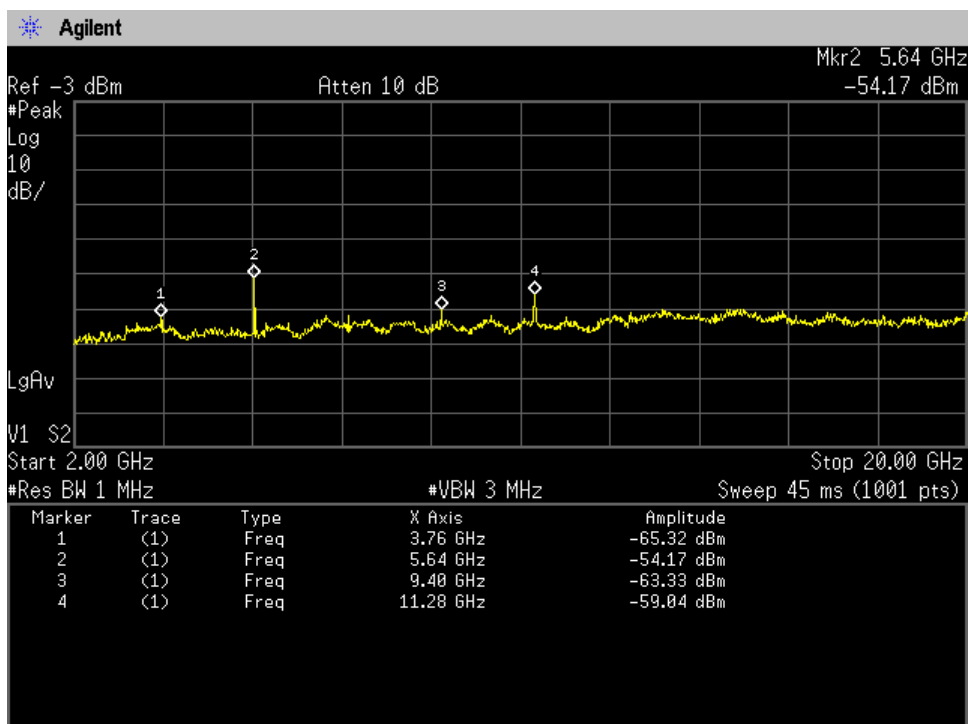


High Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

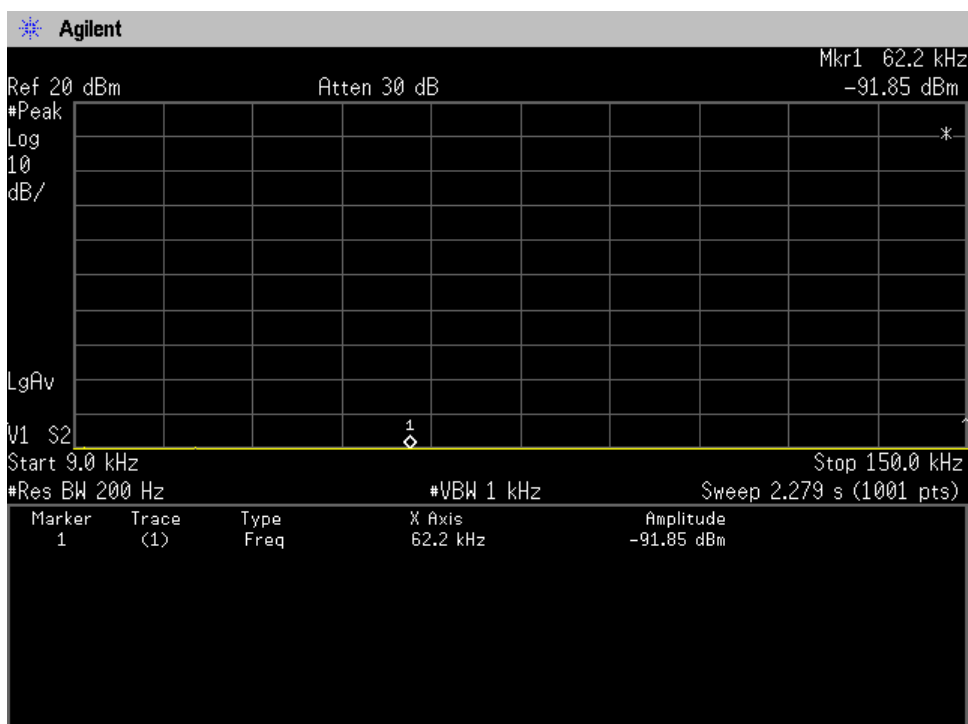


High Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

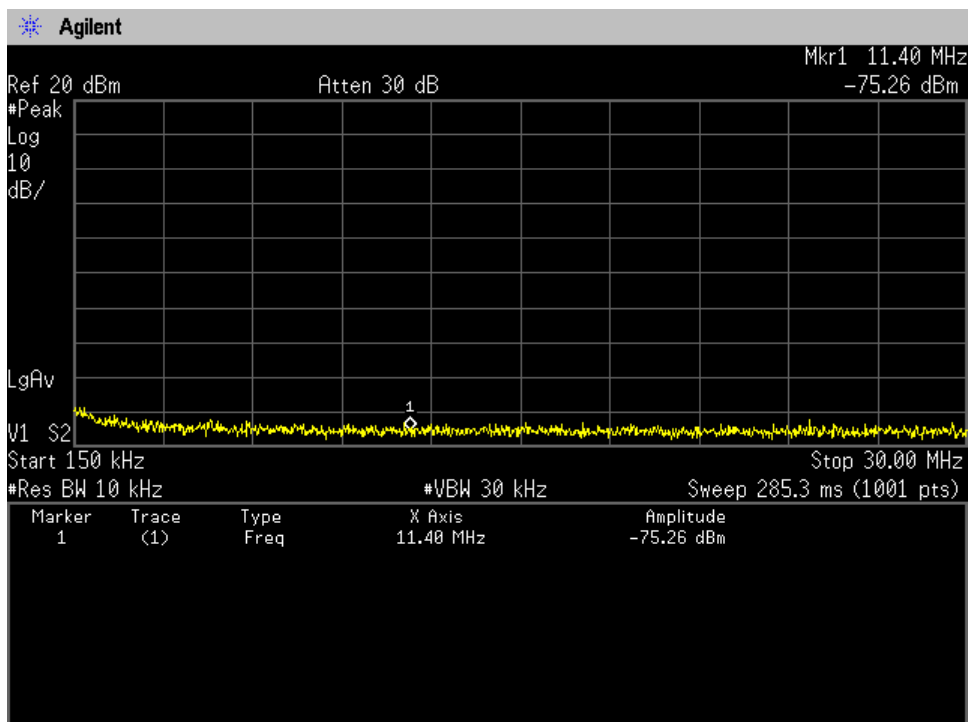

High Channel, Out-Of-Band Emissions (30 MHz – 2 GHz)

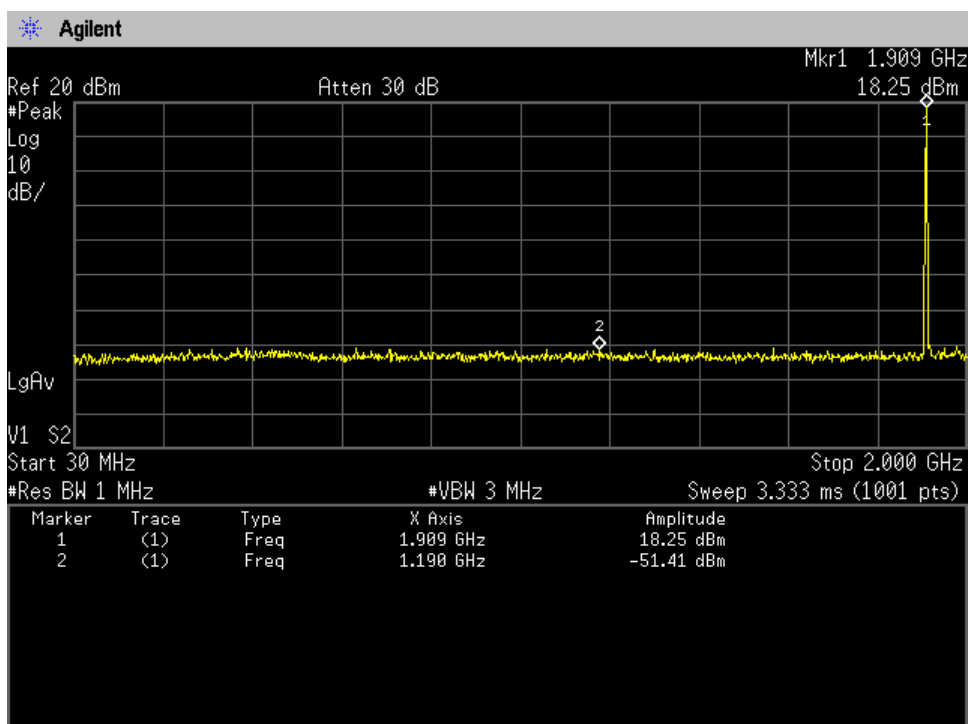

High Channel, Out-Of-Band Emissions (2 GHz – 20 GHz)

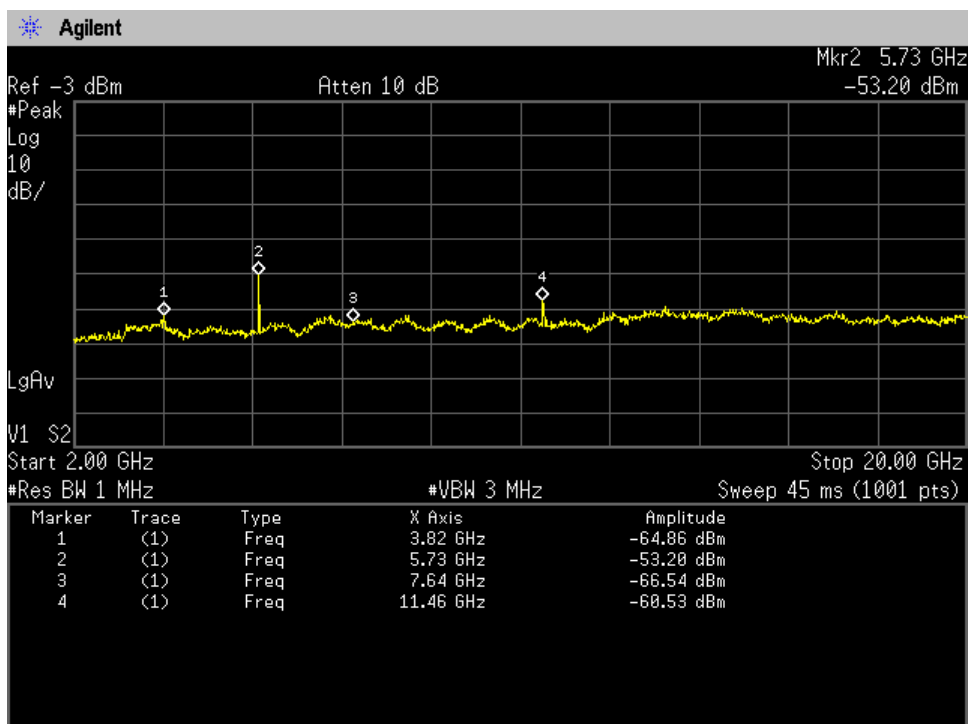


A.5 Band-Edge Emission(§2.1051)


(GSM-PCS1900)

Channel	Frequency (MHz)	Band-Edge Frequency (MHz)	Band-Edge Level (dBc)
512	1850.20	1850.00	-39.2
810	1909.80	1910.00	-39.2

Low Channel, Band-Edge Emission

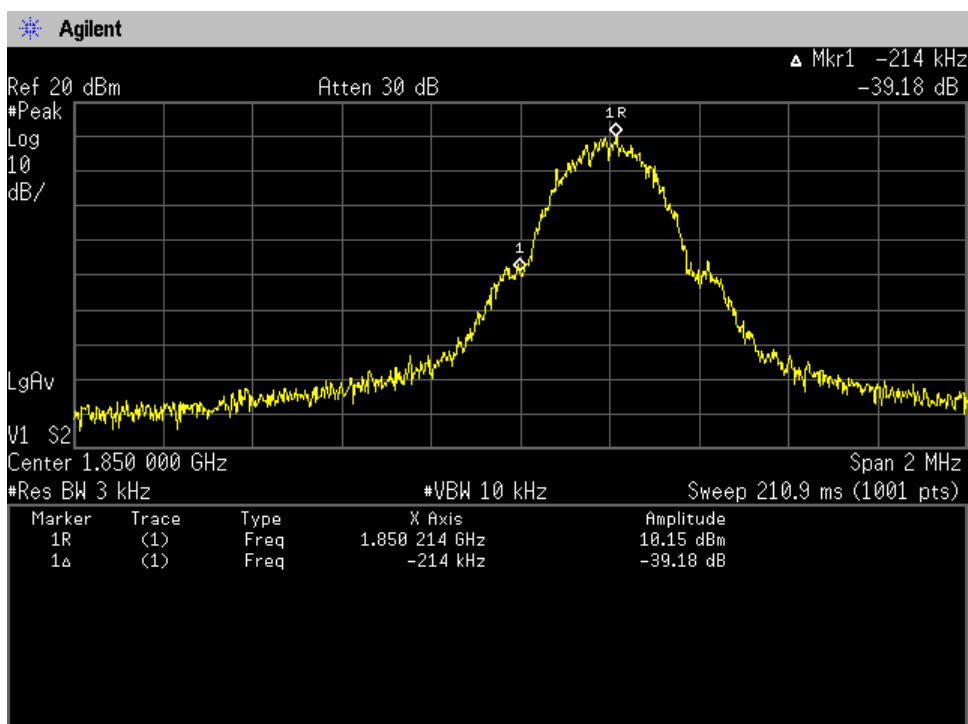

High Channel, Band-Edge Emission

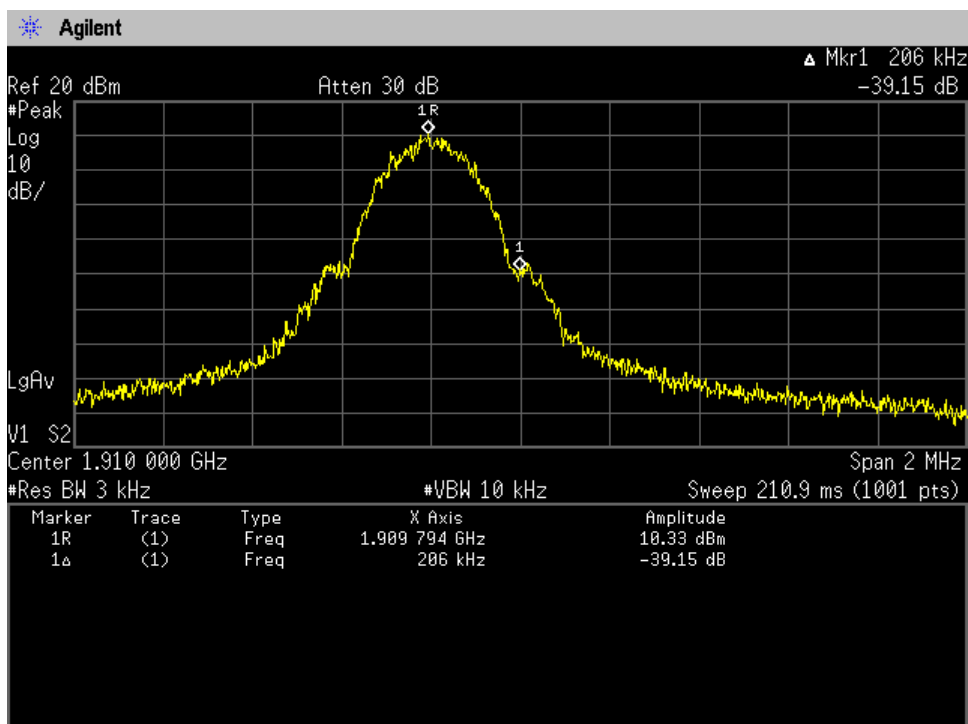

A.6 Field Strength of Spurious Radiation (§2.1053)

(GSM-PCS1900)

Test Configuration : Single Unit					Test Date: June 28, 2008 Temp.: 24 °C, Humi: 62 %		
CH	Transmitting Frequency [MHz]	Measured Frequency [MHz]	ERP [dBm]		Limits [dBm]	Margin [dB]	Remarks
			Hori.	Vert.			
512	1850.200	3700.400	< -39.2	< -39.2	-13.0	> +26.2	C
		5550.600	< -37.3	< -37.3	-13.0	> +24.3	C
		7400.800	< -36.4	< -36.4	-13.0	> +23.4	C
		9251.000	< -40.3	< -40.3	-13.0	> +27.3	C
		11101.200	< -40.4	< -40.4	-13.0	> +27.4	C
		12951.400	< -35.1	< -35.1	-13.0	> +22.1	C
		14801.600	< -35.0	< -35.0	-13.0	> +22.0	C
		16651.800	< -36.4	< -36.4	-13.0	> +23.4	C
		18502.000	< -38.6	< -38.6	-13.0	> +25.6	C
661	1880.000	3760.000	< -39.6	< -39.6	-13.0	> +26.6	C
		5640.000	< -37.0	< -37.0	-13.0	> +24.0	C
		7520.000	< -35.6	< -35.6	-13.0	> +22.6	C
		9400.000	< -45.6	< -45.6	-13.0	> +32.6	C
		11280.000	< -45.2	< -45.2	-13.0	> +32.2	C
		13160.000	< -34.9	< -34.9	-13.0	> +21.9	C
		15040.000	< -35.4	< -35.4	-13.0	> +22.4	C
		16920.000	< -36.6	< -36.6	-13.0	> +23.6	C
		18800.000	< -38.6	< -38.6	-13.0	> +25.6	C
810	1909.800	3819.600	< -39.7	< -39.7	-13.0	> +26.7	C
		5729.400	< -36.9	< -36.9	-13.0	> +23.9	C
		7639.200	< -40.1	< -40.1	-13.0	> +27.1	C
		9549.000	< -45.9	< -45.9	-13.0	> +32.9	C
		11458.800	< -45.4	< -45.4	-13.0	> +32.4	C
		13368.600	< -34.7	< -34.7	-13.0	> +21.7	C
		15278.400	< -35.8	< -35.8	-13.0	> +22.8	C
		17188.200	< -36.4	< -36.4	-13.0	> +23.4	C
		19098.000	< -38.6	< -38.6	-13.0	> +25.6	C

Calculated result at 13368.6 MHz, as the worst point shown on underline:
Minimum Margin: $-13.0 - (<-34.7) = >21.7$ (dB)

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 30 MHz to 20 GHz.
3. All emissions not reported were more than 20 dB below the applied limits.
4. Applied limits : -13.0 [dBm] = $10\log(TP[mW]) - (43 + 10\log(tp[W])) = 10\log(TP[mW]) - (43 + (10 \log(TP[mW]) - 30))$
where, $tp[W] = TP[mW] / 1000$: Transmitter power at antenna terminal
5. The symbol of "<" means "or less".
6. The symbol of ">" means "more than".
7. Setting of measuring instrument(s) :

	Detector Function	RES B.W.	V.B.W.	Sweep Time
A	Peak	10 kHz	30 kHz	20 msec.
B	Peak	100 kHz	300 kHz	20 msec.
C	Peak	1 MHz	3 MHz	20 msec.

A.7 Frequency Stability (§2.1055)

(GSM-PCS1900)

Test Date: July 1, 2008

1. Frequency Stability Measurement versus Temperature

Transmitting Frequency : 1880.000 MHz (661 ch)
DC Supply Voltage : 4.0 VDC

Ambient Temperature [°C]	Startup	Deviation [ppm]			Limits [ppm]	Margin [ppm]
		2 minutes	5 minutes	10 minutes		
-30	<u>+ 0.06</u>	+ 0.03	+ 0.02	+ 0.02	N/A	N/A
-20	<u>+ 0.06</u>	- 0.01	+ 0.01	+ 0.02	N/A	N/A
-10	+ 0.03	- 0.02	+ 0.01	+ 0.02	N/A	N/A
0	- 0.03	- 0.03	- 0.03	- 0.02	N/A	N/A
10	- 0.04	- 0.03	- 0.03	+ 0.02	N/A	N/A
20	- 0.04	- 0.03	+ 0.02	+ 0.02	N/A	N/A
30	- 0.04	- 0.03	+ 0.02	+ 0.02	N/A	N/A
40	- 0.04	- 0.03	- 0.02	+ 0.02	N/A	N/A
50	- 0.03	- 0.03	+ 0.01	+ 0.03	N/A	N/A

2. Frequency Stability Measurement versus Power Supply Voltage

Transmitting Frequency : 1880.000 MHz (661 ch)
DC Supply Voltage : 20 °C

Ambient Temperature [°C]	Startup	Deviation [ppm]			Limits [ppm]	Margin [ppm]
		2 minutes	5 minutes	10 minutes		
4.0	- 0.04	- 0.03	+ 0.02	+ 0.02	N/A	N/A
3.7(Ending)	- 0.04	- 0.03	+ 0.02	+ 0.01	N/A	N/A

Test condition example as the maximum deviation point shown on underline:

Ambient Temperature : -30 °C / Startup

DC Supply Voltage : 4 VDC

NOTE : The measurement were made after all of components of the oscillator sufficiently stabilized at each temperature.

Appendix B: Test Arrangement (Photographs)

Radiated Emission

This page is CONFIDENTIAL.

This page is CONFIDENTIAL.

Appendix C: Test Instruments**C.1 RF Power Output****C.1.1 Conducted RF Power Output**

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Power Meter	E4417A	Agilent	B-51	2008/6	1 Year
Power Sensor	E9323A	Agilent	B-59	2008/6	1 Year
Attenuator	54-10	Weinschel	D-82	2008/6	1 Year
Attenuator	54-10	Weinschel	D-83	2008/6	1 Year

C.1.2 ERP /EIRP Power Output

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Spectrum Analyzer	E4446A	Agilent	A-39	2007/12	1 Year
Signal Generator	E8257D	Agilent	B-39	2007/7	2 Years
Power Meter	N1911A	Agilent	B-63	2008/6	1 Year
Power Sensor	N1921A	Agilent	B-64	2008/6	1 Year
Attenuator(RX)	2-10	Weinschel	D-79	2007/9	1 Year
Attenuator(TX)	2-10	Weinschel	D-80	2007/9	1 Year
RF Cable(RX)	SUCOFLEX104	SUHNER	C-40-11	2007/11	1 Year
RF Cable(TX)	SUCOFLEX 102/E	SUHNER	C-70	2008/3	1 Year
Horn Antenna(RX)	91889-2	EATON	C-40-2	2008/6	1 Year
Horn Antenna(TX)	91889-2	EATON	C-41-2	2008/6	1 Year

B.2 Modulation Characteristics

Not Applicable

C.3 Occupied Bandwidth

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Spectrum Analyzer	E4446A	Agilent	A-39	2007/12	1 Year
Attenuator	54-10	Weinschel	D-83	2008/6	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-51	2008/6	1 Year

C.4 Spurious Emissions at Antenna Terminals

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Spectrum Analyzer	E4446A	Agilent	A-39	2007/12	1 Year
Attenuator	54-10	Weinschel	D-83	2008/6	1 Year
HPF	HPM13899	MICRO-TRONICS	D-96	2008/2	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-51	2008/6	1 Year

C.5 Band-Edge Emission

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Spectrum Analyzer	E4446A	Agilent	A-39	2007/12	1 Year
Attenuator	54-10	Weinschel	D-83	2008/6	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-51	2008/6	1 Year

C.6 Field Strength of Spurious Radiation

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Test Receiver	ESCI	Rohde & Schwarz	A-42	2007/12	1 Year
Biconical Antenna	VHA9103/BBA9106	Schwarzbeck	C-30	2007/8	1 Year
Log-periodic Antenna	UHALP 9108A1	Schwarzbeck	C-31	2007/8	1 Year
RF Cable	--	----	H-5	2007/8	1 Year
Site Attenuation	--	----	H-17	2007/11	1 Year
Spectrum Analyzer	E4446A	Agilent	A-39	2007/12	1 Year
Signal Generator	E8257D	Agilent	B-39	2007/7	2 Years
Power Meter	N1911A	Agilent	B-63	2008/6	1 Year
Power Sensor	N1921A	Agilent	B-64	2008/6	1 Year
Attenuator	2-10	Weinschel	D-79	2007/9	1 Year
Attenuator	2-10	Weinschel	D-80	2007/9	1 Year
Attenuator	54-10	Weinschel	D-82	2007/11	1 Year
Attenuator	54-10	Weinschel	D-83	2007/11	1 Year
Pre-Amplifier	WJ-6611-513	Watkins Johnson	A-23	2007/11	1 Year
Pre-Amplifier	WJ-6882-824	Watkins Johnson	A-21	2007/11	1 Year
Pre-Amplifier	DBL-0618N515	DBS Microwave	A-33	2007/11	1 Year
RF Cable	SUCOFLEX104	SUHNER	C-40-11	2007/11	1 Year
RF Cable	SUCOFLEX104	SUHNER	C-40-14	2007/11	1 Year
RF Cable	SUCOFLEX 102/E	SUHNER	C-70	2008/3	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-54	2008/3	1 Year
RF Cable	102EA-40 11K-252 x2 2m	SUHNER	C-69	2008/3	1 Year
Horn Antenna	91888-2	EATON	C-40-1	2008/6	1 Year
Horn Antenna	91888-2	EATON	C-41-1	2008/6	1 Year
Horn Antenna	91889-2	EATON	C-40-2	2008/6	1 Year
Horn Antenna	91889-2	EATON	C-41-2	2008/6	1 Year
Horn Antenna	94613-1	EATON	C-40-3	2008/6	1 Year
Horn Antenna	94613-1	EATON	C-41-3	2008/6	1 Year
Horn Antenna	91891-2	EATON	C-40-4	2008/6	1 Year
Horn Antenna	91891-2	EATON	C-41-4	2008/6	1 Year
Horn Antenna	94614-1	EATON	C-40-5	2008/6	1 Year
Horn Antenna	CL-107-43	ARNELLAB	C-41-5	2008/6	1 Year
Horn Antenna	3160-09	EMCO	C-48	2008/6	1 Year

C.7 Frequency Stability

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Universal Telecommunication Tester	CMU200	Rohde&Schwarz	B-21	2008/4	1 Year
DC Voltage Meter	2011-39	YEW	B-33	2008/4	1 Year
Environmental Chamber	PL-4KPH (S/N:14007470)	TABAI ESPEC	--	N/A	N/A
Temperature Recorder	SRF106AS00000M11 (S/N:1400909)	TABAI ESPEC	--	2007/10	1 Year
DC Power Supply	NL035-10	TAKASAGO	F-4	N/A	N/A