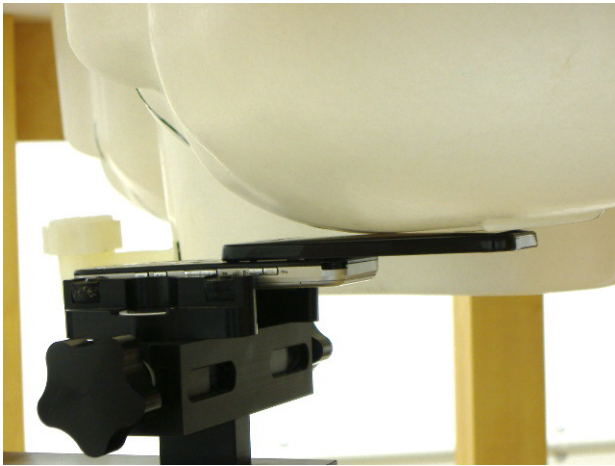
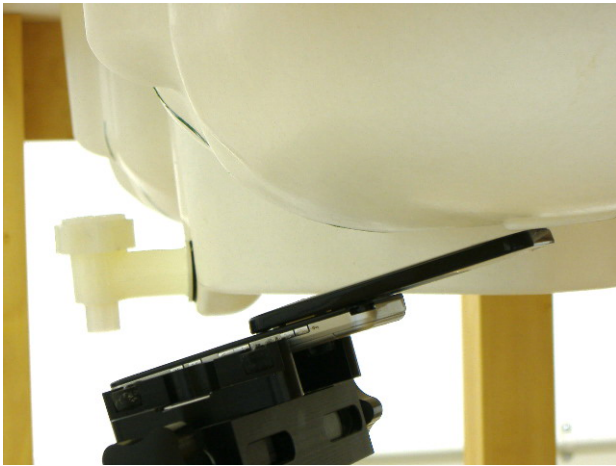
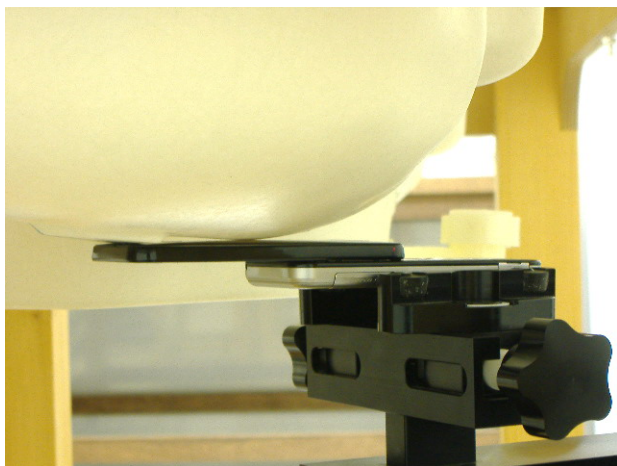
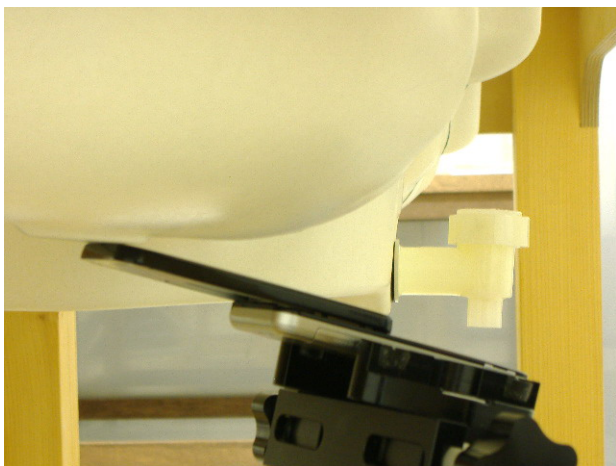


A.3 SAR Measurement Data

A.3.1 Left Head – slide out (keypad open)

							
Cheek/Touch Position	Ear/Tilt Position						
GSM 1900 (Duty Cycle: 12.5 %, Crest Factor: 8)				Date : June 24, 2008			
Test Position	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	28.68	-0.017		0.106	22.0
	0810	1909.80	--	--		**	--
Ear/Tilt	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	28.68	-0.073		0.097	22.0
	0810	1909.80	--	--		**	--
NOTES :							
1. Depth of Liquid : 15.0 cm							
2. Transmitter power was measured at the antenna-conducted terminal.							
3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.							
4. Please refer to attachment for the result presentation in plot format.							



A.3.2 Right Head – slide out (keypad open)

							
Cheek/Touch Position				Ear/Tilt Position			
GSM 1900 (Duty Cycle: 12.5 %, Crest Factor: 8)					Date : June 24, 2008		
Test Position	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	28.68	0.040		0.090	22.0
	0810	1909.80	--	--		**	--
Ear/Tilt	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	28.68	-0.040		0.138	22.0
	0810	1909.80	--	--		**	--
NOTES :							
1. Depth of Liquid : 15.0 cm							
2. Transmitter power was measured at the antenna-conducted terminal.							
3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.							
4. Please refer to attachment for the result presentation in plot format.							


A.3.3 Left Head – slide in (keypad close)

							
Cheek/Touch Position		Ear/Tilt Position					
GSM 1900 (Duty Cycle: 12.5 %, Crest Factor: 8)					Date : June 24, 2008		
Test Position	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	28.68	0.006		0.157	22.0
	0810	1909.80	--	--		**	--
Ear/Tilt	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	28.68	-0.041		0.137	22.0
	0810	1909.80	--	--		**	--
NOTES :							
1. Depth of Liquid : 15.0 cm							
2. Transmitter power was measured at the antenna-conducted terminal.							
3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.							
4. Please refer to attachment for the result presentation in plot format.							

A.3.4 Right Head – slide in (keypad close)

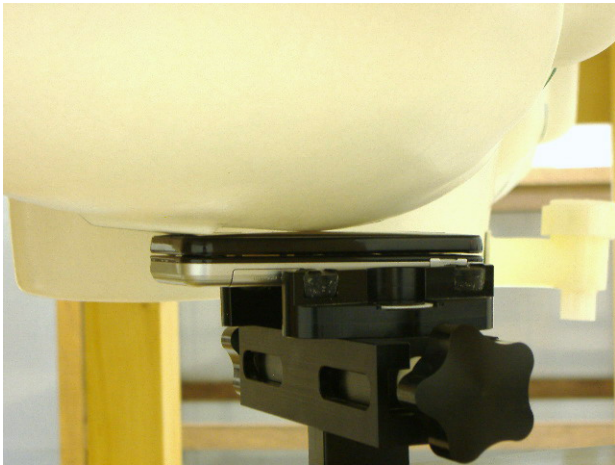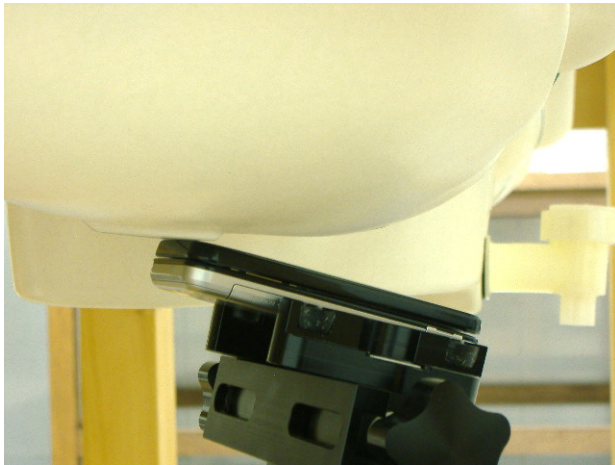							
Cheek/Touch Position				Ear/Tilt Position			
GSM 1900 (Duty Cycle: 12.5 %, Crest Factor: 8)					Date : June 24, 2008		
Test Position	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	0512	1850.20	28.70	0.047	1.6	0.227	22.0
	0661	1880.00	28.68	-0.010		0.191	22.0
	0810	1909.80	28.65	-0.061		0.158	22.0
Ear/Tilt	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	28.68	0.065		0.153	22.0
	0810	1909.80	--	--		**	--
NOTES :							
1. Depth of Liquid : 15.0 cm							
2. Transmitter power was measured at the antenna-conducted terminal.							
3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.							
4. Please refer to attachment for the result presentation in plot format.							

A.3.5 Body-worn Position

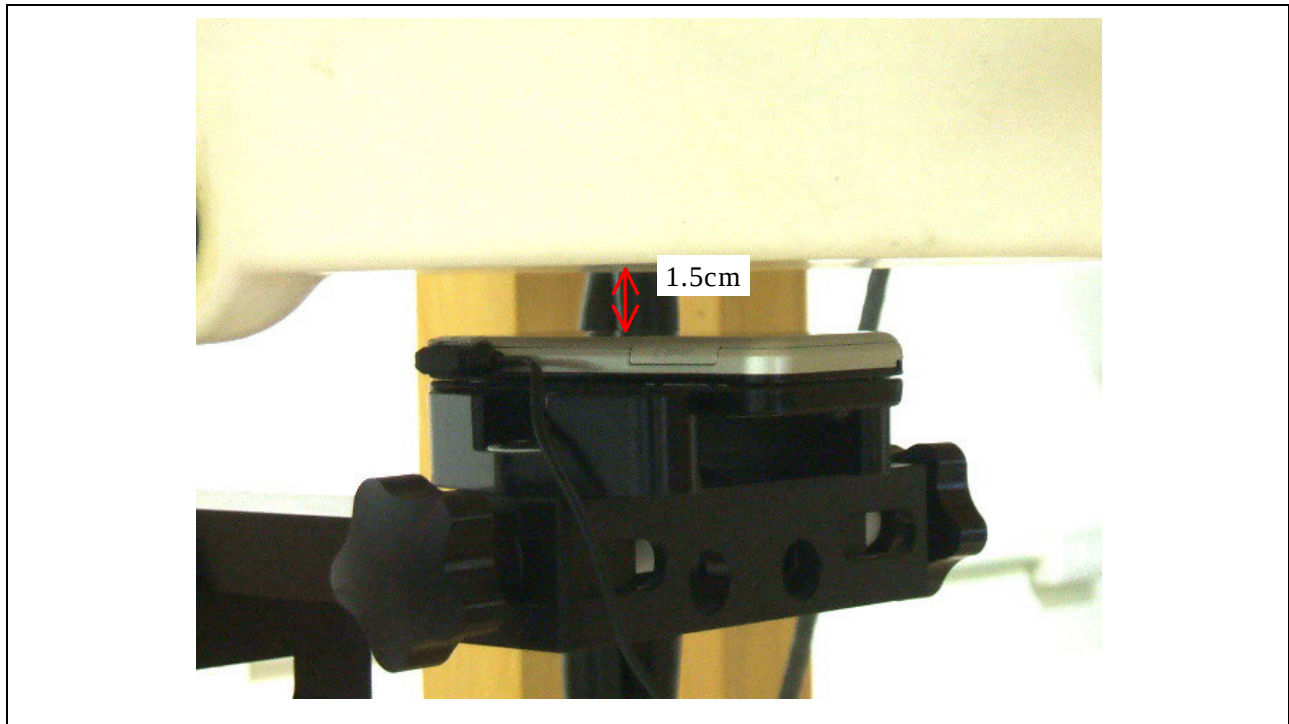

GSM 1900 (Duty Cycle: 12.5 %, Crest Factor: 8)					Date : June 30, 2008		
Separation Distance	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
1.5 cm	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	28.68	-0.038		0.254	23.0
	0810	1909.80	--	--		**	--
GSM 1900 GSM+GPRS (Duty Cycle: 25.0 %, Crest Factor: 4)							
1.5 cm	0512	1850.20	28.64	-0.045	1.6	0.642	23.0
	0661	1880.00	28.63	-0.075		0.487	23.0
	0810	1909.80	28.59	-0.001		0.398	23.0
GSM 1900 GSM+EGPRS (Duty Cycle: 25.0 %, Crest Factor: 4)							
1.5 cm	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	24.70	-0.066		0.194	23.0
	0810	1909.80	--	--		**	--
NOTES :							
1. Depth of Liquid : 15.0 cm							
2. Transmitter power was measured at the antenna-conducted terminal.							
3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.							
4. The earphone wire connected to the EUT to simulate hand-free operation in a body-worn configuration.							
5. Please refer to attachment for the result presentation in plot format.							