


RESTRICTED TO SHARP CORPORATION


FCC ID: APYHRO00073
Antenna

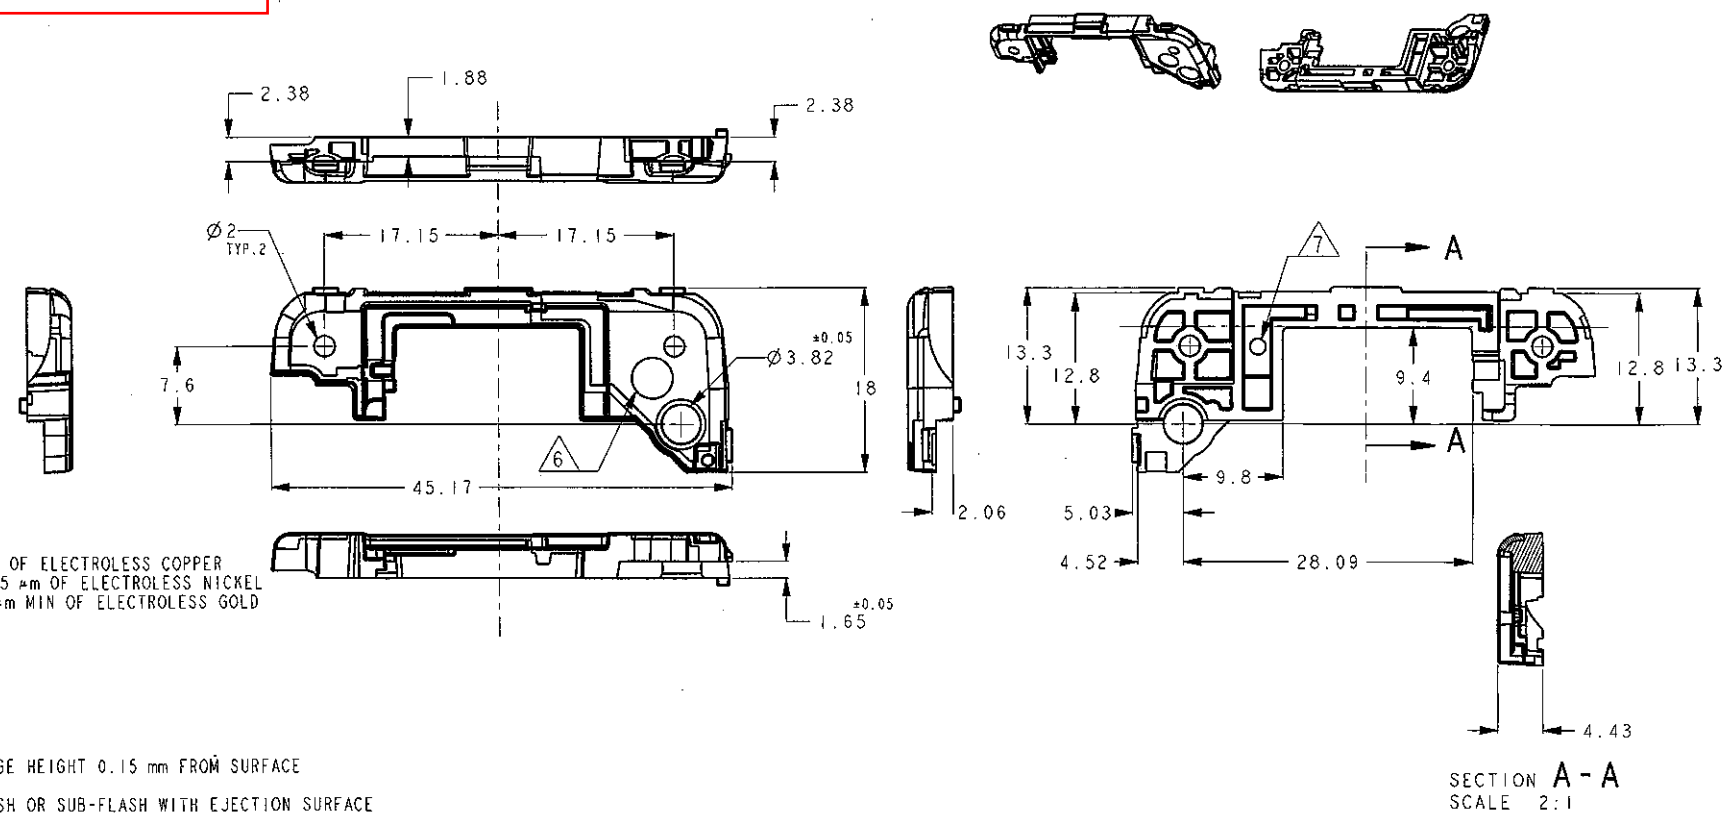

- 1. FINISH:
PLATING TO BE 15±2 μm OF ELECTROLESS COPPER
OVERPLATED WITH 3±1.5 μm OF ELECTROLESS NICKEL
OVERPLATED WITH 0.1 μm MIN OF ELECTROLESS GOLD
POROSITY SEALING
- 2. MATERIAL:
1st SHOT: PC
2nd SHOT: ABS
- 3. MAXIMUM GATE VESTIGE HEIGHT 0.15 mm FROM SURFACE
- 4. EJECTORS TO BE FLASH OR SUB-FLASH WITH EJECTION SURFACE
- 5. MAXIMUM ALLOWED FLASH IS 0.20mm.

6. DATE STAMP / CAVITY ID TO BE SUB-FLASH.
(PRODUCTION TOOL ONLY)

- 7. CAVITY ID CHARACTER (AS PERMITS)
- 8. DRAWING REFERENCES 'SHARP_L280_2SHOT_V07'
- 9. COUNTRY OF ORIGIN: JPN.

TOLERANCES UNLESS OTHERWISE SPECIFIED		DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±2		DWN Y. TAKADA 14AUG2006		tyco Electronics Harrisburg, PA 17105-3608	
						CHK T. KIMURA 14AUG2006			
DIMENSION		TOLERANCE				APVD T. KIMURA 14AUG2006		NAME MID ANTENNA FOR L280 QANTWA079AFZZ	
0 - 100		0.1				PRODUCT SPEC			
100 - 250		0.15				APPLICATION SPEC		SIZE A300779	
250 - 400		0.2				WEIGHT 0.99g			
400 - 500		0.3				RESTRICTED CUSTOMER		DRAWING NO C=1939809	
500 -		0.5				RESTRICTED TO SHP			
						SCALE 2:1		SHEET 1 OF 1	
								REV A	