


A.3 SAR Measurement Data


A.3.1 Left Head – slide out (keypad open)

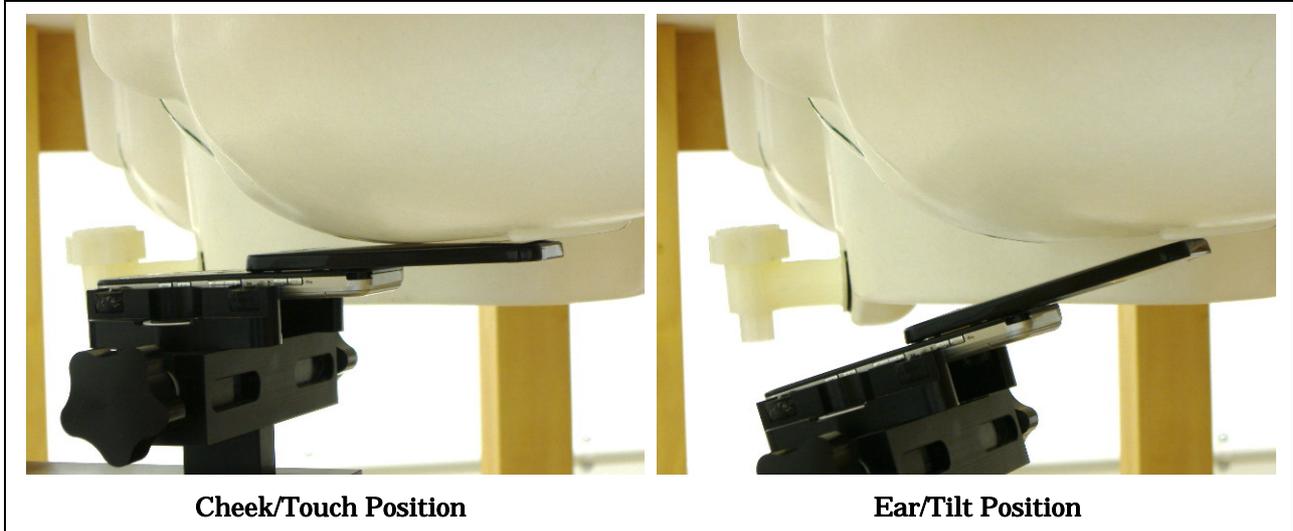

GSM 1900 (Duty Cycle: 12.5 %, Crest Factor: 8)					Date : June 24, 2008		
Test Position	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	28.70	-0.020		0.124	22.0
	0810	1909.80	--	--		**	--
Ear/Tilt	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	28.70	-0.003		0.092	22.0
	0810	1909.80	--	--		**	--

- NOTES :
1. Depth of Liquid : 15.0 cm
 2. Transmitter power was measured at the antenna-conducted terminal.
 3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
 4. Please refer to attachment for the result presentation in plot format.

A.3.2 Right Head – slide out (keypad open)

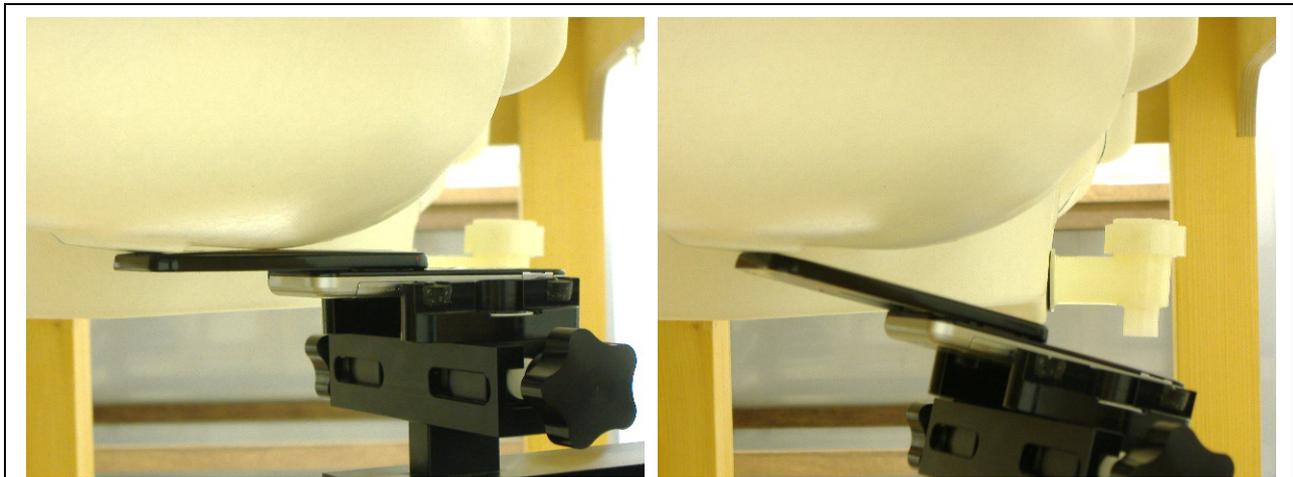

Cheek/Touch Position


Ear/Tilt Position

GSM 1900 (Duty Cycle: 12.5 %, Crest Factor: 8)			Date : June 24, 2008				
Test Position	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	28.70	0.016		0.090	22.0
	0810	1909.80	--	--		**	--
Ear/Tilt	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	28.70	0.029		0.140	22.0
	0810	1909.80	--	--		**	--

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
4. Please refer to attachment for the result presentation in plot format.

A.3.3 Left Head – slide in (keypad close)

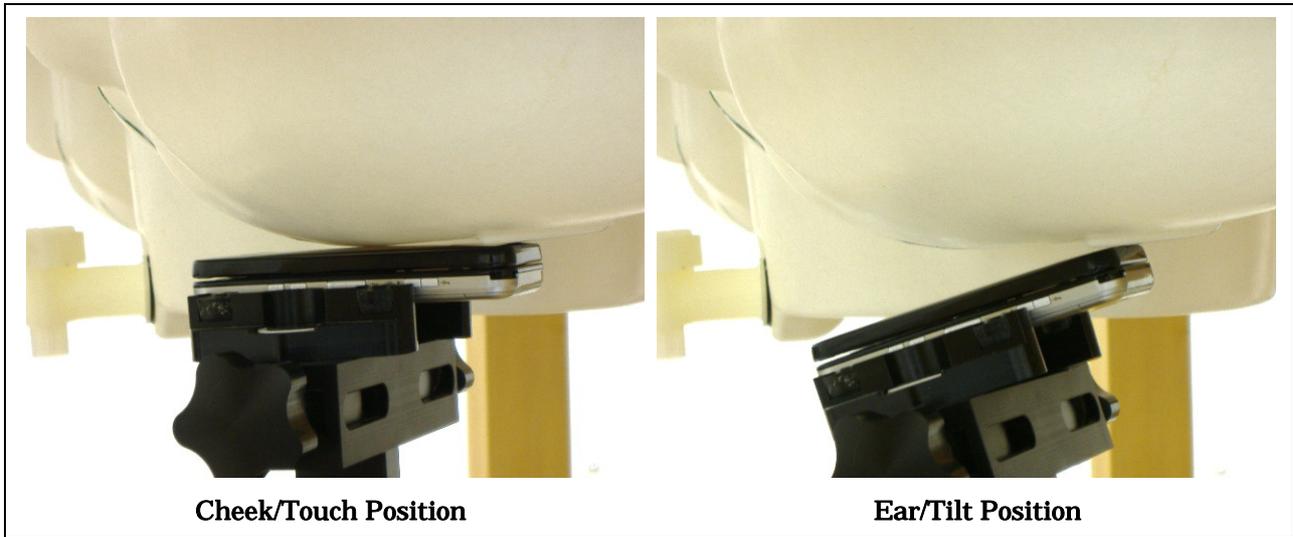


GSM 1900 (Duty Cycle: 12.5 %, Crest Factor: 8)			Date : June 24, 2008				
Test Position	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	28.70	-0.025		0.193	22.0
	0810	1909.80	--	--		**	--
Ear/Tilt	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	28.70	0.006		0.112	22.0
	0810	1909.80	--	--		**	--

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
4. Please refer to attachment for the result presentation in plot format.

A.3.4 Right Head – slide in (keypad close)

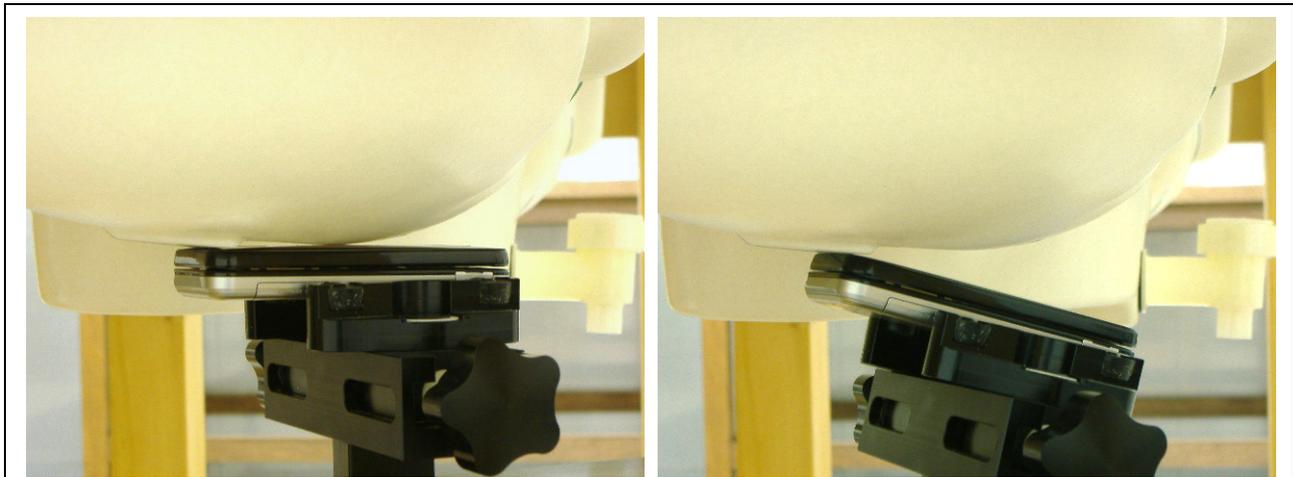

Cheek/Touch Position


Ear/Tilt Position

GSM 1900 (Duty Cycle: 12.5 %, Crest Factor: 8)						Date : June 24, 2008	
Test Position	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	0512	1850.20	28.71	-0.030	1.6	0.248	22.0
	0661	1880.00	28.70	-0.017		0.209	22.0
	0810	1909.80	28.62	-0.063		0.171	22.0
Ear/Tilt	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	28.70	0.026		0.157	22.0
	0810	1909.80	--	--		**	--

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
4. Please refer to attachment for the result presentation in plot format.

A.3.5 Body-worn Position

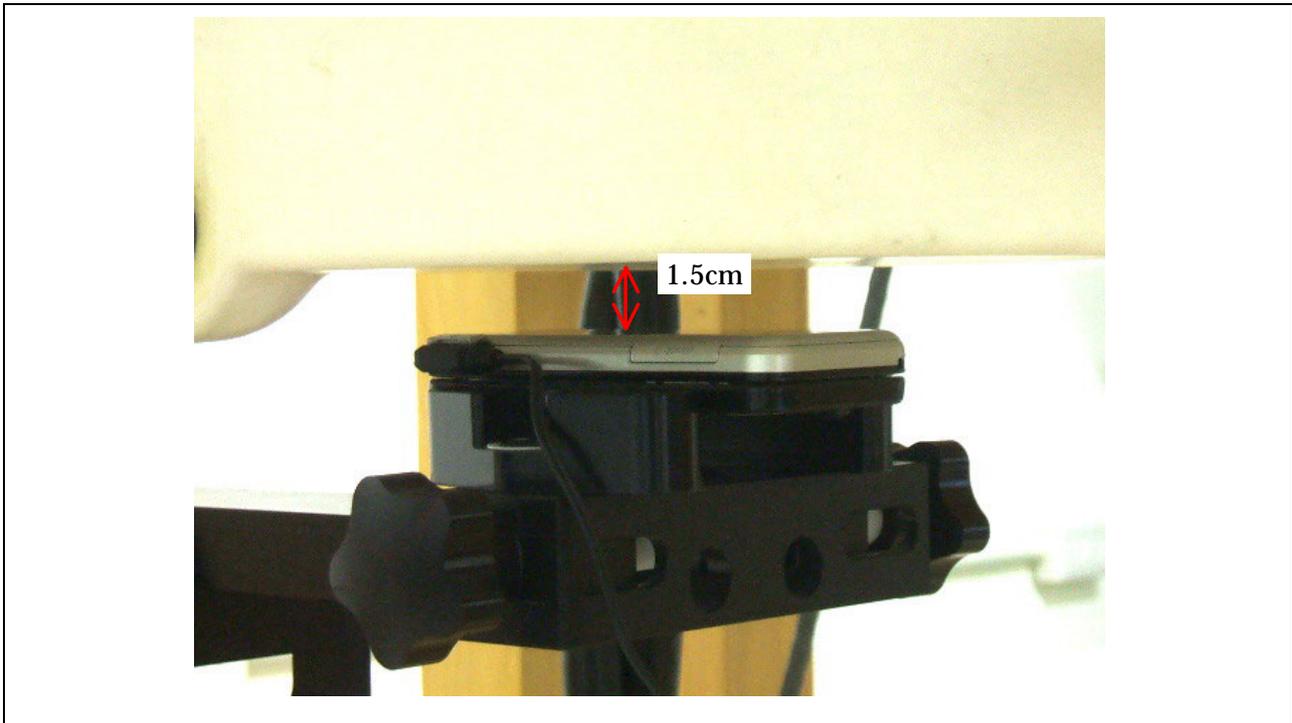

GSM 1900 (Duty Cycle: 12.5 %, Crest Factor: 8)				Date : June 30, 2008			
Separation Distance	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
1.5 cm	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	28.70	-0.047		0.259	23.0
	0810	1909.80	--	--		**	--
GSM 1900 GSM+GPRS (Duty Cycle: 25.0 %, Crest Factor: 4)							
1.5 cm	0512	1850.20	28.63	-0.058	1.6	0.603	23.0
	0661	1880.00	28.61	-0.024		0.503	23.0
	0810	1909.80	28.53	-0.025		0.410	23.0

- NOTES :
1. Depth of Liquid : 15.0 cm
 2. Transmitter power was measured at the antenna-conducted terminal.
 3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
 4. The earphone wire connected to the EUT to simulate hand-free operation in a body-worn configuration.
 5. Please refer to attachment for the result presentation in plot format.