









LOC J

DIST -

REVISIONS

| P | LTR | DESCR PTION | DATE | DWN | APVD |
|---|-----|---------------|-----------|-----|------|
| | AI | ECR-08-020822 | 19AUG2008 | T.Y | HO |

RESTRICTED TO SHARP CORPORATION

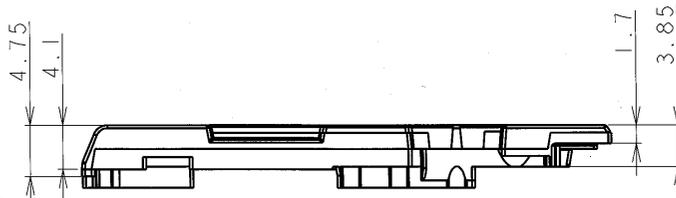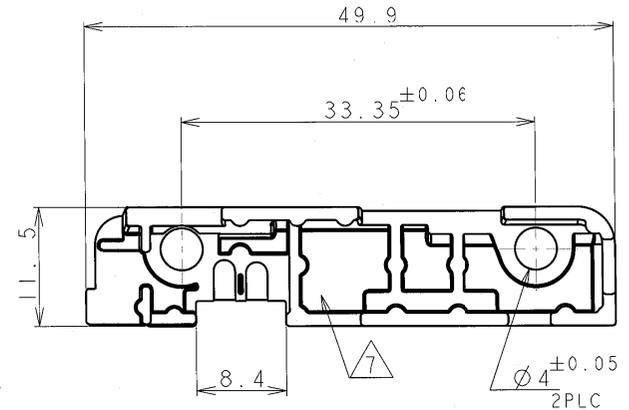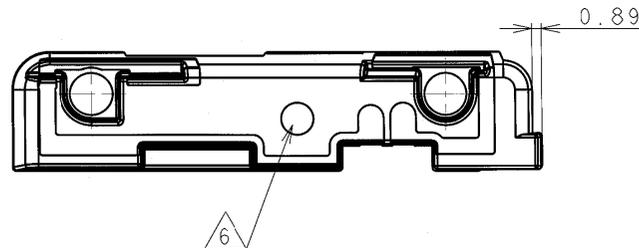

1 FINISH:
 PLATING TO BE 15±2 μm OF ELECTROLESS COPPER
 OVERPLATED WITH 3±1.5 μm OF ELECTROLESS NICKEL
 OVERPLATED WITH 0.1 μm MIN OF ELECTROLESS GOLD
 POROSITY SEALING

2 MATERIAL: THERMOPLASTIC

- 3. MAXIMUM GATE VESTIGE HEIGHT 0.15 mm FROM SURFACE.
- 4. BURR OF EJECTORS SHOULD NOT PROTRUDE.
- 5. MAXIMUM ALLOWED BURR IS 0.20mm.

6 DATE STAMP SHOULD NOT PROTRUDE.
 (PRODUCTION TOOL ONLY)

7 CAVITY ID SHOULD NOT PROTRUDE.

8. DRAWING REFERENCES 'SHARP_C150MAIN_2SHOT_V05'

- 1 : AS SHOWN

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION
 IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION
 SHOULD BE CONTACTED FOR THE LATEST REVISION.

| TOLERANCES UNLESS OTHERWISE SPECIFIED | |
|---------------------------------------|-----------|
| DIMENSION | TOLERANCE |
| 0 - 100 | 0.1 |
| 100 - 250 | 0.15 |
| 250 - 400 | 0.2 |
| 400 - 500 | 0.3 |
| 500 - | 0.5 |

| | |
|-------------------|---|
| DIMENSIONS: mm | TOLERANCES UNLESS OTHERWISE SPECIFIED: ± |
| | 0 PLC ± |
| | 1 PLC ± |
| | 2 PLC ±SEE TABLE |
| | 3 PLC ± |
| | 4 PLC ± |
| MATERIAL | ANGLES ±2 |
| 2 | FINISH |
| | 1 |

| | |
|---------------------|-----------|
| DWN T. TAMAFUNE | 27MAY2008 |
| CHK H. IKEDA | 27MAY2008 |
| APVD H. USUI | 27MAY2008 |
| PRODUCT SPEC | - |
| APPLICATION SPEC | - |
| WEIGHT | 1.28g |
| RESTRICTED CUSTOMER | |

| | | | | | |
|---|--|--------------|--|---------------|--|
| Tyco Electronics Corporation Kawasaki, Japan | | NAME | | RESTRICTED TO | |
| MID ANTENNA FOR C150 MAIN | | SIZE | | SHP | |
| CAGE CODE | | DRAWING NO | | REV | |
| A300779 | | C=2069039 | | AI | |
| SCALE 2:1 | | SHEET 1 OF 1 | | REV | |