


### A.3 SAR Measurement Data


#### A.3.1 Left Head – slide out (keypad open)

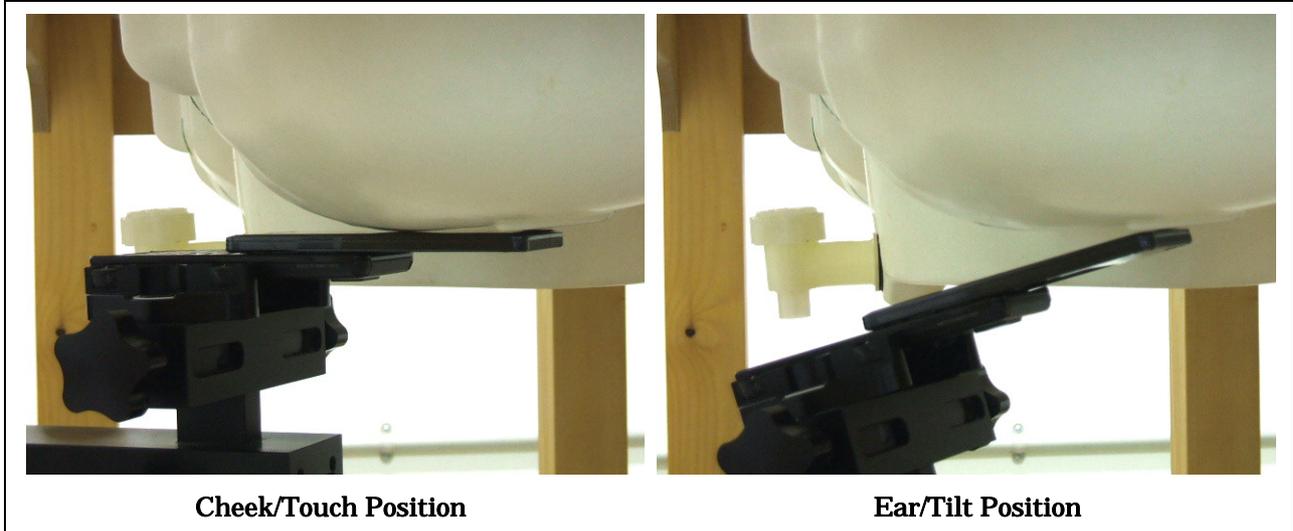

CDMA Cellular (Duty Cycle: 100 %, Crest Factor: 1)					Date : September 1, 2008		
Test Position	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	1013	824.70	24.09	-0.079	1.6	0.233	22.0
	384	836.52	23.81	0.005		<b>0.323</b>	22.0
	779	848.37	24.42	0.019		0.304	22.0
Ear/Tilt	1013	824.70	--	--	1.6	**	--
	384	836.52	23.81	-0.002		0.186	22.0
	779	848.37	--	--		**	--

- NOTES :
1. Depth of Liquid : 15.0 cm
  2. Transmitter power was measured at the antenna-conducted terminal.
  3. SAR for head exposure configurations is measured in RC3 with the EUT configured to transmit at full rate using Loopback Service Option SO55.
  4. The SAR result marked at \*\* is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
  5. Please refer to attachment for the result presentation in plot format.

**A.3.2 Right Head – slide out (keypad open)**

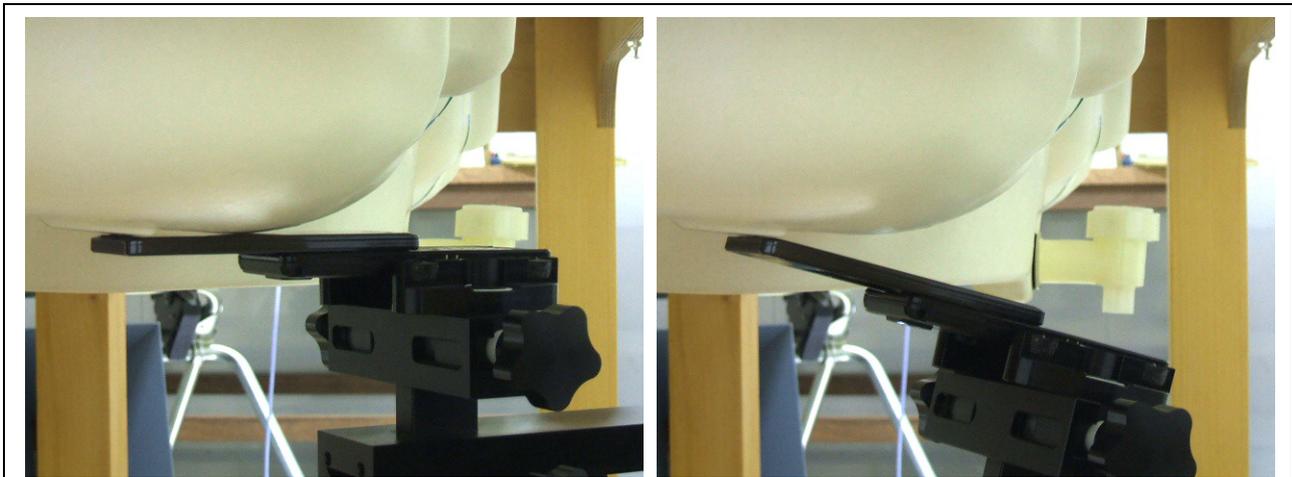


**Cheek/Touch Position**

**Ear/Tilt Position**

CDMA Cellular (Duty Cycle: 100 %, Crest Factor: 1)					Date : September 1, 2008		
Test Position	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	1013	824.70	--	--	1.6	**	--
	384	836.52	23.81	-0.068		0.301	22.0
	779	848.37	--	--		**	--
Ear/Tilt	1013	824.70	--	--	1.6	**	--
	384	836.52	23.81	-0.023		0.188	22.0
	779	848.37	--	--		**	--

- NOTES :
1. Depth of Liquid : 15.0 cm
  2. Transmitter power was measured at the antenna-conducted terminal.
  3. SAR for head exposure configurations is measured in RC3 with the EUT configured to transmit at full rate using Loopback Service Option SO55.
  4. The SAR result marked at \*\* is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
  5. Please refer to attachment for the result presentation in plot format.

**A.3.3 Left Head – slide in (keypad close)**

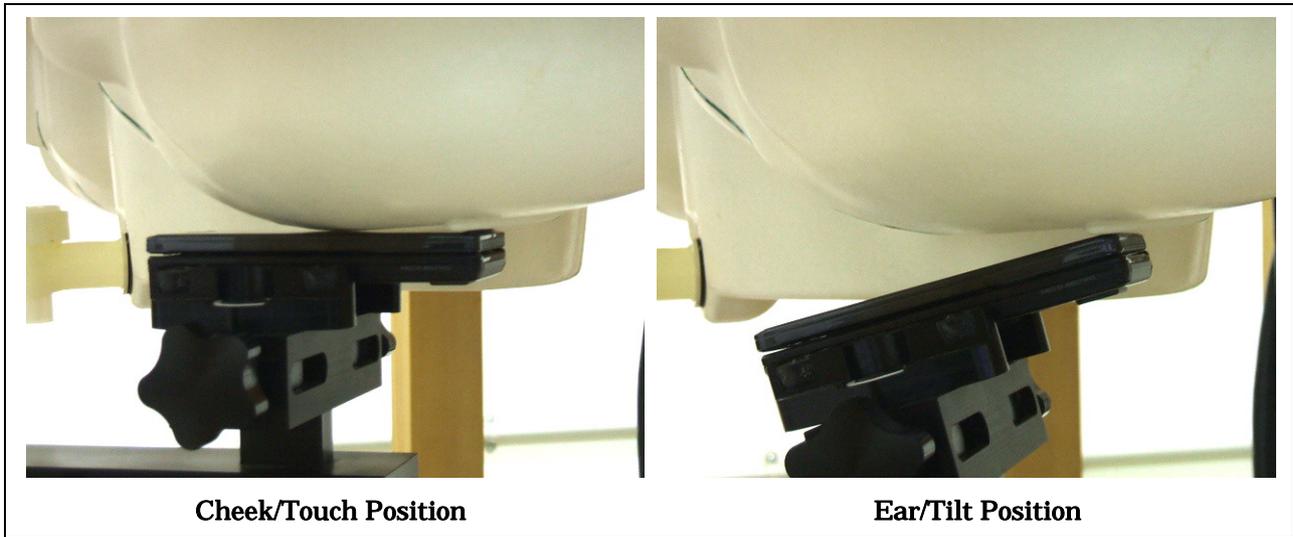


CDMA Cellular (Duty Cycle: 100 %, Crest Factor: 1) Date : September 1, 2008

Test Position	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	1013	824.70	--	--	1.6	**	--
	384	836.52	23.81	-0.002		0.231	22.0
	779	848.37	--	--		**	--
Ear/Tilt	1013	824.70	--	--	1.6	**	--
	384	836.52	23.81	-0.020		0.220	22.0
	779	848.37	--	--		**	--

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. SAR for head exposure configurations is measured in RC3 with the EUT configured to transmit at full rate using Loopback Service Option SO55.
4. The SAR result marked at \*\* is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
5. Please refer to attachment for the result presentation in plot format.

**A.3.4 Right Head – slide in (keypad close)**

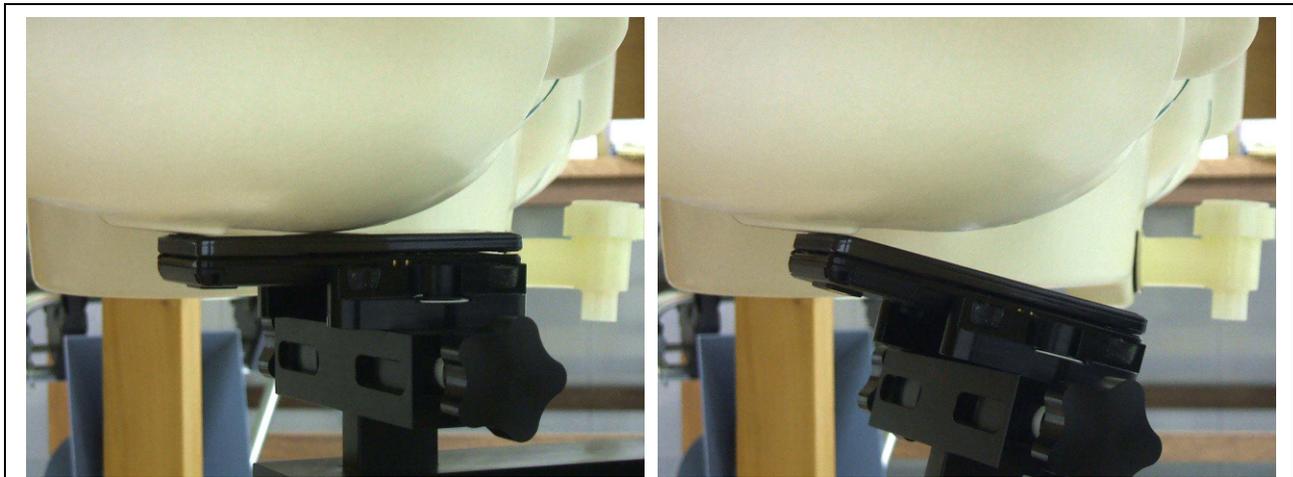

**Cheek/Touch Position**


**Ear/Tilt Position**

CDMA Cellular (Duty Cycle: 100 %, Crest Factor: 1)				Date : September 1, 2008			
Test Position	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	1013	824.70	--	--	1.6	**	--
	384	836.52	23.81	-0.023		0.234	22.0
	779	848.37	--	--		**	--
Ear/Tilt	1013	824.70	--	--	1.6	**	--
	384	836.52	23.81	-0.018		0.208	22.0
	779	848.37	--	--		**	--

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. SAR for head exposure configurations is measured in RC3 with the EUT configured to transmit at full rate using Loopback Service Option SO55.
4. The SAR result marked at \*\* is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
5. Please refer to attachment for the result presentation in plot format.

**A.3.5 Body-worn Position**

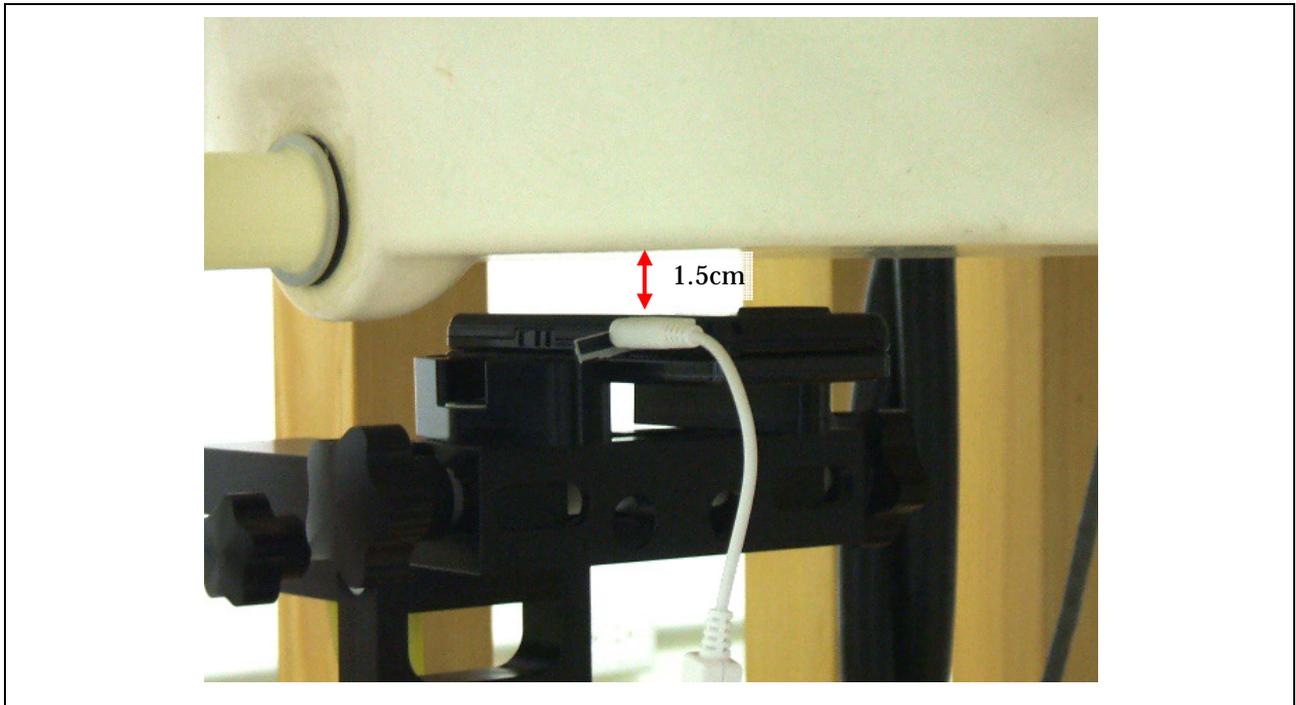

CDMA Cellular (Duty Cycle: 100 %, Crest Factor: 1)					Date : September 2, 2008		
Separation Distance	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
1.5 cm	1013	824.70	24.10	-0.040	1.6	0.360	22.0
	384	836.52	23.82	-0.036		0.375	22.0
	779	848.37	24.42	-0.005		<b>0.414</b>	22.0

- NOTES :
1. Depth of Liquid : 15.0 cm
  2. Transmitter power was measured at the antenna-conducted terminal.
  3. SAR for body exposure configurations is measured in RC3 with the EUT configured using TDSO / SO32, to transmit at full rate on FCH with all other code channels disabled.
  4. The earphone wire connected to the EUT to simulate hand-free operation in a body-worn configuration.
  5. Please refer to attachment for the result presentation in plot format.